

(19)



(11)

EP 2 993 273 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.11.2019 Bulletin 2019/46

(51) Int Cl.:
E03D 9/08 (2006.01) **E03D 11/13** (2006.01)
A47K 13/26 (2006.01) **E03D 11/00** (2006.01)

(21) Application number: **15183298.7**

(22) Date of filing: **01.09.2015**

(54) TOILET DEVICE

TOILETTE

TOILETTE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **02.09.2014 JP 2014178250**

(43) Date of publication of application:
09.03.2016 Bulletin 2016/10

(73) Proprietor: **Toto Ltd.**
Kitakyushu-shi, Fukuoka 802-8601 (JP)

(72) Inventors:
• **TOGO, Tatsuro**
Kitakyushu-shi, Fukuoka 802-8601 (JP)

• **TSUJI, Kohei**
Kitakyushu-shi, Fukuoka 802-8601 (JP)

(74) Representative: **Bandpay & Greuter**
30, rue Notre-Dame des Victoires
75002 Paris (FR)

(56) References cited:
EP-A2- 2 192 244 EP-A2- 2 325 402
WO-A1-2013/041892 DE-A1-102011 118 352
DE-U1-202013 001 133 JP-A- H0 885 999
JP-A- 2005 290 967 JP-A- 2014 147 445

EP 2 993 273 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD

[0001] Embodiments of the invention relate to a toilet device and a commode unit.

BACKGROUND

[0002] In recent years, a toilet device and a commode unit have become common.

[0003] According to JP-A 2005-290967, a sanitary washing toilet seat, which is placed on a western-style toilet and is freely removed or removable, is described.

[0004] However, for the western-style toilet on which the sanitary washing toilet seat described in the JP-A 2005-290967 is placed, the water distribution hose and the power supply cord are directly connected to the sanitary washing toilet seat from outside the western-style toilet. In other words, the water distribution hose and the power supply cord are constantly exposed outside the western-style toilet. Thereby, the design quality of the western-style toilet on which the sanitary washing toilet seat is placed is undesirably poor.

[0005] On the other hand, a method may be considered in which a through-hole is provided in the upper surface of the western-style toilet; and the water distribution hose and the power supply cord are connected to the sanitary washing toilet seat through the through-hole. However, in the case where the through-hole is provided in the upper surface of the western-style toilet, when liquid waste enters through the gap between the upper surface of the western-style toilet and the lower surface of the sanitary washing toilet seat, there is a risk that the liquid waste may undesirably enter the interior of the western-style toilet from the through-hole. Because the cleanability of the interior of the western-style toilet is poor, offensive odors may undesirably occur due to the liquid waste undesirably entering the interior of the western-style toilet.

[0006] The invention is based on the awareness of such problems and has the object of providing a toilet device and a commode unit that can improve the design quality of the commode and suppress the undesirable occurrence of offensive odors due to the liquid waste undesirably entering the interior of the commode. Furthermore, DE 20 2013 001133 U1, WO 2013/041892 A1, DE 10 2011 118352 A1, JP 2014147445 A, EP 2 325 402 A2, EP 2 192 244 A2 and JP H08 85999 A disclose a toilet device.

SUMMARY

[0007] According to one embodiment, a toilet device is provided. The toilet device is mounted to a commode. An interior space is provided in the commode. The interior space communicates with a through-hole provided in an upper surface of the commode. The toilet device com-

prises a fixing member fixable to the commode, packing covering an outer circumference of the fixing member, and a toilet device main unit mounted above the fixing member. An insertion unit is provided in the fixing member. A water supply hose or a power supply cord connected to the toilet device main unit that is insertable through the insertion unit.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008]

FIG. 1 is a schematic perspective view showing a toilet room where a commode unit according to one embodiment of the invention is mounted; FIGS. 2 and FIG. 3 are schematic front views showing the commode unit of FIG. 1;

FIG. 4 is a schematic exploded view showing the commode unit of FIG. 1;

FIG. 5 is a schematic perspective view showing the fixing member and the packing of FIG. 4;

FIG. 6 is a schematic plan view showing the commode unit in the state in which the toilet device main unit of FIG. 4 is removed;

FIG. 7 is a schematic cross-sectional view of a cross-section A-A of the commode unit of FIG. 6; and

FIG. 8 is a schematic perspective view showing a toilet room in which a commode unit according to another embodiment of the invention is mounted.

DETAILED DESCRIPTION

[0009] A first aspect of the invention is a toilet device mounted to a commode. An interior space is provided in the commode. The interior space communicates with a through-hole provided in an upper surface of the commode. The toilet device comprises a fixing member fixable to the commode, packing covering an outer circumference of the fixing member, and a toilet device main unit mounted above the fixing member. An insertion unit is provided in the fixing member. A water supply hose or a power supply cord connected to the toilet device main unit that is insertable through the insertion unit.

[0010] According to the toilet device, the insertion unit is provided in the fixing member, where the water supply hose or the power supply cord that is connected to the toilet device main unit is insertable through the insertion unit. Thereby, the water supply hose or the power supply cord is concealed in the interior of the commode through the insertion unit and the through-hole of the commode. Thereby, the exposure of the water supply hose or the power supply cord outside the commode can be suppressed. Accordingly, the design quality of the commode can be improved.

[0011] Also, according to the toilet device, the packing that covers the outer circumference of the fixing member is included. Thereby, the liquid waste can be prevented from entering the interior space of the commode through

the through-hole. Accordingly, the undesirable occurrence of offensive odors from the interior space of the commode can be suppressed.

[0012] A second aspect of the invention is that the toilet device according to the first aspect of the invention, wherein the fixing member includes a fixing unit fixed to the commode, the fixing unit has a plate configuration, a longitudinal direction of the plate configuration is a first direction, and the insertion unit is positioned on an outer side of the fixing unit in the first direction.

[0013] According to the toilet device, in the first direction (the longitudinal direction) of the plate configuration, the insertion unit is positioned on the outer side of the fixing unit fixed to the commode. Thereby, when installing the toilet device, the installer can mount the toilet device main unit above the fixing member in a state in which viewing is easy with the naked eye. In other words, a toilet device main unit that has good installability for the commode can be provided.

[0014] A third aspect of the invention is that a commode unit comprising the commode and the toilet device according to the first or second aspect of the invention, wherein the insertion unit is an insertion through-hole provided in the fixing member and an inner diameter of the through-hole is larger than an inner diameter of the insertion through-hole.

[0015] According to the commode unit, the inner diameter of the through-hole of the commode is larger than the inner diameter of the insertion through-hole provided in the fixing member. Thereby, the water supply hose or the power supply cord that is inserted through the insertion through-hole can be inserted easily into the through-hole. In other words, a toilet device main unit that has good installability for the commode can be provided.

[0016] A fourth aspect of the invention is that the commode unit according to the third aspect of the invention further comprising a pipe member provided below the fixing member, wherein the pipe member communicates with the insertion through-hole and the inner diameter of the through-hole is larger than an outer diameter of the pipe member.

[0017] According to the commode unit, the inner diameter of the through-hole is larger than the outer diameter of the pipe member that is provided below the fixing member and communicates with the insertion through-hole. Thereby, the pipe member can guide the water supply hose or the power supply cord inserted through the insertion through-hole into the through-hole. Thereby, the water supply hose or the power supply cord that is inserted through the insertion through-hole can be inserted easily by the installer into the through-hole. In other words, a toilet device main unit that has good installability for the commode can be provided.

[0018] A fifth aspect of the invention is that the commode unit according to the fourth aspect of the invention, wherein the inner diameter of the insertion through-hole is smaller than an inner diameter of the pipe member.

[0019] According to the commode unit, the inner diam-

eter of the insertion through-hole is smaller than the inner diameter of the pipe member. Thereby, the water supply hose or the power supply cord that is inserted through the insertion through-hole can be inserted easily by the installer into the pipe member. In other words, a toilet device main unit that has good installability for the commode can be provided.

[0020] According to the embodiments of the invention, a toilet device and a commode unit are provided in which the design quality of the commode can be improved and the undesirable occurrence of offensive odors due to the liquid waste undesirably entering the interior of the commode is suppressed.

[0021] Embodiments of the invention will now be described with reference to the drawings. Similar components in the drawings are marked with like reference numerals, and a detailed description is omitted as appropriate.

20 Commode unit 1

[0022] FIG. 1 is a schematic perspective view showing a toilet room where a commode unit according to one embodiment of the invention is mounted.

[0023] FIG. 2 and FIG. 3 are schematic front views showing the commode unit of FIG. 1.

[0024] First, the commode unit 1 according to one embodiment of the invention will be described using FIG. 1 to FIG. 3.

[0025] As shown in FIG. 1 and FIG. 2, the commode unit 1 is mounted on a floor surface 101 of a toilet room 100. The commode unit 1 includes a commode 2, and a toilet device 4 that is provided above the commode 2. For example, the commode 2 is a floor-mounted water rinsing commode and is made of a ceramic. The toilet device 4 includes a toilet seat (not shown), a toilet lid 6, and a toilet device main unit 8 that is connected to the toilet seat and the toilet lid 6.

[0026] The toilet device main unit 8 includes a case plate 10, a case cover 12, and a functional unit 14. For example, the case plate 10 and the case cover 12 are made of a resin. When viewed from the front (frontward) of the commode 2, the case plate 10 is placed rearward of a bowl 16 (described in FIG. 4) provided in the commode 2. The functional unit 14 includes, for example, a sanitary washing nozzle that washes a private part of a user, and a deodorizing device that removes odors inside the bowl 16. The case cover 12 is fixed to the case plate 10 to cover the functional unit 14.

[0027] As shown in FIG. 3, a power supply cord 18 that is connected to a power supply is connected to the toilet device main unit 8; and a water supply hose 20 that is connected to a water supply source is connected to the toilet device main unit 8. The power supply cord 18 and the water supply hose 20 are flexible. For example, the power supply cord 18 supplies electricity sent from the power supply to the functional unit 14. For example, the water supply hose 20 supplies water sent from the water

supply source to the sanitary washing nozzle.

Fixing member and packing

[0028] FIG. 4 is a schematic exploded view showing the commode unit of FIG. 1.

[0029] FIG. 5 is a schematic perspective view showing the fixing member and the packing of FIG. 4.

[0030] FIG. 6 is a schematic plan view showing the commode unit in the state in which the toilet device main unit of FIG. 4 is removed.

[0031] FIG. 7 is a schematic cross-sectional view of a cross-section A-A of the commode unit of FIG. 6.

[0032] A plate (a fixing member) 22 and packing 24 according to one embodiment of the invention will now be described using FIGS. 4 to 7.

[0033] As shown in FIG. 4, the toilet device 4 includes, for example, the plate (the fixing member) 22 made of a resin. The plate 22 has a plate configuration having the longitudinal direction in a first direction. For example, the plate 22 has a rectangular configuration. The first direction is, for example, a direction (the lateral direction) orthogonal to the vertical direction (referring to FIG. 1) and the frontward/rearward direction (referring to FIG. 1). A first fixing hole (a fixing unit) 26 is provided in the plate 22. The plate 22 can be fixed to the commode 2 by inserting a bolt 28 through the first fixing hole 26 into a second fixing hole 27 provided in the upper surface of the commode 2 and fastening with a nut. When mounting the toilet device main unit 8 to the commode 2, first, the plate 22 is fixed to the commode 2. The power supply cord 18 and the water supply hose 20 that are connected to the toilet device main unit 8 are inserted through an insertion through-hole (an insertion unit) 30 provided in the plate 22.

[0034] A through-hole 32 is provided in the upper surface of the commode 2. The through-hole 32 is provided on the rearward side of the bowl 16. Also, an interior space 34 is provided in the interior of the commode 2 on the rearward side of the bowl 16. The interior space 34 is made continuously with the through-hole 32. That is, the interior space 34 communicates with the through-hole 32. Further, a rear hole 36 is provided in the rear surface of the commode 2. The rear hole 36 is made continuously with the interior space 34.

[0035] When mounting the toilet device main unit 8 to the commode 2, first, the plate 22 is fixed to the commode 2. Then, the power supply cord 18 and the water supply hose 20 that are connected to the toilet device main unit 8 are inserted through the insertion through-hole 30 provided in the plate 22. The power supply cord 18 and the water supply hose 20 that are inserted through the insertion through-hole 30 pass through the through-hole 32. The power supply cord 18 and the water supply hose 20 that pass through the through-hole 32 enter the interior space 34. The power supply cord 18 that enters the interior space 34 passes through the rear hole 36 and is connected to the power supply. Also, the water supply

hose 20 that enters the interior space 34 passes through the rear hole 36 and is connected to the water supply source. Thereby, the power supply cord 18 and the water supply hose 20 can be concealed in the interior of the commode 2 through the insertion through-hole 30 and the through-hole 32 of the commode 2. Thereby, the exposure of the power supply cord 18 and the water supply hose 20 outside the commode 2 can be suppressed. Accordingly, the design quality of the commode 2 can be improved.

[0036] Subsequently, the toilet device main unit 8 is placed above the plate 22. At this time, a cutaway portion 38 that is provided in the end portion of the plate 22 engages a hook (not shown) provided in the case plate 10. Thereby, the toilet device main unit 8 can be fixed to the plate 22 easily.

[0037] As shown in FIG. 5, the toilet device 4 includes, for example, the packing 24 formed of rubber. The packing 24 covers the outer circumference of the lower surface (the surface placed on the upper surface of the commode 2) of the plate 22. Thereby, liquid waste that enters between the upper surface of the commode 2 and the toilet device main unit 8 can be prevented from undesirably entering the interior space 34 of the commode 2 via the through-hole 32. Thereby, the undesirable occurrence of offensive odors from the interior space 34 can be suppressed.

[0038] In the state in which the plate 22 is mounted to the commode 2 as shown in FIG. 6, the plate 22 is fixed to the commode 2 so that the insertion through-hole 30 of the plate 22 communicates with the through-hole 32 of the commode 2.

[0039] In the longitudinal direction of the plate 22, for example, the insertion through-hole 30 of the plate 22 is provided not less than 15 centimeters (cm) toward the outer side from a center line X of the plate 22. Also, for example, the through-hole 32 of the commode 2 is provided not less than 15 cm toward the outer side from a center line Y of the commode 2. Further, the interior space 34 of the commode 2 is provided toward the outer side from the center line Y of the commode 2. The plate 22 is fixed to the commode 2 so that the center line X and the center line Y are at the same position. Thereby, a large interior space 34 can be ensured in the interior of the commode 2 even in the case where the drain trap (not shown) of the commode 2 is positioned on the center line Y of the commode 2. Also, the power supply cord 18 and the water supply hose 20 can be concealed in the interior of the commode 2 through the insertion through-hole 30 and the through-hole 32 of the commode 2 even in the case where the drain trap of the commode 2 is positioned on the center line Y of the commode 2.

[0040] In the longitudinal direction of the plate 22, for example, the first fixing hole 26 of the plate 22 is provided not less than 10 cm toward the outer side from the center line X of the plate 22. Also, for example, the second fixing hole 27 of the commode 2 is provided not less than 10 cm toward the outer side from the center line Y of the

commode 2. Thereby, the plate 22 can be easily fixed to the commode 2 by inserting the bolt 28 through the first fixing hole 26 into the second fixing hole 27 provided in the upper surface of the commode 2 and fastening the nut even in the case where the drain trap of the commode 2 is positioned on the center line Y of the commode 2.

[0041] In the longitudinal direction of the plate 22, the insertion through-hole 30 is positioned on the outer side of the first fixing hole 26. Thereby, when installing the toilet device 4 on the commode 2, the installer can mount the toilet device main unit 8 above the plate 22 in a state in which viewing is easy with the naked eye. In other words, the toilet device main unit 8 that has good installability for the commode 2 can be provided. Also, because the installer can mount the toilet device main unit 8 above the plate 22 in the state in which viewing is easy with the naked eye, the mistake of causing the power supply cord 18 or the water supply hose 20 to be undesirably pinched between the commode 2 and the toilet device 4 can be suppressed.

[0042] As shown in FIG. 7, the toilet device 4 includes a pipe member 40 below the plate 22. The pipe member 40 is a tubular body having a circular columnar configuration and is made of a resin. For example, the lower end of the plate 22 and the upper end of the pipe member 40 are connected using a bonding agent. An inner diameter A of the through-hole 32 of the commode 2 is larger than an outer diameter B of the pipe member 40. Also, the pipe member 40 is inserted into the through-hole 32. Thereby, the water supply hose 20 or the power supply cord 18 that is inserted through the insertion through-hole 30 can be guided by the pipe member 40 into the through-hole 32. Thereby, the water supply hose 20 or the power supply cord 18 that is inserted through the insertion through-hole 30 can be inserted easily by the installer into the through-hole 32. In other words, the toilet device main unit 8 that has good installability for the commode 2 can be provided.

[0043] The inner diameter A of the through-hole 32 of the commode 2 is larger than an inner diameter C of the insertion through-hole 30. Thereby, the water supply hose 20 or the power supply cord 18 that is inserted through the insertion through-hole 30 can be inserted easily into the through-hole 32. In other words, the toilet device main unit 8 that has good installability for the commode 2 can be provided.

[0044] Also, the inner diameter C of the insertion through-hole 30 is smaller than an inner diameter D of the pipe member 40. Thereby, the water supply hose 20 or the power supply cord 18 that is inserted through the insertion through-hole 30 can be inserted easily into the pipe member 40. In other words, the toilet device main unit 8 that has good installability for the commode 2 can be provided.

[0045] Thereby, according to the toilet device 4 of the embodiment, the insertion through-hole 30 is provided in the plate 22, where the water supply hose 20 or the power supply cord 18 that is connected to the toilet device main

unit 8 is insertable through the insertion through-hole 30. Thereby, the water supply hose 20 or the power supply cord 18 is concealed in the interior of the commode 2 through the insertion through-hole 30 and the through-hole 32 of the commode 2. Thereby, the exposure of the water supply hose 20 or the power supply cord 18 outside the commode 2 can be suppressed. Accordingly, the design quality of the commode 2 can be improved.

[0046] Also, according to the toilet device 4, the packing 24 that covers the outer circumference of the lower surface of the plate 22 is included. Thereby, the liquid waste can be prevented from entering the interior space 34 of the commode 2 through the through-hole 32. Accordingly, the undesirable occurrence of offensive odors from the interior space 34 of the commode 2 can be suppressed.

Modifications

[0047] One embodiment of the invention is described above. However, the invention is not limited to such a description.

[0048] FIG. 8 is a schematic perspective view showing a toilet room in which a commode unit according to another embodiment of the invention is mounted.

[0049] Although the commode 2 is a floor-mounted water rinsing commode in one embodiment of the invention, the commode 2 is not limited thereto and may be a wall-hung water rinsing commode. In other words, as in FIG. 8, the commode unit 1A may be mounted to a wall surface 102 of the toilet room 100. The commode unit 1A has the same function as the commode unit 1 described above.

[0050] Although both the power supply cord 18 and the water supply hose 20 are connected to the toilet device main unit 8 in one embodiment of the invention, the invention is not limited thereto. In other words, one of the power supply cord 18 or the water supply hose 20 may be connected. In such a case, the water supply hose 20 or the power supply cord 18 that is connected to the toilet device main unit 8 is inserted through the insertion through-hole 30, the through-hole 32, and the rear hole 36.

[0051] Although the plate 22 has, for example, a rectangular configuration in one embodiment of the invention, the plate 22 is not limited thereto and may have, for example, a circular configuration. However, in the case where the plate 22 has a square configuration, the "longitudinal direction" of the plate 22 may be either the vertical direction or the horizontal direction of the plate 22.

[0052] Although the insertion unit is the insertion through-hole 30 having a hole configuration in one embodiment of the invention, the insertion unit is not limited thereto and may be, for example, a cutaway portion having a cutaway configuration for inserting through.

[0053] Although the plate 22 and the pipe member 40 are connected using a bonding agent in one embodiment of the invention, the invention is not limited thereto. Namely, for example, the plate 22 and the pipe member

40 may have a fitting connection or may be formed as one body.

[0054] Appropriate design modifications to the embodiments described above made by one skilled in the art also are within the scope of the invention to the extent that the features of the invention are included. For example, the configurations, dimensions, materials, arrangements, etc., of the components included in the commode unit 1, etc., the mounting method of the commode unit 1, etc., are not limited to those illustrated and can be modified appropriately.

[0055] Furthermore, various components in the above embodiment can be combined with each other as long as technically feasible. Such combinations are also encompassed within the scope of the invention as long as they include the features of the invention.

[0056] While certain embodiments have been described, these embodiments have been presented by way of example only, and are not intended to limit the scope of the inventions. Indeed, the novel embodiments described herein may be embodied in a variety of other forms; furthermore, various omissions, substitutions and changes in the form of the embodiments described herein may be made without departing from the scope of the claims. The accompanying claims are intended to cover such forms or modifications as would fall within the scope of the invention.

Claims

1. A toilet device (4) mounted to a commode (2), an interior space (34) being provided in the commode, the interior space communicating with a through-hole (32) provided in an upper surface of the commode, the toilet device comprising:

a fixing member (22) fixable to the commode (2);
and
a toilet device main unit (8) mounted above the fixing member (22), **characterized in that** the toilet device (4) further comprises
packing (24) covering an outer circumference of the fixing member (22); and
an insertion unit (30) being provided in the fixing member (22) and communicating with the through-hole (32), a water supply hose (20) or a power supply cord (18) connected to the toilet device main unit (8) being insertable through the insertion unit.

2. The device according to claim 1, wherein the fixing member (22) includes a fixing unit (26) fixed to the commode (2), the fixing unit having a plate configuration, a longitudinal direction of the plate configuration being a first direction, and the insertion unit (30) is positioned on an outer side of the fixing unit (26) in the first direction.

3. A commode unit (1), comprising the commode (2) and the toilet device (4) according to claim 1 or 2, the insertion unit (30) being an insertion through-hole provided in the fixing member (22),
an inner diameter of the through-hole being larger than an inner diameter of the insertion through-hole.
4. The commode unit (1) according to claim 3, further comprising a pipe member (40) provided below the fixing member (22), the pipe member communicating with the insertion through-hole (30), the inner diameter of the through-hole being larger than an outer diameter of the pipe member.
5. The commode unit (1) according to claim 4, wherein the inner diameter of the insertion through-hole is smaller than an inner diameter of the pipe member.

Patentansprüche

1. Toilettenvorrichtung (4), die an einer Kommode (2) montiert ist, wobei in dem Kommode ein Innenraum (34) bereitgestellt ist, wobei der Innenraum mit einer Durchgangsöffnung (32) in Verbindung steht, die in einer Oberseite der Kommode bereitgestellt ist, wobei die Toilettenvorrichtung Folgendes umfasst:

ein Befestigungselement (22), das an der Kommode (2) befestigt werden kann, und
eine Toilettenvorrichtung-Haupteinheit (8), die über dem Befestigungselement (22) montiert ist, **dadurch gekennzeichnet, dass** die Toilettenvorrichtung (4) ferner Folgendes umfasst:

eine Dichtpackung (24), die einen Außenumfang des Befestigungselements (22) abdeckt, und
eine Einsetzeinheit (30), die in dem Befestigungselement (22) bereitgestellt ist und mit der Durchgangsöffnung (32) in Verbindung steht, wobei ein Wasserzufuhrschlauch (20) oder ein Energieversorgungskabel (18), das an die Toilettenvorrichtung-Haupteinheit (8) angeschlossen ist, durch die Einsetzeinheit hindurch eingesetzt werden kann.

2. Vorrichtung nach Anspruch 1, wobei das Befestigungselement (22) eine Befestigungseinheit (26) beinhaltet, die an der Kommode (2) befestigt ist, wobei die Befestigungseinheit eine Plattengestaltung aufweist, wobei eine Längsrichtung der Plattengestaltung eine erste Richtung ist, und die Einsetzeinheit (30) in der ersten Richtung an einer Außenseite der Befestigungseinheit (26) positioniert ist.

3. Kommodeneinheit (1), das Kommode (2) und die Toilettenvorrichtung (4) nach Anspruch 1 oder 2 umfassend, wobei die Einsetzeinheit (30) eine Einsetzdurchgangsöffnung ist, die in dem Befestigungselement (22) bereitgestellt ist, wobei ein Innendurchmesser der Durchgangsöffnung größer als ein Innendurchmesser der Einsetzdurchgangsöffnung ist. 5
4. Kommodeneinheit (1) nach Anspruch 3, ferner ein Rohrelement (40) umfassend, das unter dem Befestigungselement (22) bereitgestellt ist, wobei das Rohrelement mit der Einsetzdurchgangsöffnung (30) in Verbindung steht, wobei der Innendurchmesser der Durchgangsöffnung größer als ein Außendurchmesser des Rohrelements ist. 10
5. Kommodeneinheit (1) nach Anspruch 4, wobei der Innendurchmesser der Einsetzdurchgangsöffnung kleiner als ein Innendurchmesser des Rohrelements ist. 15
- 20

té externe de l'unité de fixation (26) dans la première direction.

3. Unité de commode (1) comprenant la commode (2) et la toilette (4) selon la revendication 1 ou 2, l'unité d'insertion (30) étant un trou débouchant d'insertion prévu dans l'élément de fixation (22), un diamètre interne du trou débouchant étant supérieur à un diamètre interne du trou débouchant d'insertion. 5
4. Unité de commode (1) selon la revendication 3, comprenant en outre un élément de tuyau (40) prévu au-dessous de l'élément de fixation (22), l'élément de tuyau communiquant avec le trou débouchant d'insertion (30), le diamètre interne du trou débouchant étant supérieur à un diamètre externe de l'élément de tuyau. 10
5. Unité de commode (1) selon la revendication 4, dans laquelle le diamètre interne du trou débouchant d'insertion est inférieur à un diamètre interne de l'élément de tuyau. 15
- 20

Revendications

1. Toilette (4) montée sur une commode (2), un espace intérieur (34) étant prévu dans la commode, l'espace intérieur communiquant avec un trou débouchant (32) prévu dans une surface supérieure de la commode, la toilette comprenant : 30
- un élément de fixation (22) pouvant être fixé sur la commode (2) ; et 35
- une unité principale de toilette (8) montée au-dessus de l'élément de fixation (22), **caractérisée en ce que** la toilette (4) comprend en outre :
- une garniture (24) recouvrant une circonférence externe de l'élément de fixation (22) ; 40
- et
- une unité d'insertion (30) qui est prévue dans l'élément de fixation (22) et communiquant avec le trou débouchant (32), un tuyau d'alimentation en eau (20) ou un cordon d'alimentation électrique (18) raccordé à l'unité principale de toilette (8) pouvant être inséré à travers l'unité d'insertion. 45
- 50
2. Dispositif selon la revendication 1, dans lequel :
- l'élément de fixation (22) comprend une unité de fixation (26) fixée à la commode (2), l'unité de fixation ayant une configuration de plaque, une direction longitudinale de la configuration de plaque étant une première direction, et l'unité d'insertion (30) est positionnée sur un côté 55

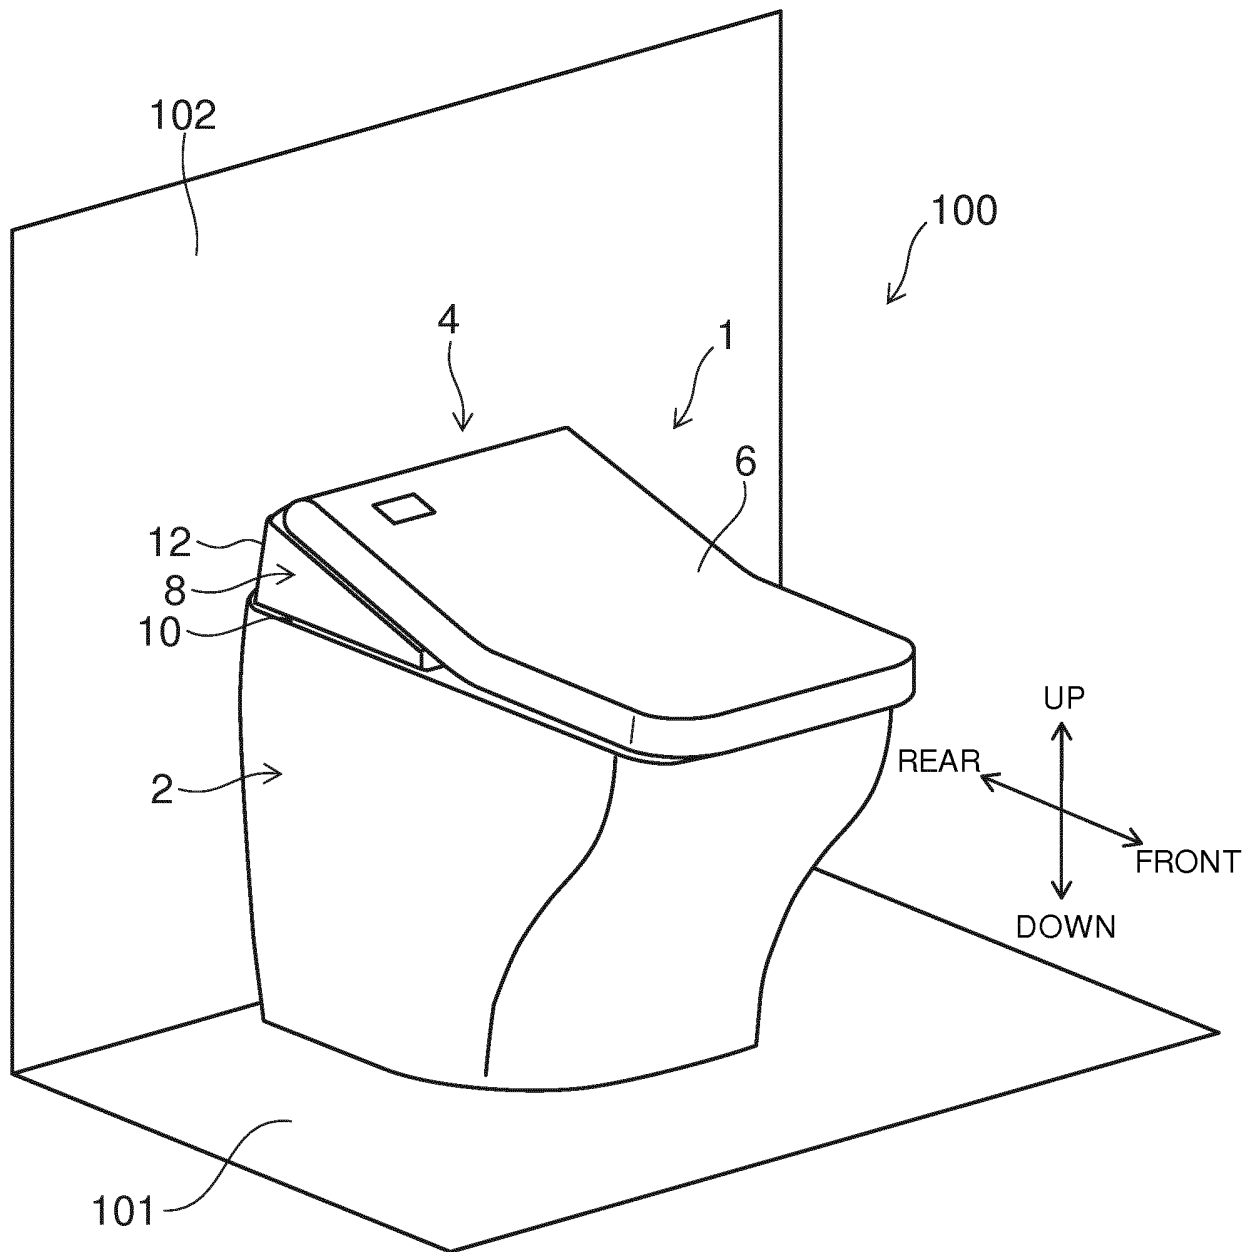


FIG. 1

FIG. 2

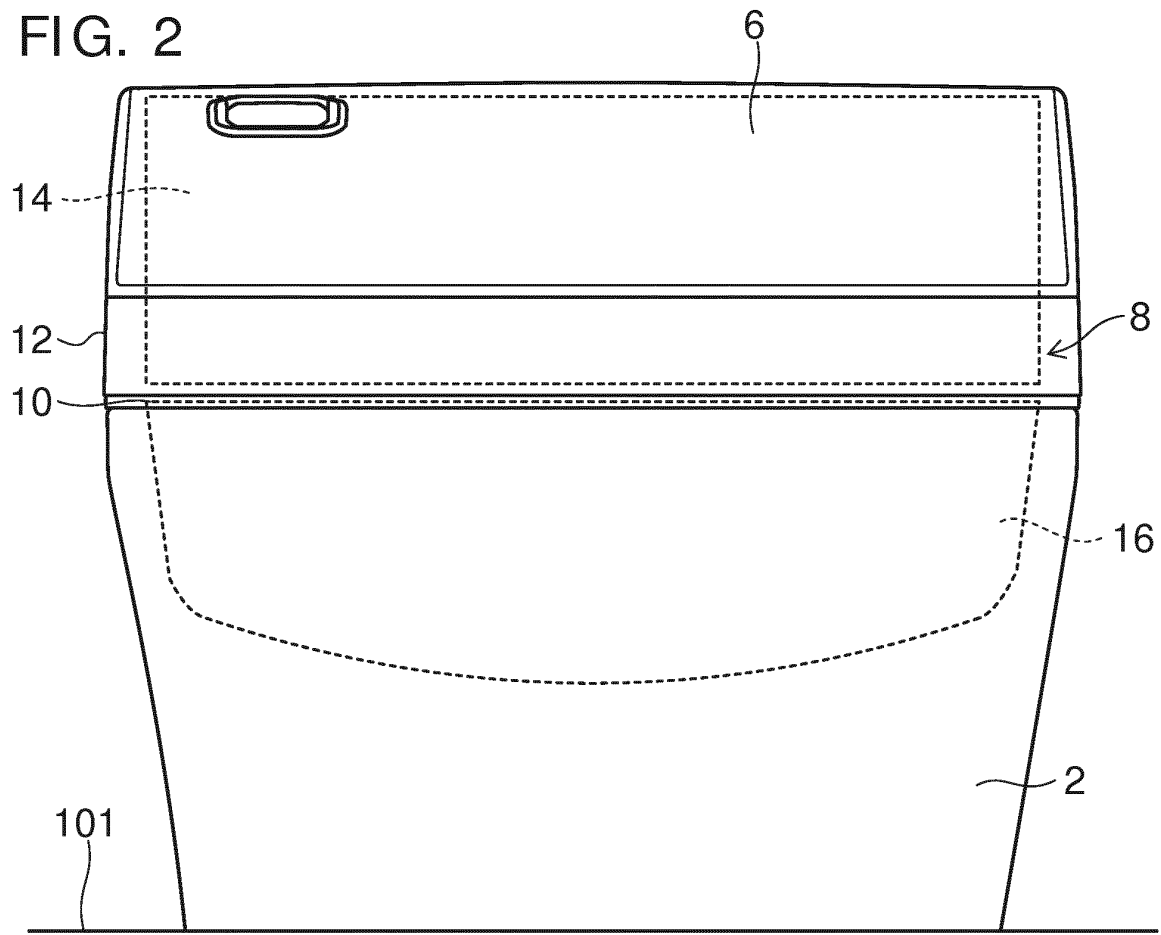
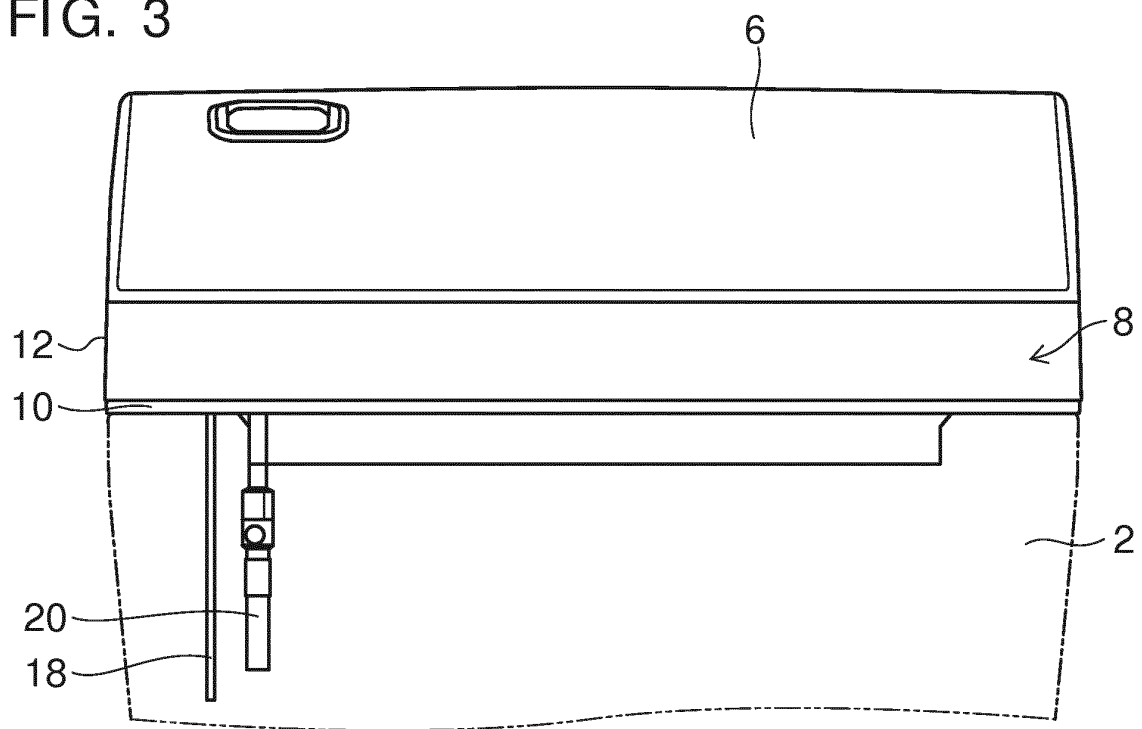


FIG. 3



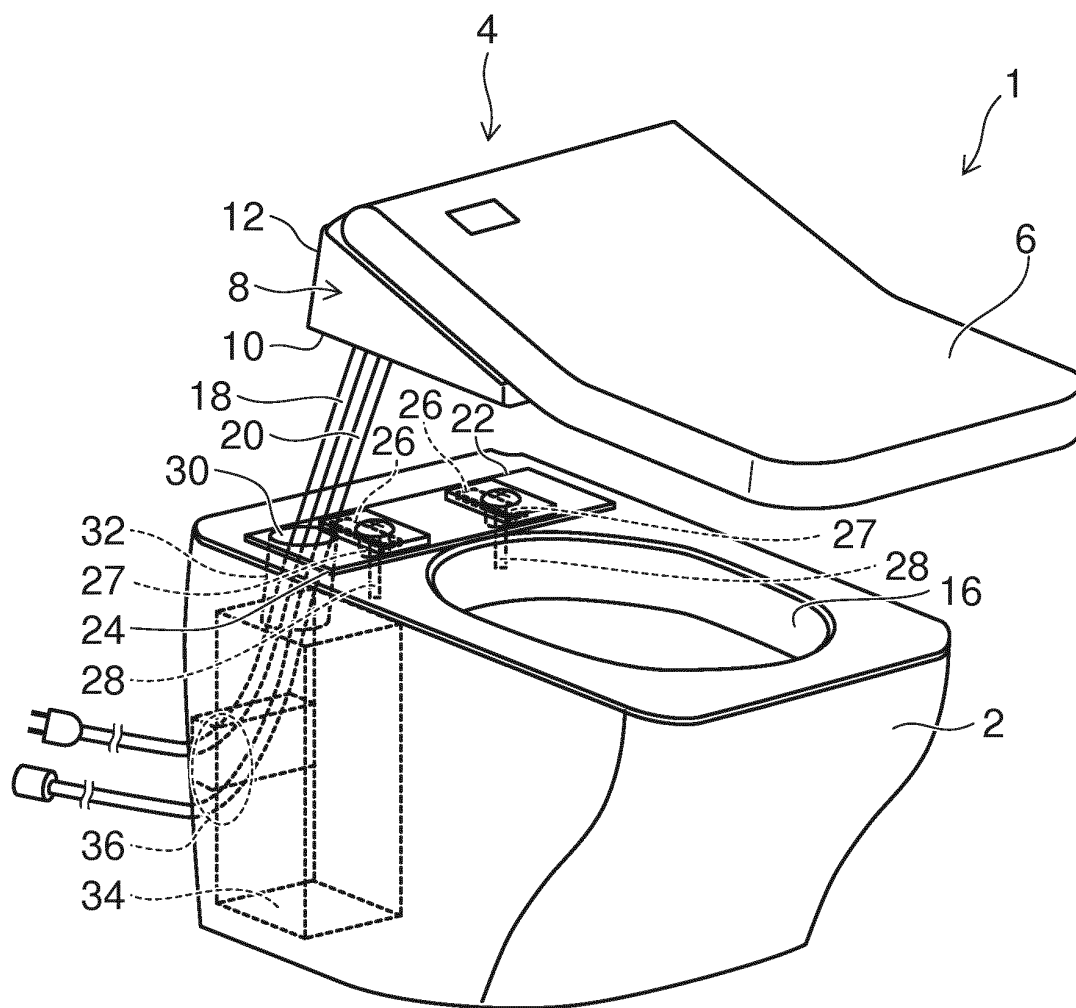


FIG. 4

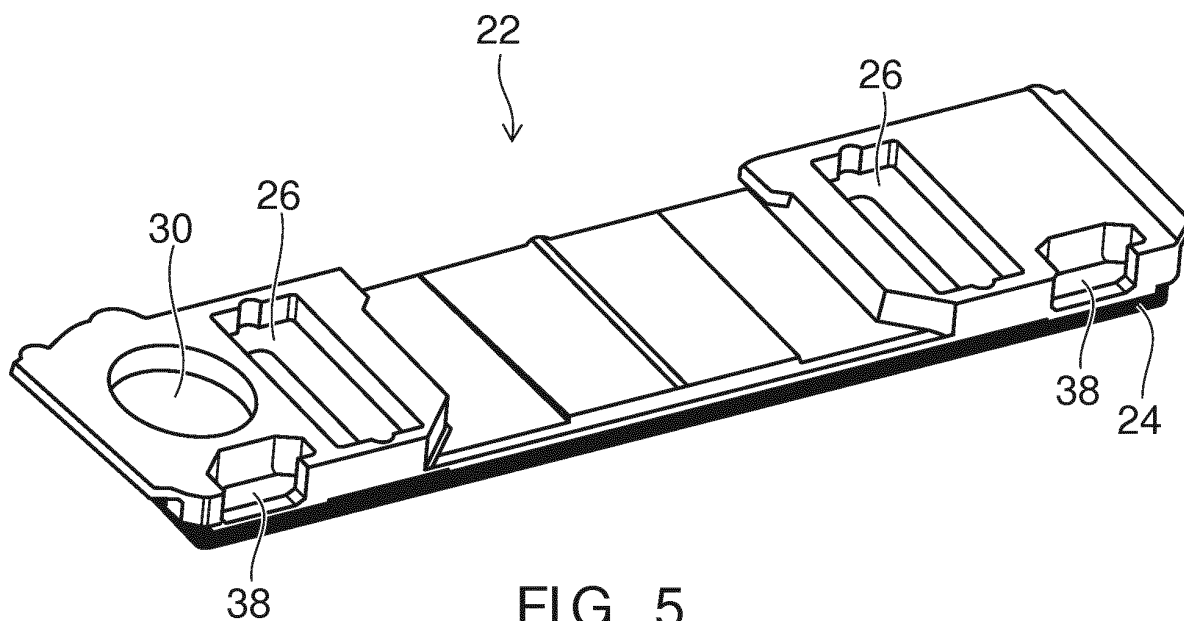


FIG. 5

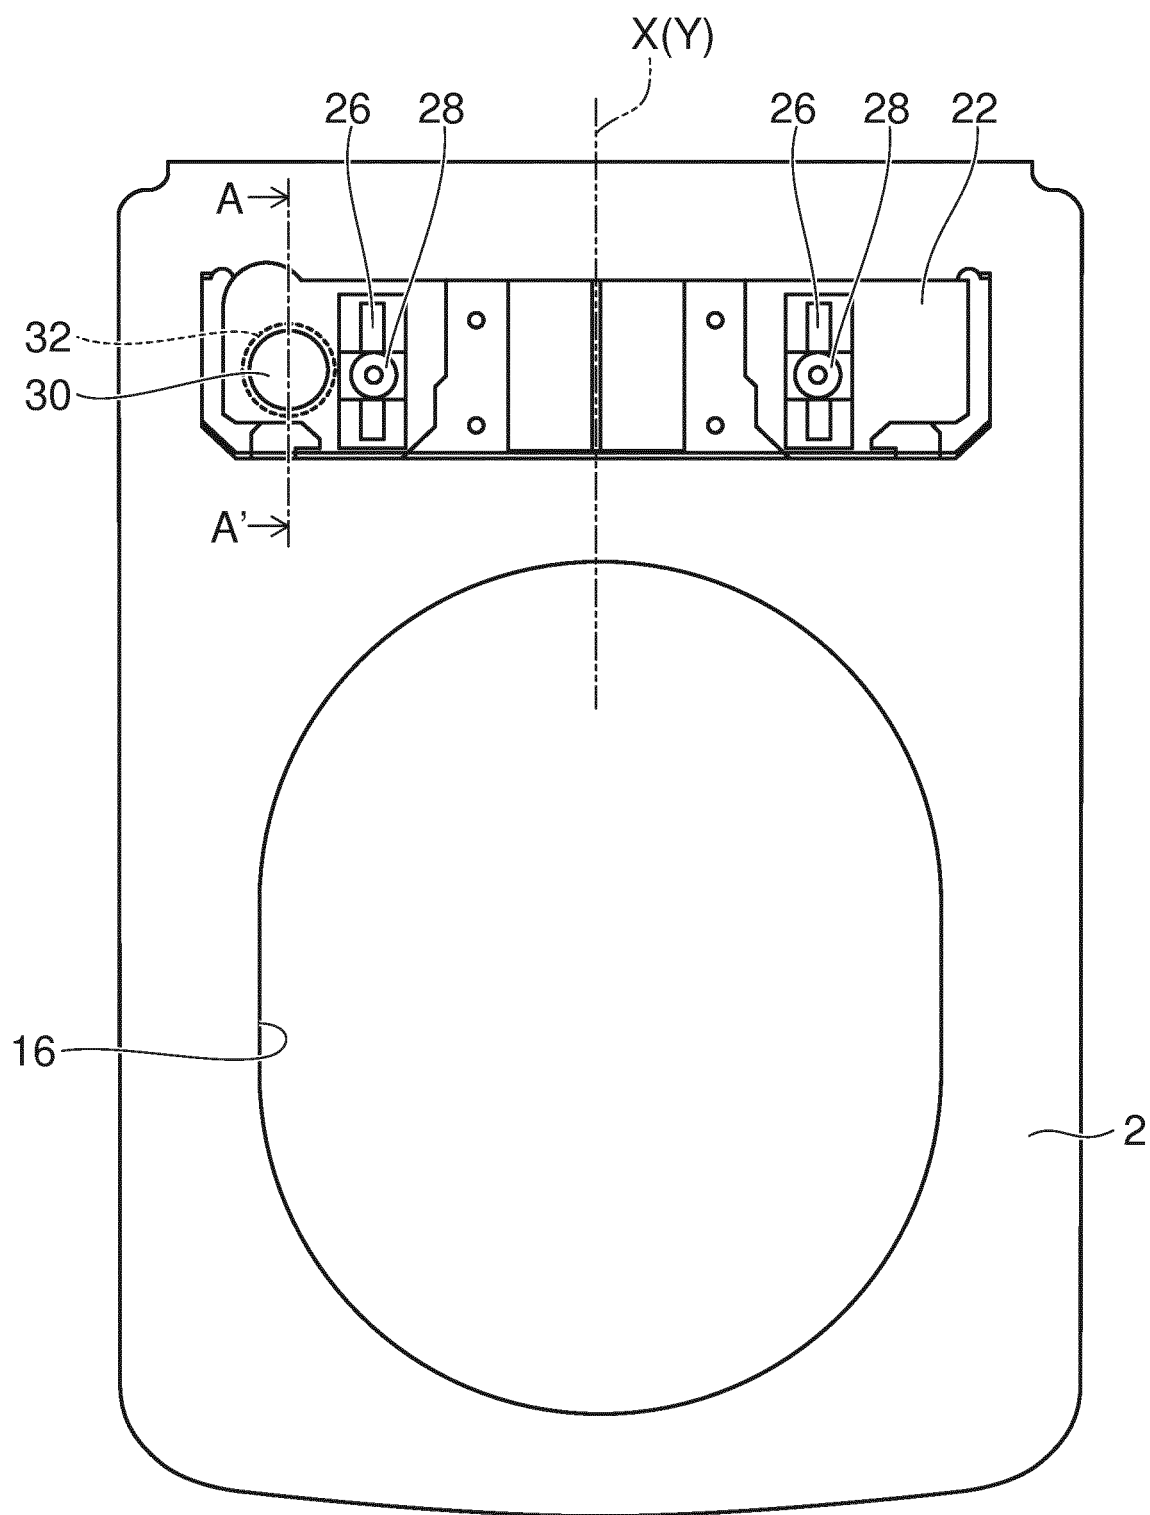


FIG. 6

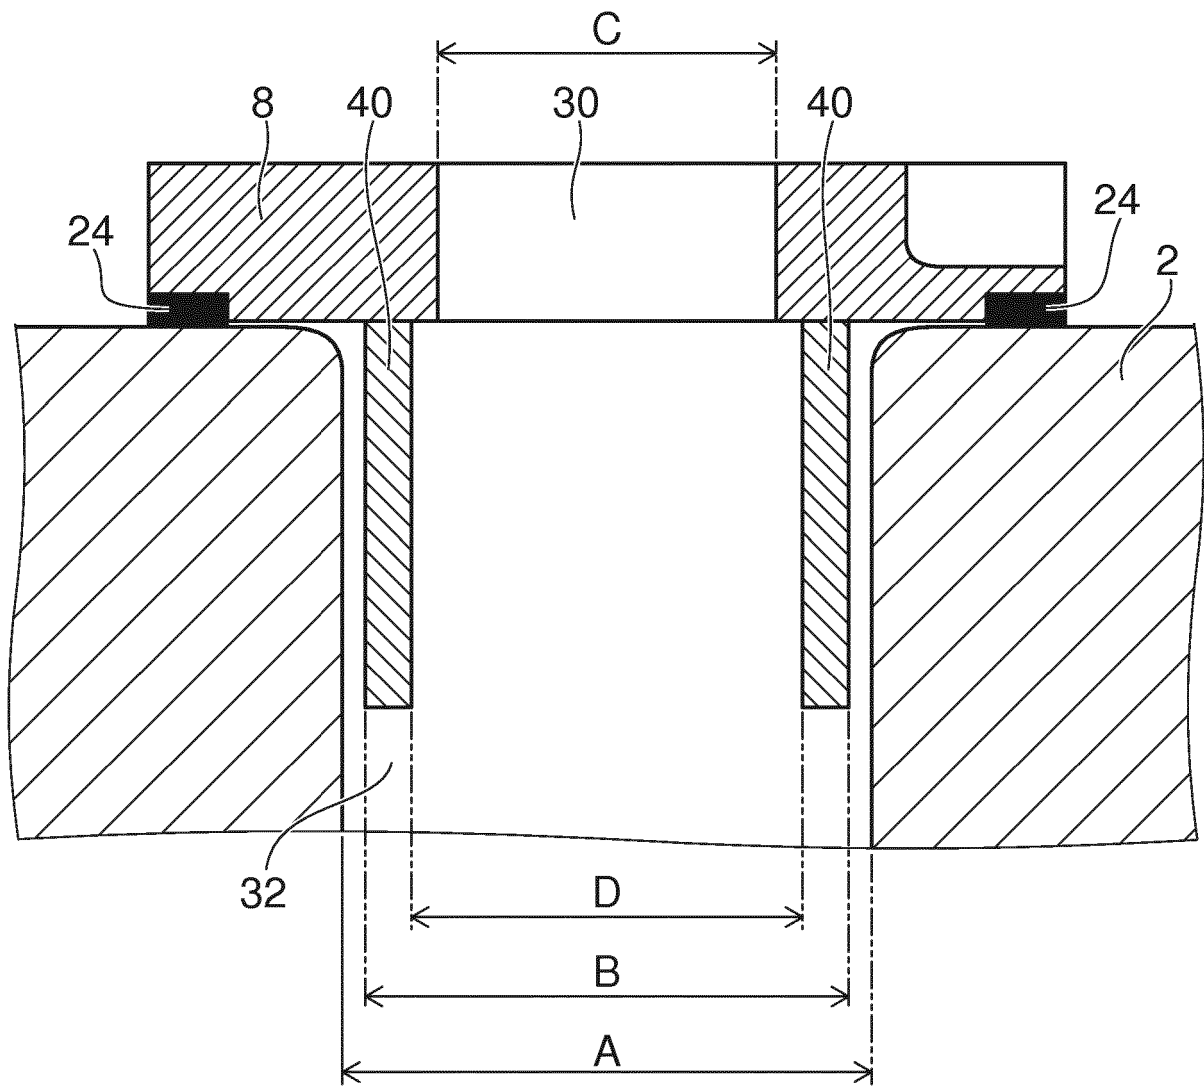


FIG. 7

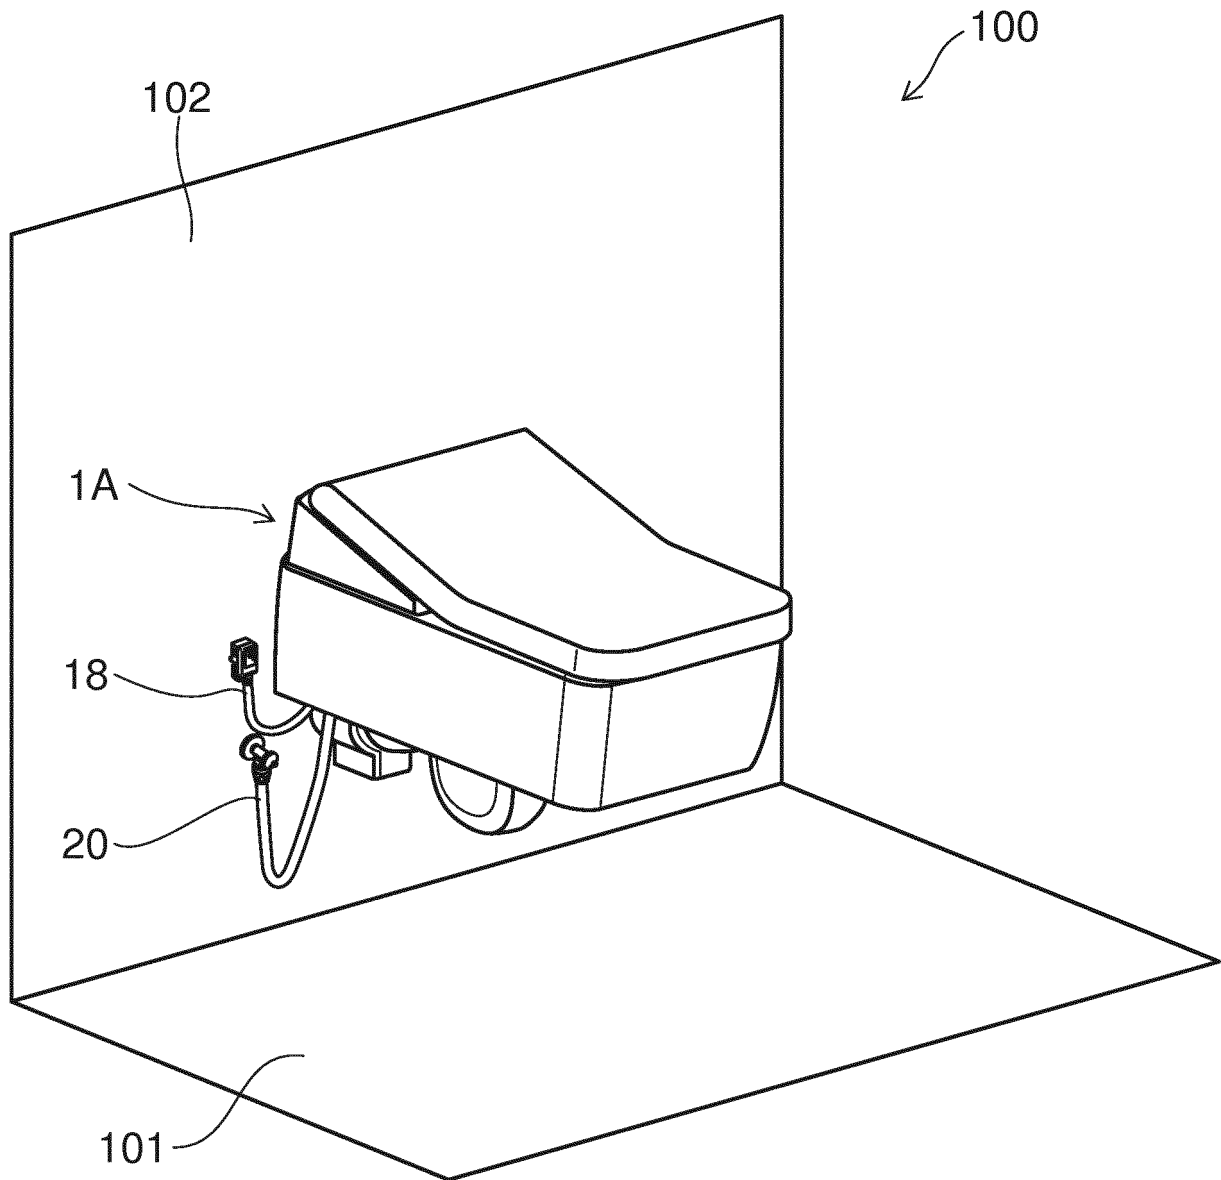


FIG. 8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2005290967 A [0003] [0004]
- DE 202013001133 U1 [0006]
- WO 2013041892 A1 [0006]
- DE 102011118352 A1 [0006]
- JP 2014147445 A [0006]
- EP 2325402 A2 [0006]
- EP 2192244 A2 [0006]
- JP H0885999 A [0006]