



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
23.03.2016 Bulletin 2016/12

(51) Int Cl.:
G03G 15/16 (2006.01)

(21) Application number: **15183271.4**

(22) Date of filing: **01.09.2015**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA

(71) Applicant: **Kyocera Document Solutions Inc.**
Osaka-shi, Osaka 540-8585 (JP)

(72) Inventor: **OBA, Keisuke**
Osaka 540-8585 (JP)

(74) Representative: **Becker Kurig Straus**
Patentanwälte
Bavariastrasse 7
80336 München (DE)


(30) Priority: **22.09.2014 JP 2014192469**

(54) **IMAGE FORMING APPARATUS**

(57) An image forming apparatus (1) includes an image carrier (7), a rotating brush (33), a collecting roller (35), a cleaning blade (37), a sealing member (41) and a side sealing member (43). The sealing member (41) has an extension part (41a) extending outside from each end of the collecting roller (35) in an axial direction. The sealing member (41) comes into contact with the collecting roller (35) between a contact area (C1) between the

rotating brush (33) and the collecting roller (35) and the cleaning blade (37) and then prevents backflow of the residue. The side sealing member (43) lifts the extension part (41a) toward the collecting roller (35) on an outside at a predetermined interval from a position corresponding to each side edge of a maximum-width sheet passing region on the image carrier (7).

FIG.1

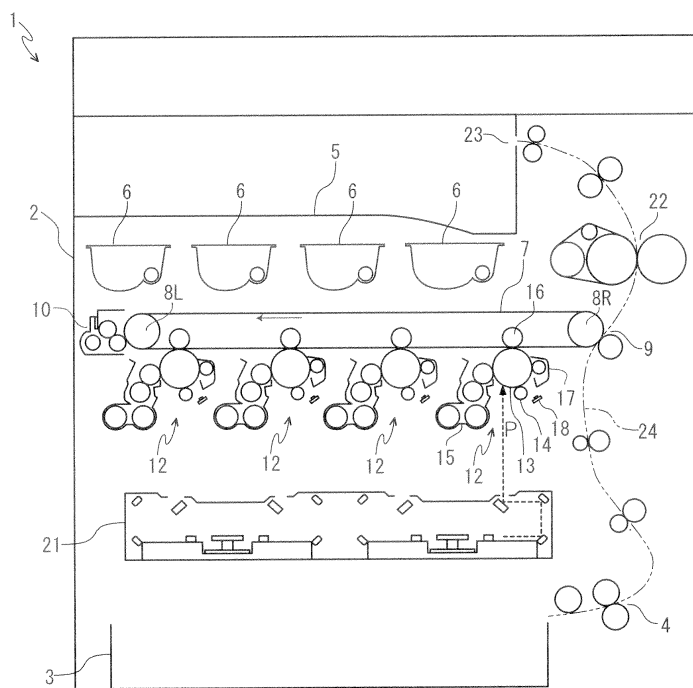

Description

INCORPORATION BY REFERENCE

[0001] This application is based on and claims the benefit of priority from Japanese Patent application No. 2014-192469 filed on September 22, 2014, the entire contents of which are incorporated herein by reference.

BACKGROUND

[0002] The present disclosure relates to an image forming apparatus provided with a cleaning device which removes a toner from an image carrier.

[0003] In an electrographic image forming apparatus, such as a printer, a facsimile machine or a multifunction peripheral, a toner remained on an image carrier is removed by a cleaning device after a toner image has been transferred to a transfer sheet. Also, in a full color image forming apparatus, an intermediate transferring belt made of resin or an intermediate transferring belt having an elastic layer is used as an image carrier.

[0004] In the case of the intermediate transferring belt made of resin, a cleaning device in which an edge of a blade made of a urethane rubber or the like presses against a surface of the intermediate transferring belt to scrape the toner is generally used because of its simple construction and inexpensiveness. On the other hand, in the case of the intermediate transferring belt having an elastic layer, there is mainly used a cleaning device in which the toner is mechanically and electrically swept from a surface of the intermediate transferring belt by a rotating brush, the swept toner is moved from the rotating brush to a collecting roller by an electrostatic force, the toner adhering to the collecting roller is scraped by a cleaning blade, and the scraped toner is delivered to a collecting tank by a collecting screw.

[0005] In the cleaning device having the rotating brush, the collecting roller and the cleaning blade, on an upstream side from the cleaning blade in a rotating direction of the collecting roller, a sealing member is provided so as to abut against the collecting roller, preventing backflow of the scraped toner. Further, in order to prevent a leakage of the toner from both side edges of the sealing member, there may be a case in which side ends of the sealing member are supported so as to come closer to the collecting roller by side sealing members.

[0006] However, in a case where the sealing member and the side sealing members are provided, the toner or sheet powder collected on the collecting roller is dammed and accumulated by the sealing member and the side sealing members, and there may occur a failure that the accumulated toner or the like drops. In particular, a large amount of sheet powder generated from cut faces of both side edges of the transfer sheet exists on each side end of the collecting roller. In addition, the side ends of the collecting roller are applied with a pressure from the sealing member by the side sealing members. Thus, the accumulation of the sheet powder or toner becomes remarkable at the side ends of the collecting roller.

[0007] Also, it is considered that the surface of the collecting roller is subjected to an alumite processing to form a high resistance layer on the surface and then an electrical adhesion force between the collecting roller and the toner or sheet powder is set to be higher than an abutment force between the collecting roller and the sealing member to prevent damming of the toner or the like by the sealing member and the side sealing members. However, if the adhesion force between the collecting roller and the toner is increased, it becomes difficult to scrape the toner from the collecting roller by the cleaning blade. Also, if a pressure applied from the cleaning blade to the collecting roller is increased in order to increase a toner scraping force, the cleaning blade may be shaved or a torque applied to the collecting roller or the like may be increased.

SUMMARY

[0008] In accordance with an embodiment of the present disclosure, an image forming apparatus includes an image carrier, a rotating brush, a collecting roller, a cleaning blade, a sealing member and a side sealing member. The image carrier has a surface on which a toner image is formed. The rotating brush comes into contact with the surface of the image carrier and then collects a residue adhering to the surface after transferring the toner image to a transfer sheet. The collecting roller comes into contact with the rotating brush on a downstream side in a rotating direction of the rotating brush from a contact area between the image carrier and the rotating brush and then removes the residue collected by the rotating brush. The cleaning blade abuts against the collecting roller on a downstream side in the rotating direction of the collecting roller from a contact area between the rotating brush and the collecting roller and then scrapes the residue collected by the collecting roller. The sealing member has an extension part extending outside from each end of the collecting roller in an axial direction, and comes into contact with the collecting roller between the contact area between the rotating brush and the collecting roller and the cleaning blade and then prevents backflow of the residue. The side sealing member lifts the extension part toward the collecting roller on an outside at a predetermined interval from a position corresponding to each side edge of a maximum-width sheet passing region on the image carrier.

[0009] The above and other objects, features, and advantages of the present disclosure will become more apparent from the following description when taken in conjunction with the accompanying drawings in which a preferred embodiment of the present disclosure is shown by way of illustrative example.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010]

FIG. 1 is a schematic view showing an outline of a color printer according to an embodiment of the present disclosure.

FIG. 2 is a front view showing a cleaning device for intermediate belt in the color printer according to the embodiment of the present disclosure.

FIG. 3 is a front view showing a sealing member in a cleaning device of the color printer according to the embodiment of the present disclosure.

FIG. 4A is a view showing the sealing member and a side sealing member viewed from a direction indicated by an arrow A of FIG. 3 in the cleaning device of the color printer according to the embodiment of the present disclosure.

FIG. 4B is a view showing the sealing member and the side sealing member viewed from a front side in cleaning device of the color printer according to the embodiment of the present disclosure.

FIG. 5A is a view showing the sealing member and a side sealing member according to a second embodiment viewed in the same direction as that indicated by the arrow A of FIG. 3 in the cleaning device of the color printer according to the embodiment of the present disclosure.

FIG. 5B is a view showing the sealing member and the side sealing member according to the second embodiment viewed from the front side in the cleaning device of the color printer according to the embodiment of the present disclosure.

DETAILED DESCRIPTION

[0011] Hereinafter, with reference to figures, an image forming apparatus according to an embodiment of the present disclosure will be described.

[0012] First, with reference to FIG. 1, the entire structure of a color printer 1 (image forming apparatus) will be described. FIG. 1 is a schematic diagram schematically showing a color printer according to an embodiment of the present disclosure. In the following description, a front side of the sheet plane of FIG.1 shows a front side of the color printer 1 and left and right directions are based on a direction viewed from the front side of the color printer 1.

[0013] The color printer 1 is provided with a box-like shaped printer main body 2. In a lower part of the printer main body 2, a sheet feeding part 4 configured to feed a transfer sheet from a sheet feeding cassette 3 is provided, and on an upper face of the printer main body 2, an ejected sheet tray 5 is provided. Inside the printer main body 2, toner containers 6 respectively storing different color (magenta, cyan, yellow and black) toner (developer) are arranged in an upper space. Under the toner containers 6, an intermediate transferring belt 7 (image carrier) is bridged around left and right rollers 8L, 8R. On one end (right end in FIG.1) of the intermediate transferring belt 7, a second transferring part 9 is formed. On the other end of the intermediate transferring belt 7, a cleaning device 10 is provided. The intermediate transferring belt 7, the left and right rollers 8L, 8R and the cleaning device 10 are integrated into an intermediate transferring unit. Under the intermediate transferring belt 7, four image forming parts 12 is provided for respective toner colors.

[0014] In the image forming part 12, a photosensitive drum 13 is rotatably provided. Around the photosensitive drum 13, a charger 14, a development unit 15, a transfer roller 16, a photosensitive drum cleaning device 17 and a static eliminator 18 are arranged along a rotating direction of the photosensitive drum 13. Under the image forming parts 12, an exposure device 12 containing a laser scanning unit (LSU) is arranged. Above the second transferring part 9, a fixing device 22 is provided. Above the fixing device 22, a sheet ejecting unit 23 facing the ejected sheet tray 5 is provided.

[0015] In the printer main body 2, a transfer sheet conveying path 24 is formed extending vertically from the sheet feeding part 4 to the sheet ejecting unit 23 through the second transferring part 9 and the fixing device 22.

[0016] Next, the operation of forming an image by the color printer 1 having such a configuration will be described. When image data is inputted from a computer or the like connected to the color printer 1, the image forming operation is carried out as follows.

[0017] After the surface of the photosensitive drum 13 is charged by the charger 14, the exposure device 21 exposes the surface of the photosensitive drum 13 with a laser light (refer to the dotted line p in FIG. 1) in accordance to the image data to form an electrostatic latent image on the surface of the photosensitive drum 13. The electrostatic latent image is then developed into a toner image of respective color by the developing unit 15. The toner images are first-
 5 transferred on the intermediate transferring belt 7 by the transferring roller 16. The above-mentioned operation is repeated in order by the respective image forming parts 12, thereby forming a full color toner image onto the intermediate transferring belt 7. Incidentally, toner and residual electric charge remained on the photosensitive drum 13 is removed by the cleaning device 17 and the static eliminator 18, respectively.

[0018] On the other hand, the transfer sheet fed from the sheet feeding cassette 3 by the sheet feeding part 4 or a bypass tray (not shown) is conveyed to the second transferring part 9 in a suitable timing for the above-mentioned image forming operation. Then, in the second transferring part 9, the full color toner image on the intermediate transferring belt 7 is second-transferred onto the transfer sheet. The transfer sheet with the second-transferred toner image is conveyed to a downstream side along the transfer sheet conveying path 24 to enter the fixing part 22, and then, the toner image is fixed on the transfer sheet in the fixing part 22. The transfer sheet with the fixed toner image is ejected from the sheet
 10 ejecting unit 23 onto the ejected sheet tray 5.

[0019] Next, with reference to FIGS. 2 to 4B, the cleaning device 10 will be described. FIG. 2 is a front view of the cleaning device; FIG. 3 is a front view mainly showing a sealing member; FIG. 4 is a view showing the sealing member and a side sealing member viewed from a direction indicated by an arrow A of FIG. 3; and FIG. 4B is a view showing the sealing member and the side sealing member viewed from the front side.

[0020] As shown in FIG. 2, the cleaning device 10 is disposed to oppose to the left roller 8L around which the intermediate transferring belt 7 is bridged. The intermediate transferring belt 7 has a substrate layer 7a made of resin, an elastic layer 7b and a coating layer (not shown) which are laminated on an outer layer side of the substrate layer 7a in the order. The elastic layer 7b is made of a urethane rubber, for example. The outer layer is made of PTFE (polytetrafluoroethylene).

[0021] The cleaning device 10 has a supporting member 31, a rotating brush 33, a collecting roller 35, a cleaning blade 37, a screwing member 39, a sealing member 41 and side sealing members 43. The supporting member 31 supports the rotating brush 33, the collecting roller 35, the cleaning blade 37, the screwing member 39, the sealing member 41 and the side sealing members 43. The rotating brush 33 is configured to come into contact with a surface of the intermediate transferring belt 7 and then collect the toner from the surface of the intermediate transferring belt 7. The collecting roller 35 is configured to come into contact with the rotating brush 33 and then collect the toner from the
 25 rotating brush 33. The cleaning blade 37 is configured to abut against the collecting roller 35 and then scrape the toner. The screwing member 39 is configured to collect the scraped toner. The sealing member 41 is configured to abut against the collecting roller 35 and then prevent backflow of the toner. The side sealing members 43 are provided on each side end of the sealing member 41 in a width direction of the transfer sheet.

[0022] The supporting member 31 is a box-shaped member of which one face opens, and is provided on the intermediate transferring unit so that the opening faces the left roller 8L.

[0023] The rotating brush 33 is supported rotatably in the counterclockwise direction of FIG. 2 so as to come into contact with the surface of the intermediate transferring belt 7 through the opening of the supporting member 31 in a counter direction relative to the traveling direction of the intermediate transferring belt 7. The rotating brush 33 is formed by a fur brush using a brush fiber made of electrically conductive resin, such as electrically conductive polyester or electrically conductive nylon, for example.

[0024] The collecting roller 35 is supported rotatably in the clockwise direction of FIG. 2 so as to come into contact with the rotating brush 33 on a downstream side in the rotating direction of the rotating brush 33 from a contact area C1 between the rotating brush 33 and the intermediate transferring belt 7.

[0025] The collecting roller 35 is formed by subjecting a surface of a substrate made of SUM (sulfur-composite free cutting steel) to a nickel plating processing. The surface of the collecting roller 35 has a surface ten-point average roughness Rz (JIS94 Standard) of 2 μm or less and a maximum height Ry (JIS94 Standard) of 6.3 μm or less.

[0026] A bias current of a reverse polarity to that of the toner is applied to the collecting roller 35. The applied current can be varied, and in a case where a large amount of toner is removed, for example, in a case where it is necessary to clean the toner image formed on the intermediate transferring belt 7 in the event of sheet jamming or the like, a high
 40 current is applied.

[0027] A substantially upper half of the cleaning blade 37 is fixedly attached to a supporting plate 37a. The supporting plate 37a is supported by the supporting member 31 so that the cleaning blade 37 abuts against the collecting roller 35 in the counter direction relative to the rotating direction of the collecting roller 35 on a downstream side in the rotating direction of the collecting roller 35 from a contact area C2 between the rotating brush 33 and the collecting roller 35. The cleaning blade 37 is made of resin, such as polyurethane or PET, for example.

[0028] The screwing member 39 is rotatably supported under the cleaning blade 37.

[0029] The sealing member 41 is a sheet-shaped member having a width larger than a length of the collecting roller 35 in an axial direction. A substantially lower half of the sealing member 41 is fixedly attached to an attachment plate

42. The attachment plate 42 is positioned in the axial direction of the collecting roller 35 so that each side end of the sealing member 41 extends outside from each side end of the collecting roller 35. In the following description, a portion extending outside from each side end of the collecting roller 35 is defined as an extension part 41a. Also, the attachment plate 42 is supported by the supporting member 31 so that the sealing member 41 comes into contact with the collecting roller 35 from the upstream side in the rotating direction of the collecting roller 35 between the contact area C2 of the rotating brush 33 with the collecting roller 35 and the cleaning blade 37.

[0030] As shown in FIG. 3, in a state in which the collecting roller 35 is not supported by the supporting member 31, the sealing member 41 is supported to be straightly inclined in an oblique left upward direction (refer to the solid line of FIG. 3). If the collecting roller 35 is supported by the supporting member 31, the sealing member 41 is pressed by the surface of the collecting roller 35, is elastically deformed so as to warp in a leftward direction of FIG. 3, and is pressed against the collecting roller 35 with a predetermined pressure (refer to the double-dotted chain line of FIG. 3). The sealing member 41 is made of a urethane sheet, for example.

[0031] The side sealing member 43 according to the first embodiment, as shown in FIG. 3, FIG. 4A and FIG. 4B, is supported by the supporting member 31 so as to oppose to each extension part 41a of the sealing member 41 from an opposite side of the collecting roller 35. The side sealing member 43 is made of foamed urethane, for example.

[0032] As shown in FIGS. 4A and 4B, in the state in which the collecting roller 35 is not supported by the supporting member 31, each extension part 41a of the sealing member 41 is lifted so as to come closer to the collecting roller 35 by a predetermined distance D1 with the side sealing member 43. Also, as shown in FIG. 4A, the side sealing members 43 are disposed outside by a predetermined distance W1 from positions R1 corresponding to side edges of a maximum width-size transfer sheet passing region R on the intermediate transferring belt 7.

[0033] In a state in which each extension part 41a of the sealing member 41 is lifted by the side sealing member 43, if the collecting roller 35 is supported by the supporting member 31, a portion of the sealing member 41 between both extension parts 41a comes into contact with an entire region in the axial direction of the collecting roller 35 at a substantially constant pressure of such strength that no gap is formed between the portion between the extension parts 41a and the collecting roller 35. However, since the extension parts 41a are lifted to come closer to the collecting roller 35, a pressure applied from the sealing member 41 to the collecting roller 35 becomes comparatively high at a vicinity of each side end of the collecting roller 35. Also, since the vicinity of each side end of the collecting roller 35 is close to the position R1 corresponding to each side edge of the maximum width-size transfer sheet passing region R on the intermediate transferring belt 7, a large amount of sheet powder is generated from each side edge face of the transfer sheet. Due to these facts, at each side end of the collecting roller 35, the sheet powder or the like is easily accumulated, in particular.

[0034] Therefore, if the position R1 corresponding to each side edge of the maximum width-size transfer sheet passing region R on the intermediate transferring belt 7 and a position at which the pressure applied to the collecting roller 35 from the sealing member 41 becomes high are spaced from each other as far as possible, it is predicted that the accumulation of sheet powder or the like can be prevented. Hence, a relationship between the position of the side sealing member 43 and an accumulation state of sheet powder or the like was obtained by way of a following experiment.

[0035] An experimental conditions are shown below.

- Machine targeted to be tested: Color printer (remodeled machine of EcosysP6035 available from Kyocera Document Solution Co., Ltd.).
- Intermediate transferring belt 7: one obtained by laminating the substrate layer 7a made of PVDF (vinylidene polyfluoride), the elastic layer 7b made of urethane and the outer layer made of PTFE (polytetrafluoroethylene) in the order (available from Okura Industrial Co., Ltd.).
- Rotating brush 33: Fur brush made of electrically conductive acrylic fiber (available from Toei Sangyo Co., Ltd.).
- Collecting roller 35 : one obtained by subjecting a surface of SUM-based substrate to a nickel plating processing. The surface ten-point average roughness is 1.5 μm and the maximum height Ry is 6.3 μm .
- Cleaning blade 37: Polyurethane rubber-based blade (available from NOK Corporation).
- Blade weighting manner: Constant displacement manner.
- Sealing member 41: Urethane sheet with a thickness of 0.1 mm (available from Nihon Matai Co., Ltd.).
- Side sealing member 43: Soft urethane foam (available from INOAC Corporation).
- Bias applied to collecting roller 35: -3 μA .
- Amount of biting of the rotating brush 33 into the intermediate transferring belt 7 at the contact area C1: 1.0 mm.
- Amount of biting of the rotating brush 33 into the collecting roller 35 at the contact area C2: 1.5 mm.

[0036] In the experimental condition described above, a lifting height D1 (hereinafter, referred to as a height difference D1) of the extension part 41a of the sealing member 41 toward the collecting roller 35 by the side sealing members 43 was set to 0.5 mm, 1 mm and 1.5 mm and a distance W1 (hereinafter, referred to as a spacing distance W1) between the position R1 corresponding to each side edge of the maximum width-size transfer sheet passing region R and the side sealing member 43 was varied to 3 mm, 5 mm, 8 mm and 10 mm. Then, an image of a test document with a

predetermined printing rate was formed on 1,000 sheets of plain sheet (available from JKSHEET Co., Ltd.), and subsequently, an accumulation state of sheet powder or the like was determined by visually observing the collecting roller 35. As to the accumulation state of sheet powder, a case in which almost no accumulation was observed was defined as O; a case in which accumulation to an extent such that a problem occurs was observed was defined as X; and an intermediate state thereof was defined as Δ. The results of the determination are shown in Table 1.

[Table 1]

		a spacing distance W1 (mm) between side edge of sheet and side sealing member			
		3	5	8	10
a height difference D1 (mm) between sealing member and side sealing member	0.5	×	Δ	○	○
	1.0	×	×	○	○
	1.5	×	×	○	○

[0037] From Table 1, it is found that the smaller the height difference D1 is and the longer the spacing distance W1 is, the less the accumulation of sheet powder is. Namely, if the height difference D1 is small, since an abutment pressure applied to the collecting roller 35 from the sealing member 41 becomes low, even in a case where the spacing distance W1 is short, the accumulation of sheet powder hardly occurs. On the other hand, if the height difference D1 is large, since the abutment pressure applied to the collecting roller 35 from the sealing member 41 becomes high, it is necessary to increase the spacing distance W1. From Table 1, in order to prevent the accumulation of sheet powder, in the experimental conditions described previously, it is found that the height difference D1 is required to be within a range of 0.5 mm to 1.5 mm and the spacing distance W1 is required to be 8 mm or more.

[0038] In the cleaning device 10 having the construction mentioned above, the residue, such as the residual toner or sheet powder, that remains on the surface of the intermediate transferring belt 7 is collected by the brush fibers at the contact area C1 between the intermediate transferring belt 7 and the rotating brush 33. The collected residue is transferred from the brush fibers to the collecting roller 35 at the contact area C2 between the rotating brush 33 and the collecting roller 35 due to a potential difference between the rotating brush 33 and the collecting roller 35. The thus transferred residue to the collecting roller 35 is mechanically scraped by the cleaning blade 37 and then dropped. The thus scraped residue is discharged to the outside of the apparatus by the screwing member 39.

[0039] In addition, the sealing member 41 abuts against the collecting roller 35 at a pressure of such strength that the toner or sheet powder collected by the collecting roller 35 is not dammed. This prevents backflow of the toner from a space 31b on a side of the cleaning blade 37 into a space 31a on a side of the rotating brush 33. Further, the side sealing members 43 prevents a leakage of the toner or sheet powder from each side edge of the sealing member 41.

[0040] As has been described above, in the cleaning device 10 of the color printer 1 according to the embodiment, since a portion at which the extension part 41a of the sealing member 41 is lifted by the side sealing members 43 and a portion at which the accumulation of sheet powder easily occurs (the position R1 corresponding to each side edge of the maximum width-size transfer sheet passing region R) are spaced from each other, the sealing member 41 comes into contact with the collecting roller 35 in a substantially straight posture along the collecting roller 35 as well as the portion at which the accumulation of sheet powder easily occurs. Therefore, the sheet powder or toner adhering to the collecting roller 35 is scraped and collected by the cleaning blade 37 without being dammed by the sealing member 41 all over the axial direction of the collecting roller 35. Further, the sealing member 41 can surely prevent the backflow of the collected sheet powder or the like.

[0041] Also, even if a pressure is applied to the collecting roller 35 from the sealing member 41, since the surface of the collecting roller 35 has a surface ten-point average roughness of 2 μm or less and a maximum surface height Ry of 6.3 μm or less, the toner or sheet powder collected from the rotating brush 33 can be kept on the collecting roller 35 without being scraped by the sealing member 41. Therefore, the toner or sheet powder collected on the collecting roller 35 can be reliably scraped by the cleaning blade 37. Accordingly, since it is not necessary to increase the abutment pressure of the cleaning blade 37, shaving of the cleaning blade 37 or the increase of the torque applied to the collecting roller 35 or the like can be prevented.

[0042] In addition, since the collecting roller 35 is formed by subjecting a surface of a substrate made of SUM (sulfur-composite free cutting steel) to a nickel plating processing, it is not necessary to apply an alumite processing in order to increase a resistance of the surface of the collecting roller 35. Therefore, the collecting roller 35 can be formed inexpensively.

[0043] Further, since a bias with an opposite polarity to the charging polarity of the toner is applied to the collecting roller 35 and the toner is electrically moved from the rotating brush 33 to the collecting roller 35, a removal efficiency of

the tonner from the rotating brush 33 can be increased. Therefore, a cleaning performance for the intermediate transferring belt 7 by the rotating brush 33 can be increased.

[0044] Next, with reference to FIGS. 5A and 5B, a side sealing member 43 according to a second embodiment will be described. FIG. 5A is a view showing the sealing member and the side sealing member viewed in the same direction as that indicated by the arrow A of FIG. 3, and FIG. 5B is a view showing the sealing member and the side sealing member viewed from the front side.

[0045] The side sealing member 43 has an upper sealing member 45 and a lower sealing member 46 which sandwich each extension part 41a of the sealing member 41 between a face on a collecting roller side and an opposite face to the collecting roller side. The upper sealing member 45 and the lower sealing member 46 are made of foamed urethane, for example.

[0046] As shown in FIGS. 5A and 5B, in the state in which the collecting roller 35 is not supported by the supporting member 31, each extension part 41a of the sealing member 41 is sandwiched between the upper and lower sealing members 45, 46 and is lifted so as to come closer to the collecting roller 35 by a predetermined distance D2. Also, the lower sealing member 46 is disposed outside by a predetermined distance W2 from the position R1 corresponding to each side edge of the maximum width-size transfer sheet passing region R.

[0047] Incidentally, a gap D3 between a face 45a on a side of collecting roller 35 of the upper sealing member 45 and a face 41b opposite to the collecting roller 35 of the sealing member 41 is within a range of 0.5 mm to 1.0 mm. Also, the upper sealing member 45 is disposed outside by a predetermined distance W3 from an inside end of the lower sealing member 46. The distance W3 is 3 mm or more, for example.

[0048] In this side sealing member 43 as well, a relationship between the position of the side sealing member 43 and the accumulation state of sheet powder or the like was obtained by the following experiment. The experimental conditions are the same as the experimental conditions shown above.

[0049] In the experimental conditions described above, a lifting height D2 (hereinafter, referred to as a height difference D2) of the extension part 41a of the sealing member 41 toward the collecting roller 35 by the side sealing member 43 was set to 0.0 mm, 0.25 mm, 0.5 mm and 0.75 mm and a distance W2 (hereinafter, referred to as a spacing distance W2) between the position R1 corresponding to each side edge of the maximum width-size transfer sheet passing region R and the lower sealing member 46 was varied to 0 mm, 2 mm, 3 mm and 4 mm. Then, an image of a test document with a predetermined printing rate was formed on 1,000 sheets of plain sheet (available from JKSHEET Co., Ltd.), and subsequently, the accumulation state of sheet powder or the like was determined by visually observing the collecting roller 35. As to the accumulation state of sheet powder, a case in which almost no accumulation was observed was defined as O; a case in which accumulation to an extent such that a problem occurs was observed was defined as X; and an intermediate state thereof was defined as Δ. The results of the determination are shown in Table 2.

[Table 2]

		a spacing distance W2 (mm) between side edge of sheet and side sealing member			
		0	2	3	4
a height difference D2 (mm) between sealing member and lower sealing member	0.00	○	○	○	○
	0.25	×	○	○	○
	0.50	×	Δ	○	○
	0.75	×	×	×	Δ

[0050] From Table 2 as well, it is found that the smaller the height difference D2 is and the longer the spacing distance W2 is, the less the accumulation of sheet powder occurs. From Table 2, in order to prevent the accumulation of sheet powder, in the experimental condition described above, the height difference D2 is required to be within a range of 0.00 mm to 0.50 mm and the spacing distance W2 is required to be 2 mm or more.

[0051] Incidentally, in a case where the side sealing member 43 is composed of the upper and lower sealing members 45, 46 like the embodiment, even if the height difference is shorter and the spacing distance is shorter than those in a case where the side sealing member 43 is composed of one member, good experimental results are obtained. This is because, if each extension part 41a of the sealing member 41 is sandwiched between the upper and lower sealing members 45, 46, the sealing member 41 is kept in a tensioned posture in the width direction in comparison with a case in which each extension part 41a of the sealing member 41 is lifted from the lower side. Therefore, it is considered that, even if the lifting distance (height difference) of the sealing member 41 is reduced or if the spacing distance is reduced, a suitable abutment force can be applied to the collecting roller 35 from the sealing member 41.

[0052] Incidentally, in the case where the side sealing member 43 is composed of the upper and lower sealing members 45, 46, since the upper sealing member 45 is pressed by the collecting roller 35, the sealing member 41 may be deformed in a wavy state. Therefore, a width of the lower sealing member 46 is made larger than a width of the upper sealing member 45, and the sealing member 41 is lifted by the lower sealing member 46 and then is pressed by the collecting roller 35. This can prevent the waving of the sealing member 41. Thus, it is preferable that the distance W3 between the inside end of the lower sealing member 46 and the inside end of the upper sealing member 45 be 2 mm or more.

[0053] Incidentally, the height difference and spacing distance shown above are preferred values in the experimental conditions described above, and the preferred height difference and spacing distance according to the specification of the cleaning device 10 are determined.

[0054] The embodiment was described in a case of applying the configuration of the present disclosure to the color printer 1. On the other hand, in another embodiment, the configuration of the disclosure may be applied to another image forming apparatus, such as a copying machine, a facsimile or a multifunction peripheral, except for the printer 1.

[0055] While the present disclosure has been described with reference to the particular illustrative embodiments, it is not to be restricted by the embodiments. It is to be appreciated that those skilled in the art can change or modify the embodiments without departing from the scope and spirit of the present disclosure.

Claims

1. An image forming apparatus (1) comprising:

an image carrier (7) having a surface on which a toner image is formed;
 a rotating brush (33) coming into contact with the surface of the image carrier (7) and then collecting a residue adhering to the surface after transferring the toner image to a transfer sheet;
 a collecting roller (35) coming into contact with the rotating brush (33) on a downstream side in a rotating direction of the rotating brush (33) from a contact area (C1) between the image carrier (7) and the rotating brush (33) and then removing the residue collected by the rotating brush (33);
 a cleaning blade (37) abutting against the collecting roller (35) on a downstream side in the rotating direction of the collecting roller (35) from a contact area (C2) between the rotating brush (33) and the collecting roller (35) and then scraping the residue collected by the collecting roller (35);
 a sealing member (41) having an extension part (41a) extending outside from each end of the collecting roller (35) in an axial direction, and coming into contact with the collecting roller (35) between the contact area (C2) between the rotating brush (33) and the collecting roller (35) and the cleaning blade (37) and then preventing backflow of the residue; and
 a side sealing member (43) lifting the extension part (41a) toward the collecting roller (35) on an outside at a predetermined interval from a position corresponding to each side edge of a maximum-width sheet passing region on the image carrier (7).

2. The image forming apparatus (1) according to claim 1, wherein the sealing member (41) is supported so as to come into contact with the collecting roller (35) at a predetermined pressing force from an upstream side in the rotating direction of the collecting roller (35).

3. The image forming apparatus (1) according to claim 1, wherein, in a state in which the collecting roller (35) is not attached, the extension part (41a) is supported so as to be lifted by 0.5 mm to 1.5 mm toward the collecting roller (35) by the side sealing member (43) on an outside by 8 mm or more from the position corresponding to each side edge of the maximum width-size transfer sheet passing region on the image carrier (7).

4. The image forming apparatus (1) according to claim 1, wherein the side sealing member (43) has an upper sealing member (45) and a lower sealing member (36) which sandwich the sealing member (41) between a face on a side of the collecting roller (35) and an opposite face to the collecting roller side.

5. The image forming apparatus (1) according to claim 4, wherein the upper sealing member (45) and the lower sealing member (46) are set in the width direction such that an inner end of the upper sealing member (45) is positioned outside from an inner end of the lower sealing member (46).

6. The image forming apparatus (1) according to claim 4, wherein, in the state in which the collecting roller (35) is not attached, the extension part (41a) is supported so as to be lifted by 0.0 mm to 0.5 mm toward the collecting roller (35) by the side sealing member (43) on an outside by 2 mm or more from the position corresponding to each side

edge of the maximum width-size transfer sheet passing region on the image carrier (7).

7. The image forming apparatus (1) according to claim 1, wherein the collecting roller (35) has a surface ten-point average roughness Rz of 2 μm or less and a maximum height Ry of 6.3 μm or less.
8. The image forming apparatus (1) according to claim 1, wherein the collecting roller (35) is formed by subjecting a surface of a substrate made of SUM (sulfur-composite free cutting steel) to a nickel plating processing.
9. The image forming apparatus (1) according to claim 1, wherein a bias with a reverse polarity to a charging polarity of the toner is applied to the collecting roller (35).

FIG. 1

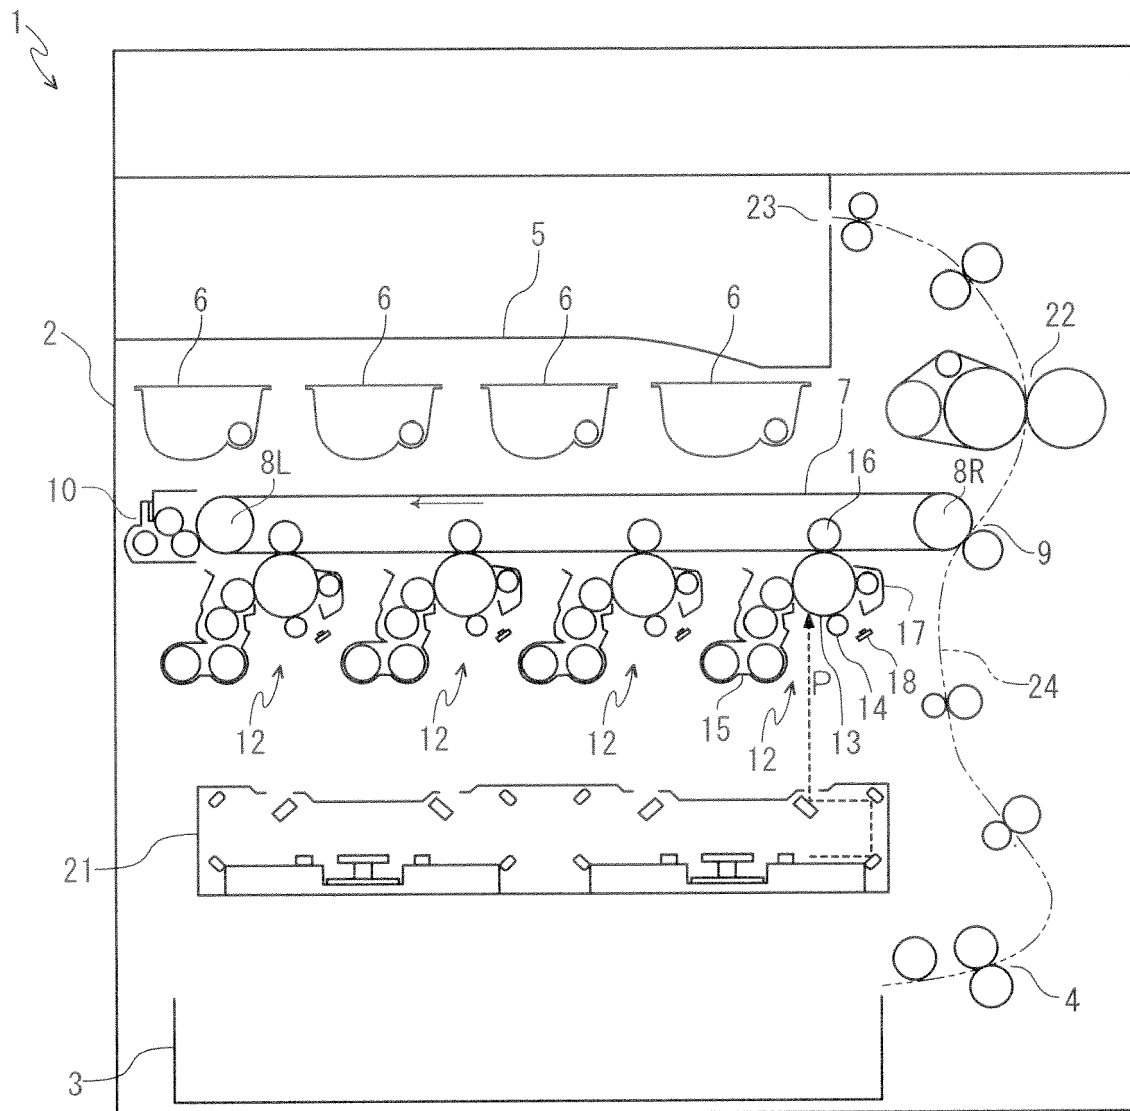


FIG.2

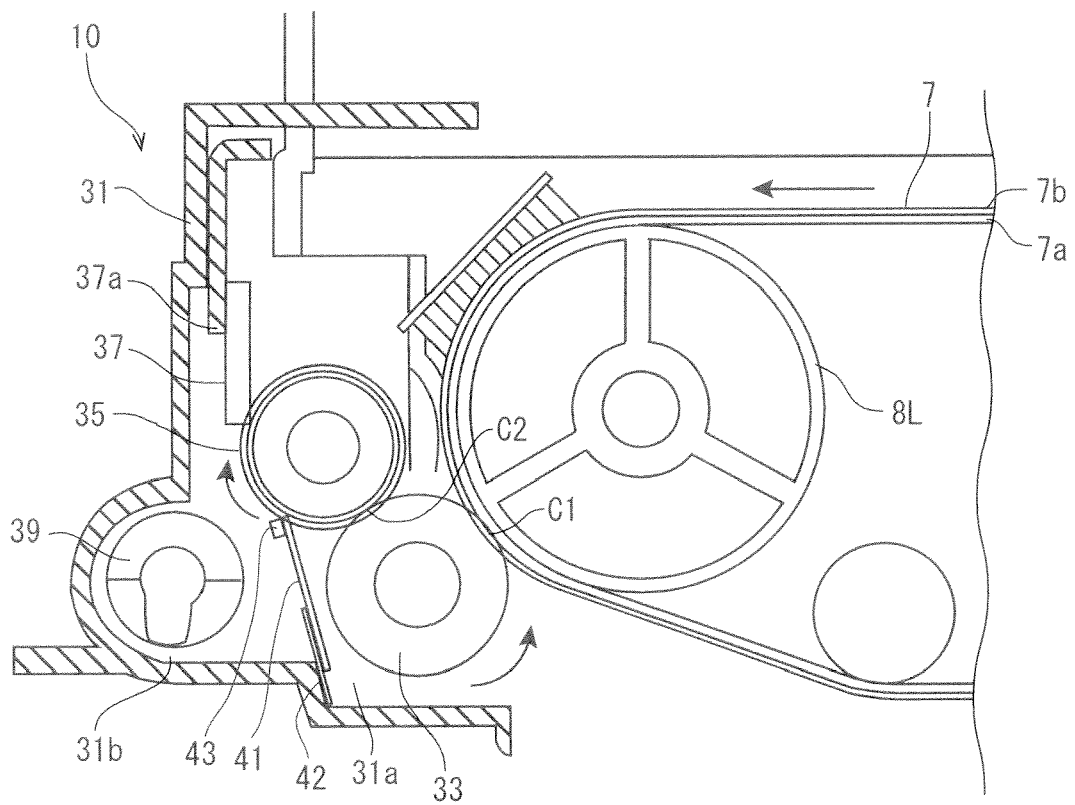


FIG.3

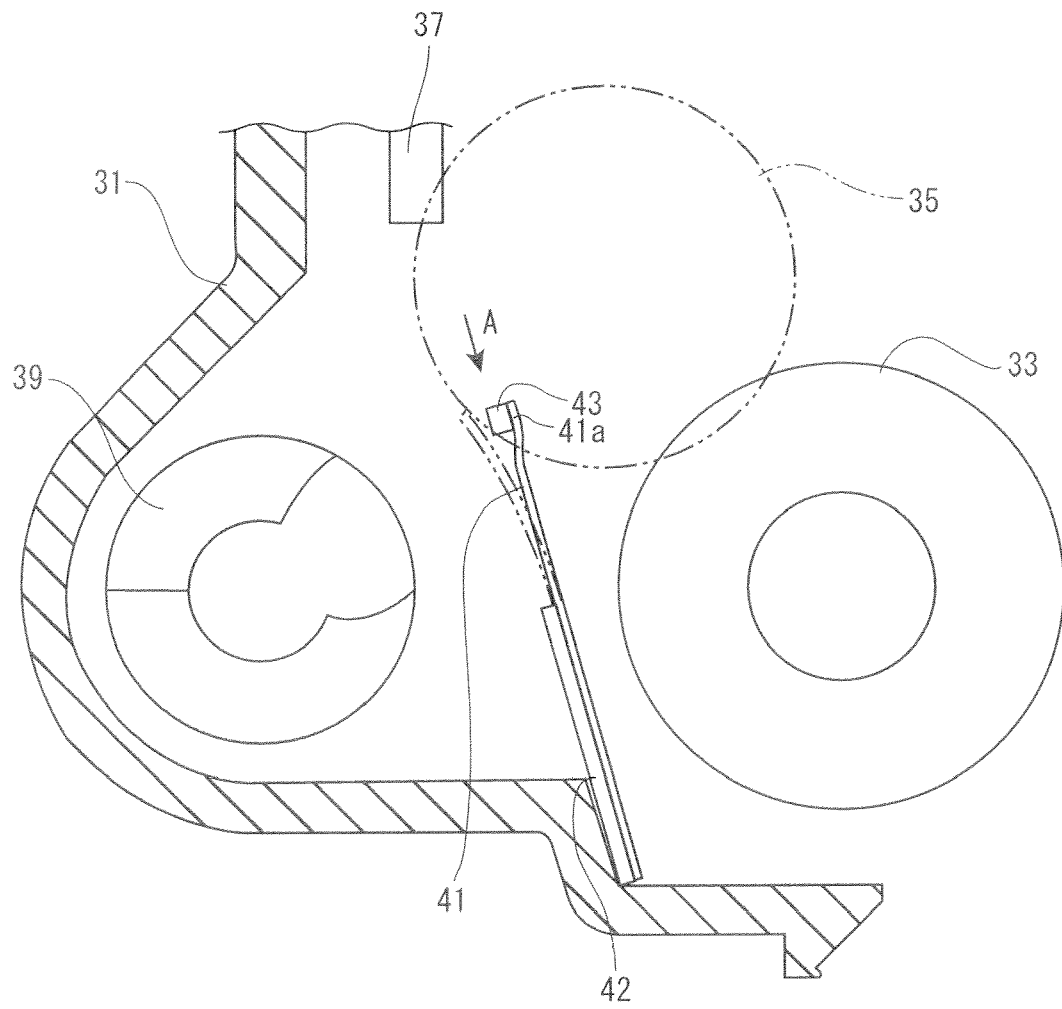


FIG.4A

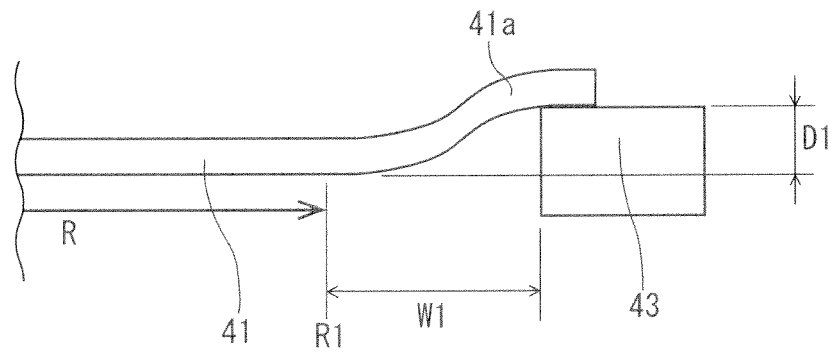


FIG.4B

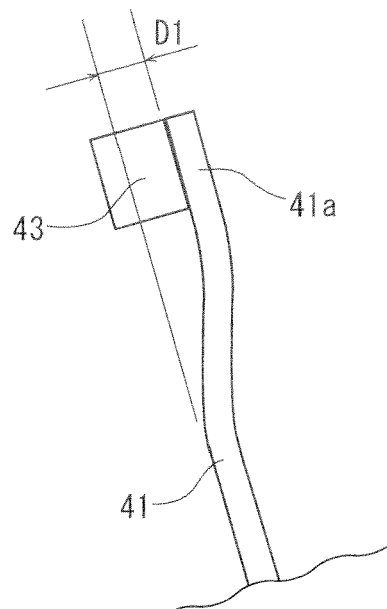


FIG.5A


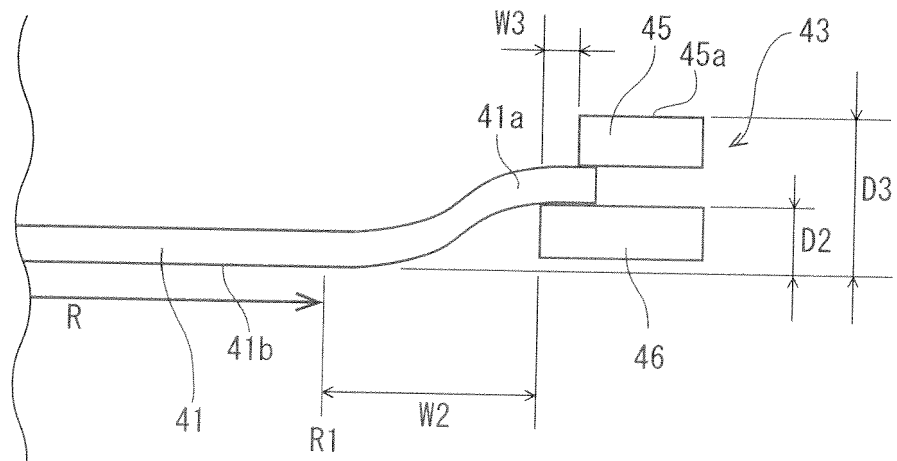


FIG.5B



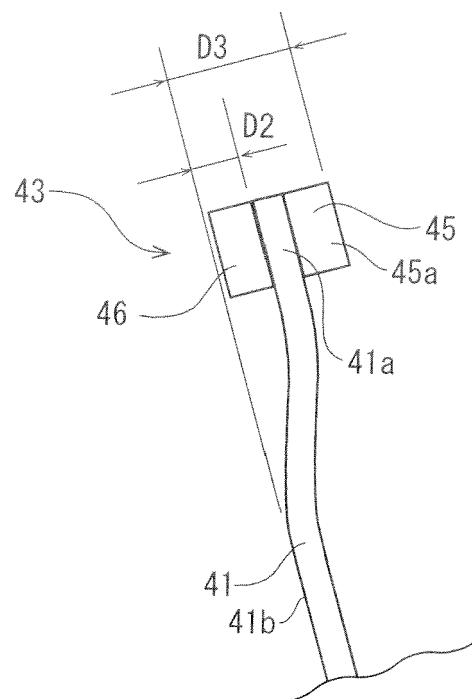

EUROPEAN SEARCH REPORT

Application Number
EP 15 18 3271

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 2 738 621 A2 (KYOCERA DOCUMENT SOLUTIONS INC [JP]) 4 June 2014 (2014-06-04) * paragraphs [0033] - [0038]; figures 7-9 *	1-9	INV. G03G15/16
X	----- JP 2010 085984 A (RICOH KK) 15 April 2010 (2010-04-15) * abstract; figures *	1	
A	----- US 2014/153957 A1 (YONEMOTO SATORU [JP]) 5 June 2014 (2014-06-05) * paragraphs [0040] - [0041]; figure 6 *	1-9	
			TECHNICAL FIELDS SEARCHED (IPC)
			G03G
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 10 February 2016	Examiner Urbaniec, Tomasz
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 15 18 3271

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-02-2016

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2738621 A2	04-06-2014	CN 103852992 A	11-06-2014
		EP 2738621 A2	04-06-2014
		JP 5750423 B2	22-07-2015
		JP 2014109592 A	12-06-2014
		US 2014153956 A1	05-06-2014

JP 2010085984 A	15-04-2010	NONE	

US 2014153957 A1	05-06-2014	JP 5728464 B2	03-06-2015
		JP 2014109593 A	12-06-2014
		US 2014153957 A1	05-06-2014

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2014192469 A [0001]