



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.03.2016 Bulletin 2016/13

(51) Int Cl.:
H04R 3/00 (2006.01) *H04R 5/04 (2006.01)*

(21) Application number: **15194296.8**

(22) Date of filing: **26.02.2009**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR

• **EL-HAGE, Mohamad**
Waterloo, Ontario N2K 0A7 (CA)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
12154650.1 / 2 456 230
09153831.4 / 2 224 748

(74) Representative: **MERH-IP Matias Erny Reichl Hoffmann**
Patentanwälte PartG mbB
Paul-Heyse-Strasse 29
80336 München (DE)

(71) Applicant: **BlackBerry Limited**
Waterloo, ON N2K 0A7 (CA)

Remarks:

This application was filed on 12-11-2015 as a divisional application to the application mentioned under INID code 62.

(72) Inventors:
• **HANSSON, Magnus**
Waterloo, Ontario N2K 0A7 (CA)

(54) **PORTABLE ELECTRONIC DEVICE WITH AN AUDIO JACK**

(57) A portable electronic device includes a processor provided in a housing, a jack being sized for receiving a plug of an audio accessory and having electrical connectors for enabling communication between the audio accessory and the processor, the electrical connectors for contacting corresponding electrical connectors of the

plug and a switching circuit in communication with the processor and the electrical connectors, the switching circuit for determining a pin-out of the plug and routing signals between ungrounded ones of the corresponding electrical connectors of the plug and the processor.

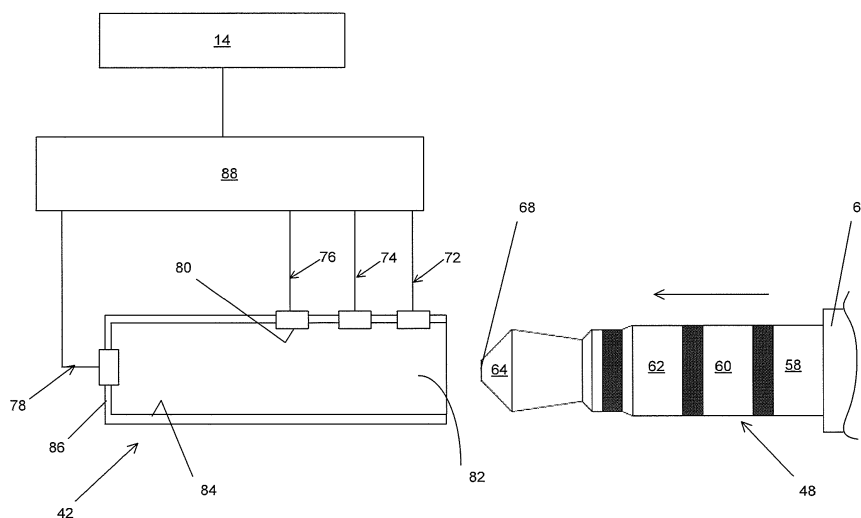


FIG. 3

Description

Technical Field

[0001] The present disclosure relates to audio jacks for portable electronic devices.

Background

[0002] In recent years, the accessibility and affordability of handheld technologies has made it commonplace for a single consumer to own several different portable electronic devices. Depending on the type of portable electronic device, accessories such as battery chargers and head phones, for example, may be provided in the packaging. Whether replacing a cell phone year after year or adding a portable music player, digital video camera or portable video game player to one's collection, duplication of accessories is very common.

[0003] Currently, there are no industry standards in place that dictate audio jack pin-out configuration for electronic devices having audio input and output capability. Therefore, the same headset, for example, will generally not work with portable electronic devices from different manufacturers. In order to avoid this problem, some electronic device vendors have begun to dictate the audio jack pin-out of the portable electronic devices that it will sell in order to ensure that the same accessories will work with the different devices. It is common for vendors in different countries to have different pin-out preferences, therefore, portable electronic device manufacturers who sell their devices to more than one vendor must incur additional costs to produce devices having different audio jack pin-outs.

[0004] One solution to this problem is to sell adapters that enable communication between incompatible accessories and portable electronic devices. This solution results in additional costs to the manufacturer and the consumer and also has the added inconvenience of requiring the consumer to keep track of adapters specific to each accessory. It is, therefore, desirable to provide an improved solution to the incompatibility of portable electronic devices and accessories. Document US 2007/0047745 A1 discloses a portable media player, wherein different types of input/output connector, such as a USB connector, an earphone or a microphone connector can be inserted in the same jack. A detection circuit is provided, which send a signal to a processor based on the connector type. Transmission pins are then switched between signal input pins and signal output pins depending on the type of connector. Document US 2007/0104332 A1 discloses a method and a system for performing automatic plug detection. When a plug is inserted into an audio jack, the plug is detected and a determination is made as to whether the plug is a stereo plug or a mono plug.

Summary

[0005] The invention is defined by the subject matter of the independent claims. Preferred embodiments can be derived from the dependent claims.

[0006] In one example useful for understanding the invention, there is provided a portable electronic device including: a processor provided in a housing, a jack provided in the housing, the jack being sized for receiving a plug of an audio accessory, electrical connectors provided in the jack for enabling communication between the audio accessory and the processor, the electrical connectors for contacting corresponding electrical connectors of the plug and a switching circuit in communication with the processor and the electrical connectors, the switching circuit for determining a pin-out of the plug; wherein the switching circuit routes signals between ungrounded ones of the corresponding electrical connectors of the plug and the processor.

[0007] In another example useful for understanding the invention, there is provided a portable electronic device including: a processor provided in a housing, a jack provided in the housing, the jack being sized for receiving a plug of an audio accessory, electrical connectors provided in the jack for enabling communication between the audio accessory and the processor, each of the electrical connectors for contacting a corresponding electrical connector of the plug and a switching circuit in communication with the processor and two of the electrical connectors, the switching circuit for selectively routing audio signals, such as microphone signals, for example, between a second one of the corresponding electrical connectors of the plug and the processor; wherein the switching circuit routes the audio signals between a second one of the corresponding electrical connectors of the plug and the processor when a first one of the corresponding electrical connectors of the plug is electrically grounded.

[0008] In yet another example useful for understanding the invention, there is provided a method for connecting a plug of an audio accessory to a portable electronic device, the method including: receiving a plug of the audio accessory in a jack of the portable electronic device, the jack having electrical connectors for enabling communication between the audio accessory and a processor of the portable electronic device, the electrical connectors for contacting corresponding electrical connectors of the plug, determining a pin-out of the plug and routing signals between ungrounded ones of the corresponding electrical connectors of the plug and the processor.

[0009] In still another example useful for understanding the invention, there is provided a method for connecting a plug of an audio accessory to a portable electronic device, the method including: receiving a plug of the audio accessory in a jack of the portable electronic device, the jack having electrical connectors for enabling communication between the audio accessory and a processor of the portable electronic device, each of the electrical connectors for contacting a corresponding electrical con-

nector of the plug, determining if a first one of the corresponding electrical connectors of the plug is electrically grounded and routing audio signals between a second one of the corresponding electrical connectors of the plug and the processor when the first one of the corresponding electrical connectors of the plug is electrically grounded.

[0010] The embodiments provided herein allow audio accessories having pin-outs that do not match a pin-out of the portable electronic device to be operated therewith. The inclusion of a switching circuit in the portable electronic device may reduce or eliminate the need for separate adapter components.

Drawings

[0011] The following figures set forth embodiments in which like reference numerals denote like parts. Embodiments are illustrated by way of example and not by way of limitation in the accompanying figures.

Figure 1 is a block diagram of a portable electronic device according to an embodiment;

Figure 2 is a perspective view of the portable electronic device of Figure 1;

Figure 3 is a schematic side view of an audio jack of the portable electronic device of Figure 1 in section and a side view of a plug of an audio accessory for use with the audio jack;

Figure 4 is a circuit diagram of a switching circuit of the portable electronic device of Figure 1;

Figure 5 is a state diagram corresponding to the circuit diagram of Figure 4;

Figure 6 is a schematic side view of a plug and headset for use with the portable electronic device of Figure 1;

Figure 7 is a side view of a plug for use with the portable electronic device of Figure 1;

Figure 8 is a schematic side view of a plug and headset for use with the portable electronic device of Figure 1;

Figure 9 is a side view of a plug for use with the portable electronic device of Figure 1;

Figure 10 is a side view of a plug for use with the portable electronic device of Figure 1;

Figure 11 is a flowchart depicting a method for connecting a plug of an audio accessory to the portable electronic device of Figure 1 according to an embodiment; and

Figure 12 is a flowchart depicting a method for connecting a plug of an audio accessory to the portable electronic device of Figure 1 according to another embodiment.

Description of Preferred Embodiments

[0012] Referring now to Figure 1, components of a portable electronic device 10 according to an embodiment are generally shown. The portable electronic device

10 includes data communication capabilities and may communicate with other electronic devices directly or through a wireless network. The portable electronic device 10 is based on the computing environment and functionality of a handheld computer, such as a wireless personal digital assistant (PDA), for example. It will be understood, however, that the portable electronic device 10 is not limited to a wireless personal digital assistant. Other portable electronic devices are possible, such as cellular telephones, smart telephones, portable music players and laptop computers.

[0013] The portable electronic device 10 includes a number of components including processor 14, which controls the overall operation of the device 10. A communication subsystem 40 controls data and voice communication functions, such as email, PIN (Personal Identification Number) message functions, SMS (Short Message Service) message functions and cellular telephone functions, for example. The communication subsystem 40 is in communication with a wireless network 12, which may be a data-centric wireless network, a voice-centric wireless network or a dual-mode wireless network.

[0014] In Figure 1, the communication subsystem 40 is a dual-mode wireless network that supports both voice and data communications. The communication subsystem 40 is configured in accordance with the Global System for Mobile Communication (GSM) and General Packet Radio Services (GPRS) standards. The communication subsystem 40 may alternatively be configured in accordance with Enhanced Data GSM Environment (EDGE) or Universal Mobile Telecommunications Service (UMTS) standards. Other wireless networks may also be associated with the portable electronic device 10, including Code Division Multiple Access (CDMA) or CDMA2000 networks. Some other examples of data-centric networks include WiFi 802.11, Mobitex™ and DataTAC™ network communication systems. Examples of other voice-centric data networks include Personal Communication Systems (PCS) networks like GSM and Time Division Multiple Access (TDMA) systems.

[0015] The wireless network 12 includes base stations (not shown) that provide a wireless link to the portable electronic device 10. Each base station defines a coverage area, or cell, within which communications between the base station and the portable electronic device 10 can be effected. It will be appreciated that the portable electronic device 10 is movable within the cell and can be moved to coverage areas defined by other cells. Data is delivered to the portable electronic device 10 via wireless transmission from base station. Similarly, data is sent from the portable electronic device 10 via wireless transmission to the base station.

[0016] The communication subsystem 40 further includes a short range communications function, which enables the device 10 to communicate directly with other devices and computer systems without the use of the network 106 through infrared or Bluetooth™ technology, for example.

[0017] Prior to the portable electronic device 10 being able to send and receive communication signals over the wireless network 12, network registration or activation procedures must have been completed. In order to enable network communication, a SIM (Subscriber Identity Module) card 24 is inserted into a card interface 26. The SIM card, or Removable User Identity Module card, is used to identify the user of the mobile device, store personal device settings and enable access to network services, such as email and voice mail, for example, and is not bound to a particular portable electronic device 10.

[0018] The processor 14 is also connected to a Random Access Memory (RAM) 16 and a flash memory 18. An operating system and device software are typically stored in flash memory 18 and are executable by the processor 14. Some device software components may alternatively be stored in RAM 16. Software applications that control basic device operation, such as voice and data communication, are typically installed during manufacture of the device 10. For devices that do not include a SIM card 24, user identification information may be programmed into the flash memory 18. The flash memory 18 may alternatively be a persistent storage, a Read-Only Memory (ROM) or other non-volatile storage.

[0019] The processor 14 receives input from various input devices including a keypad 38 and other input devices 36. The other input devices 36 typically complement the keypad 38 to facilitate input and may include devices such as: single or multi-function buttons, a touch screen, a mouse, a trackball, a capacitive touch sensor or a roller wheel with dynamic button pressing capability.

[0020] The processor 14 outputs to various output devices including an LCD display screen 20. A microphone 32 and speaker 22 are connected to the processor 14 for cellular telephone functions. A data port 34 is connected to the processor 14 for enabling data communication between the portable electronic device 10 and another computing device. The data port 34 may include data lines for data transfer and a supply line for charging a battery 30 of the portable device 10. Battery interface 28 is provided for receiving one or more rechargeable batteries 30. Jack 42 is provided for receiving an audio accessory such as headphones, a headset, amplified speakers or amplified headphones, for example. Jack 42 may also receive other accessories such as a multi-media accessory including play, pause, stop and rewind buttons or a TV-out accessory that allows for connection of the portable electronic device to a TV, for example.

[0021] Only a limited number of device subsystems have been described. It will be appreciated by a person skilled in the art that additional subsystems corresponding to additional device features may also be connected to the processor 14.

[0022] Referring also to Figure 2, the portable electronic device 10 includes a housing 44 in which the display 20 and keypad 38 are mounted. The jack 42 is provided in an opening 43 in a side surface 46 of the housing 44. It will be appreciated by a person skilled in the art that

the arrangement of Figure 2 is provided by way of example. The display 20, the keypad 38, the jack 42 and also other input devices 36 may be provided in any arrangement that allows the user to interact with the portable electronic device 10.

[0023] As shown in Figure 3, the jack 42 includes a sleeve 70 having a closed end 86 and four electrical connectors 72, 74, 76 and 78. A plug-receiving cavity 82 of the jack 42 is generally defined by an inner surface 84 of the sleeve 70 and is sized to receive a plug 48 of a headset (not shown). The electrical connectors 72, 74, 76, 78 each include a conductive surface 80 that extends into the plug-receiving cavity 82. When the plug 48 of the headset is received in the jack 42, the conductive elements 80 of the electrical connectors 72, 74, 76, 78 mate with corresponding conductive surfaces of electrical connectors 58, 60, 62 and 64 of the plug 48, respectively, to provide an electrical path between headset components, which include a microphone, a left speaker and a right speaker, and matching ports of the processor 14.

[0024] It will be appreciated by a person skilled in the art that rather than including the sleeve 70, the plug-receiving cavity 82 may be defined by the housing 44 or one or more other components of the portable electronic device 10.

[0025] Electrical connectors 58, 60, 62 and 64 are provided in order between a base 66 and a tip 68 of the plug 48. Therefore, when the plug 48 is received in the jack 42, electrical connector 72 of the jack 42 mates with electrical connector 58 of the plug 48, electrical connector 74 of the jack 42 mates with electrical connector 60 of the plug 48, electrical connector 76 of the jack 42 mates with electrical connector 62 of the plug 48 and electrical connector 78 of the jack 42 mates with electrical connector 64 of the plug 48.

[0026] In order for the left speaker, the right speaker, the microphone and a ground of the headset to operate as expected, a pin-out of the plug 48 and a pin-out of the jack 42 should match. The term pin-out is well known in the art and describes the purpose of each connector, which is commonly referred to as a pin, in a connecting device, such as a jack or a plug, for example. The pin-out of the jack 42 of the portable electronic device 10 of Figure 1 is as follows:

Electrical connector 72	Microphone
Electrical connector 74	Ground
Electrical connector 76	Right Audio channel
Electrical connector 78	Left Audio Channel

[0027] As shown in Figure 3, the electrical connectors 72, 74, 76, 78 are electrically coupled to the processor 14 via a switching circuit 88, which is shown in Figure 4. In general, the switching circuit 88 is provided to determine the pin-out of the plug 48 and swap microphone

and ground signals when the pin-out of the plug 48 does not match the pin-out of the jack 42. Specifically, the switching circuit 88 determines if electrical connector 58 is electrically grounded and, if so, routes audio signals from electrical connector 60 of the plug 48, if ungrounded, through electrical connector 72 of the jack 42 to the processor 14. The switching circuit 88 uses impedance testing to determine the pin-out of the plug 48.

[0028] Voltages are measured with respect to some sort of reference voltage, which is called the ground. In some cases, the voltage of the Earth itself serves as the reference, or ground. On a portable electronic device that is not electrically connected by a wire to the Earth, one electrical node is selected to be the "ground node," and it is with reference to the voltage of this node that other voltages are measured. To say that a connector is "electrically grounded" can be to mean that the connector is electrically coupled to, or is at substantially the same electric potential as, that ground node. As a practical matter, the voltage of a grounded connector has substantially zero difference in voltage with the ground node, and so would be measured as having a substantially constant voltage of about zero volts. Since typical electrical signals involve voltage changes, a connector that is electrically grounded typically is carrying no signal.

[0029] Referring to Figures 4 and 5, the switching circuit 88 includes a normally closed switch 98 between electrical connector 78 of the jack 42, which corresponds to the left audio channel, and an accessory detection circuitry 92. At state 100, the switching circuit 88 is in an idle mode when no plug 48 is received in the jack 42. When a plug 48 is received in the jack 42, the normally closed switch 98 opens and a signal interrupt is sent to the processor 14 to notify the processor 14 that an audio accessory has been inserted into the jack 42. When the audio accessory is detected, at state 102, the processor 14 performs a test to determine if the electrical connector 58 of the plug 48 is electrically grounded. The test is an impedance test that the processor 14 performs by: 1) applying a voltage to a microphone bias connector 94 to bias the electrical connector 72; 2) reading a direct current (dc) voltage at a microphone detection connector 96; and 3) comparing the dc voltage reading to a predetermined threshold value, V_{th} . At state 102, a switch 90 of the switching circuit is in a first position, which is the default position, to route audio signals from electrical connectors 58 and 60 of the plug 48 to mating electrical connectors 72 and 74 of the jack 42. A dc voltage reading that is high indicates that the electrical connector 58 is not electrically grounded. Therefore, it follows that the electrical connector 58 is connected to a microphone and the audio accessory is a headset, as indicated at state 104.

[0030] A four pole stereo headset plug is shown in Figure 6 and a four pole mono headset plug is shown in Figure 7. When headset plugs of Figures 6 and 7 are inserted into the jack 42, the switching circuit 88 determines that the electrical connector 58 is not electrically

grounded and the processor 14 operates the audio accessory with the adapter switch 90 in the first position.

[0031] A dc voltage reading from the impedance test that is low indicates that the electrical connector 58 is electrically grounded, and therefore, the accessory is either a headset or headphones. In response to the outcome of the test, at state 106, the switch 90 is changed to a second position in which the electrical connector 72 of the jack 42 is in communication with the electrical connector 60 of the plug 48. The processor 14 then performs a second test in order to determine if the electrical connector 60 of the plug 48 is electrically grounded. If the dc voltage reading of the second test is high, the electrical connector 60 is not electrically grounded. Therefore, it follows that the electrical connector 60 is connected to a microphone and the audio accessory is a headset, as indicated at state 108.

[0032] A stereo headset plug having the microphone and ground connectors reversed, when compared to the jack 42, is shown in Figure 8. This pin-out configuration is often found in headphones and headsets that are manufactured in China. When the headset plug of Figures 8 is inserted into the jack 42, the switching circuit 88 allows the processor 14 to operate the audio accessory with the switch 90 in the second position.

[0033] A dc voltage reading from the second test that is low indicates that the electrical connector 60 is electrically grounded, and therefore, the accessory is a set of headphones, as indicated at state 110. Plugs for stereo headphones and mono headphones are shown in Figures 9 and 10, respectively.

[0034] Once the pin-out of two of the electrical connectors of the plug 48 has been determined, a further detection scheme may be performed in order to determine the entire pin-out of the plug 48, as indicated in Figure 5. Detection schemes for determining whether a headset or headphones is mono or stereo are known in the art and therefore will not be described further.

[0035] Referring to Figure 11, a method for connecting the plug 48 of an audio accessory to a portable electronic device is generally shown. At step 112, the plug 48 is received in the jack 42 of the portable electronic device. The pin-out of the plug 48 is then determined at step 114, as has been previously described, and audio signals from electrically ungrounded electrical connectors of the plug 48 are routed to matching ports of the processor 14 at step 116.

[0036] Referring to Figure 12, another method for connecting a plug of an audio accessory to a portable electronic device is generally shown. At step 118, the plug 48 is received in the jack 42 of the portable electronic device. At steps 120 and 122, it is determined if a first electrical connector of the plug 48 is electrically grounded and, if so, audio signals are routed between a second electrical connector of the plug 48 and the processor 14.

[0037] The jack 42 shown in Figure 3 is sized to receive a 3.5 mm plug, however, it will be appreciated by a person skilled in the art that the jack 42 may alternatively be

sized to receive a 2.5 mm plug or another size of plug.

[0038] In another embodiment, the jack 42 includes a pin-out of:

Electrical connector 72	Ground
Electrical connector 74	Microphone
Electrical connector 76	Right Audio channel
Electrical connector 78	Left Audio Channel

In this embodiment, the switching circuit 88 is modified to first test if electrical connector 60 of the plug 48 is electrically grounded and, if not, change switch 90 to the second position and re-test.

[0039] The switching circuit 88 of the described embodiments is suitable for use with plugs having microphone and ground electrical connectors that are located adjacent to one another at the base of the plug and in which at least one of the two connectors located adjacent to the tip of the plug are speaker electrical connectors. Plug pin-outs having this general configuration are shown in Figures 6-10 and are the most common pin-out configurations of headset and headphone accessories. It will, however, be appreciated by a person skilled in the art that a modified switching circuit including additional switches and further impedance testing could be provided to allow for pin-out determination of any pin-out configuration. The modified switching circuit would route audio signals between ungrounded ones of the electrical connectors of the plug and matching ports of the processor.

[0040] In another embodiment, the processor 14 executes software that is stored on the device 10 to allow a user to select different pin-out options via the keypad 38, display 20 or other input devices 36. In this embodiment, the processor 14 would not perform a test to determine the pin-out of the audio accessory. Instead, when the switching circuit 88 detects that an audio accessory has been inserted into the jack 42, the user would be prompted to select the type of audio accessory. The user would be able to select the type of audio accessory from a drop-down list, for example, which could include a list of pin-outs, product manufacturers, product serial numbers or a list of countries corresponding to where the accessory was manufactured.

[0041] Specific embodiments have been shown and described herein. However, modifications and variations may occur to those skilled in the art. All such modifications and variations are believed to be within the scope and sphere of the present embodiments.

[0042] Embodiments of the present invention may relate to one or more of the following enumerated example embodiments.

1. A portable electronic device comprising:

a processor provided in a housing;
a jack provided in the housing, the jack being sized for receiving a plug of an audio accessory; electrical connectors provided in the jack for enabling communication between the audio accessory and the processor, each of the electrical connectors for contacting a corresponding electrical connector of the plug;
a switching circuit in communication with the processor and two of the electrical connectors, the switching circuit for selectively routing audio signals between a second one of the corresponding electrical connectors of the plug and the processor;
wherein the switching circuit routes the audio signals between a second one of the corresponding electrical connectors of the plug and the processor when a first one of the corresponding electrical connectors of the plug is electrically grounded.

2. A portable electronic device as in enumerated example embodiment 1, wherein no audio signals are routed to the processor when both the first one of the corresponding electrical connectors of the plug and the second one of the corresponding electrical connectors of the plug are electrically grounded.

3. A portable electronic device as in enumerated example embodiment 1 or enumerated example embodiment 2, wherein the audio accessory comprises any of: stereo headsets, stereo headphones, mono headsets and mono headphones.

4. A portable electronic device as in anyone of enumerated example embodiments 1 to 3, wherein the first one of the corresponding electrical connectors and the second one of the corresponding electrical connectors are located adjacent to one another at a base of the plug.

5. A portable electronic device as in any one of the preceding enumerated example embodiments, wherein the switching circuit comprises a switch having a default position and a second position, the audio signals being routed between the first one of the corresponding electrical connectors of the plug and the processor when the switch is in the default position.

6. A portable electronic device as in enumerated example embodiment 5, wherein the switch is changed from the default position to the second position based on an outcome of an impedance test.

7. A portable electronic device as in any one of the preceding enumerated example embodiments, wherein the plug is one of a 2.5 mm plug and a 3.5 mm plug.

8. A method for connecting a plug of an audio accessory to a portable electronic device, the method comprising:

receiving a plug of the audio accessory in a jack of the portable electronic device, the jack having electrical connectors for enabling communication between the audio accessory and a processor of the portable electronic device, each of the electrical connectors for contacting a corresponding electrical connector of the plug; determining if a first one of the corresponding electrical connectors of the plug is electrically grounded; and routing audio signals between a second one of the corresponding electrical connectors of the plug and the processor when the first one of the corresponding electrical connectors of the plug is electrically grounded.

9. A method as in enumerated example embodiment 8, wherein no audio signals are routed to the processor when both the first one of the corresponding electrical connectors of the plug and the second one of the corresponding electrical connectors of the plug are electrically grounded.

10. A method as in enumerated example embodiment 8 or enumerated example embodiment 9, wherein the audio accessory is any of: stereo headsets, stereo headphones, mono headsets and mono headphones.

11. A method as in any one of enumerated example embodiments 8 to 10, wherein the first one of the corresponding electrical connectors and the second one of the corresponding electrical connectors are located adjacent to one another at a base of the plug.

12. A method as in any one of enumerated example embodiments 8 to 11, wherein the audio signals are routed by a switching circuit.

13. A method as in enumerated example embodiment 11, wherein the switching circuit has a switch having a default position and a second position, the audio signals being routed between the first one of the corresponding electrical connectors of the plug and the processor when the switch is in the default position.

14. A method as in any one of enumerated example embodiments 8 to 13, further comprising performing a test to determine if the first one of the corresponding electrical connectors in contact with the first one of the electrical connectors of the jack is electrically grounded.

15. A method as in enumerated example embodiment 13, wherein the test is an impedance test.

16. A method as in enumerated example embodiment 15, wherein the impedance test comprises applying a voltage to a microphone bias connector, reading a voltage at a microphone detection connector and comparing the voltage reading to a predetermined threshold value.

aspects:

1. A portable electronic device having a connection for a plurality of audio accessories, comprising:

a processor;
a jack being sized for receiving a plug of an audio accessory of the plurality of audio accessories; electrical connectors provided in the jack for enabling communication between the audio accessory and the processor, each of the electrical connectors for contacting a corresponding electrical connector of the plug; and
a switching circuit in communication with the processor and two of the electrical connectors, the switching circuit for selectively routing audio signals between the corresponding electrical connectors of the plug and the processor, wherein:

the processor is adapted to perform an impedance test on a first one of the electrical connectors after insertion of the plug into the jack to determine if a first one of the corresponding electrical connectors is electrically grounded;

the switching circuit is adapted to route the audio signals between a second one of the corresponding electrical connectors of the plug and the processor, when the first one of the corresponding electrical connectors is electrically grounded; and
the audio accessory is either a headset or headphones when the first one of the corresponding electrical connectors is electrically grounded.

2. The portable electronic device as described in aspect 1, wherein the plurality of audio accessories comprises any of: a microphone, stereo headsets, stereo headphones, mono headsets and mono headphones.

3. The portable electronic device as described in any of aspects 1 or 2, wherein the first one of the corresponding electrical connectors and the second one of the corresponding electrical connectors are located adjacent to one another at a base of the plug.

4. The portable electronic device as described in any one of the preceding aspects, wherein the switching circuit comprises a switch having a first position and a second position, the audio signals being routed between the first one of the corresponding electrical connectors of the plug and the processor when the switch is in the first position.

5. The portable electronic device as described in an-

[0043] The application further comprises the following

none of the preceding aspects, wherein the plug is one of a 2.5 mm plug and a 3.5 mm plug.

6. The portable electronic device as described in any one of the preceding aspects, wherein for the impedance test, the processor is adapted to configure the switching circuit to connect:

a first connector of the electrical connectors to a first corresponding electrical connector of the corresponding electrical connectors of the plug; and
a second connector of the electrical connectors to a second corresponding electrical connector of the corresponding electrical connectors.

7. The portable electronic device as described in aspect 6, wherein the impedance test on the first one of the electrical connectors comprises:

applying a voltage to the second electrical connector;
reading a direct current (dc) voltage at a microphone detection connector connected to the second electrical connector;
comparing the dc voltage reading to a predetermined threshold value, V_{th} ; and
if the dc voltage reading is below the predetermined threshold value, then the first one of the corresponding electrical connectors is electrically grounded.

8. The portable electronic device as described in aspect 6 or 7, wherein after it is determined that the audio accessory is either the headset or the headphone:

the portable electronic device further changes the switch to a second position in which the second electrical connector is in communication with the second corresponding electrical connector; and
the processor performs a second test in order to determine if the second corresponding electrical connector is electrically grounded;
determines that the audio accessory is the headset when the second corresponding electrical connector is not electrically grounded; and
determines that the audio accessory is the headphones when the second corresponding electrical connector is electrically grounded;
the processor optionally performs a second test in order to determine if the second corresponding electrical connector is electrically grounded;
performs a third test in order to determine if the first corresponding electrical connector is electrically grounded; and

determines that the audio accessory is the headset when the second corresponding electrical connector is electrically grounded and the first corresponding electrical connector is not electrically grounded,
wherein the headset has a reversed pin-out configuration for the plug;
and
the processor optionally routes audio signals from ungrounded electrical connectors of the corresponding electrical connectors of the plug to matching ports of the processor.

9. The portable electronic device as described in any one of the preceding aspects, wherein the first one of the corresponding electrical connectors is connected to a microphone of the audio accessory when the first one of the corresponding electrical connectors is not electrically grounded.

10. A method for connecting of an audio accessory of a plurality of audio accessories to a portable electronic device, the method comprising:

receiving a plug of the audio accessory in a jack of the portable electronic device, the jack having electrical connectors for enabling communication between the audio accessory and a processor of the portable electronic device, each of the electrical connectors for contacting a corresponding electrical connector of the plug;
after receiving of the plug into the jack, conducting an impedance test on the electrical connectors to determine if a first one of the corresponding electrical connector is electrically grounded;
routing audio signals between a second one of the corresponding electrical connectors of the plug and the processor, when the first one of the corresponding electrical connectors of the plug is electrically grounded; and
determining that the audio accessory is either a headset or headphones, when the first one of the corresponding electrical connectors is electrically grounded.

11. The method as described in aspect 10, wherein the first one of the corresponding electrical connectors and the second one of the corresponding electrical connectors are located adjacent to one another at a base of the plug.

12. The method as described in aspect 10 or 11, further comprising:

connecting a first connector of the electrical connectors to a first corresponding electrical connector of the corresponding electrical connector

tors of the plug; and
connecting a second connector of the electrical
connectors to a second corresponding electrical
connector of the corresponding electrical con-
nectors.

5

13. The method as described in aspect 12, wherein
the impedance test on the electrical connectors com-
prises:

10

applying a voltage to the second electrical con-
nector;
reading a direct current (dc) voltage at a micro-
phone detection connector connected to the
second electrical connector;
comparing the dc voltage reading to a predeter-
mined threshold value, V_{th} ; and
if the dc voltage reading is below the predeter-
mined threshold value, then the first one of the
corresponding electrical connectors is electri-
cally grounded.

15

20

14. The method as described in aspect 12 or 13,
further comprising after it is determined that the au-
dio accessory is either the headset or the head-
phone:

25

changing the switch to a second position in
which the second electrical connector is in com-
munication with the second corresponding elec-
trical connector;
performing a second test in order to determine
if the second corresponding electrical connector
is electrically grounded;
determining that the audio accessory is the
headset when the second corresponding elec-
trical connector is not electrically grounded; and
determining that the audio accessory is the
headphones when the second corresponding
electrical connector is electrically grounded.

30

35

40

15. The method as described in any one of aspects
10 to 14, further comprising:

determining that the first one of the correspond-
ing electrical connectors is connected to a mi-
crophone of the audio accessory, when the first
one of the corresponding electrical connectors
is not electrically grounded.

45

50

Claims

1. A portable electronic device comprising:

55

a processor provided in a housing;
a jack provided in said housing, said jack being
sized for receiving a plug of an audio accessory;

electrical connectors provided in the jack for en-
abling communication between the audio acces-
sory and the processor and for contacting cor-
responding electrical connectors of the plug;
and

a switching circuit in communication with the
processor and two of the electrical connectors,
the switching circuit

after insertion of the plug into the jack, conduct-
ing a test on the electrical connectors to deter-
mine if a first one of the corresponding electrical
connectors is electrically grounded; and
routing audio signals between a second one of
the corresponding electrical connectors and the
processor if the test indicates that the first one
of the corresponding electrical connectors is
electrically grounded.

2. The portable electronic device of claim 1, wherein
each of the electrical connectors are for contacting
a corresponding electrical connector of the plug; and
wherein the audio accessory is either a headset or
headphones, if the first one of the corresponding
electrical connectors is electrically grounded.

3. A portable electronic device of claim 1 or 2, wherein
after insertion of the plug into the jack, the switching
circuit further determines that the audio accessory
is a microphone and does not route the audio signals
to the processor when the first one of the correspond-
ing electrical connectors and the second one of the
corresponding electrical connectors are electrically
grounded.

4. The portable electronic device of any of claims 1 to
3, wherein the audio accessory comprises any of: a
microphone, stereo headsets, stereo headphones,
mono headsets and mono headphones.

5. The portable electronic device of any of claims 1 to
4, wherein the first one of the corresponding electri-
cal connectors and the second one of the corre-
sponding electrical connectors are located adjacent
to one another at a base of the plug.

6. The portable electronic device of any of claims 1 to
5, wherein the switching circuit comprises a switch
having a first position and a second position, the au-
dio signals being routed between the first one of the
corresponding electrical connectors of the plug and
the processor when the switch is in the first position.

7. The portable electronic device of claim 6, wherein
the switch is changed from the first position to the
second position based on an impedance test of the
first one of the corresponding electrical connectors.

8. The portable electronic device of any of claims 1 to

7, wherein the plug is one of a 2.5 mm plug and a 3.5 mm plug.

9. The portable electronic device of any of claims 1 to 8, wherein for the test the switching circuit connects:
 - a first connector of the electrical connectors to a first corresponding electrical connector of the corresponding electrical connectors of the plug; and
 - a second connector of the electrical connectors to a second corresponding electrical connector of the corresponding electrical connectors.
10. The portable electronic device of any of claims 1 to 9, wherein it is determined that the first one of the corresponding electrical connectors is connected to a microphone of the audio accessory when the first one of the corresponding electrical connectors is not electrically grounded.
11. The portable electronic device of any of claims 1 to 10, wherein after insertion of the plug into the jack, the switching circuit determines the audio accessory is a microphone, if the first one of the corresponding electrical connectors is not electrically grounded.
12. A method for connecting a plug of an audio accessory to a portable electronic device, said method comprising:
 - receiving a plug of said audio accessory in a jack of said portable electronic device, said jack having electrical connectors for enabling communication between said audio accessory and a processor of said portable electronic device, said electrical connectors each having a contact to corresponding electrical connectors of said plug;
 - conducting a test on said electrical connectors to determine if a first one of said corresponding electrical connectors is electrically grounded; and
 - routing audio signals between a second one of said corresponding electrical connectors of said plug and said processor if said first one of said corresponding electrical connectors of said plug is electrically grounded.
13. The method of claim 12, wherein no audio signals are routed to said processor when both said first one of said corresponding electrical connectors and a second one of said corresponding electrical connectors are electrically grounded.
14. The method of claim 12 or 13, wherein said audio accessory is selected from a group comprising: stereo headsets, stereo headphones, mono headsets

and mono headphones.

15. The method of any of claims 12 to 14, wherein said first one of said corresponding electrical connectors and said second one of said corresponding electrical connectors are located adjacent to one another at a base of said plug.

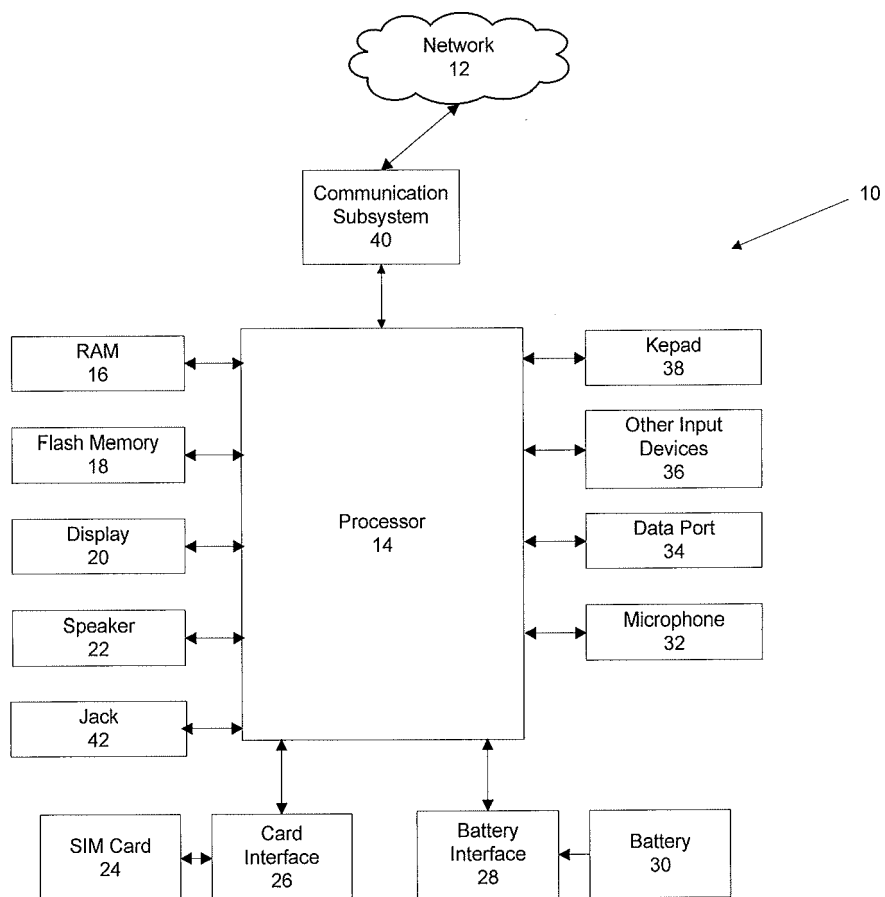


FIG. 1

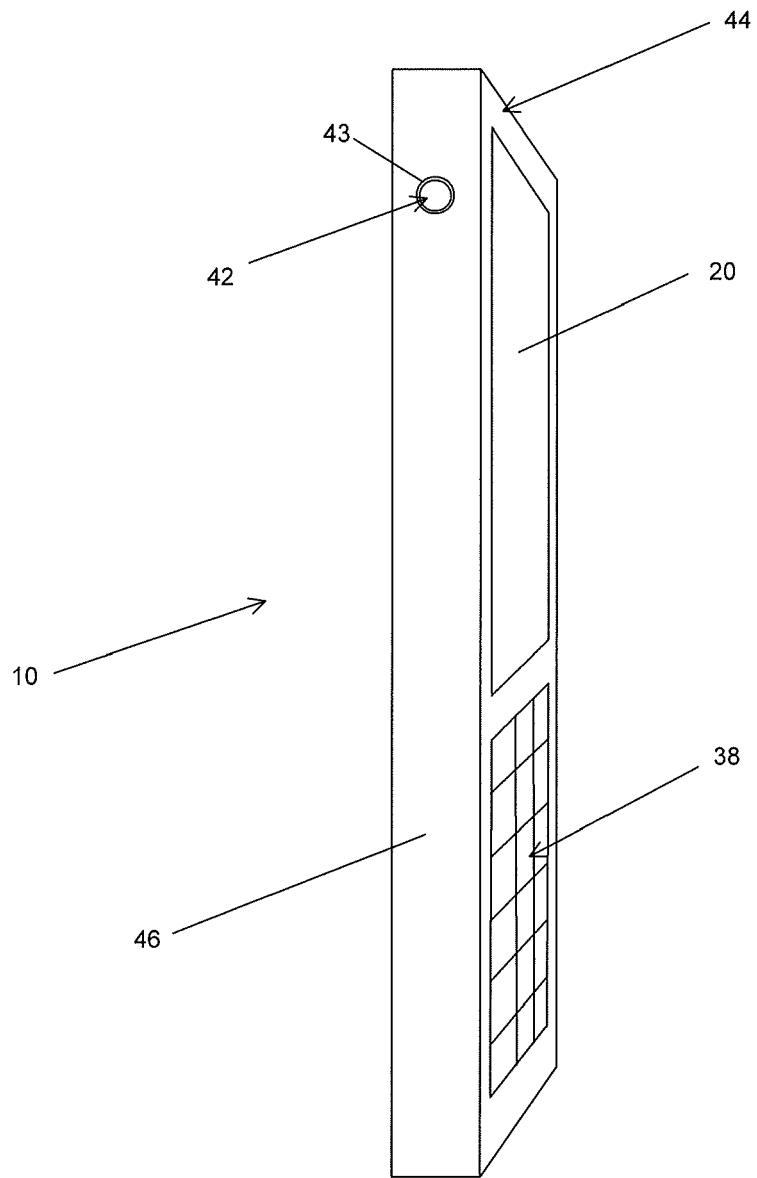


FIG. 2

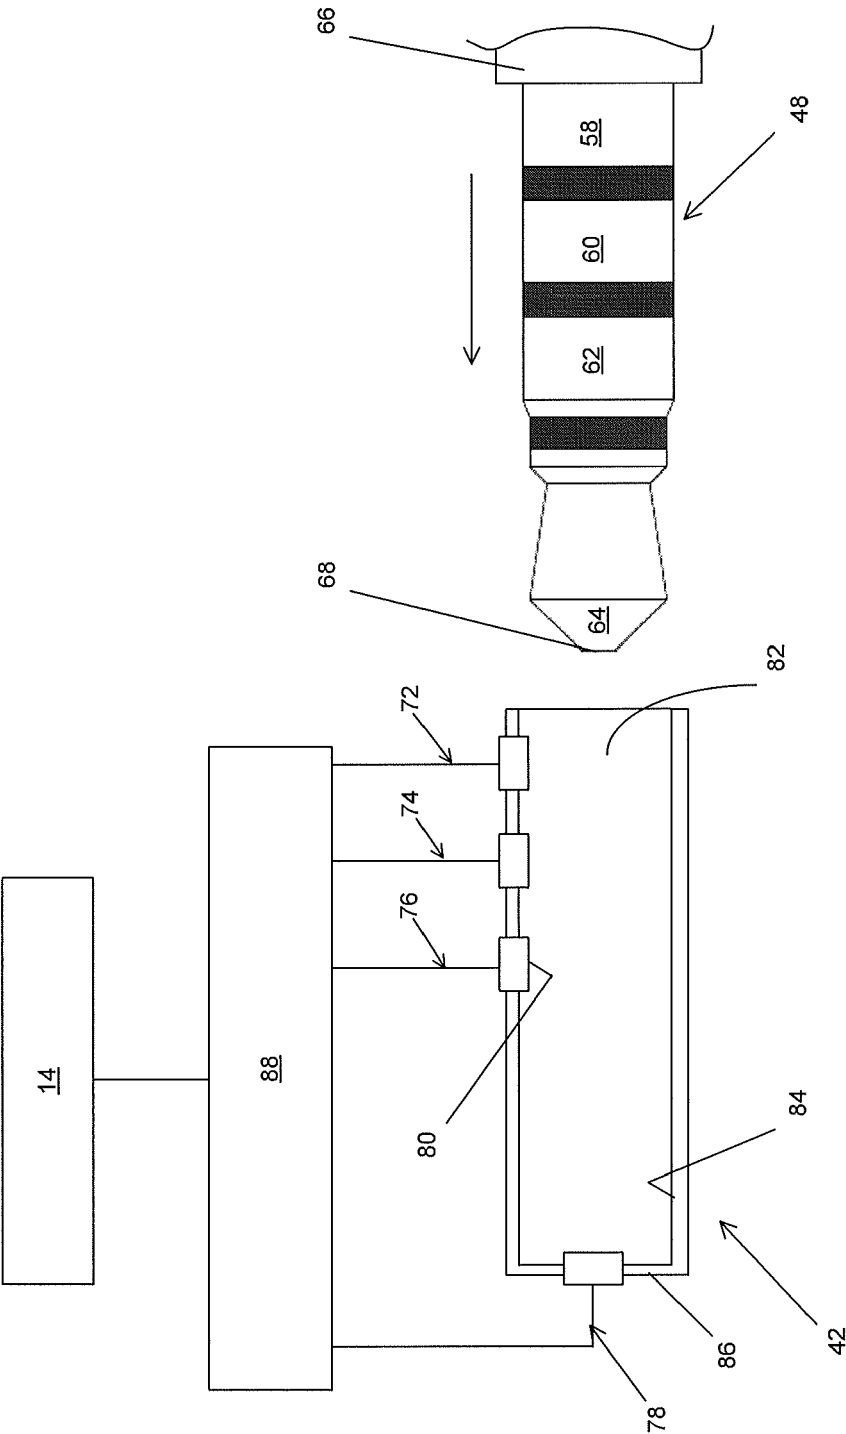


FIG. 3

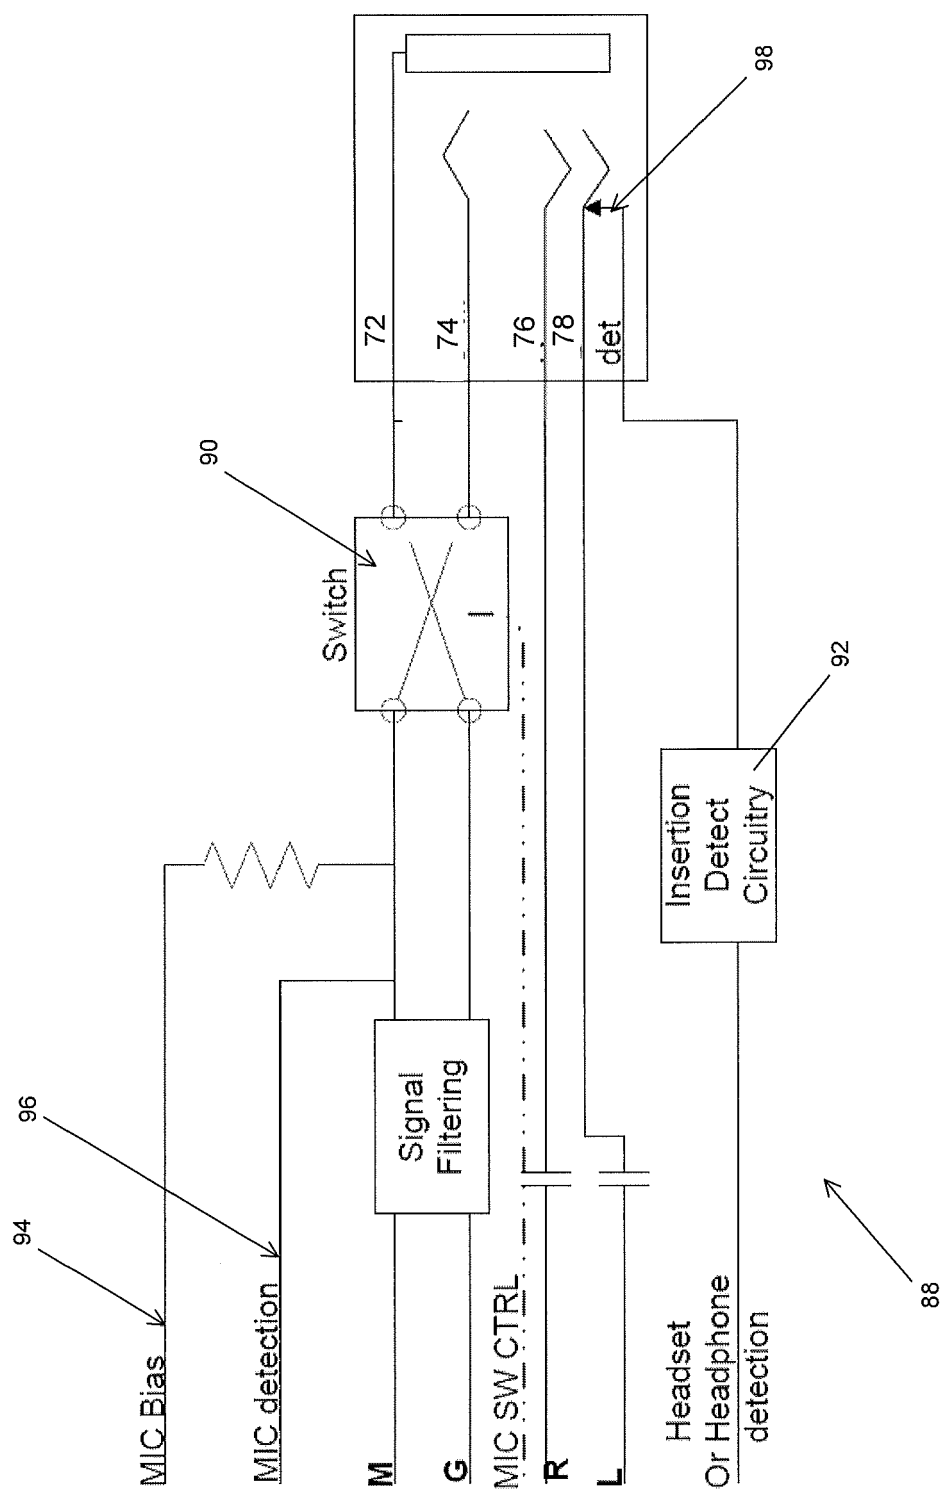


FIG. 4

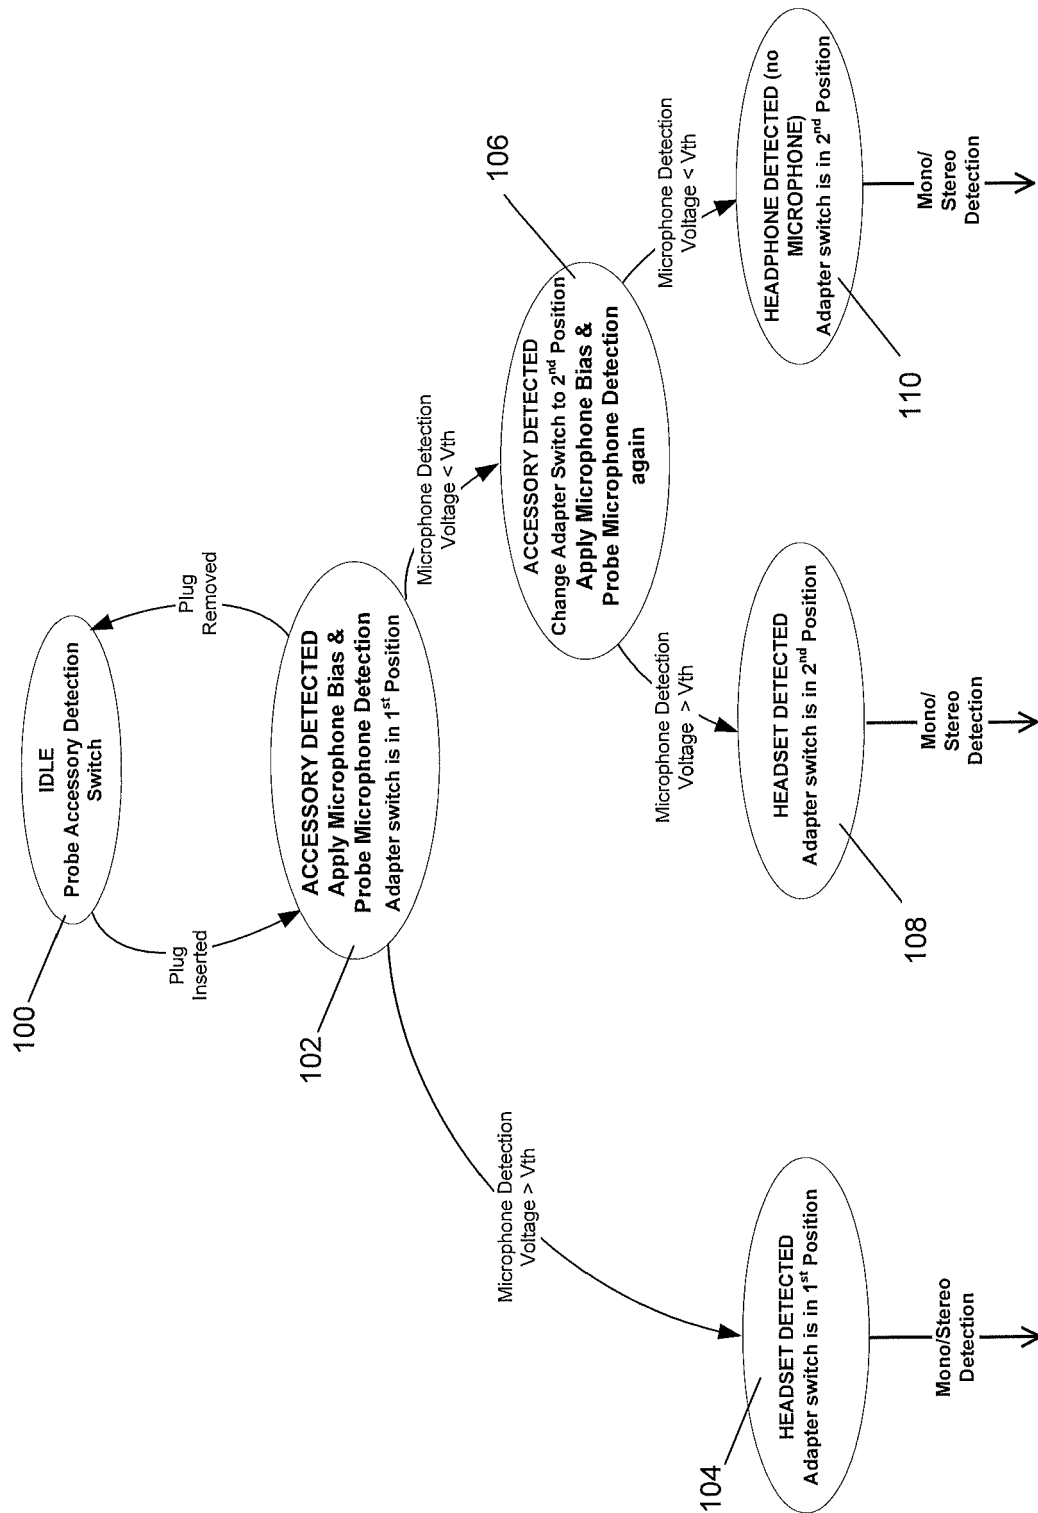


FIG. 5

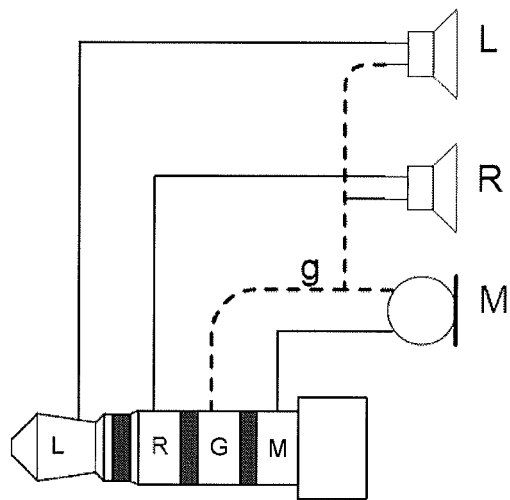


FIG. 6




FIG. 7

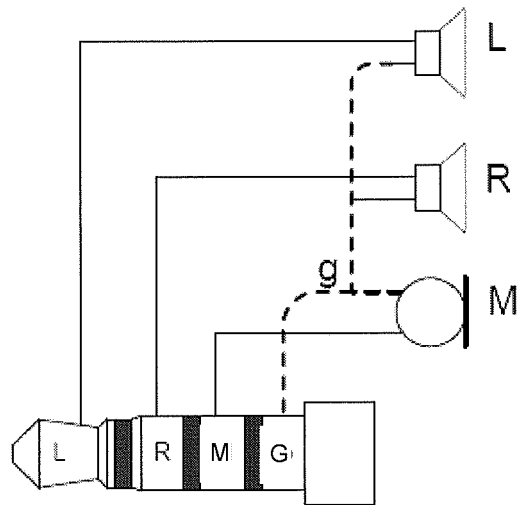


FIG. 8

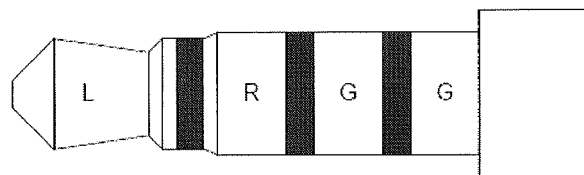


FIG. 9

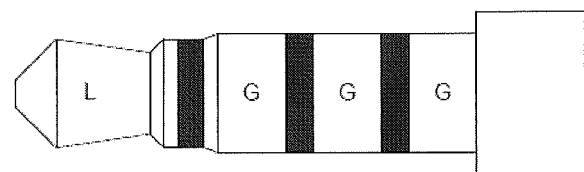


FIG. 10

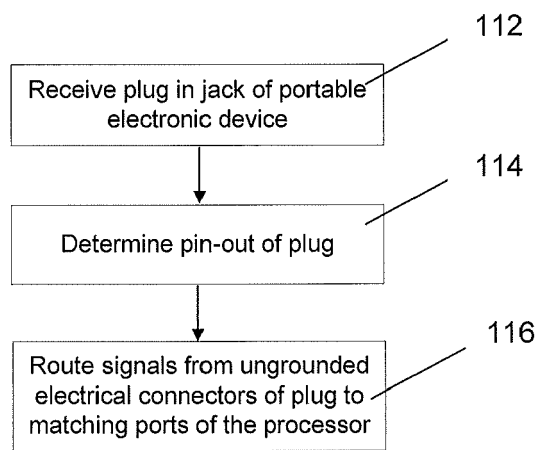


FIG. 11

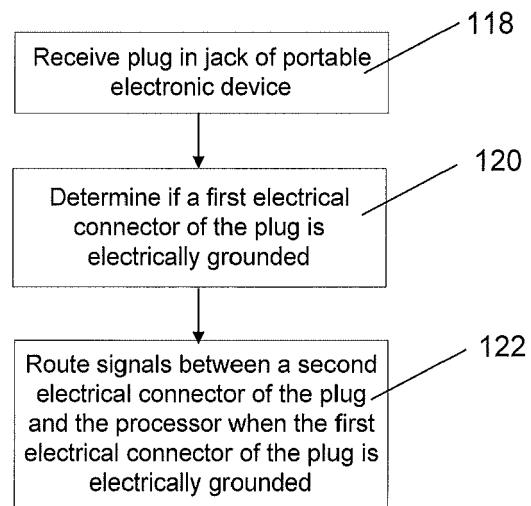


FIG. 12



EUROPEAN SEARCH REPORT

 Application Number
 EP 15 19 4296

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	GB 2 387 979 A (NEC TECHNOLOGIES [GB]) 29 October 2003 (2003-10-29) * page 1, line 5 - page 10, line 34 *	1-15	INV. H04R3/00
X	US 2005/201568 A1 (GOYAL AMIT [IN]) 15 September 2005 (2005-09-15) * paragraph [0052] - paragraph [0098] *	1-15	ADD. H04R5/04
Y	US 2007/047745 A1 (LAI CHENG-SHING [TW] ET AL) 1 March 2007 (2007-03-01) * paragraph [0001] - paragraph [0008] * * paragraph [0014] - paragraph [0023] *	1-15	
Y	US 6 594 366 B1 (ADAMS JOEL [US]) 15 July 2003 (2003-07-15) * column 3, line 5 - column 4, line 44 *	1-15	
A	US 6 069 960 A (MIZUKAMI KENICHI [JP] ET AL) 30 May 2000 (2000-05-30) * column 3, line 36 - column 8, line 36 *	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
			H04R H01R
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 16 February 2016	Examiner Peirs, Karel
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 1
 EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 15 19 4296

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-02-2016

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2387979 A	29-10-2003	NONE	
US 2005201568 A1	15-09-2005	NONE	
US 2007047745 A1	01-03-2007	TW I306563 B US 2007047745 A1	21-02-2009 01-03-2007
US 6594366 B1	15-07-2003	NONE	
US 6069960 A	30-05-2000	JP 3656334 B2 JP H1079997 A US 6069960 A	08-06-2005 24-03-1998 30-05-2000

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20070047745 A1 [0004]
- US 20070104332 A1 [0004]