

(19)



(11)

EP 3 013 402 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

18.04.2018 Bulletin 2018/16

(51) Int Cl.:

A61M 16/16 (2006.01)

(21) Application number: **14818607.5**

(86) International application number:

PCT/AU2014/050089

(22) Date of filing: **24.06.2014**

(87) International publication number:

WO 2014/205513 (31.12.2014 Gazette 2014/53)

(54) **OUTLET CONNECTION ASSEMBLY AND METHOD OF MAKING THE SAME**

AUSLASSANSCHLUSSANORDNUNG SOWIE VERFAHREN ZUR HERSTELLUNG DAVON

ENSEMBLE RACCORD DE SORTIE ET SON PROCÉDÉ DE FABRICATION

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

• **STANISLAS, Luke Andrew**
Bella Vista, NSW 2153 (AU)

• **TANG, Zhuo Ran**
The Ponds, NSW 2769 (AU)

• **TSAI, Ernie Wei-Chih**
Bella Vista, NSW 2153 (AU)

(30) Priority: **25.06.2013 US 201361838971 P**
01.05.2014 US 201461987245 P

(43) Date of publication of application:

04.05.2016 Bulletin 2016/18

(74) Representative: **Vossius & Partner**
Patentanwälte Rechtsanwälte mbB
Siebertstrasse 3
81675 München (DE)

(73) Proprietor: **ResMed Limited**
Bella Vista, NSW 2153 (AU)

(56) References cited:
WO-A1-2012/160477 WO-A1-2012/160477
US-A- 3 936 026 US-A- 3 936 026
US-A- 5 607 316 US-A- 5 607 316
US-A1- 2006 144 405 US-B2- 6 953 354
US-B2- 7 157 035

(72) Inventors:

• **FOOTE, Roger Mervyn Lloyd**
Eastwood, NSW 2122 (AU)

• **HUBY, Ronald James**
Bella Vista, NSW 2153 (AU)

• **NASR, Saad**
Bella Vista, NSW 2153 (AU)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 013 402 B1

Description

2 CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of US Provisional Application Nos. 61/838.971, filed June 25, 2013, and 61/987,245, filed May 1, 2014, each of which is incorporated herein by reference in its entirety.

3 (B) BACKGROUND OF THE TECHNOLOGY

3.1 (1) FIELD OF THE TECHNOLOGY

[0002] The present technology relates to one or more of the diagnosis, treatment and amelioration of respiratory disorders, and to procedures to prevent respiratory disorders. In particular, the present technology relates to medical devices, and their use for treating respiratory disorders and for preventing respiratory disorders.

3.2 (2) DESCRIPTION OF THE RELATED ART

[0003] The respiratory system of the body facilitates gas exchange. The nose and mouth form the entrance to the airways of a patient.

[0004] The airways include a series of branching tubes, which become narrower, shorter and more numerous as they penetrate deeper into the lung. The prime function of the lung is gas exchange, allowing oxygen to move from the air into the venous blood and carbon dioxide to move out. The trachea divides into right and left main bronchi, which further divide eventually into terminal bronchioles. The bronchi make up the conducting airways, and do not take part in gas exchange. Further divisions of the airways lead to the respiratory bronchioles, and eventually to the alveoli. The alveolated region of the lung is where the gas exchange takes place, and is referred to as the respiratory zone. See West, Respiratory Physiology- the essentials.

[0005] A range of respiratory disorders exist.

[0006] Obstructive Sleep Apnea (OSA), a form of Sleep Disordered Breathing (SDB), is characterized by occlusion or obstruction of the upper air passage during sleep. It results from a combination of an abnormally small upper airway and the normal loss of muscle tone in the region of the tongue, soft palate and posterior oropharyngeal wall during sleep. The condition causes the affected patient to stop breathing for periods typically of 30 to 120 seconds duration, sometimes 200 to 300 times per night. It often causes excessive daytime somnolence, and it may cause cardiovascular disease and brain damage. The syndrome is a common disorder, particularly in middle aged overweight males, although a person affected may have no awareness of the problem. See US Patent 4,944,310 (Sullivan).

[0007] Cheyne-Stokes Respiration (CSR) is a disorder of a patient's respiratory controller in which there are rhythmic alternating periods of waxing and waning ventilation, causing repetitive de-oxygenation and re-oxygenation of the arterial blood. It is possible that CSR is harmful because of the repetitive hypoxia. In some patients CSR is associated with repetitive arousal from sleep, which causes severe sleep disruption, increased sympathetic activity, and increased afterload. See US Patent 6,532,959 (Berthon-Jones).

[0008] Obesity Hyperventilation Syndrome (OHS) is defined as the combination of severe obesity and awake chronic hypercapnia, in the absence of other known causes for hypoventilation. Symptoms include dyspnea, morning headache and excessive daytime sleepiness.

[0009] Chronic Obstructive Pulmonary Disease (COPD) encompasses any of a group of lower airway diseases that have certain characteristics in common. These include increased resistance to air movement, extended expiratory phase of respiration, and loss of the normal elasticity of the lung. Examples of COPD are emphysema and chronic bronchitis. COPD is caused by chronic tobacco smoking (primary risk factor), occupational exposures, air pollution and genetic factors. Symptoms include: dyspnea on exertion, chronic cough and sputum production.

[0010] Neuromuscular Disease (NMD) is a broad term that encompasses many diseases and ailments that impair the functioning of the muscles either directly via intrinsic muscle pathology, or indirectly via nerve pathology. Some NMD patients are characterised by progressive muscular impairment leading to loss of ambulation, being wheelchair-bound, swallowing difficulties, respiratory muscle weakness and, eventually, death from respiratory failure. Neuromuscular disorders can be divided into rapidly progressive and slowly progressive: (i) Rapidly progressive disorders: Characterised by muscle impairment that worsens over months and results in death within a few years (e.g. Amyotrophic lateral sclerosis (ALS) and Duchenne muscular dystrophy (DMD) in teenagers); (ii) Variable or slowly progressive disorders: Characterised by muscle impairment that worsens over years and only mildly reduces life expectancy (e.g. Limb girdle, Facio-scapulothoracic and Myotonic muscular dystrophy). Symptoms of respiratory failure in NMD include: increasing generalised weakness, dysphagia, dyspnea on exertion and at rest, fatigue, sleepiness, morning headache, and difficulties with concentration and mood changes.

[0011] Chest wall disorders are a group of thoracic deformities that result in inefficient coupling between the respiratory muscles and the thoracic cage. The disorders are usually characterised by a restrictive defect and share the potential of long term hypercapnic respiratory failure. Scoliosis and/or kyphoscoliosis may cause severe respiratory failure. Symptoms of respiratory failure include: dyspnea on exertion, peripheral oedema, orthopnea, repeated chest infections, morning headaches, fatigue, poor sleep quality and loss of appetite.

[0012] Otherwise healthy individuals may take advantage of systems and devices to prevent respiratory disorders from arising.

3.2.1 Therapy

[0013] Nasal Continuous Positive Airway Pressure (CPAP) therapy has been used to treat Obstructive Sleep Apnea (OSA). The hypothesis is that continuous positive airway pressure acts as a pneumatic splint and may prevent upper airway occlusion by pushing the soft palate and tongue forward and away from the posterior oropharyngeal wall.

[0014] Non-invasive ventilation (NIV) provides ventilatory support to a patient through the upper airways to assist the patient in taking a full breath and/or maintain adequate oxygen levels in the body by doing some or all of the work of breathing. The ventilatory support is provided via a patient interface. Non-invasive ventilation (NIV) has been used to treat OHS, COPD, MD and Chest Wall disorders.

[0015] Invasive ventilation (TV) provides ventilatory support to patients that are no longer able to effectively breathe themselves and may be provided using a tracheostomy tube.

[0016] Ventilators may control the timing and pressure of breaths pumped into the patient, and monitor the breaths taken by the patient. The methods of control and monitoring of patients typically include volume-cycled and pressure-cycled methods. The volume-cycled methods may include among others, Pressure-Regulated Volume Control (PRVC), Volume Ventilation (VV), and Volume Controlled Continuous Mandatory Ventilation (VC-CMV) techniques. The pressure-cycled methods may involve, among others, Assist Control (AC), Synchronized Intermittent Mandatory Ventilation (SIMV), Controlled Mechanical Ventilation (CMV), Pressure Support Ventilation (PSV), Continuous Positive Airway Pressure (CPAP), or Positive End Expiratory Pressure (PEEP) techniques.

3.2.2 Therapy Systems

[0017] A therapy system, or a respiratory therapy system, may comprise a Respiratory Pressure Therapy Device (RPT device), an air circuit, a humidifier, a patient interface, and data management.

3.2.2.1 Patient Interface

[0018] A patient interface may be used to interface respiratory equipment to its user, for example by providing a flow of air. The flow of air may be provided via a mask to the nose and/or mouth, a tube to the mouth or a tracheostomy tube to the trachea of the user. Depending upon the therapy to be applied, the patient interface may form a seal, e.g. with a face region of the patient, to facilitate the delivery of gas at a pressure at sufficient variance with ambient pressure to effect therapy, e.g. a positive pressure of about 10cmH₂O. For other forms of therapy, such as the delivery of oxygen, the patient interface may not include a seal sufficient to facilitate delivery to the airways of a supply of gas at a positive pressure of about 10cmH₂O.

[0019] The design of a patient interface presents a number of challenges. The face has a complex three-dimensional shape. The size and shape of noses varies considerably between individuals. Since the head includes bone, cartilage and soft tissue, different regions of the face respond differently to mechanical forces. The jaw or mandible may move relative to other bones of the skull. The whole head may move during the course of a period of respiratory therapy.

[0020] As a consequence of these challenges, some masks suffer from being one or more of obtrusive, aesthetically undesirable, costly, poorly fitting, difficult to use, and uncomfortable especially when worn for long periods of time or when a patient is unfamiliar with a system. For example, masks designed solely for aviators, mask designed as part of personal protection equipment (e.g. filter masks), SCUBA masks, or for the administration of anaesthetics may be tolerable for their original application, but nevertheless may be undesirably uncomfortable to be worn for extended periods of time, e.g. several hours. This discomfort may lead to a reduction in patient compliance with therapy. This is even more so if the mask is to be worn during sleep.

[0021] Nasal CPAP therapy is highly effective to treat certain respiratory disorders, provided patients comply with therapy. If a mask is uncomfortable, or difficult to use a patient may not comply with therapy. Since it is often recommended that a patient regularly wash their mask, if a mask is difficult to clean (e.g. difficult to assemble or disassemble), patients may not clean their mask and this may impact negatively on patient compliance.

[0022] While a mask for other applications (e.g. aviators) may not be suitable for use in treating sleep disordered breathing, a mask designed for use in treating sleep disordered breathing may be suitable for other applications.

[0023] For these reasons, masks for delivery of nasal CPAP during sleep form a distinct field.

3.2.2.1.1 Seal-forming portion

[0024] Patient interfaces may include a seal-forming portion. Since it is in direct contact with the patient's face, the shape and configuration of the seal-forming portion can have a direct impact on the effectiveness and comfort of the patient interface,

[0025] A patient interface may be partly characterised according to the design intent of where the seal-forming portion is to engage with the face in use. In one form of patient interface, a seal-forming portion may comprise two sub-portions to engage with respective left and right nares. In one form of patient interface, a seal-forming portion may comprise a single element that surrounds both nares in use. Such single element may be designed to, for example, overlay an upper lip region and a nasal bridge region of a face. In one form of patient interface, a seal-forming portion may comprise an element that surrounds a mouth region in use, e.g. by forming a seal on a lower lip region of a face. In one form of patient interface, a seal-forming portion may comprise a single element that surrounds both nares and a mouth region in use. These different types of patient interfaces may be known by a variety of names by their manufacturer including nasal masks, full-face masks, nasal pillows, nasal puffs and oro-nasal masks.

[0026] A seal-forming portion that may be effective in one region of a patient's face may be in appropriate in another region, e.g. because of the different shape, structure, variability and/or sensitivity regions of the patient's face. For example, a seal on swimming goggles that overlays a patient's forehead may not be appropriate to use on a patient's nose.

[0027] Certain seal-forming portions may be designed for mass manufacture such that one design is able to fit and be comfortable and effective for a wide range of different face shapes and sizes. To the extent to which there is a mismatch between the shape of the patient's face and the seal-forming portion of the mass-manufactured patient interface, one or both must adapt in order for a seal to form.

[0028] One type of seal-forming portion extends around the periphery of the patient interface, and is intended to seal against the user's face when force is applied to the patient interface with the seal-forming portion in confronting engagement with the user's face. The seal-forming portion may include an air or fluid filled cushion, or a moulded or formed surface of a resilient seal element made of an elastomer such as a rubber. With this type of seal-forming portion, if the fit is not adequate, there will be gaps between the seal-forming portion and the face, and additional force will be required to force the patient interface against the face in order to achieve a seal

[0029] Another type of seal-forming portion incorporates a flap seal of thin material so positioned about the periphery of the mask so as to provide a self-sealing action against the face of the user when positive pressure is applied within the mask. Like the previous style of seal forming portion, if the match between the face and the mask is not good, additional force may be required to effect a seal, or the mask may leak. Furthermore, if the shape of the seal-forming portion does not match that of the patient, it may crease or buckle in use, giving rise to leaks.

[0030] Another form of seal-forming portion may use adhesive to effect a seal. Some patients may find it inconvenient to constantly apply and remove an adhesive to their face.

[0031] A range of patient interface seal-forming portion technologies are disclosed in the following patent applications, assigned to ResMed Limited: WO 1998/004,310; WO 2006/074,513; WO 2010/135,785. One form of nasal pillow is found in the Adam Circuit manufactured by Puritan Bennett. Another nasal pillow, or nasal puff is the subject of US Patent 4,782,832 (Trimble et al.), assigned to Puritan-Bennett Corporation.

[0032] ResMed Limited has manufactured the following products that incorporate nasal pillows; SWIFT nasal pillows mask, SWIFT II nasal pillows mask. SWIFT LT nasal pillows mask, SWIFT FX nasal pillows mask and LIBERTY full-face mask. The following patent applications, assigned to ResMed Limited, describe nasal pillows masks: International Patent Application WO2004/073,778 (describing amongst other things aspects of ResMed SWIFT nasal pillows). US Patent Application 2009/0044808 (describing amongst other things aspects of ResMed SWIFT LT nasal pillows); International Patent Applications WO 2005/063,328 and WO 2006/130,903 (describing amongst other things aspects of ResMed LIBERTY full-face mask); International Patent Application WO 2009/052,560 (describing amongst other things aspects of ResMed SWIFT FX nasal pillows).

3.2.2.1.2 Positioning and stabilising

[0033] A seal-forming portion of a patient interface used for positive air pressure therapy is subject to the corresponding force of the air pressure to disrupt a seal. Thus a variety of techniques have been used to position the seal-forming portion, and to maintain it in sealing relation with the appropriate portion of the face.

[0034] One technique is the use of adhesives. See for example US Patent publication US 2010/0000534.

[0035] Another technique is the use of one or more straps and stabilising harnesses. Many such harnesses suffer from being one or more of ill-fitting, bulky, uncomfortable and awkward to use.

3.2.2.13 Vent technologies

[0036] Some forms of patient interface systems may include a vent to allow the washout of exhaled carbon dioxide. The vent may allow a flow of gas from an interior space of the patient interface, e.g. the plenum chamber, to an exterior of the patient interface, e.g. to ambient. The vent may comprise an orifice and gas may flow through the orifice in use of the mask. Many such vents are noisy. Others may block in use and provide insufficient washout. Some vents may be disruptive of the sleep of a bed-partner 1100 of the patient 1000, e.g. through noise or focussed airflow.

[0037] ResMed Limited has developed a number of improved mask vent technologies. See WO 1998/034,665; WO 2000/078,381; US 6,581,594; US Patent Application; US 2009/0050156; US Patent Application 2009/0044808.

[0038] Table of noise of prior masks (ISO 17510-2:2007, 10 cmH₂O pressure at Im)

Mask name	Mask type	A-weightcd sound power level dbA (uncertainty)	A-weighted sound pressure dbA (uncertainty)	Year (approx.)
Glue-on (*)	nasal	50.9	42.9	1981
ResCare standard (*)	nasal	31.5	23.5	1993
Mirage (*)		29.5	21.5	1998
ResMed UltraMirage	nasal	36 (3)	28 (3)	2000
ResMed Mirage Activa	nasal	32 (3)	24 (3)	2002
ResMed Mirage Micro	nasal	30 (3)	22 (3)	2008
ResMed Mirage SoftGel	nasal	29 (3)	22 (3)	2008
Mirage FX		26 (3)		2010
ResMed Mirage Swift (*)	nasal pillows	37	29	2004
ResMed Mirage Swift II	nasal pillows	28 (3)	20 (3)	2005
ResMed Mirage Swift LT	nasal pillows	25 (3)	17 (3)	2008
(* one specimen only, measured using lest method specified in ISO3744 in CPAP mode at 10cmH ₂ O)				

[0039] Sound pressure values of a variety of objects are listed below

Object	A-weighted sound pressure dbA (uncertainty)	Notes
Vacuum cleaner: Nilfisk Walter Broadly Litter Hog: B+ Grade	68	ISO3744 at 1m distance
Conversational speech	60	1m distance
Average home	50	
Quiet library	40	
Quiet bedroom at night	30	
Background in TV studio	20	

3.2.2.2 Respiratory Pressure Therapy (RPT) Device

[0040] One known type of RPT device used for treating sleep disordered breathing is a positive airway pressure (PAP) device, such as the S9 Series, manufactured by ResMed. Other examples of RPT devices include a ventilator and a high flow therapy device. In some cases, RPT devices such as PAP devices have been known to be referred to as flow generators. Ventilators such as the ResMed Stellar™ Series of Adult and Paediatric Ventilators may provide support for invasive and non-invasive non-dependent ventilation for a range of patients for treating a number of conditions such as but not limited to NMD, OHS and COPD.

[0041] The ResMed Elisée™ 150 ventilator and ResMed VS III™ ventilator may provide support for invasive and non-invasive dependent ventilation suitable for adult or paediatric patients for treating a number of conditions. These ventilators provide volumetric and barometric ventilation modes with a single or double limb circuit.

[0042] RPT devices typically comprise a pressure generator, such as a motor-driven blower or a compressed gas reservoir, and are configured to supply a flow of air to the airway of a patient. In some cases, the flow of air may be supplied to the airway of the patient at positive pressure. The outlet of the RPT device is connected via an air circuit to a patient interface, such as those described above.

[0043] RPT devices typically also include an inlet filter, various transducers, and a microprocessor-based controller. A blower may include a servo-controlled motor, a volute, and an impeller. In some cases a brake for the motor may be implemented to more rapidly reduce the speed of the blower so as to overcome the inertia of the motor and impeller. The braking can permit the blower to more rapidly achieve a lower pressure condition in time for synchronization with expiration despite the inertia. In some cases the pressure generator may also include a valve capable of discharging generated air to atmosphere as a means for altering the pressure delivered to the patient as an alternative to motor speed control. The transducers may measure, amongst other things, motor speed, mass flow rate and outlet pressure, such as with a pressure transducer or the like. The controller may include data storage capacity with or without integrated data retrieval and display functions.

[0044] Table of noise output levels of prior RPT devices (one specimen only, measured using test method specified in ISO3744 in CPAP mode at 10cmH₂O).

RPT Device name	A-weighted sound power level dB(A)	Year (approx.)
C-Scies Tango	31.9	2007
C-Scies Tango with Humidifier		2007
S8 Escape II	30.5	2005
S8 Escape II with H4i Humidifier	31.1	2005
S9 AutoSet		2010
S9 AutoSet with H5i Humidifier	28.6	2010

3.2.2.3 Humidifier

[0045] Delivery of a flow of air without humidification may cause drying of airways. Medical humidifiers are used to increase humidity and/or temperature of the flow of air in relation to ambient air when required, typically where the patient may be asleep or resting (e.g. at a hospital). As a result, a medical humidifier may be relatively small for bedside placement, and it may be configured to only humidify and/or heat the flow of air delivered to the patient without humidifying and/or heating the patient's surroundings. Room-based systems (e.g. a sauna, an air conditioner, an evaporative cooler), for example, may also humidify air that is breathed in by the patient, however they would also humidify and/or heat the entire room, which may cause discomfort to the occupants.

[0046] The use of a humidifier with a RPT device and the patient interface produces humidified gas that minimizes drying of the nasal mucosa and increases patient airway comfort. In addition in cooler climates, warm air applied generally to the face area in and about the patient interface is more comfortable than cold air.

[0047] Respiratory humidifiers are available in many forms and may be a standalone device that is coupled to a RPT device via an air circuit, is integrated with the RPT device or configured to be directly coupled to the relevant RPT device. While known passive humidifiers can provide some relief, generally a heated humidifier may be used to provide sufficient humidity and temperature to the air so that the patient will be comfortable. Humidifiers typically comprise a water reservoir or tub having a capacity of several hundred milliliters (ml), a heating element for heating the water in the reservoir, a control to enable the level of humidification to be varied, a gas inlet to receive air from the RPT device, and a gas outlet adapted to be connected to an air circuit that delivers the humidified air to the patient interface.

[0048] Heated passover humidification is one common form of humidification used with a RPT device. In such humidifiers the heating element may be incorporated in a heater plate which sits under, and is in thermal contact with, the water tub. Thus, heat is transferred from the heater plate to the water reservoir primarily by conduction. The air flow from the RPT device passes over the heated water in the water tub resulting in water vapour being taken up by the air flow.

The ResMed H4i™ and H5i™ Humidifiers are examples of such heated passover humidifiers that are used in combination with ResMed S8 and S9 CPAP devices respectively.

[0049] Other humidifiers may also be used such as a bubble or diffuser humidifier, a jet humidifier or a wicking humidifier. In a bubble or diffuser humidifier the air is conducted below the surface of the water and allowed to bubble back to the top. A jet humidifier produces an aerosol of water and baffles or filters may be used so that the particles are either removed or evaporated before leaving the humidifier. A wicking humidifier uses a water absorbing material, such as sponge or paper, to absorb water by capillary action. The water absorbing material is placed within or adjacent at least a portion of the air flow path to allow evaporation of the water in the absorbing material to be taken up into the air flow.

[0050] An alternative form of humidification is provided by the ResMed HumiCare™ D900 humidifier that uses a CounterStream™ technology that directs the air flow over a large surface area in a first direction whilst supplying heated water to the large surface area in a second opposite direction. The ResMed HumiCare™ D900 humidifier may be used with a range of invasive and non-invasive ventilators. WO 2012/160477 A1 relates to a connection assembly for rotatably and electrically coupling an accessory to a main device including a housing portion, a rotatable port assembly, and a wire assembly. It is described that an end of the port assembly is coupled to the accessory, wherein the port assembly includes an electrical connector member having a first connector end electrically coupled to the accessory. The wire assembly is described to have an electrical wire member having a first end electrically coupled to a second connector end of the electrical connector member and a second end electrically coupled to a power supply, wherein the wire member is spooled around the port assembly and encased in a chamber defined between the housing portion and the port assembly. It is further described that rotation of the port assembly in opposite directions causes the electrical wire member to spool more and less tightly around the port assembly without causing pinching or tangling of wires.

4 (C) BRIEF SUMMARY OF THE TECHNOLOGY

[0051] The invention relates to a connection assembly according to claim 1.

[0052] The present technology is directed towards providing medical devices used in the diagnosis, amelioration, treatment, or prevention of respiratory disorders having one or more of improved comfort, cost, efficacy, ease of use and manufacturability.

[0053] A first aspect of the present technology relates to apparatus used in the diagnosis, amelioration, treatment or prevention of a respiratory disorder.

[0054] Another aspect of the present technology relates to methods used in the diagnosis, amelioration, treatment or prevention of a respiratory disorder.

[0055] Another aspect of the present technology is directed to a connection assembly for a respiratory therapy system. The connection assembly may comprise; an outlet assembly, said outlet assembly including an outlet housing and a swivelling disc located on said outlet housing, said outlet housing comprising a void and an annular section; and a cable having a first end to connect to an electrical connector and a second end to connect to at least one electrical component of the respiratory therapy system, said cable having a slack portion, wherein said swivelling disc is rotatable relative to said outlet housing between a first position and a second position, and wherein the slack portion of the cable extends from the void and wraps around the annular section as the swivelling disc is rotated from the first position to the second position.

[0056] In examples, (a) said swivelling disc may include a first pair of stop surfaces and said outlet housing may include a second pair of stop surfaces to limit the rotation of the swivelling disc relative to the outlet housing, (b) each pair of stop surfaces may be arranged to limit the rotation of the swivelling disc relative to the outlet housing to less than 360°, (c) each pair of stop surfaces may be arranged to limit the rotation of the swivelling disc relative to the outlet housing to greater than 180°. (d) the first pair of stop surfaces may be located on either side of and adjacent to a receiver opening in the swivelling disc that receives the cable, (e) the outlet housing may include an inner wall, said second pair of stop surfaces may be located on the inner wall and said inner wall may be configured to rotatably receive said swivelling disc. (f) the void may be defined, at least in part, by the inner wall and an outer wall of the outlet housing, (g) a distance between the inner wall and the outer wall of the outlet housing and across the void may be in the range of about 2mm to about 5mm, (h) the cable may comprise a flexible circuit board or a ribbon cable, (i) the cable may have a substantially rectangular cross-section, and a major side of the substantially rectangular cross-section may be oriented in parallel to an axis of rotation of the swivelling disc, (j) the swivelling disc may include an electrical connector receiver to receive the electrical connector, and the electrical connector may be electrically connectable to the cable within the electrical connector receiver, (k) the electrical connector receiver may include an opening to receive the electrical connector when the outlet connector is connected to the outlet assembly, and the outlet connector may be shaped to cover the opening

of the electrical connector receiver when the outlet connector is connected to the outlet assembly. (1) the outlet connector may include a recess proximal to the electrical connector shaped to correspond to a protruding portion of the electrical connector receiver, (m) the outlet housing may include a retainer, said retainer may be configured to retain the slack portion within the void of the outlet housing as the swivelling disc is rotated from the second position to the first position, (n) the outlet connector may include at least one retention feature to releasably connect the outlet connector to the swivelling disc via at least one corresponding notch located on the swivelling disc. (o) the outlet connector may include at least one tab, each said at least one retention feature may be located on a corresponding tab having a corresponding actuator, and each said actuator may be adapted to release each said retention feature from a corresponding notch of the swivelling disc, (p) the gas delivery tube may include a heating element disposed along at least a portion of the gas delivery tube, said heating element may be connected to the electrical connector, (q) the outlet connector may include a grommet to connect the gas delivery tube to a tube connection region of the outlet connector, (r) the grommet may include threads to receive corresponding coils of the gas delivery tube. (s) the grommet may be comprised of a thermoplastic elastomer. (t) the grommet may include at least one keyway for restraining the grommet during forming, (u) the grommet may include at least one radial flange to engage a mold tool during forming. (v) the grommet may include a grip section, (w) the grip section may include a plurality of ridges and recesses disposed radially about the grommet. (x) the outlet connector may comprise an elbow. (y) the elbow may be bent at about 90°, (z) when the outlet connector is connected to the outlet assembly a rotatable, electrical, and pneumatic connection may be formed, (aa) the outlet assembly may comprise an airflow tube having a tapered end to connect to the outlet connector and form a pneumatic seal therewith, (bb) the swivelling disc may include at least one tang to rotatably connect the swivelling disc to the outlet housing, (cc) the slack portion may comprise a fixed length that is less than a circumference of the swivelling disc, (dd) when the swivelling disc is in the first position the slack portion may gather in the void. (ee) a larger portion of the cable may be contained in the void when the swivelling disc is in the first position than when the swivelling disc is in the second position, (ff) an electrical connection formed by the connection assembly may comprise at least one wire to perform powering and/or signalling functions, (gg) the outlet connector may include at least one rib at an outlet connection region to support the outlet connector on the airflow tube when connected to the outlet assembly, (hh) the connection assembly may comprise an outlet connector located at an end of a gas delivery tube to connect the gas delivery tube to the outlet assembly, said outlet connector including an electrical connector, wherein said outlet connector and said swivelling disc arc connectable such that said outlet connector and said swivelling disc are rotatable in unison, (ii) the annular section may be defined, at least in part, by the inner wall and an outer wall of the outlet housing, (jj) the void and annular section may be on opposing sides of the inner wall, (kk) the outlet housing may be comprised of thermoplastic elastomer, (11) the elbow may be bent at an angle between about 0° and about 120°, (mm) the airflow tube may be removable, (nn) the outlet connector may include a receiver at a tube connection region, said receiver comprising receiver threads, a receiver flange, and at least one protrusion, (oo) the outlet connector may comprise a clip to secure the gas delivery tube within the receiver, the clip comprising clip threads, a clip flange, and at least one tab and each at least one tab may be structured to engage with a respective one of the at least one protrusion to secure the clip to the receiver, (pp) the clip threads and the receiver threads may be structured to receive corresponding coils of the gas delivery tube, and/or (qq) the clip flange and the receiver flange may be structured to engage a mold tool during forming,

[0057] Another aspect of the present technology is directed to a method of manufacturing an air circuit for use with a respiratory therapy device. The method may comprise: molding an outlet connector substructure including a tube connection region, wherein an interior of said tube connection region is formed around a mandrel such that an orifice is formed in the outlet connector substructure opposite the tube connection region; threading a grommet onto a first end of a gas delivery tube having a helical heating element disposed thereon such that a connection portion of the gas delivery tube extends through the grommet; connecting the connection portion of the gas delivery tube to the tube connection region of the outlet connector substructure; attaching an electrical connector to the helical heating element at the tube connection region of the outlet connector substructure; molding an outlet connector housing over the outlet connector substructure, at least in part by scaling the mold tool around the grommet; and attaching an end cap over the orifice.

[0058] Another aspect of the present technology is directed to a respiratory therapy system for the treatment of sleep disordered breathing in a patient. The respiratory therapy system may comprise: a pressure generator to provide a flow of air to the patient at positive pressure, the pressure generator comprising a housing; an outlet assembly located on the housing, said outlet assembly comprising: an outlet housing and a swivelling disc located on said outlet housing, said outlet housing comprising a void; and a cable having a first end to connect to an electrical connector and a second end to connect to at least one electrical component of the respiratory therapy system, said cable having a slack portion; and an air circuit configured to connect to the outlet assembly at a first end and to a patient interface at a second end, said air circuit comprising: an outlet connector located at the second end of a gas delivery tube to connect the gas delivery tube to the outlet assembly, said outlet connector including the electrical connector, wherein said outlet connector and said swivelling disc arc connectable such that said outlet connector and said swivelling disc are rotatable in unison relative to said outlet housing between a first position and a second position, and wherein a larger portion of the cable

is contained in the void when the swivelling disc is in the first position than when the swivelling disc is in the second position.

[0059] In examples, (a) said swivelling disc may include a first pair of stop surfaces and said outlet housing may include a second pair of stop surfaces to limit the rotation of the swivelling disc relative to the outlet housing, (b) each pair of stop surfaces may be arranged to limit the rotation of the swivelling disc relative to the outlet housing to less than 360°, (c) each pair of stop surfaces may be arranged to limit the rotation of the swivelling disc relative to the outlet housing to greater than 180°. (d) the first pair of stop surfaces may be located on either side of and adjacent to a receiver opening in the swivelling disc that receives the cable, (e) the outlet housing may include an inner wall, said second pair of stop surfaces may be located on the inner wall and said inner wall may be configured to rotatably receive said swivelling disc. (f) the void may be defined, at least in part, by the inner wall and an outer wall of the outlet housing. (g) a distance between the inner wall and the outer wall of the outlet housing and across the void may be in the range of about 2mm to about 5mm, (h) the cable may comprise a flexible circuit board or a ribbon cable, (i) the cable may have a substantially rectangular cross-section, and a major side of the substantially rectangular cross-section may be oriented in parallel to an axis of rotation of the swivelling disc, (j) the swivelling disc may include an electrical connector receiver to receive the electrical connector, and the electrical connector may be electrically connectable to the cable within the electrical connector receiver, (k) the electrical connector receiver may include an opening to receive the electrical connector when the outlet connector is connected to the outlet assembly, and the outlet connector may be shaped to cover the opening of the electrical connector receiver when the outlet connector is connected to the outlet assembly. (l) the outlet connector may include a recess proximal to the electrical connector shaped to correspond to a protruding portion of the electrical connector receiver, (m) the outlet housing may include a retainer, said retainer may be configured to retain the slack portion within the outlet housing as the swivelling disc is rotated from the second position to the first position, (n) the outlet connector may include at least one retention feature to releasably connect the outlet connector to the swivelling disc via at least one corresponding notch located on the swivelling disc, (o) the outlet connector may include at least one tab, each said at least one retention feature may be located on a corresponding tab having a corresponding actuator, and each said actuator may be adapted to release each said retention feature from a corresponding notch of the swivelling disc, (p) the gas delivery tube may include a heating element disposed along at least a portion of the gas delivery tube, said heating element may be connected to the electrical connector, (q) the outlet connector may include a grommet to connect the gas delivery tube to a tube connection region of the outlet connector, (r) the grommet may include threads to receive corresponding coils of the gas delivery tube, (s) the grommet may be comprised of a thermoplastic elastomer, (t) the grommet may include at least one keyway for restraining the grommet during forming, (u) the grommet may include at least one radial flange to engage a mold tool during forming, (v) the grommet may include a grip section, (w) the grip section may include a plurality of ridges and recesses disposed radially about the grommet. (x) the outlet connector may comprise an elbow, (y) the elbow may be bent at about 90°, (z) the outlet housing may be comprised of thermoplastic elastomer, (aa) when the outlet connector is connected to the outlet assembly a rotatable, electrical, and pneumatic connection may be formed, (bb) the outlet assembly may comprise an airflow tube having a tapered end to connect to the outlet connector and form a pneumatic seal therewith, (cc) the swivelling disc may include at least one tang to rotatably connect the swivelling disc to the outlet housing. (dd) the slack portion may comprise a fixed length that is less than a circumference of the swivelling disc, (ee) when the swivelling disc is in the first position the slack portion may gather in the void, (ff) the slack portion of the cable may extend from the void and wrap around the annular section as the swivelling disc is rotated from the first position to the second position, (gg) an electrical connection formed by the connection assembly may comprise at least one wire to perform powering and/or signalling functions. (hh) the outlet connector may include at least one rib at an outlet connection region to support the outlet connector on the airflow tube when connected to the outlet assembly, (ii) the respiratory therapy system may comprise a humidifier to humidify the flow of air, (jj) the outlet housing may comprise an annular section configured to receive the cable when the swivelling disc is in the second position, (kk) the elbow may be bent at an angle between about 0° and about 120°, (ll) the airflow tube may be removable. (mm) the outlet connector may include a receiver at a tube connection region, said receiver comprising receiver threads, a receiver flange, and at least one protrusion, (nn) the outlet connector may comprise a clip to secure the gas delivery tube within the receiver, the clip comprising clip threads, a clip flange, and at least one tab and each at least one tab may be structured to engage with a respective one of the at least one protrusion to secure the clip to the receiver, (oo) the clip threads and the receiver threads may be structured to receive corresponding coils of the gas delivery tube, and/or (pp) the clip flange and the receiver flange may be structured to engage a mold tool during forming.

[0060] Another aspect of the present technology is directed to a connection assembly for a respiratory therapy system. The connection assembly may comprise: a housing; an outlet assembly located on the housing and including an outlet tube; an outlet connector having a first end adapted to pneumatically connect to a gas delivery tube and a second end adapted to removably connect to the outlet assembly and form a pneumatic connection with the outlet tube; a plurality of first electrical connectors; and a second electrical connector adapted to electrically connect to one of the plurality of first electrical connectors, wherein the outlet assembly and the outlet connector are removably connectable in a plurality of predetermined and discrete positions to form both pneumatic and electrical connections.

[0061] In examples, (a) the quantity of the plurality of first electrical connectors may equal the quantity of the plurality of predetermined and discrete positions, (b) the outlet assembly may comprise the plurality of first electrical connectors and the outlet connector may comprise the second electrical connector, (c) the outlet assembly may include at least one cable to electrically connect the plurality of first electrical connectors to at least one electronic component of the respiratory therapy system, (d) the outlet assembly may comprise the second electrical connector and the outlet connector may comprise the plurality of first electrical connectors, (e) the connection assembly may comprise at least one dummy connector configured to cover at least one of the plurality of first electrical connectors that is not connected to the second electrical connector, (f) a quantity of the at least one dummy connectors may be one less than a quantity of the plurality of first electrical connectors, (g) the outlet connector may comprise an elbow, (h) the elbow may be bent at about 90°. (i) the outlet assembly may include a recess to receive the second end of the outlet connector, and the recess and the second end of the outlet connector may be shaped substantially correspondingly, (j) the elbow may be bent between about 0° and about 120°, and/or (k) an electrical connection formed by the connection assembly may comprise at least one wire to perform powering and/or signalling functions.

[0062] Another aspect of the present technology is directed to a method of manufacturing an air circuit for use with a respiratory therapy device. The method may comprise: molding an outlet connector substructure, the outlet connector substructure including a receiver and receiver threads at a tube connection region, wherein an interior of said outlet connector substructure is formed around a mandrel such that an orifice is formed in the outlet connector substructure opposite the tube connection region: threading a first end of a gas delivery tube having a helical heating element disposed thereon into the receiver threads such that a connection portion of the gas delivery tube extends through the receiver; connecting the connection portion of the gas delivery tube to the tube connection region of the outlet connector substructure by securing a clip around the connection portion of the gas delivery tube such that the connection portion of the gas delivery tube is substantially surrounded by the receiver and the clip; attaching an electrical connector to the helical heating element at the tube connection region of the outlet connector substructure; molding an outlet connector housing over the outlet connector substructure, at least in part by scaling the mold tool around the tube connection region; and attaching an end cap over the orifice.

[0063] In examples, (a) the clip may be a separate component from the receiver, the clip comprising a pair of tabs and the receiver comprising a pair of protrusions, and securing the clip may comprise snapping each of the pair of tabs onto respective ones of the pair of protrusions, and/or (b) the clip and the receiver may comprise one piece and the clip is joined to the receiver by a hinge, the clip comprising a tab and the receiver comprising a protrusion, and securing the clip may comprise snapping the tab onto the protrusion.

[0064] Another aspect of the present technology is directed to an outlet connector assembly for a device to deliver continuous positive airway pressure to a patient for treatment of sleep disordered breathing. The outlet connector assembly may comprise: a body having a tube connection region and an outlet connection region: a cap structured to attach to the body such that the cap and the body at least partially define an airflow path between the tube connection region and the outlet connection region; and an electrical contact assembly molded to the body and configured to form an electrical connection between the tube connection region and the outlet connection region.

[0065] In examples, (a) the airflow path defined at least partially by the cap and the body may have a curved shape and the airflow path may have a substantially uniform cross-section, (b) a radius of the curved shape of the airflow path may be 1 to 3 times the diameter of the airflow path, (c) an inner radius and an outer radius of the curved shape of the airflow may share a common arc center, (d) the tube connection region may comprise a shoulder and contact recesses, (e) the electrical contact assembly may comprise contacts positioned in the contact recesses, the contacts being extended completely around the outlet connection region, (f) the cap may comprise tabs and prongs and the body may comprise notches and detents, and the tabs may engage the notches and the prongs may engage the detents to attach the cap to the body, (g) the tube connection region may comprise a thread shaped to receive a helical coil of a gas delivery tube, and/or (h) the outlet connector assembly may comprise a housing overmolded to the body and the cap to pneumatically seal the airflow path.

[0066] Of course, portions of the examples/aspects may form sub-examples/sub-aspects of the present technology. Also, various ones of the sub-examples/sub-aspects and/or examples/aspects may be combined in various manners and also constitute additional examples/aspects or sub-examples/sub-aspects of the present technology.

[0067] Other features of the technology will be apparent from consideration of the information contained in the following detailed description, abstract, drawings and claims.

5 (D) BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0068] The present technology is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings, in which like reference numerals refer to similar elements including:

5.1 THERAPY SYSTEMS

[0069]

Fig. 1a shows a system in accordance with the present technology. A patient 1000 wearing a patient interface 3000, in the form of a nasal pillows, receives a supply of air at positive pressure from a RPT device 4000. Air from the RPT device is humidified in a humidifier 5000, and passes along an air circuit 4100 to the patient 1000.

Fig. 1b shows a system including a patient 1000 wearing a patient interface 3000, in the form of a nasal mask, receiving a supply of air at positive pressure from a RPT device 4000. Air from the RPT device is humidified in a humidifier 5000. and passes along an air circuit 4100 to the patient 1000.

Fig. 1c shows a system including a patient 1000 wearing a patient interface 3000. in the form of a full-face mask, receiving a supply of air at positive pressure from a RPT device 4000. Air from the RPT device is humidified in a humidifier 5000. and passes along an air circuit 4100 to the patient 1000.

5.2 THERAPY

5.2.1 Respiratory system

[0070]

Fig. 2a shows an overview of a human respiratory system including the nasal and oral cavities, the larynx, vocal folds, oesophagus, trachea, bronchus, lung, alveolar sacs, heart and diaphragm.

Fig. 2b shows a view of a human upper airway including the nasal cavity, nasal bone, lateral nasal cartilage, greater alar cartilage, nostril, lip superior, lip inferior, larynx, hard palate, soft palate, oropharynx, tongue, epiglottis, vocal folds, oesophagus and trachea.

5.2.2 Patient Interface

[0071]

Fig. 2c shows a patient interface in the form of a nasal mask in accordance with one form of the present technology.

5.3 RPT DEVICE AND HUMIDIFIER

[0072]

Fig. 3a shows a RPT device in an exploded view in accordance with one form of the present technology.

Fig. 3h shows another RPT device 4000 with an integrated humidifier 5000 in an exploded view in accordance with one aspect of the present technology.

Fig. 3c shows a front perspective view of an RPT device 4000 with an integrated humidifier 5000 in accordance with one aspect of the present technology.

Fig. 3d shows a rear perspective view of an RPT device 4000 with an integrated humidifier 5000 in accordance with one aspect of the present technology.

Fig. 3e shows a schematic diagram of the pneumatic circuit of a RPT device in accordance with one form of the present technology. The directions of upstream and downstream are indicated.

Fig. 3f shows a schematic diagram of electrical components of an RPT device in accordance with one form of the present technology.

Fig. 3g shows a perspective view of a humidifier 5000 in accordance with one form of the present technology.

Fig. 3h shows a perspective view of a humidifier 5000 in accordance with one form of the present technology, showing the humidifier reservoir 5180 in an exploded state.

Fig. 4a shows a perspective view of an air circuit comprising an outlet connector according to an example of the present technology.

Fig. 4b shows another perspective view of an air circuit comprising an outlet connector according to an example of the present technology.

Fig. 4c shows a detailed view of an electrical connector of an outlet connector according to an example of the present technology.

Fig. 4d shows another perspective view of a portion of an outlet connector according to an example of the present technology.

Fig. 4e shows a detailed bottom view of an outlet connector and a portion of an airflow tube according to an example of the present technology.

Fig. 4f shows another detailed bottom view of an outlet connector according to an example of the present technology.

Fig. 4g shows another perspective view of an air circuit comprising an outlet connector according to an example of the present technology.

Fig. 4h shows another perspective view of an air circuit comprising an outlet connector according to an example of the present technology.

Fig. 5a shows a perspective view of an air circuit comprising an outlet connector and a tube according to an example of the present technology.

Fig. 5b shows a bottom view of an air circuit comprising an outlet connector and a tube according to an example of the present technology.

Fig. 5c shows a side view of an air circuit comprising an outlet connector and a tube according to an example of the present technology.

Fig. 5d shows an end view of an air circuit comprising an outlet connector and a tube according to an example of the present technology.

Fig. 5c shows a bottom perspective view of an air circuit comprising an outlet connector and a tube according to an example of the present technology.

Fig. 5f shows an exploded perspective view of an air circuit comprising an outlet connector and a tube according to an example of the present technology.

Fig. 5g shows a partially exploded perspective view of an air circuit comprising an outlet connector and a tube according to an example of the present technology.

Fig. 5h shows a detailed side cross-section view of an air circuit comprising an outlet connector and a tube according to an example of the present technology.

Fig. 5i shows a side cross-section view of an air circuit comprising an outlet connector and a tube according to an example of the present technology.

Fig. 6a shows a perspective view of a substructure of an outlet connector and an electrical connector according to an example of the present technology.

Fig. 6b shows a perspective view of an electrical connector of an outlet connector according to an example of the present technology.

Fig. 6c shows a detailed perspective view of a substructure of an outlet connector according to an example of the present technology.

Fig. 6d shows a top perspective view of a substructure of an outlet connector according to an example of the present technology.

Fig. 6c shows another detailed perspective view of a substructure of an outlet connector according to an example of the present technology.

Fig. 6f shows a perspective view of a substructure of an outlet connector, a tube and an electrical connector according to an example of the present technology.

Fig. 6g shows a cross-sectional perspective view of a substructure of an outlet connector, a tube and an electrical connector according to an example of the present technology.

Fig. 6h shows a perspective view of a substructure of an outlet connector according to an example of the present technology.

Fig. 6i shows a bottom perspective view of a substructure of an outlet connector according to an example of the present technology.

Fig. 7a shows a perspective view of a grommet according to an example of the present technology.

Fig. 7b shows a cross-sectional perspective view of a grommet according to an example of the present technology.

Fig. 7c shows a perspective view of a grommet according to an example of the present technology.

Fig. 7d shows another perspective view of a grommet according to an example of the present technology.

Fig. 7c shows a side view of a grommet according to an example of the present technology.

Fig. 7f shows an end view of a grommet according to an example of the present technology.

Fig. 8a shows a bottom perspective view of a swivelling disc and a cable according to an example of the present technology.

Fig. 8b shows a bottom perspective view of a cable housing, a swivelling disc, and a cable according to an example of the present technology.

Fig. 8c shows a perspective view of a cable housing according to an example of the present technology.

Fig. 8d shows a perspective view of a cable housing with a swivelling disc and a cable in a first position relative to the cable housing according to an example of the present technology.

Fig. 8c shows a perspective view of a cable housing with a swivelling disc and a cable in a second position relative to the cable housing according to an example of the present technology.

Fig. 8f shows a perspective view of a cable housing with a swivelling disc and a cable in a third position relative to the cable housing according to an example of the present technology.

Fig. 8g shows a perspective view of a cable housing with a swivelling disc, a cable, and a substructure of an outlet connector in a first position relative to the cable housing according to an example of the present technology.

Fig. 8h shows a perspective view of a cable housing with a swivelling disc, a cable, and a substructure of an outlet connector in a second position relative to the cable housing according to an example of the present technology.

Fig. 8i shows a top view of a cable housing according to an example of the present technology.

Fig. 9a shows a perspective view of a swivelling disc according to an example of the present technology.

Fig. 9b shows a side view of a swivelling disc according to an example of the present technology.

5 Fig. 9c shows another side view of a swivelling disc according to an example of the present technology.

Fig. 9d shows a bottom perspective view of a swivelling disc according to an example of the present technology.

10 Fig. 9e shows a bottom view of a swivelling disc according to an example of the present technology.

Fig. 10a shows a side view of an airflow tube according to an example of the present technology.

Fig. 10b shows another side view of an airflow tube according to an example of the present technology.

15 Fig. 10c shows another side view of an airflow tube according to an example of the present technology.

Fig. 10d shows an exploded perspective view of an airflow tube according to an example of the present technology.

20 Fig. 11a shows a side view of a cable housing according to an example of the present technology.

Fig. 11b shows a perspective view of a cable housing according to an example of the present technology.

Fig. 11c shows a top view of a cable housing according to an example of the present technology.

25 Fig. 11d shows another side view of a cable housing according to an example of the present technology.

Fig. 12a shows a bottom perspective view of an air circuit comprising an outlet connector and a tube connected to a cable housing and an airflow tube according to an example of the present technology.

30 Fig. 12b shows a bottom view of an air circuit comprising an outlet connector and a tube connected to a cable housing and an airflow tube according to an example of the present technology.

35 Fig. 12c shows an end view of an air circuit comprising an outlet connector and a tube connected to a cable housing and an airflow tube according to an example of the present technology.

Fig. 12d shows a side view of an air circuit comprising an outlet connector and a tube connected to a cable housing and an airflow tube according to an example of the present technology.

40 Fig. 12e shows a partially exploded perspective view of an air circuit comprising an outlet connector and a tube connected to a cable housing and an airflow tube according to an example of the present technology.

Fig. 12f shows a perspective view of an air circuit comprising an outlet connector and a tube connected to a cable housing and an airflow tube according to an example of the present technology.

45 Fig. 13a shows a top view of an outlet connector connected to a humidifier housing according to an example of the present technology.

50 Fig. 13b shows a side view of an outlet connector connected to a humidifier housing according to an example of the present technology.

Fig. 13c shows another side view of an outlet connector connected to a humidifier housing according to an example of the present technology.

55 Fig. 13d shows a perspective view of an outlet connector connected to a humidifier housing according to an example of the present technology.

Fig. 13e shows a perspective view of an outlet connector detached from a humidifier housing according to an example of the present technology.

Fig. 13f shows a perspective view of an outlet of a humidifier housing according to an example of the present technology.

Fig. 13g shows a front view of an outlet of a humidifier housing according to an example of the present technology.

Fig. 13h shows another perspective view of an outlet connector detached from a humidifier housing according to an example of the present technology.

Fig. 13j shows a perspective view of an outlet connector connected to a humidifier housing according to an example of the present technology.

Fig. 13k shows a side view of an outlet connector according to an example of the present technology.

Fig. 13l shows a top view of an outlet connector according to an example of the present technology.

Fig. 13m shows another side view of an outlet connector according to an example of the present technology.

Fig. 13n shows a perspective view of an outlet assembly according to an example of the present technology.

Fig. 14a shows a partially exploded perspective view of an air circuit comprising an outlet connector and a tube, a swivelling disc, a cable and a cable housing according to an example of the present technology.

Fig. 14b shows another partially exploded perspective view of an air circuit comprising an outlet connector and a tube, a swivelling disc, and a cable housing according to an example of the present technology.

Fig. 14c shows another partially exploded perspective view of an air circuit comprising an outlet connector and a tube, a swivelling disc, a cable and a cable housing according to an example of the present technology.

Fig. 14d shows a perspective view of an air circuit comprising an outlet connector and a tube connected to a swivelling disc, a cable and a cable housing according to an example of the present technology.

Fig. 14e shows a perspective view of a swivelling disc according to an example of the present technology.

Fig. 14f shows a perspective view of a cable housing and a cable according to an example of the present technology.

Fig. 14g shows a perspective view of an electrical connector detached from an elbow according to an example of the present technology.

Fig. 14h shows a perspective view of an electrical connector connected to an elbow according to an example of the present technology.

Fig. 14i shows a top perspective view of a tube and tube cuff according to an example of the present technology.

Fig. 14j shows a bottom perspective view of a tube and tube cuff according to an example of the present technology.

Fig. 15a shows a perspective view of a swivelling disc, a swivel electrical connector, and a cable housing assembled together according to an example of the present technology.

Fig. 15b shows a side view of an air circuit comprising an outlet connector and a tube detached from a swivelling disc, a swivel electrical connector, and a cable housing according to an example of the present technology.

Fig. 16a shows a side view of an air circuit comprising an outlet connector and a tube detached from a swivelling disc, and a cable housing according to an example of the present technology.

Fig. 16b shows a top perspective view of a cable housing and a swivelling disc according to an example of the present technology.

Fig. 17 shows a cross-sectional view of an air circuit comprising an outlet connector and a tube with mold tools

according to an example of the present technology.

Fig. 18a shows a perspective view of a female electrical connector according to an example of the present technology.

5 Fig. 18b shows a side view of a female electrical connector according to an example of the present technology.

Fig. 18c shows a rear view of a female electrical connector according to an example of the present technology.

10 Fig. 18d shows a perspective view of a female electrical connector according to an example of the present technology.

Fig. 18e shows a front-on view of a female electrical connector according to an example of the present technology, indicating the cross section taken for Fig. 18f.

15 Fig. 18f shows a side cross-sectional view of a female electrical connector according to an example of the present technology.

Fig. 18g shows a rear perspective view of an electrical connector receiver contact element according to an example of the present technology.

20 Fig. 18h shows a front perspective view of an electrical connector receiver contact element according to an example of the present technology.

Fig. 19a shows an exploded bottom perspective view of a portion of a RPT device/humidifier and an airflow tube according to an example of the present technology.

25 Fig. 19b shows a bottom perspective view of a portion of a RPT device/humidifier and an airflow tube according to an example of the present technology.

30 Fig. 19c shows an exploded rear perspective view of a portion of a RPT device/humidifier and an airflow tube according to an example of the present technology.

Fig. 19d shows a rear perspective view of a portion of a RPT device/humidifier and an airflow tube according to an example of the present technology.

35 Fig. 19e shows a rear perspective view of a portion of a RPT device/humidifier, an airflow tube and a cable housing according to an example of the present technology.

Fig. 20a shows an exploded rear perspective view of a RPT device/humidifier and an airflow tube according to an example of the present technology.

40 Fig. 20b shows a rear perspective view of a RPT device/humidifier and an airflow tube according to an example of the present technology.

45 Fig. 21a shows a top view of an outlet assembly according to an example of the present technology.

Fig. 21b shows a cross-sectional view of the outlet assembly of Fig. 21a taken through line 21b-21b according to an example of the present technology.

50 Fig. 21c shows a cross-sectional view of the outlet assembly of Fig. 21a taken through line 21c-21c according to an example of the present technology.

Fig. 22a shows a front perspective view of a substructure assembly of an outlet connector according to an example of the present technology.

55 Fig. 22b shows a rear perspective view of a substructure assembly of an outlet connector according to an example of the present technology.

Fig. 22c shows another front perspective view of a substructure assembly of an outlet connector according to another

example of the present technology.

Fig. 22d shows a side view of a substructure assembly of an outlet connector according to an example of the present technology.

Fig. 22e shows another side view of a substructure assembly of an outlet connector according to an example of the present technology.

Fig. 22f shows a top view of a substructure assembly of an outlet connector according to an example of the present technology.

Fig. 22g shows an exploded front perspective view of a substructure assembly of an outlet connector according to an example of the present technology.

Fig. 22h shows a partially exploded rear perspective view of a substructure assembly of an outlet connector according to an example of the present technology.

Fig. 23a shows a front perspective view of a substructure assembly of an outlet connector without electrical connectors according to an example of the present technology.

Fig. 23b shows another front perspective view of a substructure assembly of an outlet connector without electrical connectors according to an example of the present technology.

Fig. 23c shows a rear perspective view of a substructure assembly of an outlet connector without electrical connectors according to an example of the present technology.

Fig. 23d shows a side view of a substructure assembly of an outlet connector without electrical connectors according to an example of the present technology.

Fig. 23e shows a top view of a substructure assembly of an outlet connector without electrical connectors according to an example of the present technology.

Fig. 23f shows another side view of a substructure assembly of an outlet connector without electrical connectors according to an example of the present technology.

Fig. 24 shows a cap for a substructure assembly of an outlet connector according to an example of the present technology.

Fig. 25a shows unformed electrical connectors for an outlet connector according to an example of the present technology.

Fig. 25b shows formed electrical connectors for an outlet connector according to an example of the present technology.

Fig. 26a shows a cross-sectional view an outlet end of an outlet connector joined to a respiratory apparatus according to an example of the present technology.

Fig. 26b shows a detailed cross-sectional view an outlet end of an outlet connector joined to a respiratory apparatus according to an example of the present technology.

Fig. 27a shows a cross-sectional view an outlet end of an outlet connector joined to a respiratory apparatus according to an example of the present technology.

Fig. 27b shows a cross-sectional view an outlet end of an outlet connector joined to a respiratory apparatus according to an example of the present technology.

Fig. 27c shows a detailed cross-sectional view an outlet end of an outlet connector joined to a respiratory apparatus according to an example of the present technology.

Fig. 28a shows a cross-sectional view an outlet end of an outlet connector joined to a respiratory apparatus according to an example of the present technology.

Fig. 28b shows a cross-sectional view an outlet end of an outlet connector joined to a respiratory apparatus according to an example of the present technology.

Fig. 28c shows a detailed cross-sectional view an outlet end of an outlet connector joined to a respiratory apparatus according to an example of the present technology.

Fig. 29a shows a cross-sectional view an outlet end of an outlet connector being joined to a respiratory apparatus according to an example of the present technology.

Fig. 29b shows a cross-sectional view an outlet end of an outlet connector after being joined to a respiratory apparatus according to an example of the present technology.

Fig. 30a shows a front perspective view of a substructure assembly of an outlet connector according to an example of the present technology.

Fig. 30b shows an exploded front perspective view of a substructure assembly of an outlet connector according to an example of the present technology.

Fig. 30c shows a perspective view of a substructure assembly of an outlet connector joined to a tube portion according to an example of the present technology.

Fig. 30d shows a partially exploded perspective view of a substructure assembly of an outlet connector joined to a tube portion according to an example of the present technology.

Fig. 30e shows a perspective view of an outlet connector joined to a tube portion according to an example of the present technology.

Fig. 30f shows a cross-sectional view of a substructure assembly of an outlet connector joined to a tube portion according to an example of the present technology.

Fig. 30g shows a partially exploded bottom perspective view of a substructure assembly of an outlet connector joined to a tube portion according to an example of the present technology.

Fig. 30h shows a partially exploded bottom perspective view of a substructure assembly of an outlet connector joined to a tube portion according to an example of the present technology.

Fig. 30i shows another partially exploded bottom perspective view of a substructure assembly of an outlet connector joined to a tube portion according to an example of the present technology.

6 (E) DETAILED DESCRIPTION OF EXAMPLES OF THE TECHNOLOGY

[0073] Before the present technology is described in further detail, it is to be understood that the technology is not limited to the particular examples described herein, which may vary. It is also to be understood that the terminology used in this disclosure is for the purpose of describing only the particular examples discussed herein, and is not intended to be limiting.

[0074] The following description is provided in relation to various examples which may share one or more common characteristics and/or features. It is to be understood that one or more features of any one example may be combinable with one or more features of another example or other examples. In addition, any single feature or combination of features in any of the examples may constitute a further example.

6.1 THERAPY SYSTEMS

[0075] In one form, the present technology comprises a respiratory therapy system for treating a respiratory disorder. The respiratory therapy system may comprise a RPT device 4000 for supplying a flow of breathable gas, such as air, to the patient 1000 via an air circuit 4100 leading to a patient interface 3000. In some forms, the respiratory therapy

system may further comprise a humidifier 5000 configured to humidify the flow of air relative to the ambient.

6.2 THERAPY

[0076] In one form, the present technology comprises a method for treating a respiratory disorder comprising the step of applying positive pressure to the entrance of the airways of a patient 1000.

[0077] In one form, the present technology comprises a method of treating Obstructive Sleep Apnea in a patient by applying nasal continuous positive airway pressure to the patient.

[0078] In certain examples of the present technology, a supply of air at positive pressure is provided to the nasal passages of the patient via one or both nares.

[0079] In certain examples of the present technology, mouth breathing is limited, restricted or prevented.

6.3 PATIENT INTERFACE 3000

[0080] A non-invasive patient interface 3000 in accordance with one aspect of the present technology comprises the following functional aspects: a seal-forming structure 3100, a plenum chamber 3200, a positioning and stabilising structure 3300 and a connection port 3600 for connection to air circuit 4100. For example, see Fig. 2c. In some forms a functional aspect may be provided by one or more physical components. In some forms, one physical component may provide one or more functional aspects. In use the seal-forming structure is arranged to surround an entrance to the airways of the patient so as to facilitate the supply of air at positive pressure to the airways.

6.3.1 Seal-forming structure

[0081] In one form of the present technology, a seal-forming structure 3100 provides a sealing-forming surface, and may additionally provide a cushioning function.

[0082] A seal-forming structure in accordance with the present technology may be constructed from a soft, flexible, resilient material such as silicone.

[0083] In one form, the seal-forming structure comprises a scaling flange and a support flange. The sealing flange may comprise a relatively thin member with a thickness of less than about 1mm, for example about 0.25mm to about 0.45mm, that extends around the perimeter of the plenum chamber. A support flange may be relatively thicker than the scaling flange. The support flange is disposed between the sealing flange and the marginal edge of the plenum chamber, and extends at least part of the way around the perimeter. The support flange is or includes a spring-like element and functions to support the scaling flange from buckling in use. In use the sealing flange can readily respond to system pressure in the plenum chamber acting on its underside to urge it into tight sealing engagement with the face.

[0084] In another form, the seal-forming portion of the non-invasive patient interface 3000 comprises a pair of nasal puffs, or nasal pillows, each nasal puff or nasal pillow being constructed and arranged to form a seal with a respective naris of the nose of a patient.

[0085] Nasal pillows in accordance with an aspect of the present technology include: a frusto-cone, at least a portion of which forms a seal on an underside of the patient's nose; a stalk, a flexible region on the underside of the cone and connecting the cone to the stalk. In addition, the structure to which the nasal pillow of the present technology is connected includes a flexible region adjacent the base of the stalk. The flexible regions can act in concert to facilitate a universal joint structure that is accommodating of relative movement - both displacement and angular - of the frusto-cone and the structure to which the nasal pillow is connected. For example, the frusto-cone may be axially displaced towards the structure to which the stalk is connected.

[0086] In one form the non-invasive patient interface 3000 comprises a seal-forming portion that forms a seal in use on an upper lip region (that is, the *lip superior*) of the patient's face.

[0087] In one form the non-invasive patient interface 3000 comprises a seal-forming portion that forms a seal in use on a chin-region of the patient's face.

6.3.2 Plenum chamber

[0088] The plenum chamber 3200 may have a perimeter that is shaped to be complementary to the surface contour of the face of an average person in the region where a seal will form in use. In use, a marginal edge of the plenum chamber is positioned in close proximity to an adjacent surface of the face. Actual contact with the face is provided by the seal-forming structure. The seal-forming structure may extend in use about the entire perimeter of the plenum chamber.

6.3.3 Positioning and stabilising structure

[0089] The seal-forming portion of the patient interface 3000 of the present technology may be held in scaling position in use by the positioning and stabilising structure 3300. for example a headgear system or strap.

6.3.4 Vent

[0090] In one form, the patient interface 3000 may include a vent 3400 constructed and arranged to allow for the washout of exhaled carbon dioxide.

[0091] One form of the vent 3400 in accordance with the present technology comprises a plurality of holes, for example, about 20 to about 80 holes, or about 40 to about 60 holes, or about 45 to about 55 holes.

[0092] The vent 3400 may be located in the plenum chamber 3200. Alternatively, the vent may be located in a decoupling structure, e.g. a swivel or ball and socket.

6.3.5 Other patient Interface Components

[0093] The patient interface 3000 may include one or more of the following additional components:

(i) a forehead support 3700 that assists with supporting the patient interface on the face;

(ii) an anti-asphyxia valve to allow a patient 1000 to receive fresh air into the patient interface 3000 if required: and

(iii) one or more ports (e.g. connection port 3600) to allow access to the volume within the plenum chamber. In one form this allows a clinician to supply supplemental oxygen. In one form, this allows for the direct measurement of a property of gases within the plenum chamber, such as the pressure.

6.4 RPT DEVICE 4000

[0094] A RPT device 4000 in accordance with one aspect of the present technology (see Fig. 3a) comprises mechanical and pneumatic components 4300, electrical components 4200 and is programmed to execute one or more algorithms. An exemplary RPT device has an external housing 4010. formed in two parts, an upper portion 4012 and a lower portion 4014. Furthermore, the external housing 4010 may include one or more panel(s) 4015. The RPT device 4000 may comprise a chassis 4016 that supports one or more internal components of the RPT device 4000. In one form a pneumatic block 4020 is supported by, or formed as part of the chassis 4016. The RPT device 4000 may include a handle 4018. Another example of an RPT device 4000 including an integrated humidifier 5000 is shown in Figs. 3b-3d.

[0095] The pneumatic path of the RPT device 4000 (e.g. shown in Fig. 3e) may comprise an inlet air filter 4312, an inlet muffler 4322, a controllable pressure device 4340 capable of supplying air at positive pressure (e.g., a blower 4342), and an outlet muffler 4324. One or more pressure transducers and flow transducers may be included in the pneumatic path.

[0096] A pneumatic block 4020 houses at least the controllable pressure device 4340 (e.g. blower 4342). The pneumatic block may comprise a portion of the pneumatic path that is located within the external housing 4010. In one form, the chassis 4016 may form a part of the pneumatic block 4020 as shown in Fig. 3a. In another form, the chassis 4016 may support the pneumatic block 4020 without forming a part thereof as shown in Fig. 3b.

[0097] The RPT device 4000 may have an electrical power supply 4210, one or more input devices 4220. a central controller 4230. a therapy device controller 4240, a pressure device, one or more protection circuits, memory, transducers 4270. data communication interface and one or more output devices. Electrical components 4200 may be mounted on a single Printed Circuit Board Assembly (PCBA) 4202. In an alternative form, the RPT device 4000 may include more than one PCBA 4202.

[0098] The central controller of the RPT device 4000 may be programmed to execute one or more algorithm modules, including a pre-processing module, a therapy engine module, a pressure control module, and further a fault condition module.

6.4.1 RPT device mechanical & pneumatic components 4300

6.4.1.1 Air filter(s) 4310

[0099] A RPT device in accordance with one form of the present technology may include an air filter 4310. or a plurality of air filters 4310.

[0100] In one form, an inlet air filter 4312 is located at the beginning of the pneumatic path upstream of a blower 4342.

See Fig. 3c.

[0101] In one form, an outlet air filter 4314, for example an antibacterial filter, is located between an outlet of the pneumatic block 4020 and a patient interface 3000. See Fig. 3c.

6.4.1.2 Muffler(s) 4320

[0102] In one form of the present technology, an inlet muffler 4322 is located in the pneumatic path upstream of a blower 4342. See Fig. 3e.

[0103] In one form of the present technology, an outlet muffler 4324 is located in the pneumatic path between the blower 4342 and a patient interface 3000. See Fig. 3e.

6.4.1.3 Pressure device 4340

[0104] In a form of the present technology, a pressure device 4340 (also referred to as a pressure generator) for producing a flow of air at positive pressure is a controllable blower 4342. For example, the blower may include a brushless DC motor 4344 with one or more impellers housed in a volute. The blower may be capable of delivering a supply of air, for example about 120 litres/minute, at a positive pressure in a range from about 4 cmH₂O to about 20 cmH₂O, or in other forms up to about 30 cmH₂O.

[0105] The pressure device 4340 is under the control of the therapy device controller 4240.

6.4.1.4 Transducer(s) 4270

[0106] One or more transducers 4270 may be constructed and arranged to measure properties of the air at one or more predetermined points in the pneumatic path, or of the ambient air.

[0107] In one form of the present technology, one or more transducers 4270 are located downstream of the pressure device 4340, and upstream of the air circuit 4100. In one form of the present technology, one or more transducers 4270 are located upstream of the pressure device 4340.

[0108] In one form of the present technology, one or more transducers 4270 are located proximate to the patient interface 3000.

6.4.1.5 Anti-spill back valve 4360

[0109] In one form of the present technology, an anti-spill back valve is located between the humidifier 5000 and the pneumatic block 4020. The anti-spill back valve is constructed and arranged to reduce the risk that water will flow upstream from the humidifier 5000. for example to the motor 4344.

6.4.1.6 Air circuit 4100

[0110] An air circuit 4100 in accordance with an aspect of the present technology is constructed and arranged to allow a flow of air or breathable gasses between the pneumatic block 4020 and the patient interface 3000.

6.4.1.7 Oxygen delivery 4380

[0111] In one form of the present technology, supplemental oxygen 4380 is delivered to a point in the pneumatic path.

[0112] In one form of the present technology, supplemental oxygen 4380 is delivered upstream of the pneumatic block 4020.

[0113] In one form of the present technology, supplemental oxygen 4380 is delivered to the air circuit 4100.

[0114] In one form of the present technology, supplemental oxygen 4380 is delivered to the patient interface 3000.

6.4.2 RPT device electrical components 4200

6.4.2.1 Power supply 4210

[0115] Power supply 4210 supplies power to the other components of the basic RPT device 4000: the input device 4220, the central controller 4230. the pressure device 4340, and the output device 4290 (see Fig. 3f).

[0116] In one form of the present technology, power supply 4210 is internal of the external housing 4010 of the RPT device 4000. In another form of the present technology, power supply 4210 is external of the external housing 4010 of the RPT device 4000.

6.4.2.2 Input device(s) 4220

[0117] Input device 4220 comprises buttons, switches or dials to allow a person to interact with the RPT device 4000. The buttons, switches or dials may be physical devices, or software devices accessible via a touch screen. The buttons, switches or dials may, in one form, be physically connected to the external housing 4010. or may, in another form, be in wireless communication with a receiver that is in electrical connection to the central controller.

[0118] In one form, the input device 4220 may be constructed and arranged to allow a person to select a value and/or a menu option.

6.4.2.3 Central controller 4230

[0119] In one form of the present technology, the central controller 4230 is one or a plurality of processors suitable to control an RPT device 4000. The central controller 4230 may be configured to receive input signal(s) from the input device 4220, and to provide output signal(s) to the output device 4290 and/or the therapy device controller 4240

[0120] Suitable processors may include an x86 INTEL processor, a processor based on ARM Cortex-M processor from ARM Holdings such as an STM32 series microcontroller from ST MICROELECTRONIC. In certain alternative forms of the present technology, a 32-bit RISC CPU. such as an STR9 series microcontroller from ST MICROELECTRONICS or a 16-bit RISC CPU such as a processor from the MSP430 family of microcontrollers, manufactured by TEXAS INSTRUMENTS may also be suitable.

[0121] In one form of the present technology, the central controller 4230 is a dedicated electronic circuit.

[0122] In one form, the central controller 4230 is an application-specific integrated circuit. In another form, the central controller 4230 comprises discrete electronic components.

6.4.2.4 Output device 4290

[0123] An output device 4290 in accordance with the present technology may take the form of one or more of a visual, audio, and haptic output. A visual output may be a Liquid Crystal Display (LCD) or Light Emitting Diode (LED) display. An audio output may be a speaker or audio tone emitter.

6.5 HUMIDIFIER 5000

6.5.1 Humidifier overview

[0124] In one form of the present technology there is provided a humidifier 5000 to change the absolute humidity of air for delivery to a patient relative to ambient air. Typically, the humidifier 5000 is used to increase the absolute humidity and increase the temperature of the flow of air relative to ambient air before delivery to the patient's airways. The humidifier 5000 typically comprises an inlet to receive a flow of air, and an outlet to deliver the flow of air with added humidity.

[0125] In one form, a humidifier 5000 may comprise a humidifier reservoir 5180, a heating element 5240 and one or more transducers. The humidifier 5000 may be configured to receive a flow of air from a RPT device and deliver a flow of humidified air to a patient interface 3000 for example via an air circuit 4100. The air circuit 4100 may be coupled to the humidifier 5000 through an outlet, such as the humidifier reservoir outlet 5182 as shown in Fig. 3g and Fig. 3h.

[0126] As described above, the humidifier 5000 may deliver a pressurised flow of air to the patient 1000 with sufficient humidity to prevent drying of the mucosa and increase patient airway comfort. At the same time, the humidifier 5000 and the air circuit 4100 is configured to prevent occurrence of any condensation, especially in the air circuit 4100. To this end, the air circuit 4100 may be provided with a heating element as will be described in greater detail below. The humidifier 5000 and the air circuit 4100 may be further configured to allow the patient 1000 to arrange the air circuit 4100 to improve their sleeping comfort. Further, the humidifier 5000 and the air circuit 4100 are configured to allow cleaning of the air circuit 4100 and/or the humidifier 5000, and to prevent ingress of water into any electronic components, such as in the humidifier 5000, the air circuit 4100 or the RPT device 4000.

[0127] An example of a humidifier 5000 which is integrated with an RPT device 4000 is shown in Figures 3b-3d. Another example of a humidifier 5000 is shown in Figs. 3g-3h.

6.6 AIR CIRCUIT-OUTLET CONNECTION

6.6.1 Connection overview

[0128] As described in some detail above, a respiratory therapy system may include certain components such as a

RPT device 4000, a humidifier 5000, and a patient interface 3000. The RPT device 4000 and humidifier 5000 may be combined into a single, integrated unit as shown in Fig. 3b-3d. Alternatively, the RPT device 4000 and the humidifier 5000 may be separable such that the patient can use the RPT device without the humidifier. In either scenario a connection must be made to the patient interface 3000 so that the patient can receive the flow of gas from the RPT device 4000 and/or the humidifier 5000. An air circuit 4100, as described above, may be provided to pneumatically connect the patient interface 3000 to the RPT device 4000 and/or the humidifier 5000. As shown in Fig. 4a, the air circuit 4100 may include a tube portion 4102 and an outlet connector 4106 to connect the air circuit to the RPT device 4000 and/or the humidifier 5000. The tube portion 4102 may also include a helical coil 4103 to provide support for the tube portion. The air circuit 4100 may also incorporate a heating element, which may be provided within the helical coil 4103. The heating element in the air circuit 4100 may heat the air circuit 4100 and the flow of gas travelling therethrough in order to prevent rainout (condensation of water vapor, for example, within the tube portion 4102 or the patient interface 3000). When a heating element is provided in the helical coil 4103 electrical power and/or signalling may be necessary if, for example, the heating element is an electrical resistance heater. In some instances, an electrical connection may be required between the patient interface 3000 and the RPT device 4000 and/or the humidifier 5000 for electrical power and/or communication therebetween.

[0129] Fig. 20a and Fig. 20b show an example of the RPT device 4000 and a humidifier 5000 that has been combined into a single, integrated unit, wherein a water reservoir is not shown. Fig. 20a shows an air circuit 4100 separated from the RPT device 4000 in an exploded view, and Fig. 20b shows the air circuit 4100 assembled with the RPT device 4000.

6.6.1.1 Pneumatic and electrical connections with a single connector

[0130] The air circuit 4100 may require both pneumatic and electrical connections to be formed to the humidifier 5000 (or the RPT device 4000), as well as a mechanical connection. These connections may be formed through the outlet connector 4106 to allow the pressurized gas to flow to the patient interface 3000, to provide electrical power and signalling to the heating element in the helical coil 4103 and to locate and secure the air circuit 4100 relative to the humidifier 5000 (or the RPT device 4000). These connections may be formed simultaneously or in series such that one of the mechanical, pneumatic or electrical connections is completed before others. The air circuit 4100 may comprise on another end a patient interface connector 4107 to couple to a patient interface 3000. In some forms, the patient interface connector 4107 may be different to the outlet connector 4106 as shown in Figs. 4g-4h.

[0131] Figs. 4a-h and 5a-i depict air circuits or portions thereof according to examples of the present technology. Figs. 12a-f also depict exemplary air circuits that are connected to an outlet assembly 5107. As can be seen in Fig. 4a, for example, a tube portion 4102 having a helical coil 4103 may be connected to an outlet connector 4106. As shown in Fig. 5a the connection of the helical coil 4103 to the outlet connector 4106 may be facilitated by the use of a grommet 4104. The helical coil 4103, as discussed above, may include a heating element and it may also function as a support structure for the tube portion 4102. An electrical connection may be formed by inserting the outlet connector 4106 on the outlet assembly 5107 (to be discussed in greater detail below) so that an electrical connector 4112 comes into electrical contact with electrical components of the outlet assembly. As can be seen in Figs. 4c-d, the electrical connector 4112 may be oriented parallel a centre axis of the outlet connection region 4114 and extend downward from an underside of the outlet connector 4106 and out from an opening 4118.

6.6.1.1.1 Formation of pneumatic and electrical connections

[0132] A recess 4116 may also be formed on the outlet connector 4106, the recess 4116 being configured to couple to an electrical connector receiver 5114 of a swivelling disc 5104 (see Fig. 8d and further discussion below) to aid in releasably securing the outlet connector 4106 to the humidifier 5000, for example at the outlet assembly 5107. The recess 4116 may also provide a visual aid to the patient to locate the outlet connector 4106 in relation to the outlet assembly 5107 by being shaped to correspond to the electrical connector receiver 5114 (see Fig. 12c). The electrical connector receiver 5114 may house a female electrical connector 5158 such as that shown in Figs. 18a-18h. The outlet connector 4106 may also include an actuator 4108 that controls a retention feature 4110. When the outlet connector is inserted onto the outlet assembly 5107, the retention feature 4110 may engage with a corresponding notch 5126 of the swivelling disc 5104 (see Fig. 21b and further discussion below). The actuator 4108 in conjunction with the notch 5126 may produce an audible sound and/or provide tactile feedback at the actuator 4108 upon engagement. The actuator 4108 and/or the retention feature 4110 may be produced with higher wear characteristics than the swivelling disc 5104 to allow wear to occur on the air circuit 4100, which is typically a consumable component. This may be achieved by use of a material with lower hardness to form the retention feature 4110 compared to the material from which the swivelling disc 5104 is formed. The retention feature 4110 and notch 5126 may engage by a snap-fit and the actuator 4108 may be depressible to bring in the retention feature to release it from the notch 5126. In some cases, the retention feature 4110 and the notch 5126 may be configured so that when they are not completely engaged, they may be forced into

place at commencement of therapy by the therapy pressure, for example by being configured so that the therapy pressure acting on the tab 4148 urges the retention feature 4110 towards the notch 5126. As shown in Fig. 6a, the actuator 4108 and the retention feature 4110 may both be located on a tab 4148 such that pushing the actuator inward also causes the retention feature to be moved inward, thereby freeing it from the notch 5126. In one form, the actuator 4108 may be located further from a pivot of the tab 4148 than the retention feature 4110, which would impart a mechanical advantage to the user and increase the travel required to depress the actuator 4108 to improve the resolution of movement of the retention feature 4110 to the user. This arrangement may further improve the feedback provided to the user during engagement/disengagement of the outlet connector 4106. An outlet connection region 4114 may be shaped to correspond with the shape of the swivelling disc 5104, as shown in Fig. 9a. for example.

[0133] As shown in Fig. 6h and 6g. a travel stop 4178 located at the inner ends of the ribs 4120 may be used in some examples of this technology in order to limit the travel, or level of squeezing, of the actuator 4108 during insertion and removal to prevent plastic deformation of the surrounding portions and/or to prevent tear of the housing 4134. The travel stops 4178 extend from the inner ends of the ribs 4120 and are aligned with the inner surface of the outlet connector 4106 in the location of the actuator 4108. When the actuator is squeezed or pushed inwards the inner surface of the outlet connector 4106 is correspondingly squeezed or pushed inwards until it contacts the travel stop 4178. The travel stop prevents further squeezing or pushing of the actuator.

[0134] In a further example of the technology, the notch may be replaced with a radial slot that is capable of retaining the outlet connector via the retention feature(s) but allowing rotation thereof. In such an example the swivelling disc may be fixed relative to the outlet housing or it may be eliminated completely such that the radial slot is located on the housing. Furthermore, it should be understood that such examples would retain the need for a movable electrical connector within the outlet assembly such that the electrical connection may be maintained while the outlet connector rotates.

[0135] Figs. 4c and 4f show detailed bottom views of examples of the outlet connector 4106 and specifically the outlet connection region 4114. Fig. 4e shows the outlet connector 4106 connected at the outlet connection region 4114 to an outlet end 5134 of an airflow tube 5130 (shown in Figs. 10a-d and discussed further below). The airflow tube 5130 may be formed as a multiple patient/multiple user (MPMU) tube that is removable, replaceable and/or cleanable. It should be noted that for the sake of clarity the outlet end 5134 is shown in this view and reference should be made to Figs. 10a-d for further depiction. The airflow tube 5130 may function as a removable intermediate pneumatic coupling between the outlet connector 4106 of the air circuit 4100 and the air outlet of RPT device 4000 and/or the humidifier 5000.

6.6.1.1.2 Internal ribs of the outlet connector 4106

[0136] Fig. 4e shows a plurality of ribs 4120 disposed around the inner periphery of the outlet connection region 4114 of the outlet connector 4106. In the illustrated example four ribs 4120 are shown but a different number of ribs such as two, three, five or more ribs may be utilised. The ribs 4120 may function to support and position the outlet connector 4106 relative to the outlet end 5134 of the airflow tube 5130. The ribs 4120 may function to guide the outlet connector 4106 during insertion to couple to the outlet end 5134 of the airflow tube 5130 in the outlet assembly 5107 to form the pneumatic connection. This guidance may also assist in aligning the outlet connection region 4114 to facilitate the electrical connection between the electrical connector 4112 and the electrical connector receiver 5114 on the swivelling disc 5104 of the outlet assembly 5107. In this arrangement, although a single action is required for insertion or connection of the air circuit outlet connector 4106 to the RPT device outlet assembly 5107, the pneumatic connection is formed first and the electrical connection is formed second. The outlet connector 4106, the outlet assembly 5107 and the airflow tube 5130 may be configured such that airflow tube 5130 engages the seal 4170 of the outlet connector 4106 prior to the electrical connector receiver 5114 forming an electrical connection with the electrical connector 4112. Accordingly, during removal or disconnection, the electrical connection is the first to be disconnected and the pneumatic connection is disconnected second. This may be advantageous to ensure that a pneumatic seal is maintained from the RPT device 4000 and/or the humidifier 5000 to the air circuit 4100 and, more specifically, between the outlet connector 4106 and the airflow tube 5130. Furthermore, this may provide improved safety, for examples if supplemental oxygen is added to the flow of air delivered by the humidifier 5000, as this arrangement may prevent oxygen from being exposed to connection and/or disconnection of the electrical connections. Fig. 4f shows a similar view to Fig. 4e. however, the outlet end 5134 of the airflow tube 5130 is not shown to provide a clearer depiction of an example of the ribs 4120. Both of these views also show the profile of the recess 4116.

[0137] In some cases, a non-heated air circuit 4100 may be used that does not incorporate a heating element. Accordingly, the diameter of the central opening in the swivelling disc 5104 may be arranged (e.g., sufficiently sized and/or shaped) to accept such a non-heated air circuit 4100. Accordingly, in one example of the current technology, the external diameter of the airflow tube may be approximately 22 mm to allow connection to a standard 22 mm external diameter non-heated air circuit, and the external diameter of the outlet connector 4106 may be approximately 36 mm. However, it is recognised that other external diameter sizes may be utilised.

[0138] Internal ribs 4120 may be used to reduce any radial gaps between the interior of the outlet connection region

4114 and the airflow tube 5130. Still further, the ribs 4120 and the airflow tube 5130 may be configured so that the gaps therebetween are relatively smaller than the gap between the exterior of the outlet connection region 4114 and the swivelling disc 5104. This may allow more of the wear from rotation to occur on the airflow tube 5130 in comparison to the swivelling disc 5104, which may be advantageous as the airflow tube 5130 may be more readily replaced than the swivelling disc 5104.

[0139] Another advantage of the ribs 4120 may be to allow a greater portion of any mechanical load that may result from tilting and/or non-axial movement to be transferred from the outlet connector 4106 to the airflow tube 5130. This may be advantageous in that this may help wear occur on the consumable components such as the air circuit 4100 and/or the airflow tube 5130 than the non-consumable components of the humidifier 5000, such as the swivelling disc 5104. Yet another advantage of the ribs 4120 may be to maintain or restrict the deformation of the base seal 4170 (as shown in Fig. 5e) during engagement of the outlet connector 4106 with the outlet assembly 5107 by limiting the maximum axial deformation that the base seal 4170 can undergo towards the interior of the outlet connector 4106.

6.6.1.1.3 Electrical Connection

[0140] The electrical connector 4112 may include one or more lead-in features, such as chamfers, or curved radii on its edges on the leading surface in the direction of insertion such as shown in Fig. 5c. This may assist insertion of the electrical connector 4112 into the electrical connector receiver 5114 to provide a surface wipe connection and prevents damage to the conductors on the electrical connector 4112. The thickness of the electrical leads 4128 on the electrical connector 4112 may be approximately between 0.2 mm to 1.2 mm, for example 0.4 mm, 0.6 mm, 0.8 mm or 1 mm. The thickness may vary according to a number of parameters such as, the design life of the electrical connector 4112, material chosen for the electrical leads 4128 and the material chosen for the receiver contact elements 5146. One suitable example of material for the electrical leads 4128 may be high temper phosphor bronze, that is nickel plated and then gold plated. In some circumstances, an increased amount of conductive material and/or high conductivity plating (such as gold and/or platinum) may be used on the electrical leads 4128. This may have the advantage of improving wear characteristics and/or dissipating heat from the connector 4112. The electrical leads 4128 may have exposed conductive surfaces on the lower end of the electrical connector 4112 to ensure full insertion is required to make the electrical connection.

[0141] Another feature provided by the connection of the electrical connector 4112 to the electrical connector receiver 5114 on the swivelling disc 5104 may be that when assembled together, the electrical connector receiver 5114 is covered by the outlet connector 4106 as shown in Fig. 12e and Fig. 12f. Fig. 12e shows an exploded view wherein the outlet connector 4106 is shown above the swivelling disc 5104, and Fig. 12f shows the outlet connector 4106 in engagement with the swivelling disc 5104. Discussed above was the shape of the recess 4116, as shown in Fig. 4c, such that it may conform to the inward portion of the electrical connector receiver 5114 depicted in Fig. 9a, for example. Figs. 4c and 4d also depict the region of the outlet connector 4106 that surrounds the opening 4118 of the outlet connector where the electrical connector 4112 (not shown in Fig. 4d) is received. When the outlet connector 4106 is inserted onto the swivelling disc 5104, as shown in Figs. 12c and 12d, the region of the outlet connector that surrounds the electrical connector 4112 may cover over the opening in the electrical connector receiver 5114 to prevent debris and contaminants (such as liquids) from entering into the electrical connector receiver. As mentioned above, the connector 4112 and the receiver 5114 are configured so that the electrical connection between them is to be made after the outlet connector 4106 is mechanically engaged with the swivelling disc 5104. This reduces the proportion of any deformation or load from misalignment between the outlet connector 4106 and the swivelling disc 5104 that is supported by the electrical connector 4112 and the receiver 5114. This may be achieved by configuring the outlet connector 4106 and the swivelling disc 5104 so that during insertion of the outlet connector 4106 with the swivelling disc 5104, the airflow tube 5130 and the ribs 4120 engage prior to engagement of the electrical connector 4112 and the receiver 5114. This configuration may also be advantageous in cases where the gas provided via the air circuit 4100 includes supplementary oxygen, as it may prevent occurrence of electrical arcing while the pneumatic circuit is not isolated.

[0142] A yet another feature of the current technology may be found in the arrangement of the receiver contact elements 5146 on the female electrical connector 5158 in the electrical connector receiver 5114 as shown in Fig. 18a-18b. The electrical leads 4128 may engage the receiver contact elements 5146 as the electrical connector 4112 is inserted into the receiver 5114 from the top of the connector TS. This engagement may occur via a sliding action in the direction of the arrow ENG shown in Fig. 18a-18b. The receiver contact elements 5146 may be configured in a sloped, triangular profile as shown in Fig. 18h and/or to be compliant in a perpendicular direction PER to the sliding plane to assist in their engagement with the electrical leads 4128.

[0143] The aforementioned triangular profile and/or compliance may allow improved engagement between the electrical leads 4128 on the connector 4112 and the receiver contact elements 5146 as the connector 4112 is progressively inserted into the electrical connector receiver 5114. During engagement with the connector 4112, as the connector 4112 slides along the length of the female electrical connector 5158 the contact elements 5146 may be depressed inwards

and maintain contact to the electrical leads 4128. This may allow improved accommodation of mechanical tolerances from such sources as manufacturing variance or in-use deformation.

[0144] Still further, the receiver contact elements 5146 may be biased, so that when deformed from its original configuration (as shown in Fig. 18b) and depressed inwards, the receiver contact elements 5146 may be biased towards returning to the undeformed position, thereby improving the fidelity of its connection with the electrical leads 4128. Another advantage of such an arrangement of the female electrical connector 5158 may be that it is self-cleaning. As the female electrical connector 5158 and the connector 4112 may engage each other in a slide-on, slide-off action, it may prevent build-up of contaminants which, if left uncleaned, may affect the fidelity of the electrical connection formed between the two parts. Any contaminants that have been removed by the wiping action may be prevented from entering the air path, for example by swivel disc seal 5113. In addition when the female electrical connector 5158 is arranged in a vertical position and the connection is made in a vertical direction any contaminants that are wiped off the electrical contacts will fall down below the connector. A cavity may be formed below the female electrical connector 5158 within the receiver 5114 into which the contaminants may collect. This cavity is not in communication with the airpath.

[0145] Fig. 18c shows the surface of the female electrical connector 5158 that may be connected to the cable 5102. The connector comprises a plurality of weld points 5150, 5152, 5154, for example there may be two weld points for each of the conductive tracks, which allows for improved mechanical strength against load. The connector may also incorporate one or more pegs, rivets or pins 5156 for alignment during assembly and/or mechanical bonding. Optionally the one or more pegs, rivets or pins 5156 may be heat staked to provide a mechanical restraint. In certain arrangements a washer or plate may be provided between the one or more pegs, rivets or pins 5156 and the cable to spread the mechanical restraint force over a larger surface of the connector.

[0146] Figs. 18d-18f show another example of the female electrical connector 5158, including another example of receiver contact elements 5146, shown in further detail in Figs. 18g-18h. A feature of this example of the receiver contact element 5146 is that a bifurcated retention feature 5162 is formed from the base portion 5166 rather than the contact portion 5164 and/or the curved portion 5168. The receiver contact elements 5146 may be made from a material of high electrical and thermal conductivity with high strength and hardness, such as beryllium copper.

[0147] Having the exposed electrical connections on the outlet connector 4106 of the air circuit 4100 provides additional electrical safety as the air circuit does not include a power supply but requires connection to swivelling disc 5104 on the RPT device 4000 and/or humidifier 5000 to receive power. Also, the exposed electrical connections that may be exposed to cleaning processes are also on the replaceable air circuit 4100 component.

6.6.1.2 Elbow outlet connector

[0148] By forming the outlet connector 4106 with an elbow, as can be seen in Figs. 4a-b, 5a-f, and 12a-d, the chance that the air circuit 4100 is accidentally or unintentionally pulled off of the RPT device 4000 and/or the humidifier 5000 (e.g., by the patient tugging at the air circuit 4100 during sleep by accident) may be reduced, because the direction of the tension force vector of the air circuit will be located at an angle (e.g., perpendicular) to the direction of engagement of the air circuit 4100 with RPT device 4000 and/or the humidifier 5000. Also, as shown in Figs. 1a-c, the RPT device 4000 and/or the humidifier 5000 may be located on a nightstand, for example, during treatment such that the patient lying in bed is at substantially the same height as the RPT device and/or the humidifier. In such a situation, the inclusion of an elbow as part of the outlet connector 4106 may allow the air circuit 4100 to be pointed more directly at the patient such that bend angles of the air circuit may be reduced, particularly at or near the elbow, which in turn may reduce stress on the air circuit. In one example of the present technology, the outlet connector 4106 may include an elbow having an angle of about 90°. It should be understood, however, that any number of angles may be possible, such as for example between 0° and 120°, including 20°, 40°, 60°, 80° or 100°. The choice of this angle may be affected by any number of design requirements such as flow impedance, convenience, location of the outlet connector 4106 or noise implications.

6.6.1.3 Rotatable outlet connector

[0149] As the patient may move during treatment, thus pulling the air circuit 4100, it may be advantageous to further reduce the bend angles of the air circuit and reduce stress on the assembly, in particular the air circuit, as well as the connection thereto from the outlet connector 4106. This may be accomplished by allowing the outlet connector 4106 to rotate relative to the RPT device 4000 and/or the humidifier 5000 while the mechanical, pneumatic and electrical connections are maintained.

[0150] As described above, the air circuit 4100 may be connected to the RPT device 4000 and/or the humidifier 5000 by inserting the outlet connector 4106 onto the outlet assembly 5107, as shown in Figs. 12a-d. Rotatability may be provided by features shown in Figs. 8a-h, 9a-c, 11a-d, 12a-d, and 21a-c.

[0151] Figs. 8a, 8b, 8d-h, 9a-c, 21a-c show various views of the swivelling disc 5104 according to various examples of the technology. It has been described above that the swivelling disc 5104 may be the component that receives the

outlet connector 4106 when connecting the air circuit 4100 to the RPT device 4000 and/or the humidifier 5000. The swivelling disc 5104 may also provide rotatability (e.g., for the outlet connector 4106) relative to the RPT device and/or the humidifier while maintaining the pneumatic and the electrical connections.

[0152] Figs. 8a and 9a-c show views of swivelling disc 5104 according to examples of the present technology. Fig. 8a shows a perspective view of the bottom of the exemplary swivelling disc 5104. In other words, this view depicts features of the swivelling disc 5104 that are located opposite the side to which the outlet connector 4106 may connect. A cable 5102, to be discussed in greater detail below, can be seen extending from an underside of the electrical connector receiver 5114. An end of the cable 5102 that is inside of the electrical connector receiver 5114 may be in electrical communication with the electrical connector 4112 when the outlet connector 4106 is inserted onto the swivelling disc 5104. The free end of the cable 5102 shown may be in electrical communication with at least one electrical component 4200 of the RPT device 4000 and/or the humidifier 5000 (e.g., a controller, printed circuit board (PCB) and/or a power supply), for example at another end of the cable 5102 (not shown). It should also be understood that the cable 5102 may be of any sufficient length to perform its connective function, as will be discussed in greater detail below.

[0153] A pair of disc stop surfaces 5108, 5110 on either side of and adjacent to the cable 5102 are shown in Fig. 8a. These disc stop surfaces 5108, 5110 may limit rotation of the swivelling disc 5104 relative to a cable housing 5100, as will be described in greater detail below. The exit flange 5109 around the cable 5102 also supports the cable 5102 as it extends through the outlet assembly 5107 from where it is connected to the female electrical connector 5158 in the electrical connector receiver 5114. A flange 5112 may be disposed radially about the swivelling disc 5104 to perform sealing and/or cable 5102 containment functions, as will be discussed in greater detail below as well. The notch 5126, of which there may be more than one, may also be seen.

[0154] Figs. 9b-e show similar features to those described in relation to Fig. 8a, but also show tangs 5128 that may allow the swivelling disc 5104 to be snap-fit onto the cable housing 5100. The tangs 5128 may also retain the swivelling disc 5104 on the cable housing 5100 while allowing it to rotate relative thereto.

[0155] The swivelling disc 5104 may also incorporate a swivel disc seal 5113 as shown in Fig. 9a-9e that may comprise a compliant material such as TPE. The swivel disc seal 5113 may function to maintain a seal between the swivelling disc 5104 and the airflow tube 5130 to prevent any contaminants from entering the air path.

[0156] As described above, the outlet connector 4106 may be releasably coupled to the swivelling disc 5104 by engagement of the retention features 4110 in corresponding notches 5126 and by engagement of the recess 4116 onto the electrical connector receiver 5114. When connected to the swivelling disc 5104, the outlet connector 4106 may be able to rotate in unison with the swivelling disc and relative to the cable housing 5100.

[0157] Figs. 21a-c show views of the swivelling disc 5104 joined to the cable housing 5100. Fig. 21a shows a top view of an outlet assembly according to an example of the present technology. In Figs. 21a-c the swivelling disc 5104 may be in an intermediate rotational position relative to the cable housing 5100.

[0158] Fig. 21b shows a cross-section of the outlet assembly 5107 across the symmetrical plane of the female electrical connector 5158 taken through line 21b-21b of Fig. 21a. This example of the current technology shows an internal shoulder 5160 that recesses the female electrical connector 5158 from the opening of the electrical connector receiver 5114, which may improve the electrical safety of the electrical connector receiver 5114 when engaging with and/or disengaging from the connector 4112. Recessed placement of the female electrical connector 5158 from the opening of the electrical connector receiver 5114 may also prevent occurrence of any electrical arcing at or near an exposed area. The current arrangement of the female electrical connector 5158 and the electrical connector receiver 5114 may also prevent any powered components from being touched by a user.

[0159] Fig. 21c shows another cross-sectional view of the outlet assembly 5107 taken through line 21c-21c of Fig. 21a. Inner wall 5101 of the swivelling disc 5104 can be seen within the outer wall of the cable housing 5100. The tabs 5106 of the cable housing 5100 can also be seen. The flange 5112 of the swivelling disc 5104 can also be seen above the outer wall 5103 of the cable housing 5100.

6.6.1.3.1 Limited rotation

[0160] Another feature of the present technology can be seen in Figs. 8a and 8c. The disc stop surfaces 5108, 5110 (shown in Fig. 8a), discussed above, have a pair of complementary housing stop surfaces 5120, 5122 (shown in Fig. 8c) that may be located on an inner wall 5101 of the cable housing 5100. By connecting the swivelling disc 5104 to and within the inner wall 5101 of the cable housing 5100, for example as shown in Figs. 8d-8f, the rotation of the swivelling disc 5104 relative to the cable housing 5100 may be limited by engagement of corresponding stop surfaces at or near its extreme positions. Rotation of the swivelling disc 5104, in one example of the technology, may be limited to less than about 360°. Rotation may also be limited to an amount that is greater than about 180°. In a further example, rotation may be limited to about 270°. The desired range of rotation of the swivelling disc 5104 may be determined by a number of factors, such as the location of the swivelling disc 5104 with respect to the RPT device 4000 and/or humidifier 5000, the elbow angle of the outlet connector 4106, and material properties of the components.

[0161] The depicted examples show two pairs of complementary stop surfaces, as discussed above, that may represent opposite ends or surfaces of one structure. It may be possible to have multiple stop structures formed on respective components. For example, the stop surfaces on the inner wall of the housing may be provided with two separate protrusions thereon and likewise for the swivelling disc. It is also envisioned that multiple configurations of stop surfaces may be provided on a single combination of housing and swivelling disc such that one combination may include a number of available rotational limits.

[0162] Fig. 8d shows the swivelling disc 5104 rotated into one extreme position in the counter-clockwise direction relative to the cable housing 5100. Fig. 8f shows the swivelling disc 5104 rotated into another extreme position towards the other limit of travel in the clockwise direction relative to the cable housing 5100. Fig. 8e shows the swivelling disc 5104 in a position relative to the cable housing 5100 that is between the extreme positions shown in Figs. 8d and 8f. Although the swivelling disc 5104 does not allow the stop surfaces 5108, 5110, 5120, 5122 to be seen in Figs. 8d-f, it should be understood that when the swivelling disc 5104 is in either extreme position shown in Figs. 8d and 8f that one of the disc stop surfaces 5108, 5110 is engaged and/or abutted against a corresponding housing stop surface 5120, 5122.

[0163] Figs. 8g and 8h also show examples of the swivelling disc 5104 rotated into clockwise and counter-clockwise extreme positions relative to the cable housing 5100. Figs. 8g and 8h also show a substructure 4132 (shown in greater detail in Figs. 6a-g and described further below) of the outlet connector 4106 connected to the swivelling disc 5104. The position of the swivelling disc 5104 and the substructure 4132 in Fig. 8g corresponds to the position shown in Fig. 8f and, likewise, Fig. 8h corresponds to Fig. 8d. While not visible in Figs. 8g and 8h, it should be understood that each tab 4148 includes a retention feature 4110 that is engaged with a corresponding notch 5126 of the swivelling disc 5104 to releasably connect the substructure to the swivelling disc so that they may rotate in unison relative to the cable housing 5100. It should also be understood that Figs. 8g and 8h depict possible extreme positions of the rotation of the substructure 4132 in this example by virtue of the connection of the substructure to the swivelling disc 5104.

6.6.1.4 Electrical cable connection

[0164] As discussed above, the cable 5102 may be provided to electrically connect the electrical connector 4112 to at least one electrical component of the RPT device 4000 and/or the humidifier 5000. The cable 5102 shown in Figs. 8a-h may be a flexible circuit board (FCB) or a ribbon cable. The cable 5102 may also include multiple wires to provide multiple electrical connections for powering and signalling functions. The cable 5102 may be oriented such that the major or longer side is oriented in parallel to the axis of rotation of the swivelling disc. If an FCB is used as the cable 5102, it may be oriented so that the surface of the FCB where the conductive tracks are located is protected from frictional contact with the cable housing 5100 as it rotates with the swivelling disc 5104, in order to help prolong the life of the cable 5102. Still further, the contacting surface (away from the conductive tracks) may comprise a low-friction surface so that when it slides relative to the cable housing 5100 the friction force created is minimised. This may have the effect of reducing the amount of wear occurring on the cable 5102, as well as reducing the load imposed on the solder/mounting joints between the cable 5102 and any electrical connectors connected thereto, such as the female electrical connector 5158. An example of such a low-friction surface may be a polyamide substrate.

6.6.1.4.1 Cable management

[0165] In accordance with an example of the present technology, the cable 5102 may be fixed at one end to the electrical connector receiver 5114 of the swivelling disc 5104. Although not shown, it should be understood that the opposite end of the cable 5102 may be fixedly connected to at least one electrical component 4200 of the RPT device 4000 and/or the humidifier 5000 such as a PCB to provide power to the cable. Thus, the cable 5102 may have a fixed length between the connection to the swivelling disc 5104 and the connection to at least one electrical component 4200 of the RPT device 4000 and/or the humidifier 5000.

[0166] The cable 5102, in an example of the present technology shown in Figs. 8d-h, may also include a slack portion that may be contained within either an annular section 5174 between the inner wall 5101 and the outer wall 5103, or a recess or void 5124 defined, at least in part, by the cable housing 5100 depending upon the position of the swivelling disc 5104. The flange 5112 of the swivelling disc 5104 may also contribute to defining the upper cover of the annular section 5174, however, the flange 5112 does not contact the cable 5102 within the annular section 5174. The cable housing 5100 (see fig. 8c) may also include the inner wall 5101 and an outer wall 5103, both of which may further define the void 5124. The cable housing 5100 may also include a retainer 5118, which may help to maintain the cable 5102 in the proper orientation by reducing the chance of entanglement or pinching and to prevent the slack portion from being pushed out of the cable housing 5100. The outer diameter of the retainer 5118 may be designed to provide a minimum diameter for bend of the cable 5102 without damaging the electrical elements of the cable 5102. For example an outer diameter of approximately 4 mm, 4.5 mm, 5 mm or some other outer diameter. It is to be understood that the outer diameter size of the retainer 5118 may be varied depending upon the size and type of cable used. As can be seen in

Fig. 8c, the exemplary cable housing 5100 depicted may include an opening 5116 that may be formed in the shape of a slot and through which the cable 5102 may pass, while maintaining a substantially fixed length of the cable 5102 within the cable housing 5100.

[0167] The cable 5102 is at least partially wrapped around the inner wall 5101 within the annular section 5174 when the swivelling disc is rotated towards the extreme position shown in Fig. 8f. The cable 5102 does not wrap around the swivelling disc 5104, but moves with the swivelling disc within the annular section 5174 as the swivelling disc 5104 is rotated.

[0168] Figs. 8d-i depict another feature of the depicted examples of the technology. As the swivelling disc 5104 is rotated between extreme positions the cable 5102 may be pushed and pulled between the void 5124 and annular section 5174 of the cable housing 5100 due to its connection to the swivelling disc. For example, when the swivelling disc 5104 is rotated from the position shown in Fig. 8d to the position shown in Fig. 8e it can be seen that a portion of the cable 5102 is pulled out of the void 5124 and into the annular section 5174. It should be understood that the portion of the cable 5102 shown doubled back in the void 5124 in Fig. 8d, for example, may be considered the slack portion. In other words, the slack portion may be the excess cable that represents a length of the cable beyond what is necessary for direct connection to the swivelling disc 5104. Thus, as the swivelling disc 5104 is rotated from the position shown in Fig. 8d to the position shown in Fig. 8c the slack portion may be progressively removed from the void 5124 so that the slack portion of the cable 5102 may be progressively pulled into the annular section 5174 and begin to wrap around the inner wall 5101 as the cable is pulled. As the swivelling disc 5104 is rotated further, from the position shown in Fig. 5c to the position shown in Fig. 5f, the portion of the cable 5102 that is pulled into the annular section 5174 increases and the slack portion may be pulled completely or nearly completely from the void 5124. The recess or void 5124 and the annular section 5174 may be formed on opposing sides of the inner wall 5101.

[0169] Rotation of the swivelling disc 5104 in the opposite direction, from the position in Fig. 8f to the position in Fig. 8e to the position in Fig. 8d, may cause the cable 5102 to be progressively pushed from the annular section 5174 and unwrapped from around the inner wall 5101 such that the slack portion in the void 5124 may increase and begin to double back. In an example of the present technology, the maximum slack portion of the cable 5102 may be of a fixed length. In another example, that fixed length may be less than about the circumference of the swivelling disc 5104 and/or about equal to the distance of an arc swept out by the electrical connector receiver 5114 as the swivelling disc rotates between extreme positions. It should also be understood that in an example of the present technology when the swivelling disc 5104 is in the position shown in Fig. 8d the largest amount of the slack portion of the cable 5102 is gathered or contained in the void 5124. Also, it should be understood that the examples of the technology depicted in Figs. 8g and 8h illustrate similar features to those depicted in Figs. 8d and 8f and as described above.

6.6.1.4.2 Cable housing

[0170] Figs. 8b-i and 11a-d depict features of the cable housing 5100 according to examples of the present technology. As described above, the cable housing 5100 may include the inner wall 5101 and the outer wall 5103 that together may define the void 5124 and the annular section 5174. The inner wall 5101 may define an opening through which the airflow tube 5130 may extend when the outlet assembly 5107 is assembled onto the RPT device 4000 and/or the humidifier 5000. Further facilitating this assembly, tabs 5106 may be located on the cable housing 5100 to attach the cable housing to the RPT device 4000 and/or the humidifier 5000, or a further housing thereof. This may improve the manufacturability and serviceability of the cable housing 5100. The tabs 5106 may be configured so that they are, by themselves and/or as a set, able to support the weight of the humidifier 5000 and/or the RPT device 4000. This may prevent damage from occurring to the humidifier 5000, the RPT device 4000 and/or the cable housing 5100 when the assembly is accidentally lifted by the air circuit 4100 and/or the outlet connector 4106. In some instances, the air circuit 4100 and/or the outlet connector 4106 may be configured to mechanically fail if the humidifier 5000 and/or the RPT device 4000 is held in place and a force is imposed onto the air circuit 4100 and/or the outlet connector 4106 in the upwards direction (in relation to Fig. 5c).

[0171] Returning to the inner wall 5101 and the outer wall 5103, in an example of the present technology, the slack portion of the cable 5102 can be seen (for example, in Fig. 8e) to form a radius in the void 5124. This radius may affect the stress imposed on the cable 5102 (and therefore potentially its operating life) and is defined in part by the distance (VO_H in Fig. 8i) between the inner wall 5101 and the outer wall 5103 in the void 5124. Therefore, these walls may be separated by a distance in the range of 2mm to 5mm across the void 5124 based on a desired minimum radius of the cable 5102. In one example, the distance is in the range of 4mm to 5mm. It should be understood that the desired minimum radius of the cable may change as a function of the properties of the cable 5102 and its design parameters such as design life, or usage cases. Similarly, the length (VO_L in Fig. 8i) of the void 5124 may be lengthened or shortened according to the maximum slack length of the cable 5102, which may be driven by the maximum rotation of the swivelling disc 5104.

[0172] The width (AN_W in Fig. 8i) of the annular section 5174 between the inner wall 5101 and the outer wall 5103

may be minimised as the cable 5102 travels therein as the swivelling disc 5104 rotates from one extreme position to the other. This may have the benefit of reducing noise produced by the cable and preventing buckling of the cable in the annular section. The width of the annular section may be between approximately 1 mm and 4 mm, such as 2 mm or 3 mm, and it should be understood that the width may depend on various characteristics and/or properties of the assembly, such as the characteristics of the cable chosen or the radius of the inner wall 5101. In some arrangements the inner wall 5101 of the annular section 5174 and/or the outer wall 5103 of the annular section 5174 may include dampening material to help improve sound performance when the swivelling disc is rotated. A dampening material may also ensure the cable moves around the inner wall 5101 rather than the outer wall 5103 or vice versa.

[0173] In an example of the present technology, the cable housing 5100 may be formed from polypropylene, or polycarbonate/acrylonitrile butadiene styrene (PC/ABS). The swivelling disc 5104 may be formed from a combination of polycarbonate/acrylonitrile butadiene styrene (PC/ABS) and a thermoplastic elastomer (TPE).

6.6.1.5 Airflow tube

[0174] Figs. 10a-d show various views of the airflow tube 5130. As noted above, the airflow tube may be a multiple patient/multiple user (MPMU) tube formed as a removable component that may be replaced or cleaned. The airflow tube 5130 may include an inlet end 5132 that connects to the humidifier 5000 or the RPT device 4000 as shown in Fig. 19a-19d. The inlet end 5132 may comprise a pressure activated face seal or bellows seal to provide sealed pneumatic connection from an outlet of the RPT device 4000 and/or the humidifier 5000. A seal may be used such as that described in U.S. Patent Application Publication No. 2011/0271956.

[0175] In another example of the present technology, the airflow tube 5130 may be connected at the inlet end 5132 to at least one conduit that is in turn connected to the RPT device 4000 and/or the humidifier 5000. In any of these scenarios one function of the airflow tube 5130, and specifically the inlet end 5132, may be to receive the flow of gas from the RPT device 4000 and/or the humidifier 5000 and direct it outside of the device to the air circuit 4100 via the outlet connector 4106. The airflow tube 5130 also facilitates rotation of the outlet connector 4106 of the air circuit 4100 by allowing the outlet connector 4106 to rotate around the outlet end 5134.

[0176] A portion of the humidifier 5000 is shown in Figs. 19a-19e with the airflow tube 5130 and/or the cable housing 5100. The airflow tube 5130 may also incorporate a latch portion 5172 to connect with a receiving portion 5176 of the RPT device 4000 and/or the humidifier 5000 to locate and/or retain the airflow tube in a correct position within the RPT device 4000 and/or the humidifier 5000. The latch portion 5172 may assist in locating the inlet end 5132 of the airflow tube in the correction position. The engagement of the latch portion 5172 with the receiving portion may provide a sensory feedback, such as a click, to indicate correct connection. The latch portion 5172 may be further configured so that the airflow tube 5130 would be dislodged from receiving portion as it disengages therefrom. The latch portion 5172 may be a different colour to the complementary receiving portion or RPT device 4000 and/or the humidifier 5000 component for improved visibility. In certain circumstances, the airflow tube 5130 and/or the receiving portion 5176 may be configured so that a button such as at the end of the latch portion 5172 may be used to release the airflow tube 5130 from the receiving portion 5176. A tool may be used to release the airflow tube 5130 from the receiving portion 5176.

[0177] The airflow tube 5130 may be configured so that engagement of the latch portion 5172 with the receiving portion 5176 also completes a pneumatic connection between the air circuit 4100 and the RPT device 4000 and/or the humidifier 5000 when the air circuit 4100 is attached to the RPT device 4000 and/or humidifier 5000. Accordingly, it may be possible to detect the absence or incorrect connection of the airflow tube 5130 or a disengagement thereof by detection of air leak.

[0178] In a further optional arrangement, when the outlet connector 4106 of the air circuit 4100 is connected to the RPT device 4000 and/or the humidifier 5000 the connection action may be configured to ensure the correct connection of the airflow tube 5130 with the receiving portion 5176. Incorrect connection of the airflow tube 5130 to the receiving portion 5176 may prevent the outlet connector 4106 from being able to connect correctly to the airflow tube 5130. which may be indicated by the RPT device 4000 through detection of a high leak flow, for example. In a further alternative the outlet connector 4106 of the air circuit 4100 may be used to facilitate insertion and/or removal of the airflow tube 5130 from the RPT device 4000 and/or the humidifier 5000.

[0179] As discussed above, when the air circuit 4100 is attached to the RPT device 4000 and/or humidifier 5000, the outlet end 5134 of the airflow tube 5130 may be coupled to the outlet connection region 4114 of the outlet connector 4106. The outlet end 5134 may also be formed with an ISO taper, such as a 22 mm outer diameter ISO taper, to allow connection of standard non-heated air circuit.

[0180] As seen in Fig. 10a the airflow tube 5130 may comprise a flow bend, having an internal circular or curved cross-section configured to reduce the impedance of the air flow through the airflow tube 5130. The airflow tube 5130 may be constructed as a two-part process as shown in Fig. 10d, wherein the first portion 5130a is moulded from rigid material such as Bisphenol A (BPA) free polycarbonate/acrylonitrile butadiene styrene (PC/ABS), and the second portion 5130b comprising at least a part of the flow bend is overmoulded from a compliant material such as silicone. Use of a compliant material to form the second portion 5130b that comprises a portion of the bend may allow withdrawal of a moulding tool

that comprises the internal bend from the internal cavity at the end of the moulding process by deforming the second portion 5130b.

[0181] The airflow tube 5130 may also include a retaining flange 5136 to assist in locating and/or securing the airflow tube 5130 to the RPT device 4000 and/or the humidifier 5000, or a housing or chassis thereof. The retaining flange 5136 may assist in correctly locating or positioning the outlet end 5134 of the airflow tube 5130 within the outlet of the RPT device 4000 and/or humidifier 5000 as shown in Fig. 19c-19d by abutting a locating flange in the RPT device 4000 and/or humidifier 5000. It should be understood that the retaining flange 5136 may allow for fixed attachment of the airflow tube 5130. The retaining flange 5136 may, alternatively, allow for removable attachment of the airflow tube 5130 so that it may be cleaned or replaced, for example.

6.6.2 Producing the air circuit

[0182] Certain features of the air circuit 4100 and their relationship to its production, according to examples of the present technology, will now be described. Fig. 5f shows an exploded view of the components of the air circuit 4100 according to an example of the present technology. The substructure 4132 of the outlet connector 4106 may be a molded part that includes the tube connection region 4136 with structure to attach the tube portion 4102. The orifice 4144 opposite the tube connection region 4136 may receive an end cap 4124 to partially provide a pneumatic seal to the outlet connector 4106. A housing 4134 may be provided over the top of the substructure 4132 to further seal the outlet connector 4106 pneumatically and to provide additional structural support. The housing 4134 may be introduced to the substructure 4132 by way of an overmoulding process. The electrical connector 4112 may include a support structure 4126 to support at least one electrical lead 4128. The electrical connector 4112 may be produced by insert moulding, whereby the electrical lead 4128 is moulded into the electrical connector 4112 by moulding the support structure 4126 around the electrical lead 4128. The electrical connector 4112 may be located and/or connected onto the outlet connector 4106 by the protruding tabs 4180 near the tube connection region 4136 of the substructure 4132. The grommet 4104 is also shown with threads 4130 to allow the grommet to be threaded onto the tube portion 4102, as will be discussed in greater detail below.

[0183] Figs. 6a and 6c-e show various views of the substructure 4132 including the electrical connector 4112. The substructure 4132 and the support structure 4126 of the electrical connector 4112 may be molded from polycarbonate/acrylonitrile butadiene styrene (PC/ABS). Also visible in Fig. 6a are the tube connection region 4136 and the tab 4148 having the actuator 4108 and the retention feature 4110 disposed thereon. The orifice 4144 can also be seen opposite the tube connection region. The orifice 4144 may be formed on the substructure 4132 during molding of the substructure. A mandrel may be used to form the tube connection region 4136 and the interior of the substructure 4132 during molding and the orifice 4144 may be formed around the mandrel leaving this region open when the mandrel is pulled out after the substructure is molded. The end cap 4124, as shown in Fig. 5f, may be welded ultrasonically onto the substructure 4132 to sealingly cover the orifice 4144. The end cap 4124 may comprise an internal profile configured to reduce flow impedance through the outlet connector 4106. For instance, the end cap 4124 may incorporate a flow radius 4176 as shown in Fig. 5g-5i configured to increase the radius of the internal corners of the outlet connector 4106. The flow radius 4176 may also be constructed from materials suited for improved thermal and/or acoustic performance, and/or comprise an air gap between the flow radius 4176 and the housing 4134 for improved thermal and/or acoustic performance.

[0184] Fig. 6b shows the support structure 4126 of the electrical connector 4112 together with the at least one electrical lead 4128. A connection end 4138 and a tube end 4140 of the support structure 4126 are also shown. It is noted that in Fig. 6b, the electrical lead 4128 shows a snap-off plate 4174 protruding towards the tube end 4140, which is not shown in the assembly figure (Fig. 6f). The snap-off plate 4174 is used during assembly only, and does not form a part of the completed outlet connector 4106. In one form, the snap-off plate 4174 is removed after individual wires (e.g., of the helical coil 4103) are connected to their corresponding electrical lead 4128.

[0185] Fig. 6f shows a perspective view of the assembled outlet connector 4106 with the housing 4134 removed to show the internal structures. Fig. 6g shows a similar view in cross-section. Fig. 6g shows engagement of the threads 4130 of the grommet 4104 onto the helical coil 4103 of the tube portion 4102. Also, a portion of the tube portion 4102 can be seen extending through the grommet 4104 for attachment to the tube connection region 4136 of the substructure 4132 at connector threads 4142. These connector threads 4142 can also be seen in Fig. 6c. In some forms, the portion of tube portion 4102 which engages with the tube connection region 4136 may be torn to enable a portion of the helical coil 4103 to be unwound. This may allow the unwound portion of the helical coil 4103 to be routed around the tube connection region 4136 to form the electrical connections with the electrical connector 4112.

[0186] Fig. 17 shows a hatched cross-sectional view, in accordance with the present technology, of how the housing 4134 may be formed around the assembly of the tube portion 4102, the grommet 4104, and the substructure 4132. Fig. 17 shows the outlet connector 4106 assembled as shown in Figs. 6f and 6g with upper and lower mold tools 6000, 6002 above and below the assembly. The mold tools 6000, 6002 can be seen to define the exterior of the housing 4134, and

the interior of the housing 4134 may be defined by the grommet 4104, and the substructure 4132. A function of the grommet 4104 may also be understood from this view and may be explained as follows. When molding the housing 4134 to complete the outlet connector 4106 the mold tools 6000, 6002 may need to complete a seal around the internal structures which may require some pressure to affect a sufficient seal. The requisite amount of pressure from the mold tools 6000, 6002 to achieve this seal may damage the tube portion 4102 if the mold tools are pressed against it. Typically, a mandrel (not shown) would be inserted in the tube portion 4102 to maintain its shape while molding, which may then effectively 'clamp' any exposed portions of the tube portion 4102 against the mold tools 6000, 6002. Thus, the grommet 4104 may be included to allow the mold tools 6000, 6002 to form a sealed chamber to mold the housing 4134 while the grommet protects the tube portion 4102. Another feature that can also be seen in Figs. 6f, 6g, and 17 is that the gas delivery tube portion 4102 may be threaded through the grommet 4104 such that the grommet will abut against the tube connection region 4136 of the substructure 4132. This may provide a further sealing function.

6.6.2.1 The grommet

[0187] Figs. 7a-f show views of the grommet 4104 according to examples of the present technology. As shown in Figs. 7b-d, the grommet 4104, according to examples of the present technology, may include threads 4130 internally to allow the grommet to be threaded onto the tube portion 4102. Threads 4130 may be configured to accept the helical coil 4103 of the tube portion 4102 and may be shaped and dimensioned to cover one complete turn of the helical coil. As shown in Figs. 7c-f, the grommet 4104 may also include a grip section or grips 4154 around a radial portion. The grips 4154 may allow for easier gripping of the grommet 4104 as it is threaded onto the tube portion 4102.

6.6.2.1.1 Producing the grommet

[0188] The grommet 4104, according to an example of the present technology, may be pre-molded or molded separately from the other components of the air circuit 4100. In such a situation it may be advantageous to include at least one keyway 4150 on the grommet 4104, as shown in Fig. 7a. The inclusion of a keyway in this exemplary grommet 4104 may allow the grommet to be restrained by the keyway 4150 while an internal mold tool is rotated and extracted from the molded grommet. The grips 4154 may also be used for securement of the grommet 4104 during removal of an internal tool.

[0189] The grommet 4104, in accordance with an example of the present technology, may be formed of a material of sufficient strength and hardness to protect the tube portion 4102 during molding of the housing 4134, as shown in Fig. 17. At the same time, the material should not be so hard such that the grommet 4104 itself damages the tube portion 4102.

[0190] The grommet 4104 may also include at least one flange 4152 disposed about a radial portion thereof. The flange 4152 may allow the upper and lower mold tools 6000, 6002 to better seal around the grommet 4104 during molding, as shown in Fig. 17. The flange 4152 may also help to distribute the pressure of the mold tools 6000, 6002 around the grommet 4104 to prevent pinching, as lower pressures may be required for the mold tools 6000, 6002 to achieve sealing in comparison to if the flange 4152 was absent.

[0191] Another feature of the grommet 4104 may be to lengthen the life of the tube portion 4102 by reducing the peak stress created at the joint of the tube portion 4102 and the tube connection region 4136. Typically, the tube connection region 4136 is of much higher stiffness than in the tube portion 4102 in the bending direction, and a sudden change in stiffness as such may lead to a localised high stress area. The grommet 4104 may achieve the stress reduction by decreasing the change in stiffness along the length of the assembled outlet connector 4106 between the tube connection region 4136 and the tube portion 4102. This may decrease the stress concentration created on the tube portion 4102.

[0192] Thus, according to an example of the present technology, a thermoplastic elastomer may be used to form the grommet 4104. It should be understood, however, that other materials having similar properties may be equally suitable.

6.6.2.2 Clip-Receiver Tube Attachment

[0193] Figs. 30a to 30i depict further examples of the present technology for connecting the tube portion 4102 to the substructure 4132. According to these examples of the present technology, a clip-receiver arrangement is provided to locate and/or secure the tube portion 4102 to the substructure 4132 prior to overmolding to form the outlet connector 4106. The clip-receiver arrangement may also protect the tube portion 4102 from damage while the substructure 4132 is overmoulded, for example with the housing 4134.

[0194] The tube connection region 4136 of these examples is formed with a receiver 4135. The receiver 4135 may be integrally molded with the substructure 4132 in one piece. Receiver threads 4135.1 are provided internally to the receiver 4135 so that the helical coil 4103 may be threaded onto the receiver threads to locate the tube portion 4102 in the substructure 4132. In one form, the receiver 4135 may not completely surround the periphery (or circumference) of the tube portion 4102, yet allow the tube portion 4102 to be inserted into the receiver such that the receiver threads

4135.1 fit onto the helical coil 4103. In this form, a clip 4137 may be provided to fit around the remainder of the periphery of the tube portion 4102. and may engage with the receiver 4135. Clip threads 4137.1 may be formed internally on the clip 4137 such that when the clip is attached to the receiver 4135 the outer periphery of the tube portion 4102 is surrounded by the clip and the receiver. Also, the clip threads 4137.1 and the receiver threads 4135.1 may be formed so that when assembled these threads have complementary shapes that substantially match the helical coil 4103.

[0195] To attach the clip 4137 onto the receiver 4135 to secure the tube portion 4102, a protrusion 4139.1 may be provided on each side of the receiver 4135 and corresponding tabs 4139 may be formed on the clip. The tabs 4139 may snap onto the respective protrusions 4139.1 to hold the clip 4137 onto the receiver 4135 with a snap-fit. Fig. 30a shows the clip 4137 attached to the receiver 4135 and Fig. 30b shows how the clip may be attached. Figs. 30d and 30g show the tube portion 4102 inserted into the receiver 4135 prior to attachment of the clip 4137 and Fig. 30c shows the clip attached to secure the tube in the tube connection region 4136.

[0196] Figs. 30e and 30f show views of the substructure 4132 attached to the tube portion 4102 and then overmolded with the housing 4134 to complete the outlet connector 4106 of the air circuit 4100. Once the tube portion 4102 is attached to the substructure 4132 and secured at the tube connection region 4136 between the receiver 4135 and the clip 4137, as shown in Fig. 30c. this assembly may be overmolded in a manner similar to what is shown in Fig. 17. However, since the grommet 4104 described above is not used in the present example, the receiver 4135 may be provided with a receiver flange 4135.2 and the clip 4137 may be provided with a clip flange 4137.2 in place of the flange 4152 on the grommet to form a seal with the mold tools 6000, 6002 during overmolding of the housing 4134. Fig. 30f shows a cross-sectional view of the outlet connector 4106 after overmolding the housing 4134 onto the substructure 4132. The helical coil 4103 can be seen to be engaged to the receiver threads 4135.1 and the clip threads 4137.1. In order to connect the helical coil 4103 electrically to the electrical connector 4112, an end of the tube portion 4102 may be torn to allow the helical coil 4103 to be moved into position (e.g., by unwinding). Also, the housing 4134 can be seen molded around the receiver 4135 and the clip 4137 up to the receiver flange 4135.2 and the clip flange 4137.2.

[0197] Figs. 30h and 30i show another example of the present technology where the clip 4137 is attached to the receiver 4135 by a pivoting structure such as a hinge 4141. According to this example, the hinge 4141 and the clip 4137 may be integrally molded with the substructure 4132 such that these components are one piece. To secure the tube portion 4102 to the substructure 4132. the tube may be inserted into the receiver 4135, as described above, then the clip 4137 may be positioned over the exposed periphery of the tube portion 4102 and secured by snapping the tab 4139 onto the protrusion 4139.1. Accordingly, this example may have only one protrusion 4139.1 and one tab 4139 for attachment of the clip 4137.

6.6.2.3 Separable gas delivery tube and elbow connector

[0198] Figs. 14a-j depict another example of the present technology where the tube portion 4102 may be separable from an elbow connector 4158. In this example the tube portion 4102 may be connected to a tube cuff 4156 that includes at least one cuff retention feature 4160 and a cuff electrical connector 4164 (see figs. 14i and 14j). The tube cuff 4156 may be attachable to the elbow connector 4158 which may be a component of the outlet connector 4106. The elbow connector 4158 may include at least one cuff receiver 4162 to receive a corresponding cuff retention feature 4160, thereby releasably attaching the tube cuff 4156 to the elbow connector 4158.

[0199] The tube cuff 4156 may also include a cuff electrical connector 4164 to form an electrical connection with the electrical connector 4112 of the outlet connector 4106. The electrical connector 4112 may, in turn, connect electrically to the cable 5102 via a swivel electrical connector 5105.

[0200] This arrangement may, in similar fashion to other examples described herein, provide for the formation of both pneumatic and electrical connections with the outlet connector 4106. In this example one electrical and pneumatic connection may be formed by the connection of the cuff 4156 to the elbow connector 4158 and another may be formed by the connection of the outlet connector 4106 to the outlet assembly 5107. Also, this example may provide a rotatable arrangement.

6.6.2.3.1 Electrical connector fixed to the outlet assembly

[0201] Figs. 15a and 15b show an alternative example to the arrangement depicted in Figs. 14a-j. In this example the swivel electrical connector 5105 is shaped to form an electrical connection with the cuff electrical connector 4164 (shown in Fig. 14j) such that the electrical connector 4112 is not required. It should be understood that the swivel electrical connector 5105 may be fixedly attached to the outlet assembly 5107 and electrical and pneumatic connections are both made by the attachment of the outlet connector 4106 to the outlet assembly 5107. In other words, this arrangement may be the inverse of that which is disclosed in other examples such that the exposed electrical connector in this example is located on the outlet assembly 5107 and the outlet connector 4106 has a feature to receive and form an electrical connection.

6.6.2.4 Connection assembly with extended tube

[0202] Figs. 16a and 16b depict another example of the present technology. Similar to other examples, this example may provide for both electrical and pneumatic connections to be made between an outlet assembly 5107 and an outlet connector 4106. The connection may also be rotatable in similar fashion to the other examples. This example also includes an outlet tube 5142 that may extend from the outlet assembly 5107 to form the pneumatic connection and define the axis of rotation of the connection. The outlet tube 5142 may be part of an airflow tube 5130 as described above.

6.6.3 Air circuit-outlet connection having multiple discrete positions

[0203] According to another example of the present technology, as shown in Figs. 13a-n, provides for a connection assembly wherein the air circuit 4100, specifically the outlet connector 4106, may be connected to an outlet 5140 in one of a plurality of discrete positions. The outlet 5140 of this example of the present technology may be located on a housing 5138 of the RPT device 4000 and/or the humidifier 5000. The outlet 5140 may also include an outlet tube 5142 and at least one outlet electrical connector 5144. The outlet tube 5142 may be part of an airflow tube 5130 as described above. Although not shown in these views, it should be understood that the outlet connector 4106 will be connectable to a gas delivery tube that is connectable to a patient interface at the opposite end and may include a heating element as described above. The gas delivery tube may be formed integrally with the outlet connector 4106 or it may be removable, in which case a further electrical connection would need to be provided for the tube. The examples depicted in these views may also provide for an electrical and pneumatic connection as disclosed above. The outlet connector 4106 depicted in these examples may be shaped as an elbow and may be bent about 90°, although it should be understood that a number angles may be possible, such as straight (180°), 150°, 120° or 60°.

[0204] One feature of the exemplary arrangement shown in Figs. 13a-13n is the provision of multiple discrete positions for removable attachment of the outlet connector 4106 on the outlet 5140. This may be accomplished by providing multiple outlet electrical connectors 5144 on the outlet 5140 as shown in Figs. 13f-h. The outlet connector 4106 may then include an electrical connector 4112 as shown in Fig. 13k. Thus, when the outlet connector 4106 is connected to the outlet 5140, the electrical connector 4112 electrically communicates with a corresponding one of the outlet electrical connectors 5144. Figs. 13b and 13d show the outlet connector 4106 connected to the outlet 5140 in a first position and Fig. 13j shows the outlet connector in a second position. The examples depicted in these Figures show two possible positions for the outlet connector 4106 relative to the outlet 5140, however it should be understood that any number of positions may be provided by additional outlet electrical connectors 5144.

[0205] It should also be understood that an alternative to the examples heretofore described may provide for a plurality of electrical connectors 4112 on the outlet connector 4106 while the outlet 5140 includes a single outlet electrical connector 5144. Such an arrangement would provide for a similar arrangement described above with multiple discrete positions for the outlet connector. In other words, this arrangement is merely the inverse of the arrangement described above such that in the instant arrangement the outlet connector is provided with multiple electrical connectors.

[0206] As can be seen in Figs. 13b, 13d, and 13j, the outlet 5140 and the outlet connector 4106 may be shaped complementary to one another. While complementary rectangular shapes are shown in these views it should be understood that the outlet 5140 and the outlet connector 4106 may take on any other complementarily shaped arrangement.

[0207] Fig. 13n depicts a view of the connection assembly that is similar to that shown in Fig. 13j, for example, with the external components removed to show the internal components. An outlet connector tube 4168 is shown as an elbow with a bend of about 90° and is connected to the outlet 5140. The electrical connector 4112 can also be seen connected to a corresponding outlet electrical connector 5144 and another outlet electrical connector is not occupied. The cable 5102 is also shown passing across and in communication with the outlet electrical connectors 5144. This view shows how the components of the outlet connector 4106, the outlet connector tube 4168 and the electrical connector 4112, may provide both pneumatic and electrical connections. It also may be envisioned that the electrical connector 4112 may be connected to the other outlet electrical connector 5144 and, accordingly, the outlet connector tube 4168 may be pointed in the opposite direction. Alternative examples may include the outlet electrical connectors 5144 positioned in various vertical and horizontal orientations.

[0208] The cable 5102 may be a flexible circuit board (FCB), as shown in Fig. 13n, to connect to at least one electrical component 4200 or the RPT device 4000 and/or the humidifier 5000. In such an arrangement a multi-layer FCB may facilitate multiple signalling paths for each outlet electrical connector 5144. Alternatively, a number of separate wiring looms may be provided. Each wiring loom would, in such an arrangement, be connected to individual outlet electrical connectors 5144.

[0209] The outlet electrical connectors 5144, the electrical connector 4112, and the cable 5102 may also include multiple connections for the provision of powering and/or signalling functions.

6.6.3.1.1 Protection of electrical connectors

[0210] The outlet connector 4106 may also include at least one dummy connector 4113. The dummy connector 4113 may function to cover and protect the unused outlet electrical connector 5144 when the outlet connector 4106 is attached to the outlet 5140, as shown in Figs. 13e and 13h. By covering the unused outlet electrical connector 5144 it may be protected from damage due to debris and contaminants. In arrangements where more than one unused electrical connector is provided a corresponding number of dummy connectors may also be provided. Also, in the situation where there are multiple electrical connectors 4112 on the outlet connector 4106 and one outlet electrical connector 5144, the outlet 5140 may include a number of dummy connectors sufficient to protect the unused electrical connectors.

6.6.4 Rotatable Outlet Connector

[0211] Figs. 22a to 29b show examples of the present technology where an outlet connector may provide pneumatic, electrical, and mechanical connections simultaneously while allowing a full rotational degree of freedom, or freedom of rotation over 360° when connected. The outlet connector may be used, for example, to join an air circuit comprising electrical circuitry (such as a heated air circuit, or an air circuit capable of communicating electrical signals) to a respiratory apparatus such as a RPT device, a humidifier, or an integrated PAP-humidifier device.

[0212] Figs. 22a to 22h show an exemplary substructure assembly 4500 of an outlet connector. Fig. 22g shows an exploded view of the substructure assembly 4500 to depict individual components of the substructure assembly. A body 4502 may provide structure to the substructure assembly 4500. The body 4502 may facilitate the mechanical connection with the respiratory apparatus at the outlet connection region 4530 and with the tube portion 4102 at a tube connection region 4526. A shoulder 4532 may be formed on the body 4502 near the outlet connection region 4530 to resist detachment from the respiratory apparatus, as will be described in greater detail below. The tube connection region 4526 may have threads 4528 to join with the helical coil of a tube portion 4102.

[0213] The body 4502 alone may not form a completely pneumatically sealed path for the flow of gas generated by the respiratory apparatus from the outlet connection region 4530 to the tube connection region 4526, as can be seen in Fig. 22g. Thus, a cap 4504, shown separately in Fig. 24, may be joined to the body 4502 to provide an airflow path from the outlet connection region 4530 to the tube connection region 4526. The cap 4504 may be provided with a retaining feature, such as tabs 4520 to engage with notches 4524 on the body 4502. The cap 4504 may also be provided with prongs 4518 to engage with detents 4522 on the body 4502. The engagement between the tabs 4520 and the notches 4524 and between the prongs 4518 and the detents 4522 may locate and/or securely connect the cap 4504 to the body 4502. Fig. 22h shows an example of the attachment of the cap 4504 to the body 4502. While this engagement may provide a mechanical connection between the body 4502 and the cap 4504, it should be understood that a complete pneumatic seal for the airflow path between the outlet connection region 4530 and the tube connection region 4526 may not be formed between the cap and the body. The complete pneumatic seal may be formed by an overmoulding process similar to that described above in section 5.6.2. Thus, the substructure assembly 4500 may be joined to a tube portion at the tube connection region 4526 and then this assembly may be overmoulded to form a seal around the substructure assembly and the tube portion by molding a housing around the substructure assembly 4500.

[0214] As the air circuit 4100 may be heated according to this example of the technology, connector contacts 4510, 4512, 4514 are provided to the substructure assembly 4500 at the outlet connection region 4530. The connector contacts 4510, 4512, 4514 may form electrical connections with the respiratory apparatus to provide electrical power and/or signal to the air circuit. The connector contacts 4510, 4512, 4514 may surround the outer periphery of the outlet connection region 4530. The connector contacts 4510, 4512, 4514 may be joined to wires 4508 of an electrical contact assembly 4506. A snap-off plate 4536 may be provided to the electrical contact assembly 4506 and the snap-off plate may be removed when joining electrical wires of the tube portion to the electrical contact assembly 4506 during production. The electrical contact assembly 4506 may be joined to the body 4502 by moulding the body over the electrical contact assembly such that only the connector contacts 4510, 4512, 4514 and the snap-off plate 4536 are exposed. The connector contacts 4510, 4512 and 4514 are protected from being covered by the injected polymer during the moulding process. For example, the connector contacts 4510, 4512 and 4514 are held tightly within a mould tool so they are not displaced during the moulding process and are not covered by the injected polymer. Moulding the body 4502 over the electrical contact assembly 4506 may protect the wires 4508 and/or preserve the electrical power and/or signal carried by the wires 4508. For instance, by moulding the body 4502 over electrical contact assembly 4506, the wires 4508 may be protected from moisture in the airflow path during operation of the respiratory apparatus, and any risk of short-circuiting within the wires 4508 may be also reduced. It should be understood that the components of the electrical contact assembly 4506 may be comprised of a material that conducts electricity, e.g., a metal or a metallic alloy. Although the electrical contact assembly 4506 is shown with three connector contacts 4510, 4512 and 4514, it will be understood that any number of connector contacts may be utilised.

[0215] Figs. 25a and 25b show a portion of wires 4508 and the connector contacts 4510, 4512, 4514 with snap-off

plate 4536. Fig. 25a shows the wires 4508, the connector contacts 4510, 4512, 4514, and the snap-off plate 4536 in a flat shape and these parts may be stamped and formed from a flat sheet of material. Fig. 25b shows the wires 4508 wrapped in a circular shape to form the connector contacts 4510, 4512, 4514 that will be exposed at the outlet connection region 4530 when the body 4502 is moulded over the electrical contact assembly 4506. It will be appreciated that the portion of wires 4508 shown in Figs. 25a and 25b may be joined with one or more portions of wires to produce the electrical contact assembly 4506 as shown in Fig. 22g, or in some forms, the electrical contact assembly 4506 may be produced from one sheet (e.g., by stamping and/or bending from a sheet of electrically conductive material).

[0216] As noted above, it may be desirable to shield the electrical contact assembly 4506 from exposure to moisture in the airflow path and this may be accomplished by moulding the body 4502 onto the electrical contact assembly, for example by insert moulding. Moulding the body 4502 onto the electrical contact assembly 4506 in this manner may result in the formation of a wire overmould 4534. The wire overmould 4534 may be formed as a portion of the body 4502 to enclose the wires 4508 and protect the wires from moisture in the airflow path up to the point in the body where the wires emerge to be joined with the tube portion at the tube connection region.

[0217] Fig. 22d shows a side view of an exemplary substructure assembly 4500 to depict a sweep bend of the substructure assembly. The sweep bend may be understood in a two-dimensional (planar) sense as bend shape of the substructure assembly 4500 where an inner radius R_i and an outer radius R_o of the substructure assembly may have a common arc center. In a three-dimensional sense, a sweep bend may be understood as a bend wherein the entire outline of a cross section has a common arc center, thereby provides a constant cross-sectional shape through the length of the bend in the substructure assembly 4500 along the airflow path. In some forms, R_o may be between about 1 and about 3 times that of a diameter of the cross-section. In further examples, R_o may be between 1.5 and 2 times that of a diameter of the cross-section.

[0218] A sweep bend (in a two- or three-dimensional sense) may be advantageous in that a smaller pressure drop may result from a sweep bend as compared to a sharper and/or more abrupt bend, for example a right-angle bend, or a right-angle bend which comprise internal radii of substantially similar diameters. Additionally, an exemplary sweep bend may have a relatively large radius of curvature in that the center radius of the sweep bend (average of the inner radius and the outer radius) may be 0.5-3 times the internal diameter of the airflow path defined by the interior of the substructure assembly 4500.

[0219] Figs. 23a to 23f show examples of the substructure assembly 4500 without the electrical contact assembly 4506. While the substructure assembly 4500 has been described above as having the electrical contact assembly 4506 moulded with the body 4502, it should be understood that these views depict some structural features of the substructure assembly 4500 that may not be visible because of the presence of the electrical contact assembly. For example, contact recesses 4511, 4513, 4515 may be formed in the body 4502 at the outlet connection region 4530. The contact recesses 4511, 4513, 4515 may be formed around the connector contacts 4510, 4512, 4514 when moulding the body 4502 onto the electrical contact assembly 4506. Figs. 23d and 23f, for example, show the absence of the connector contacts 4510, 4512, 4514 at the outlet connection region 4530. Also, the outlet connection region 4530 can be seen to taper down to decrease in external diameter towards a housing end of the outlet connection region 4530. As will be described in further detail below, this arrangement may comprise one detent 4522, and thus provide one point of force feedback to the user upon engagement. It is also envisaged that multiple detents may be used, however in some cases this may not be desirable, as the user may potentially perceive engagement of one detent (whilst others may not be engaged) as the engagement of the connection.

6.6.4.1 Manufacture of the Outlet Connector

[0220] In one form, the substructure assembly 4500 may be manufactured according to the following steps. The electrical contact assembly 4506 may be formed by stamping a flat sheet of material, and forming the bends and curvatures as required to a final shape as shown in Fig. 22g. The body 4502 may be moulded including the electrical contact assembly 4506, for example by insert moulding over the electrical contact assembly 4506.

[0221] Then, the cap 4504 may then be located on the body 4502, for example joined by the detents 4522 and tabs 4520, and the electrical contact assembly 4506 may be joined to wires to form electrical connections with the tube portion 4102. The plate 4536 may then be removed, and the substructure assembly 4500 may be overmoulded with the housing (not shown) similarly to above. During this process, one or more internal jigs (not shown) may be inserted into the substructure assembly 4500 to prevent the cap 4504 from collapsing to the interior of the air path of the body 4502.

6.6.4.2 Connecting the Outlet Connector

[0222] Fig. 26a shows a cross-sectional view of a connection arrangement between the outlet connection region 4530 and a housing 5200 of a respiratory apparatus according to an example of the present technology. The connector contacts 4510, 4512, 4514 at the outlet connection region 4530 are shown in contact with outlet contacts 5202, 5204,

5206. The outlet contacts 5202, 5204, 5206 may be positioned in grooves 5208, 5210, 5212 in the periphery of an opening 5201 of the housing 5200.

[0223] Fig. 26b shows a detailed view of this connection arrangement. In Fig. 26b it can also be seen how the shoulder 4532 may be shaped to engage with the outlet contact 5202 to facilitate retention of the outlet connection region 4530 within the housing 5200. Although the outlet contact 5202 may primarily perform the retention function in the depicted example, it should be understood that in further examples more than one of the outlet contacts may perform the retention function. Accordingly, additional corresponding shoulders may be formed on the outlet connection region 4530.

[0224] According to an example of the present technology, each of the outlet contacts 5202, 5204, 5206 may comprise a canted spring in a corresponding groove 5208, 5210, 5212, Exemplary canted springs are BalContact™ springs from Bal Seal Engineering Co. Inc. In the example where the outlet contacts 5202, 5204, 5206 are canted springs, the canted springs may be comprised of an elastic material that conducts electricity, e.g., a metal or a metallic alloy. It may be advantageous for the material and/or a configuration of the outlet contacts 5202, 5204, 5206 to be elastic so that the outlet contacts will elastically deform during engagement and/or disengagement with the outlet connection region 4530. This may ensure that the outlet contacts 5202, 5204, 5206 maintain electrical contact with the connector contacts 4510, 4512, 4514 when the outlet connection region 4530 is engaged with the housing 5200. It may also be advantageous to use canted springs as the outlet contacts 5202, 5204, 5206 because their elasticity may provide mechanical and/or audible feedback to indicate to the user that a connection has been made, while also providing secure retention of the outlet connection region 4530. Moreover, canted springs may also allow for some play within the connection necessary for rotation, while maintaining secure engagement. Also, each of the grooves 5208, 5210, 5212 may be formed from a material that conducts electricity, e.g., a metal or a metallic alloy. Although not shown in these views, it should be understood that the grooves 5208, 5210, 5212 are in electrical communication with a source of electrical power, for example with a source of electrical power in the respiratory apparatus. Thus, the respiratory apparatus may deliver electrical power to heat the tube, which is provided from the grooves 5208, 5210, 5212 through the outlet contacts 5202, 5204, 5206 to the connector contacts 4510, 4512, 4514. The electrical connections formed may also provide communication functions such as electrical signalling.

[0225] According to these depicted examples, electrical, pneumatic, and mechanical connections may be formed and maintained when the outlet connection region 4530 is inserted into the housing 5200. The outlet connector may be rotated once this connection is formed while maintaining these electrical, pneumatic, and mechanical connections. The electrical connection may be maintained because the connector contacts 4510, 4512, 4514 extend peripherally around the outlet connection region 4530 such that at least a portion of each connector contact is always in contact with a respective one of the outlet contacts 5202, 5204, 5206 during within the housing 5200. Engagement of the shoulder 4532 with the outlet contact 5202 may serve to maintain the mechanical connection during rotation. It should be understood that additional shoulders may be provided to engage with the other outlet contacts should additional retention be desired. The pneumatic connection may be maintained during rotation because the outlet connection region 4530 may be sized and shaped to form close fit with the opening 5201 of the housing 5200. Additionally, peripheral seal(s) may be provided to ensure a secure pneumatic connection between the outlet connector and the respiratory apparatus.

[0226] Figs. 27a to 27c show cross-sectional views of further examples of connection arrangements according to the present technology. Fig. 27a shows an example where the outlet connection region 4530 includes the connector contact 4510 with the shoulder 4532 on one side and an additional shoulder 4532.1 on the other side such that the connector contact 4510 is recessed. The outlet contact 5202 may extend from the groove 5208 into the recessed connector contact 4510 between the shoulder 4532 and the additional shoulder 4532.1. Fig. 27c depicts a detailed view of this arrangement. Fig. 27b shows a further alternative where the connector contact 4510 may be further recessed between the shoulder 4532 and the additional shoulder 4532.1. Also, in this example the outlet contact 5202 is carried on the outlet connection region 4530 between the shoulder 4532 and the additional shoulder 4532.1, rather than in the groove 5208 of the housing 5200. The peripheral surfaces of the connector contact 4510 and of the groove 5208 in these examples may be flat where they engage with the outlet contact 5202.

[0227] Figs. 28a to 28c show cross-sectional views of further examples of connection arrangements according to examples of the present technology. The example shown in Figs. 28a and 28c varies from the example shown in Figs. 27a and 27c in that the surface of the groove 5208 is V-shaped. The example shown in Fig. 28b varies from the example shown in Fig. 27b in that the connector contact 4510 is V-shaped.

[0228] Figs. 29a and 29b show examples of the present technology where the outlet connection region 4530 may be attached and retained in the housing 5200. Fig. 29a shows the outlet connection region 4530 being inserted into the housing 5200. The outlet connection region 4530 may be tapered to progressively compress the outlet contact 5202 into the groove 5208 as the outlet connection region is inserted into the housing. Once inserted, as shown in Fig. 29b, the outlet contact 5202 may abut against the shoulder 4532 and/or the additional shoulder 4532.1 to limit axial movement of the outlet connection region 4530 relative to the housing 5200.

[0229] While Figs. 27a-c, 28a-c, and 29a-b each show one set of a connector contact 4510, an outlet contact 5202, and a groove 5208, it should be understood that a plurality of sets of these components may be provided.

[0230] While the examples discussed above have referred to connecting the depicted outlet connector to a respiratory apparatus, it should be understood that these connection arrangements may be suitable for forming electrical, mechanical and pneumatic connections between other components, such as two air circuits, a RPT device to a humidifier, a RPT device to a patient interface and/or a humidifier to a patient interface. For example, the ability to maintain electrical, mechanical, and pneumatic connections while allowing a full rotational degree of freedom may be beneficial because it may help to reduce tube stress resulting from patient movement while wearing a patient interface at the opposite end of the tube. Another advantage of the present technology may be that rotational alignment may not be required to engage and/or disengage the connection arrangement, such as between the outlet connector and the respiratory apparatus.

6.7 GLOSSARY

[0231] For the purposes of the present technology disclosure, in certain forms of the present technology, one or more of the following definitions may apply. In other forms of the present technology, alternative definitions may apply.

6.7.1 General

[0232] *Air*: In certain forms of the present technology, air supplied to a patient may be atmospheric air, and in other forms of the present technology atmospheric air may be supplemented with oxygen.

[0233] *Continuous Positive Airway Pressure (CPAP)*: CPAP treatment will be taken to mean the application of a supply of air or breathable gas to the entrance to the airways at a pressure that is continuously positive with respect to atmosphere, and preferably approximately constant through a respiratory cycle of a patient. In some forms, the pressure at the entrance to the airways will vary by a few centimeters of water within a single respiratory cycle, for example being higher during inhalation and lower during exhalation. In some forms, the pressure at the entrance to the airways will be slightly higher during exhalation, and slightly lower during inhalation. In some forms, the pressure will vary between different respiratory cycles of the patient, for example being increased in response to detection of indications of partial upper airway obstruction, and decreased in the absence of indications of partial upper airway obstruction.

6.7.2 Aspects of RPT devices

[0234] *Air circuit*: A conduit or tube constructed and arranged in use to deliver a supply of air or breathable gas between two components such as a RPT device and a patient interface, a RPT device and humidifier, or a humidifier and a patient interface. The air circuit may be referred to as air delivery tube. In some cases there may be separate limbs of the circuit for inhalation and exhalation. In other cases a single limb is used.

[0235] *Controller*: A device, or portion of a device that adjusts an output based on an input. For example one form of controller has a variable that is under control- the control variable- that constitutes the input to the device. The output of the device is a function of the current value of the control variable, and a set point for the variable. A servo-ventilator may include a controller that has ventilation as an input, a target ventilation as the set point, and level of pressure support as an output. Other forms of input may be one or more of oxygen saturation (SaO₂), partial pressure of carbon dioxide (PCO₂), movement, a signal from a photoplethysmogram, and peak flow. The set point of the controller may be one or more of fixed, variable or learned. For example, the set point in a ventilator may be a long term average of the measured ventilation of a patient. Another ventilator may have a ventilation set point that changes with time. A pressure controller may be configured to control a blower or pump to deliver air at a particular pressure.

[0236] *Transducers*: A device for converting one form of energy or signal into another. A transducer may be a sensor or detector for converting mechanical energy (such as movement) into an electrical signal. Examples of transducers include pressure transducers, flow transducers, carbon dioxide (CO₂) transducers, oxygen (O₂) transducers, effort transducers, movement transducers, noise transducers, a plethysmograph, and cameras.

6.7.3 Humidifiers

[0237] *Dew Point*: The atmospheric temperature (varying according to pressure and humidity) below which water droplets begin to condense and dew can form.

[0238] *Humidity, absolute*: The amount of water vapor present in a unit volume of air, usually expressed in mass per volume (e.g. g/m³).

[0239] *Humidity, relative*: The amount of water vapor present in air expressed as a percentage of the amount needed for saturation at the same temperature.

6.7.4 Materials

[0240] *Silicone or Silicone Elastomer*: A synthetic rubber. In this specification, a reference to silicone is a reference to liquid silicone rubber (LSR) or a compression moulded silicone rubber (CMSR). One form of commercially available LSR is SILASTIC (included in the range of products sold under this trademark), manufactured by Dow Corning. Another manufacturer of LSR is Wacker. Unless otherwise specified to the contrary, a preferred form of LSR has a Shore A (or Type A) indentation hardness in the range of about 35 to about 45 as measured using ASTM D2240.

[0241] *Polycarbonate*; a typically transparent thermoplastic polymer of Bisphenol-A Carbonate.

6.7.5 Aspects of a patient interface

[0242] *Anti-asphyxia valve (AAV)*: The component or sub-assembly of a mask system that, by opening to atmosphere in a failsafe manner, reduces the risk of excessive CO₂ rebreathing by a patient.

6.7.6 Terms used in relation to patient interface

[0243] *Curvature (of a surface)*: A region of a surface having a saddle shape, which curves up in one direction and curves down in a different direction, will be said to have a negative curvature. A region of a surface having a dome shape, which curves the same way in two principle directions, will be said to have a positive curvature. A flat surface will be taken to have zero curvature.

[0244] *Floppy*: A quality of a material, structure or composite that is the combination of features of:

- Readily conforming to finger pressure.
- Unable to retain its shape when caused to support its own weight.
- Not rigid.
- Able to be stretched or bent elastically with little effort.

[0245] The quality of being floppy may have an associated direction, hence a particular material, structure or composite may be floppy in a first direction, but stiff or rigid in a second direction, for example a second direction that is orthogonal to the first direction.

[0246] *Resilient*: Able to deform substantially elastically, and to release substantially all of the energy upon unloading, within a relatively short period of time such as 1 second.

[0247] *Rigid*: Not readily deforming to finger pressure, and/or the tensions or loads typically encountered when setting up and maintaining a patient interface in scaling relationship with an entrance to a patient's airways.

[0248] *Semi-rigid*: means being sufficiently rigid to not substantially distort under the effects of mechanical forces typically applied during positive airway pressure therapy.

6.8 OTHER REMARKS

[0249] A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

[0250] Unless the context clearly dictates otherwise and where a range of values is provided, it is understood that each intervening value, to the tenth of the unit of the lower limit, between the upper and lower limit of that range, and any other stated or intervening value in that stated range is encompassed within the technology. The upper and lower limits of these intervening ranges, which may be independently included in the intervening ranges, are also encompassed within the technology, subject to any specifically excluded limit in the stated range. Where the stated range includes one or both of the limits, ranges excluding either or both of those included limits are also included in the technology.

[0251] Furthermore, where a value or values are stated herein as being implemented as part of the technology, it is understood that such values may be approximated, unless otherwise slated, and such values may be utilized to any suitable significant digit to the extent that a practical technical implementation may permit or require it.

[0252] Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this technology belongs. Although any methods and materials similar or equivalent to those described herein can also be used in the practice or testing of the present technology, a limited number of the exemplary methods and materials are described herein.

[0253] When a particular material is identified as being used to construct a component, obvious alternative materials with similar properties may be used as a substitute. Furthermore, unless specified to the contrary, any and all components

herein described arc understood to be capable of being manufactured and, as such, may be manufactured together or separately.

[0254] It must be noted that as used herein and in the appended claims, the singular forms "a", "an", and "the" include their plural equivalents, unless the context clearly dictates otherwise.

[0255] The publications discussed herein are provided solely for their disclosure prior to the filing date of the present application. Nothing herein is to be construed as an admission that the present technology is not entitled to antedate such publication by virtue of prior invention. Further, the dates of publication provided may be different from the actual publication dates, which may need to be independently confirmed.

[0256] The subject headings used in the detailed description are included only for the ease of reference of the reader and should not be used to limit the subject matter found throughout the disclosure or the claims. The subject headings should not be used in construing the scope of the claims or the claim limitations.

[0257] Although the technology herein has been described with reference to particular examples, it is to be understood that these examples are merely illustrative of the principles and applications of the technology. In some instances, the terminology and symbols may imply specific details that are not required to practice the technology. For example, although the terms "first" and "second" may be used, unless otherwise specified, they are not intended to indicate any order but may be utilized to distinguish between distinct elements. Furthermore, although process steps in the methodologies may be described or illustrated in an order, such an ordering is not required. Those skilled in the art will recognize that such ordering may be modified and/or aspects thereof may be conducted concurrently or even synchronously.

[0258] It is therefore to be understood that numerous modifications may be made to the illustrative examples and that other arrangements may be devised without departing from the scope of the technology.

7 REFERENCE NUMERAL LIST

[0259]

patient	1000
bed partner	1100
patient interface	3000
structure	3100
plenum chamber	3200
structure	3300
vent	3400
connection port	3600
forehead support	3700
rpt device	4000
external housing	4010
upper portion	4012
portion	4014
panel	4015
chassis	4016
handle	4018
pneumatic block	4020
air circuit	4100
tube portion	4102
helical coil	4103
grommet	4104
outlet connector	4106

EP 3 013 402 B1

(continued)

	patient interface connector	4107
5	actuator	4108
	retention feature	4110
	electrical connector	4112
	dummy connector	4113
10	outlet connection region	4114
	recess	4116
	opening	4118
15	rib	4120
	end cap	4124
	support structure	4126
	electrical lead	4128
20	thread	4130
	substructure	4132
	housing	4134
25	receiver	4135
	receiver thread	4135.1
	receiver flange	4135.2
	tube connection region	4136
30	clip	4137
	clip thread	4137.1
	clip flange	4137.2
35	connection end	4138
	tab	4139
	protrusion	4139.1
40	tube end	4140
	hinge	4141
	connector thread	4142
	orifice	4144
45	tab	4148
	keyway	4150
	flange	4152
	grip	4154
50	cuff	4156
	elbow connector	4158
	cuff retention feature	4160
55	least one cuff receiver	4162
	cuff electrical connector	4164
	outlet connector tube	4168

EP 3 013 402 B1

(continued)

	base seal	4170
5	plate	4174
	flow radius	4176
	travel stop	4178
	tab	4180
10	electrical component	4200
	PCBA	4202
	power supply	4210
15	input device	4220
	central controller	4230
	therapy device controller	4240
	transducer	4270
20	output device	4290
	pneumatic component	4300
	air filter	4310
25	inlet air filter	4312
	outlet air filter	4314
	muffler	4320
	inlet muffler	4322
30	outlet muffler	4324
	pressure device	4340
	blower	4342
35	motor	4344
	back valve	4360
	supplemental oxygen	4380
	substructure assembly	4500
40	body	4502
	cap	4504
	electrical contact assembly	4506
45	wire	4508
	connector contact	4510
	contact recess	4511
	connector contact	4512
50	contact recess	4513
	connector contact	4514
	contact recess	4515
55	prong	4518
	tab	4520
	detent	4522

EP 3 013 402 B1

(continued)

	notches	4524
5	tube connection region	4526
	thread	4528
	outlet connection region	4530
	shoulder	4532
10	additional shoulder	4532.1
	wire overmould	4534
	plate	4536
15	humidifier	5000
	cable housing	5100
	inner wall	5101
	cable	5102
20	outer wall	5103
	swivelling disc	5104
	swivel electrical connector	5105
25	tab	5106
	outlet assembly	5107
	stop surface	5108
	exit flange	5109
30	stop surface	5110
	flange	5112
	swivel disc seal	5113
35	electrical connector receiver	5114
	opening	5116
	retainer	5118
	stop surface	5120
40	stop surface	5122
	void	5124
	notch	5126
45	tang	5128
	airflow tube	5130
	first portion	5130a
	second portion	5130b
50	inlet end	5132
	outlet end	5134
	flange	5136
55	housing	5138
	outlet	5140
	outlet tube	5142

(continued)

	outlet electrical connector	5144
5	contact element	5146
	point	5150
	point	5152
	point	5154
10	pin	5156
	female electrical connector	5158
	internal shoulder	5160
15	retention feature	5162
	contact portion	5164
	base portion	5166
	curved portion	5168
20	latch portion	5172
	annular section	5174
	portion	5176
25	humidifier reservoir	5180
	humidifier reservoir outlet	5182
	housing	5200
	opening	5201
30	outlet contact	5202
	outlet contact	5204
	outlet contact	5206
35	groove	5208
	groove	5210
	groove	5212
	heating element	5240
40	mold tool	6000
	mold tool	6002

Claims

1. A connection assembly for a respiratory therapy system, comprising:

a gas outlet assembly (5107), said gas outlet assembly including an outlet housing (5100) and a swivelling disc (5104) located on said outlet housing, said outlet housing comprising a void (5124) and an annular section (5174); and

a cable (5102) having a first end to connect to an electrical connector (5105) and a second end to connect to at least one electrical component of the respiratory therapy system, said cable having a slack portion, wherein said swivelling disc (5104) is rotatable relative to said outlet housing (5100) between a first position and a second position, and

wherein the slack portion of the cable (5102) is pulled from the void (5124) and wrapped around the annular section (5174) as the swivelling disc (5104) is rotated from the first position to the second position such that in the first position of the swivelling disc the slack portion is in the void (5124) and is not wrapped around the

annular section (5174) and in the second position of the swivelling disc the slack portion is not in the void (5124) and is wrapped around the annular section (5174).

2. The connection assembly of claim 1, wherein said swivelling disc (5104) includes a first pair of stop surfaces (5108, 5110) and said outlet housing (5100) includes a second pair of stop surfaces (5120, 5122) to limit the rotation of the swivelling disc (5104) relative to the outlet housing (5100), wherein each pair of stop surfaces are arranged to limit the rotation of the swivelling disc relative to the outlet housing to less than 360° and greater than 180°.
3. The connection assembly of claim 2, wherein the first pair of stop surfaces (5108, 5110) is located on either side of and adjacent to a receiver opening in the swivelling disc (5104) that receives the cable (5102).
4. The connection assembly of claim 2 or 3, wherein the outlet housing (5100) includes an inner wall (5101), said second pair of stop surfaces (5120, 5122) located on the inner wall and said inner wall configured to rotatably receive said swivelling disc (5104), wherein the void (5124) is defined, at least in part, by the inner wall (5101) and an outer wall (5103) of the outlet housing (5100), wherein the annular section (5174) is defined, at least in part, by the inner wall (5101) and the outer wall (5103) of the outlet housing (5100), wherein the void (5124) and annular section (5174) are on opposing sides of the inner wall (5101), and wherein a distance (VO_H) between the inner wall (5101) and the outer wall (5103) of the outlet housing and across the void (5124) is in the range of about 2mm to about 5mm.
5. The connection assembly of any one of claims 1 to 4, wherein the cable (5102) comprises a flexible circuit board or a ribbon cable, wherein the cable has a substantially rectangular cross-section, and wherein a major side of the substantially rectangular cross-section is oriented in parallel to an axis of rotation of the swivelling disc (5104).
6. The connection assembly of any one of claims 1 to 5, wherein the outlet housing (5100) includes a retainer (5118), said retainer configured to retain the slack portion within the void (5124) of the outlet housing as the swivelling disc (5104) is rotated from the second position to the first position.
7. The connection assembly of any one of claims 1 to 6, wherein the slack portion comprises a fixed length that is less than a circumference of the swivelling disc (5104), wherein when the swivelling disc is in the first position the slack portion gathers in the void (5124), wherein a larger portion of the cable (5102) is contained in the void (5124) when the swivelling disc (5104) is in the first position than when the swivelling disc is in the second position.
8. The connection assembly of any one of claims 1 to 7, comprising:
 - a gas outlet connector (4106) located at an end of a tube portion to connect the tube portion (4102) to the gas outlet assembly (5107), said gas outlet connector including the electrical connector (4112), wherein said gas outlet connector (4106) and said swivelling disc (5104) are connectable such that said gas outlet connector (4106) and said swivelling disc (5104) are rotatable in unison.
9. The connection assembly of claim 8, wherein the tube portion (4102) includes a heating element disposed along at least a portion of the tube portion (4102), said heating element connected to the electrical connector (4112).
10. The connection assembly of claim 8 or 9, wherein the swivelling disc (5104) includes an electrical connector receiver (5114) to receive the electrical connector (4112), and wherein the electrical connector (4112) is electrically connectable to the cable (5102) within the electrical connector receiver (5114), wherein the electrical connector receiver (5114) includes an opening to receive the electrical connector (4112) when the gas outlet connector (4106) is connected to the gas outlet assembly (5107), wherein the gas outlet connector (4106) is shaped to cover the opening of the electrical connector receiver (5114) when the gas outlet connector is connected to the gas outlet assembly (5107), and wherein the gas outlet connector (4106) includes a recess proximal to the electrical connector (4112) shaped to

correspond to a protruding portion of the electrical connector receiver (5114).

11. The connection assembly of any one of claims 8 to 10, wherein the gas outlet connector (4106) includes at least one retention feature (4110) to releasably connect the gas outlet connector (4106) to the swivelling disc (5104) via at least one corresponding notch (5126) located on the swivelling disc (5104), wherein the gas outlet connector (4106) includes at least one tab (4139), each said at least one retention feature (4110) located on a corresponding tab (4139) having a corresponding actuator (4108), and wherein each said actuator (4108) is adapted to release each said retention feature (4110) from the at least one corresponding notch (5126) of the swivelling disc (5104).
12. The connection assembly of any one of claims 8 to 11, wherein the gas outlet connector (4106) includes a grommet (4104) to connect the tube portion (4102) to the gas outlet connector, wherein the grommet (4104) includes threads (4130) to receive corresponding coils (4103) of the tube portion, wherein the grommet (4104) is comprised of a thermoplastic elastomer, wherein the grommet (4104) includes at least one keyway (4150) for restraining the grommet during forming, wherein the grommet (4104) includes at least one radial flange (4152) to engage a mold tool (6000, 6002) during forming, wherein the grommet (4104) includes a grip section (4154), and wherein the grip section (4154) includes a plurality of ridges and recesses disposed radially about the grommet.
13. The connection assembly of any one of claims 8 to 12, wherein the gas outlet connector (4106) includes a receiver (4135) at a tube connection region (4136), said receiver comprising receiver threads (4135.1), a receiver flange (4135.2), and at least one protrusion, wherein the gas outlet connector (4106) further comprises a clip (4137) to secure the tube portion (4102) within the receiver (4135), the clip comprising clip threads (4137.1), a clip flange (4137.2), and at least one tab (4139), wherein at least one tab (4139) is structured to engage with at least one protrusion to secure the clip to the receiver, wherein the clip threads (4137.1) and the receiver threads (4135.1) are structured to receive corresponding coils (4103) of the tube portion (4102), and wherein the clip flange (4137.2) and the receiver flange (4135.2) are structured to engage a mold tool (6000, 6002) during forming.
14. The connection assembly of any one of claims 8 to 13, wherein when the gas outlet connector (4106) is connected to the gas outlet assembly (5107) a rotatable, electrical, and pneumatic connection is formed.
15. The connection assembly of any one of claims 8 to 14, wherein the gas outlet assembly (5107) comprises an airflow tube (5130) having a tapered end to connect to the gas outlet connector and form a pneumatic seal therewith, wherein the airflow tube is removable, and wherein the gas outlet connector includes at least one rib at an outlet connection region to support the gas outlet connector (4106) on the airflow tube (5130) when connected to the gas outlet assembly (5107).

Patentansprüche

1. Verbindungsanordnung für ein Atemtherapiesystem, die aufweist:

eine Gasauslassanordnung (5107), wobei die Gasauslassanordnung ein Auslassgehäuse (5100) und eine auf dem Auslassgehäuse liegende Schwenkscheibe (5104) aufweist und das Auslassgehäuse einen Hohlraum (5124) und einen ringförmigen Abschnitt (5174) aufweist; und ein Kabel (5102) mit einem ersten Ende zur Verbindung mit einem elektrischen Verbinder (5105) und einem zweiten Ende zur Verbindung mit mindestens einer elektrischen Komponente des Atemtherapiesystems, wobei das Kabel einen schlaffen bzw. lockeren Abschnitt hat, wobei die Schwenkscheibe (5104) relativ zum Auslassgehäuse (5100) zwischen einer ersten Position und einer zweiten Position drehbar ist und wobei der schlaffe Abschnitt des Kabels (5102) aus dem Hohlraum (5124) gezogen und um den ringförmigen Abschnitt (5174) gewickelt wird, wenn die Schwenkscheibe (5104) aus der ersten Position in die zweite Position gedreht wird, so dass sich der schlaffe Abschnitt in der ersten Position der Schwenkscheibe im Hohlraum (5124) befindet und nicht um den ringförmigen Abschnitt (5174) gewickelt ist und sich der schlaffe Abschnitt in der zweiten Position der Schwenkscheibe nicht im Hohlraum (5124) befindet und um den ringförmigen Abschnitt

(5174) gewickelt ist.

2. Verbindungsanordnung nach Anspruch 1, wobei die Schwenkscheibe (5104) ein erstes Paar Anschlagflächen (5108, 5110) aufweist und das Auslassgehäuse (5100) ein zweites Paar Anschlagflächen (5120, 5122) aufweist, um die Drehung der Schwenkscheibe (5104) relativ zum Auslassgehäuse (5100) zu begrenzen, wobei jedes Paar Anschlagflächen so angeordnet ist, um die Drehung der Schwenkscheibe relativ zum Auslassgehäuse auf unter 360° und über 180° zu begrenzen.
3. Verbindungsanordnung nach Anspruch 2, wobei das erste Paar Anschlagflächen (5108, 5110) auf jeder Seite und benachbart zu einer Aufnahmeöffnung in der Schwenkscheibe (5104), die das Kabel (5102) aufnimmt, liegt.
4. Verbindungsanordnung nach Anspruch 2 oder 3, wobei das Auslassgehäuse (5100) eine Innenwand (5101) aufweist, wobei das zweite Paar Anschlagflächen (5120, 5122) an der Innenwand angeordnet ist und die Innenwand so konfiguriert ist, dass sie die Schwenkscheibe (5104) drehbar aufnimmt, wobei der Hohlraum (5124) mindestens teilweise durch die Innenwand (5101) und eine Außenwand (5103) des Auslassgehäuses (5100) gebildet ist, wobei der ringförmige Abschnitt (5174) mindestens teilweise durch die Innenwand (5101) und die Außenwand (5103) des Auslassgehäuses (5100) gebildet ist, wobei der Hohlraum (5124) und der ringförmige Abschnitt (5174) auf gegenüberliegenden Seiten der Innenwand (5101) angeordnet sind, und wobei ein Abstand (VO_H) zwischen der Innenwand (5101) und der Außenwand (5103) des Auslassgehäuses und durch den Hohlraum (5124) im Bereich von etwa 2 mm bis etwa 5 mm liegt.
5. Verbindungsanordnung nach einem der Ansprüche 1 bis 4, wobei das Kabel (5102) eine flexible Leiterplatte oder ein Flachbandkabel aufweist, wobei das Kabel einen im Wesentlichen rechteckigen Querschnitt hat, und wobei eine Hauptseite des im Wesentlichen rechteckigen Querschnitts parallel zu einer Drehachse der Schwenkscheibe (5104) orientiert ist.
6. Verbindungsanordnung nach einem der Ansprüche 1 bis 5, wobei das Auslassgehäuse (5100) einen Halter (5118) aufweist, wobei der Halter so konfiguriert ist, dass er den schlaffen Abschnitt im Hohlraum (5124) des Auslassgehäuses hält, wenn die Schwenkscheibe (5104) aus der zweiten Position in die erste Position gedreht wird.
7. Verbindungsanordnung nach einem der Ansprüche 1 bis 6, wobei der schlaffe Abschnitt eine feste Länge aufweist, die kleiner als ein Umfang der Schwenkscheibe (5104) ist, wobei der schlaffe Abschnitt sich im Hohlraum (5124) ansammelt, wenn sich die Schwenkscheibe in der ersten Position befindet, wobei ein größerer Abschnitt des Kabels (5102) im Hohlraum (5124) enthalten ist, wenn sich die Schwenkscheibe (5104) in der ersten Position befindet als wenn sich die Schwenkscheibe in der zweiten Position befindet.
8. Verbindungsanordnung nach einem der Ansprüche 1 bis 7, die aufweist:

einen Gasauslassverbinder (4106), der an einem Ende eines Schlauchabschnitts angeordnet ist, um den Schlauchabschnitt (4102) mit der Gasauslassanordnung (5107) zu verbinden, wobei der Gasauslassverbinder den elektrischen Verbinder (4112) aufweist, wobei der Gasauslassverbinder (4106) und die Schwenkscheibe (5104) so verbindbar sind, dass der Gasauslassverbinder (4106) und die Schwenkscheibe (5104) gemeinsam drehbar sind.
9. Verbindungsanordnung nach Anspruch 8, wobei der Schlauchabschnitt (4102) ein Heizelement aufweist, das entlang mindestens eines Abschnitts des Schlauchabschnitts (4102) angeordnet ist, wobei das Heizelement mit dem elektrischen Verbinder (4112) verbunden ist.
10. Verbindungsanordnung nach Anspruch 8 oder 9, wobei die Schwenkscheibe (5104) eine elektrische Verbinderaufnahme (5114) aufweist, um den elektrischen Verbinder (4112) aufzunehmen, und wobei der elektrische Verbinder (4112) mit dem Kabel (5102) in der elektrischen Verbinderaufnahme (5114) elektrisch verbindbar ist, wobei die elektrische Verbinderaufnahme (5114) eine Öffnung aufweist, um den elektrischen Verbinder (4112) aufzunehmen, wenn der Gasauslassverbinder (4106) mit der Gasauslassanordnung (5107) verbunden ist,

wobei der Gasauslassverbinder (4106) so geformt ist, dass er die Öffnung der elektrischen Verbinderaufnahme (5114) abdeckt, wenn der Gasauslassverbinder mit der Gasauslassanordnung (5107) verbunden ist, und wobei der Gasauslassverbinder (4106) eine Aussparung proximal zum elektrischen Verbinder (4112) aufweist, die so geformt ist, dass sie einem vorstehenden Abschnitt der elektrischen Verbinderaufnahme (5114) entspricht.

5 11. Verbindungsanordnung nach einem der Ansprüche 8 bis 10, wobei der Gasauslassverbinder (4106) mindestens ein Haltemerkmal (4110) aufweist, um den Gasauslassverbinder (4106) mit der Schwenkscheibe (5104) über mindestens eine entsprechende Aussparung (5126), die auf der Schwenkscheibe (5104) liegt, lösbar zu verbinden, wobei der Gasauslassverbinder (4106) mindestens eine Lasche (4139) aufweist, wobei jedes mindestens eine Haltemerkmal (4110) jeweils auf einer entsprechenden Lasche (4139) mit einem entsprechenden Betätigungselement (4108) angeordnet ist, und wobei jedes Betätigungselement (4108) geeignet ist, jedes Haltemerkmal (4110) aus der mindestens einen entsprechenden Aussparung (5126) der Schwenkscheibe (5104) zu lösen.

15 12. Verbindungsanordnung nach einem der Ansprüche 8 bis 11, wobei der Gasauslassverbinder (4106) eine Tülle (4104) aufweist, um den Schlauchabschnitt (4102) mit dem Gasauslassverbinder zu verbinden, wobei die Tülle (4104) Gewinde (4130) aufweist, um entsprechende Spiralen (4103) des Schlauchabschnitts aufzunehmen, wobei die Tülle (4104) ein thermoplastisches Elastomer aufweist, wobei die Tülle (4104) mindestens eine Keilnut (4150) zum Festhalten der Tülle bei der Formgebung aufweist, wobei die Tülle (4104) mindestens einen radialen Flansch (4152) aufweist, um einen Eingriff mit einem Formwerkzeug (6000, 6002) bei der Formgebung herzustellen, wobei die Tülle (4104) einen Griffabschnitt (4154) aufweist und wobei der Griffabschnitt (4154) mehrere Grate bzw. Rippen und Vertiefungen aufweist, die um die Tülle radial angeordnet sind.

30 13. Verbindungsanordnung nach einem der Ansprüche 8 bis 12, wobei der Gasauslassverbinder (4106) eine Aufnahme (4135) an einem Schlauchverbindungsgebiet (4136) aufweist, wobei die Aufnahme Aufnahmegewinde (4135.1), einen Aufnahmeflansch (4135.2) und mindestens einen Vorsprung aufweist, wobei der Gasauslassverbinder (4106) ferner einen Clip (4137) aufweist, um den Schlauchabschnitt (4102) in der Aufnahme (4135) zu befestigen, wobei der Clip Clipgewinde (4137.1), einen Clipflansch (4137.2) und mindestens eine Lasche (4139) aufweist, wobei mindestens eine Lasche (4139) so aufgebaut ist, dass sie einen Eingriff mit mindestens einem Vorsprung herstellt, um den Clip an der Aufnahme zu befestigen, wobei die Clipgewinde (4137.1) und die Aufnahmegewinde (4135.1) so aufgebaut sind, dass sie entsprechende Spiralen (4103) des Schlauchabschnitts (4102) aufnehmen, und wobei der Clipflansch (4137.2) und der Aufnahmeflansch (4135.2) so aufgebaut sind, dass sie einen Eingriff mit einem Formwerkzeug (6000, 6002) bei der Formgebung herstellen.

40 14. Verbindungsanordnung nach einem der Ansprüche 8 bis 13, wobei bei Verbindung des Gasauslassverbinders (4106) mit der Gasauslassanordnung (5107) eine drehbare, elektrisch und pneumatische Verbindung gebildet wird.

45 15. Verbindungsanordnung nach einem der Ansprüche 8 bis 14, wobei die Gasauslassanordnung (5107) ein Luftströmungsrohr (5130) mit einem sich verjüngenden Ende aufweist, um mit dem Gasauslassverbinder verbunden zu sein und eine pneumatische Dichtung damit zu bilden, wobei das Luftströmungsrohr entfernbar ist, und wobei der Gasauslassverbinder mindestens eine Rippe an einem Auslassverbindungsgebiet aufweist, um den Gasauslassverbinder (4106) auf dem Luftströmungsrohr (5130) zu stützen, wenn er mit der Gasauslassanordnung (5107) verbunden ist.

Revendications

55 1. Ensemble de raccordement pour un système de thérapie respiratoire, comprenant :

un ensemble d'évacuation de gaz (5107), ledit ensemble d'évacuation de gaz comprenant un boîtier de sortie (5100) et un disque pivotant (5104) situé sur ledit boîtier de sortie, ledit boîtier de sortie comprenant un évidement (5124) et une section annulaire (5174) ; et

un câble (5102) ayant une première extrémité destinée à être raccordée à un connecteur électrique (5105) et une seconde extrémité destinée à être raccordée à au moins un composant électrique du système de thérapie respiratoire, ledit câble ayant une partie lâche, dans lequel ledit disque pivotant (5104) pivote par rapport audit boîtier de sortie (5100) entre une première position et une seconde position, et dans lequel la partie lâche du câble (5102) est tirée de l'évidement (5124) et enroulée autour de la section annulaire (5174) lorsque le disque pivotant (5104) tourne de la première position vers la seconde position de sorte que, dans la première position du disque pivotant, la partie lâche se trouve dans l'évidement (5124) et ne soit pas enroulée autour de la section annulaire (5174) et, dans la seconde position du disque pivotant, la partie lâche ne se trouve pas dans l'évidement (5124) et soit enroulée autour de la section annulaire (5174).

2. Ensemble de raccordement selon la revendication 1, dans lequel ledit disque pivotant (5104) comprend une première paire de surfaces d'arrêt (5108, 5110) et ledit boîtier de sortie (5100) comprend une seconde paire de surfaces d'arrêt (5120, 5122) pour limiter la rotation du disque pivotant (5104) par rapport au boîtier de sortie (5100), dans lequel chaque paire de surfaces d'arrêt est prévue pour limiter la rotation du disque pivotant par rapport au boîtier de sortie à moins de 360° et plus de 180°.
3. Ensemble de raccordement selon la revendication 2, dans lequel la première paire de surfaces d'arrêt (5108, 5110) est située de chaque côté et de manière adjacente à une ouverture de réception dans le disque pivotant (5104) qui reçoit le câble (5102).
4. Ensemble de raccordement selon les revendications 2 ou 3, dans lequel le boîtier de sortie (5100) comprend une paroi interne (5101), ladite seconde paire de surfaces d'arrêt (5120, 5122) est située sur la paroi interne, et ladite paroi interne est configurée pour recevoir de manière rotative ledit disque pivotant (5104), dans lequel l'évidement (5124) est défini, au moins en partie, par la paroi interne (5101) et une paroi externe (5103) du boîtier de sortie (5100), dans lequel la section annulaire (5174) est définie, au moins en partie, par la paroi interne (5101) et la paroi externe (5103) du boîtier de sortie (5100), dans lequel l'évidement (5124) et la section annulaire (5174) se trouvent sur les côtés opposés de la paroi interne (5101), et dans lequel une distance (VO_H) entre la paroi interne (5101) et la paroi externe (5103) du boîtier de sortie et à travers l'évidement (5124) est comprise entre environ 2 mm et environ 5 mm.
5. Ensemble de raccordement selon l'une quelconque des revendications 1 à 4, dans lequel le câble (5102) comprend une carte de circuit flexible ou un câble plat, dans lequel le câble possède une section transversale sensiblement rectangulaire, et dans lequel un côté majeur de la section transversale sensiblement rectangulaire est orienté parallèlement à un axe de rotation du disque pivotant (5104).
6. Ensemble de raccordement selon l'une quelconque des revendications 1 à 5, dans lequel le boîtier de sortie (5100) comprend un dispositif de retenue (5118), ledit dispositif de retenue étant configuré pour retenir la partie lâche à l'intérieur de l'évidement (5124) du boîtier de sortie lorsque le disque pivotant (5104) est mis en rotation de la seconde position vers la première position.
7. Ensemble de raccordement selon l'une quelconque des revendications 1 à 6, dans lequel la partie lâche comprend une longueur fixe qui est inférieure à une circonférence du disque pivotant (5104), dans lequel, lorsque le disque pivotant se trouve dans la première position, la partie lâche se rassemble dans l'évidement (5124), dans lequel une plus grande partie du câble (5102) est contenue dans l'évidement (5124) lorsque le disque pivotant (5104) se trouve dans la première position que lorsque le disque pivotant se trouve dans la seconde position.
8. Ensemble de raccordement selon l'une quelconque des revendications 1 à 7, comprenant :

un connecteur de sortie de gaz (4106) situé au niveau d'une extrémité d'une partie de tube destinée à raccorder la partie de tube (4102) à l'ensemble de sortie de gaz (5107), ledit connecteur de sortie de gaz comprenant le connecteur électrique (4112), dans lequel ledit connecteur de sortie de gaz (4106) et ledit disque pivotant (5104) peuvent être raccordés de sorte que le connecteur de sortie de gaz (4106) et ledit disque pivotant (5104) puissent pivoter ensemble.

9. Ensemble de raccordement selon la revendication 8, dans lequel la partie de tube (4102) comprend un élément chauffant disposé le long d'au moins une partie de la partie de tube (4102), ledit élément chauffant étant raccordé au connecteur électrique (4112).

10. Ensemble de raccordement selon la revendication 8 ou 9, dans lequel le disque pivotant (5104) comprend un récepteur de connecteur électrique (5114) destiné à recevoir le connecteur électrique (4112), et dans lequel le connecteur électrique (4112) peut être électriquement raccordé au câble (5102) à l'intérieur du récepteur de connecteur électrique (5114), dans lequel le récepteur de connecteur électrique (5114) comprend une ouverture destinée à recevoir le connecteur électrique (4112) lorsque le connecteur de sortie de gaz (4106) est raccordé à l'ensemble de sortie de gaz (5107), dans lequel le connecteur de sortie de gaz (4106) est formé pour recouvrir l'ouverture du récepteur de connecteur électrique (5114) lorsque le récepteur de connecteur électrique est raccordé à l'ensemble de sortie de gaz (5107), et dans lequel le connecteur de sortie de gaz (4106) comprend un évidement proche du connecteur électrique (4112) formé pour correspondre à une partie saillante du récepteur de connecteur électrique (5114).

11. Ensemble de raccordement selon l'une quelconque des revendications 8 à 10, dans lequel le connecteur de sortie de gaz (4106) comprend au moins un élément de retenue (4110) destiné à raccorder de manière amovible le connecteur de sortie de gaz (4106) au disque pivotant (5104) via au moins une encoche correspondante (5126) située sur le disque pivotant (5104), dans lequel le connecteur de sortie de gaz (4106) comprend au moins une languette (4139), chacun desdits au moins un élément de retenue (4110) étant situé sur une languette correspondante (4139) ayant un actionneur correspondant (4108), et dans lequel chacun desdits actionneurs (4108) est adapté pour libérer chacun desdits éléments de retenue (4110) de la au moins une encoche correspondante (5126) du disque pivotant (5104).

12. Ensemble de raccordement selon l'une quelconque des revendications 8 à 11, dans lequel le connecteur de sortie de gaz (4106) comprend un oeillet (4104) destiné à raccorder la partie de tube (4102) au connecteur de sortie de gaz, dans lequel l'oeillet (4104) comprend des fils (4130) destinés à recevoir des bobines correspondantes (4103) de la partie de tube, dans lequel l'oeillet (4104) est constitué d'un élastomère thermoplastique, dans lequel l'oeillet (4104) comprend au moins une rainure de clavette (4150) destinée à retenir l'oeillet pendant le formage, dans lequel l'oeillet (4104) comprend au moins une bride radiale (4152) destinée à engager un outil de moulage (6000, 6002) pendant le formage, dans lequel l'oeillet (4104) comprend une section de préhension (4154), et dans lequel la section de préhension (4154) comprend une pluralité de nervures et de creux disposés radialement autour de l'oeillet.

13. Ensemble de raccordement selon l'une quelconque des revendications 8 à 12, dans lequel le connecteur de sortie de gaz (4106) comprend un récepteur (4135) au niveau d'une zone de raccordement du tube (4136), ledit récepteur comprenant des fils de récepteur (4135.1), une bride de récepteur (4135.2), et au moins une partie saillante, dans lequel le connecteur de sortie de gaz (4106) comprend en outre une attache (4137) destinée à fixer la partie de tube (4102) à l'intérieur du récepteur (4135), l'attache comprenant des fils d'attache (4137.1), une bride d'attache (4137.2), et au moins une languette (4139), dans lequel au moins une languette (4139) est structurée pour s'engager avec au moins une partie saillante afin de fixer l'attache sur le récepteur, dans lequel les fils d'attache (4137.1) et les fils de récepteur (4135.1) sont structurés pour recevoir des bobines correspondantes (4103) de la partie de tube (4102), et dans lequel la bride d'attache (4137.2) et la bride de récepteur (4135.2) sont structurées pour engager un outil de moulage (6000, 6002) pendant le formage.

14. Ensemble de raccordement selon l'une quelconque des revendications 8 à 13, dans lequel, lorsque le connecteur de sortie de gaz (4106) est raccordé à l'ensemble de sortie de gaz (5107), un raccord rotatif, électrique et pneumatique est formé.

15. Ensemble de raccordement selon l'une quelconque des revendications 8 à 14, dans lequel l'ensemble de sortie de gaz (5107) comprend un tube d'écoulement d'air (5130) ayant une extrémité conique destinée à être raccordée au connecteur de sortie de gaz et à former un joint pneumatique avec celui-ci,

EP 3 013 402 B1

dans lequel le tube d'écoulement d'air est amovible, et
dans lequel le connecteur de sortie de gaz comprend au moins une rainure au niveau d'une zone de raccordement
de sortie afin de supporter le connecteur de sortie de gaz (4106) sur le tube d'écoulement d'air (5130) lorsqu'il est
raccordé à l'ensemble de sortie de gaz (5107).

5

10

15

20

25

30

35

40

45

50

55

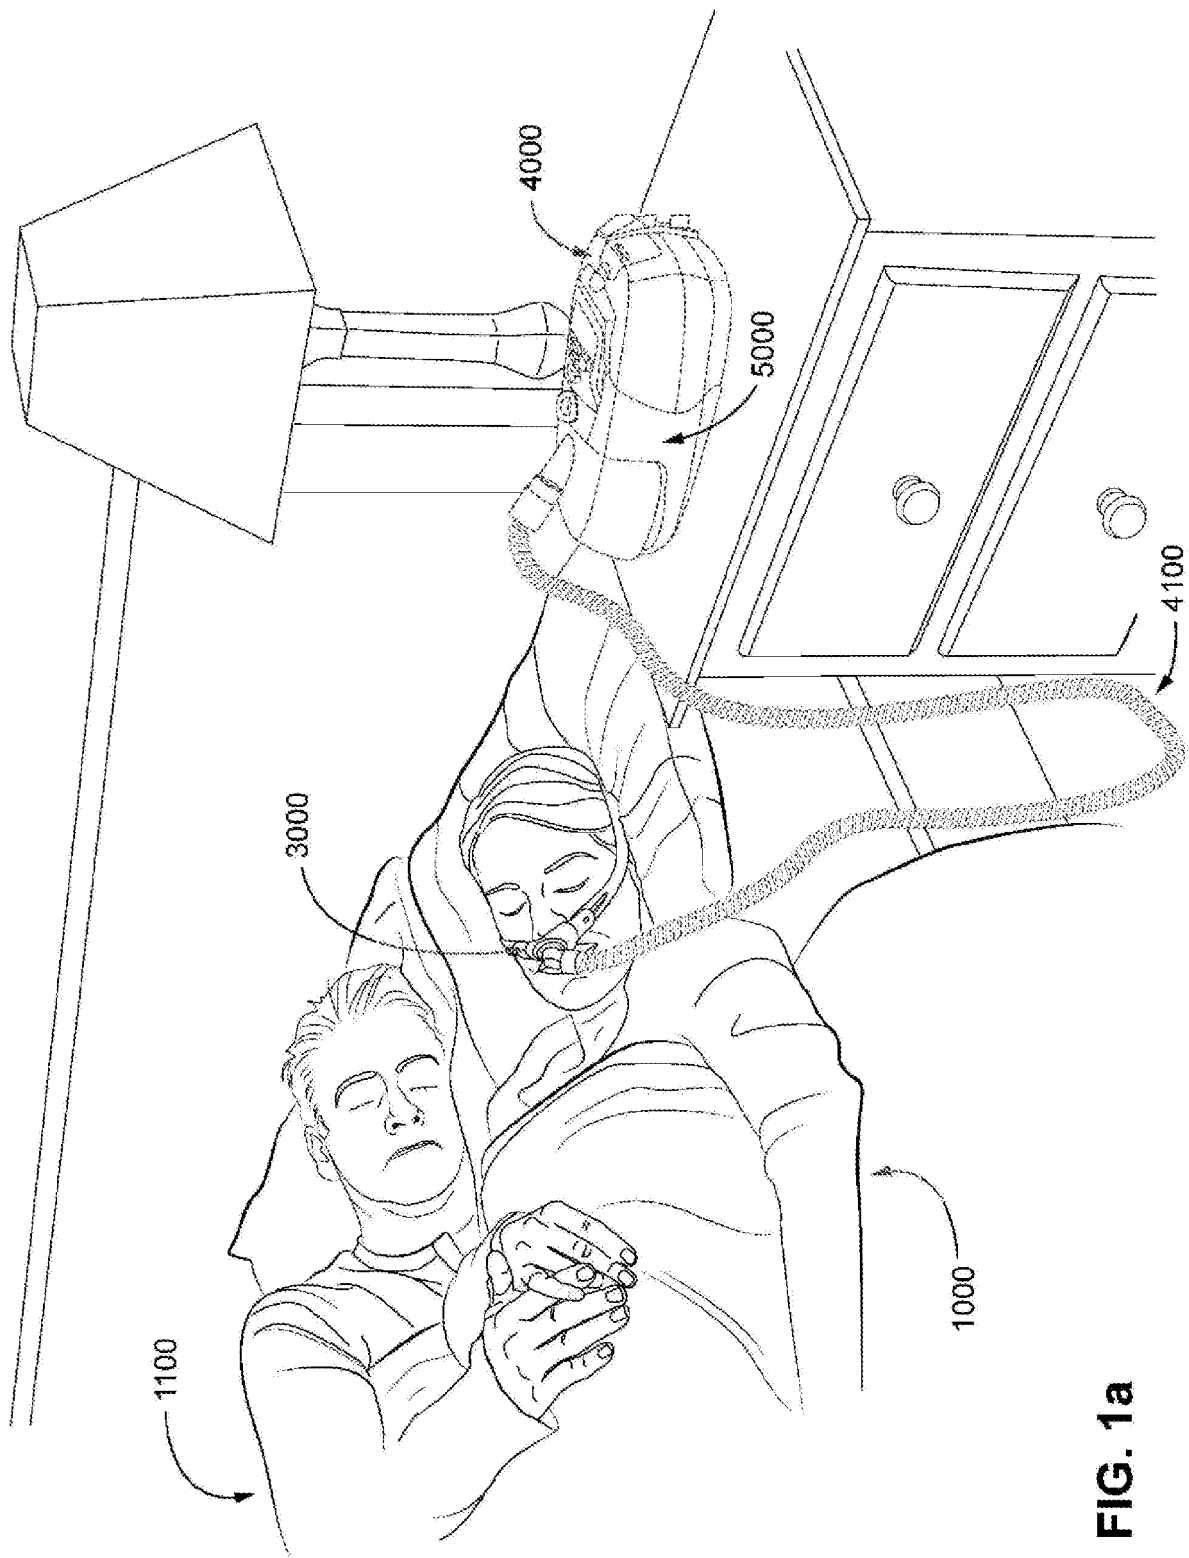


FIG. 1a

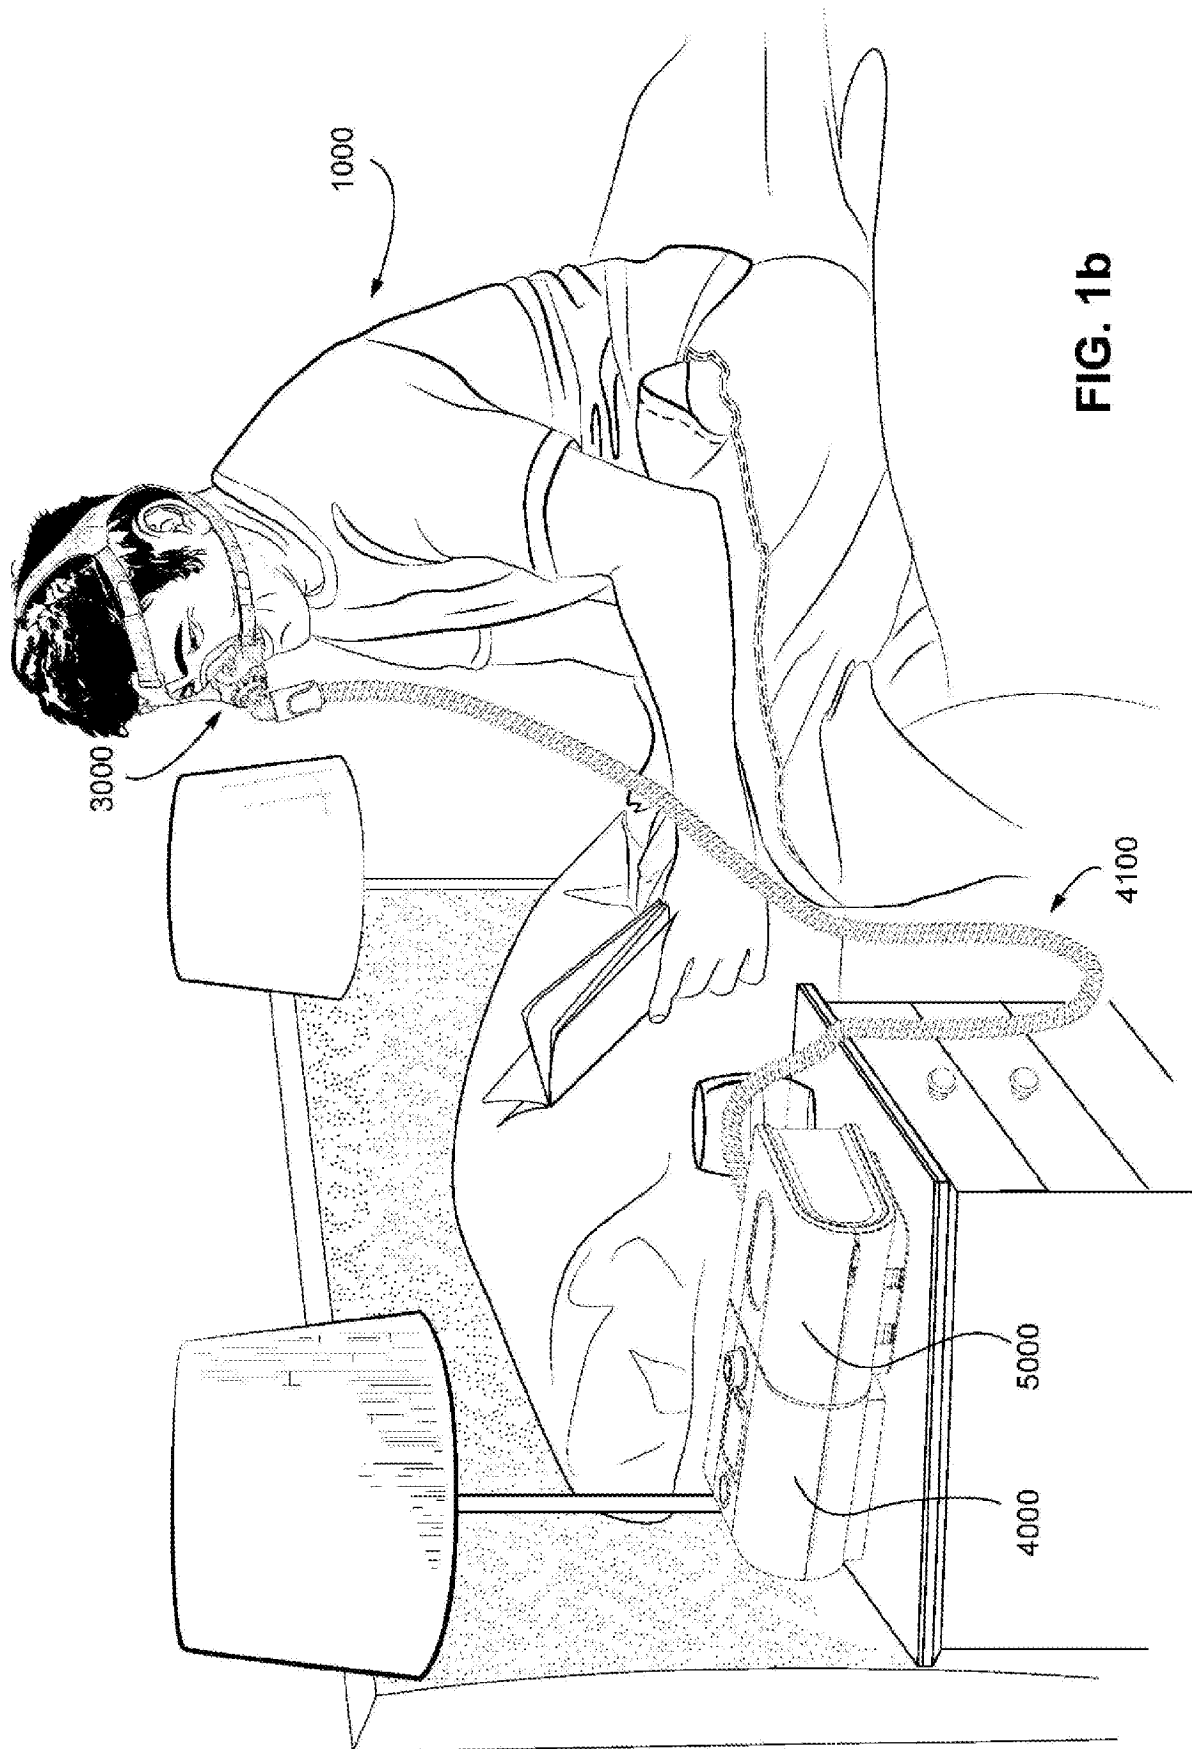


FIG. 1b



FIG. 1c

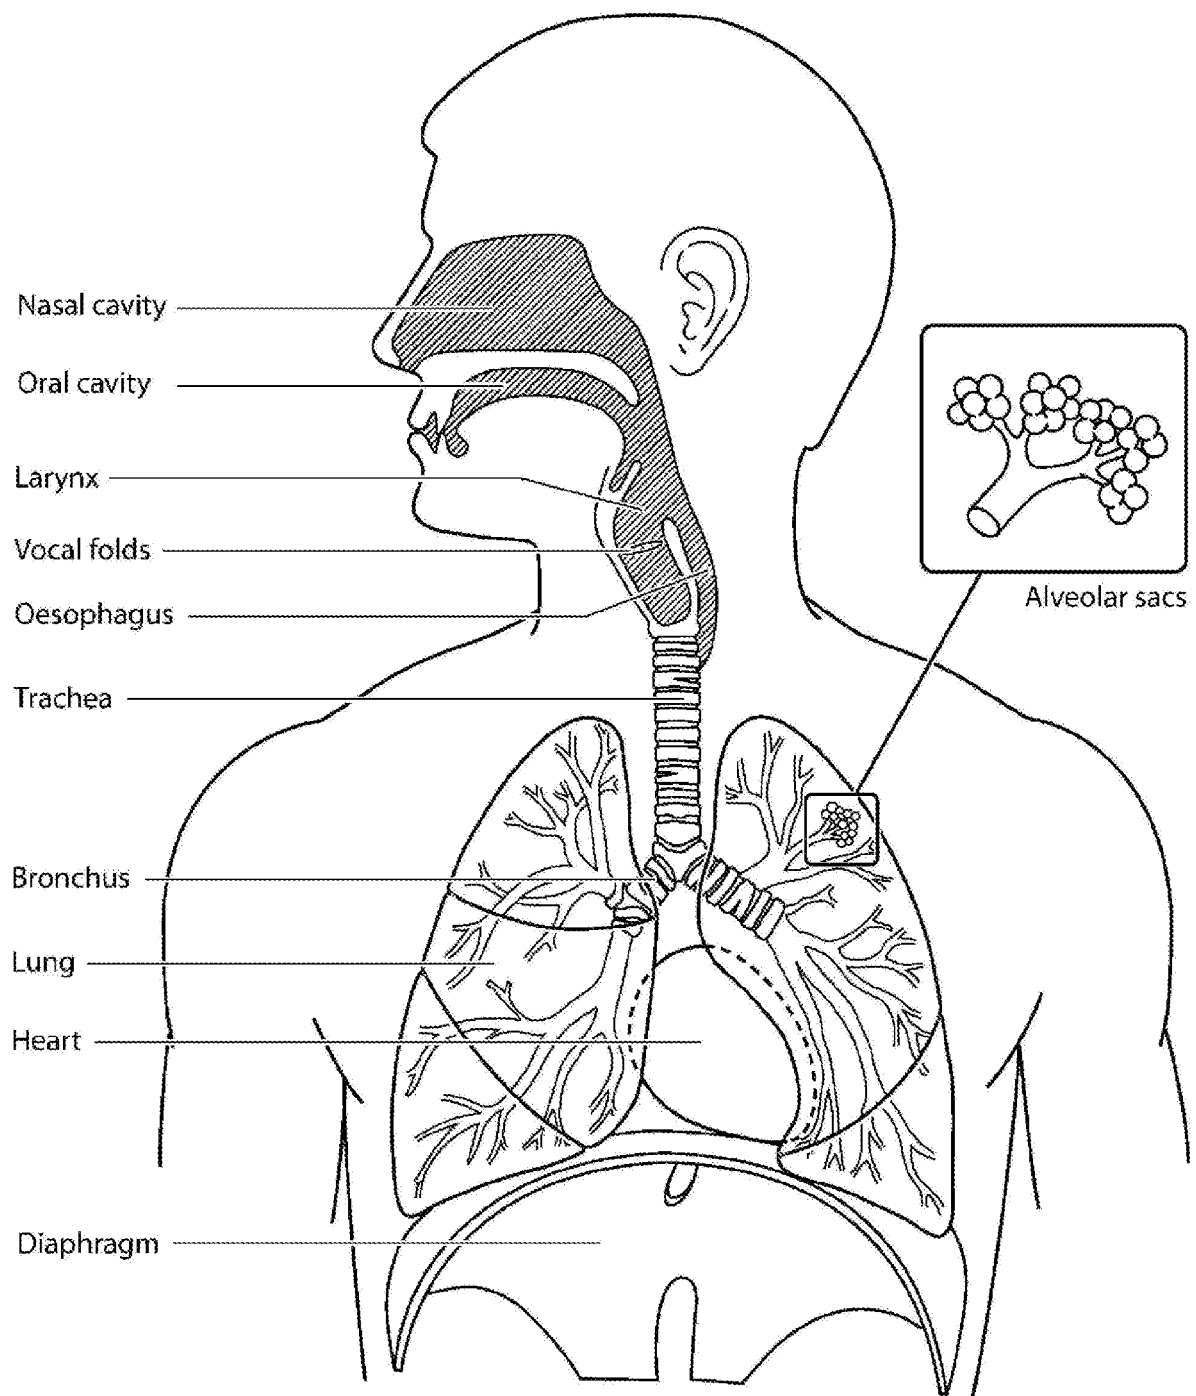


FIG. 2a

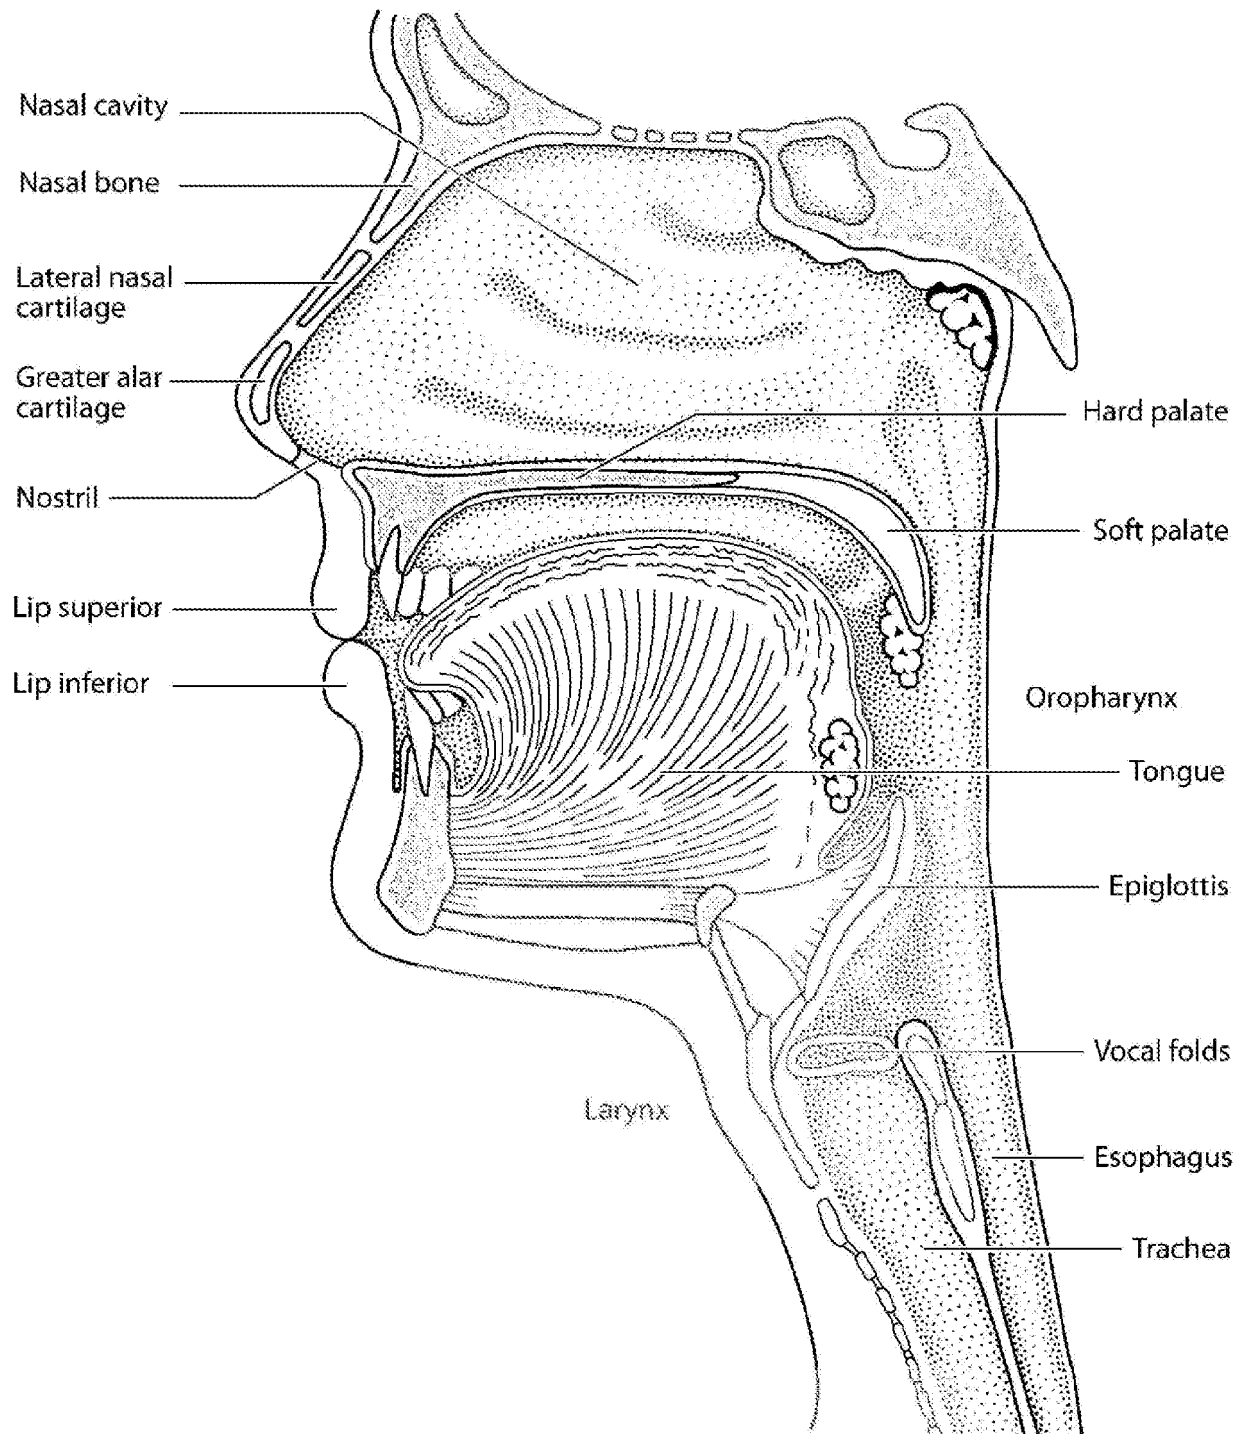


FIG. 2b

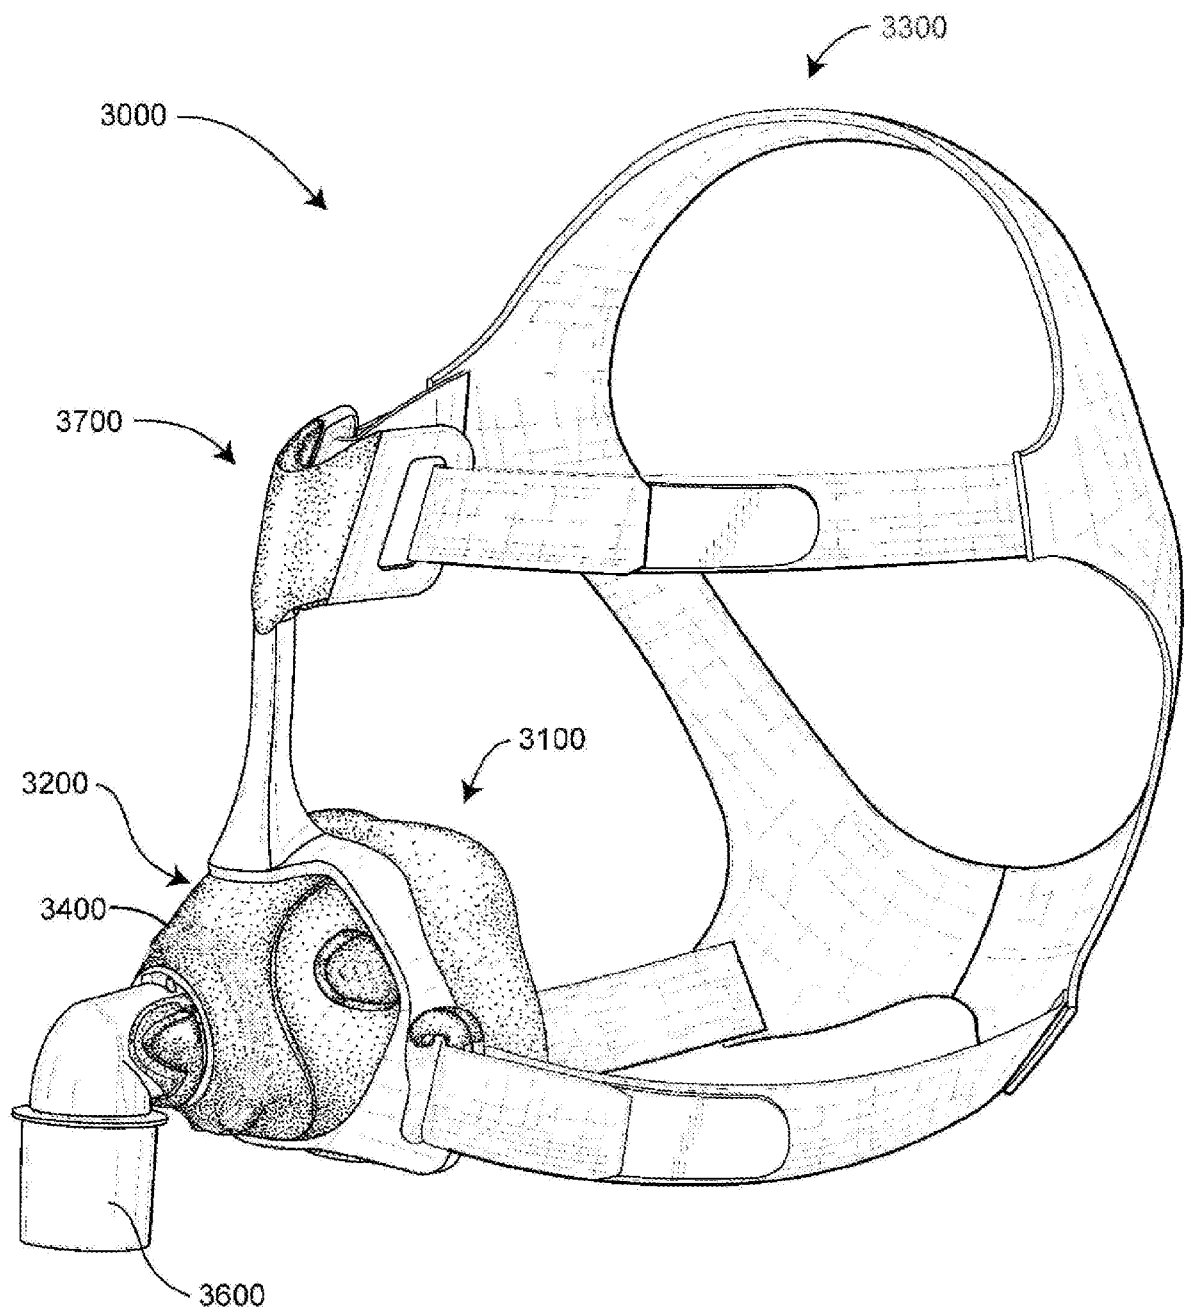


FIG. 2c

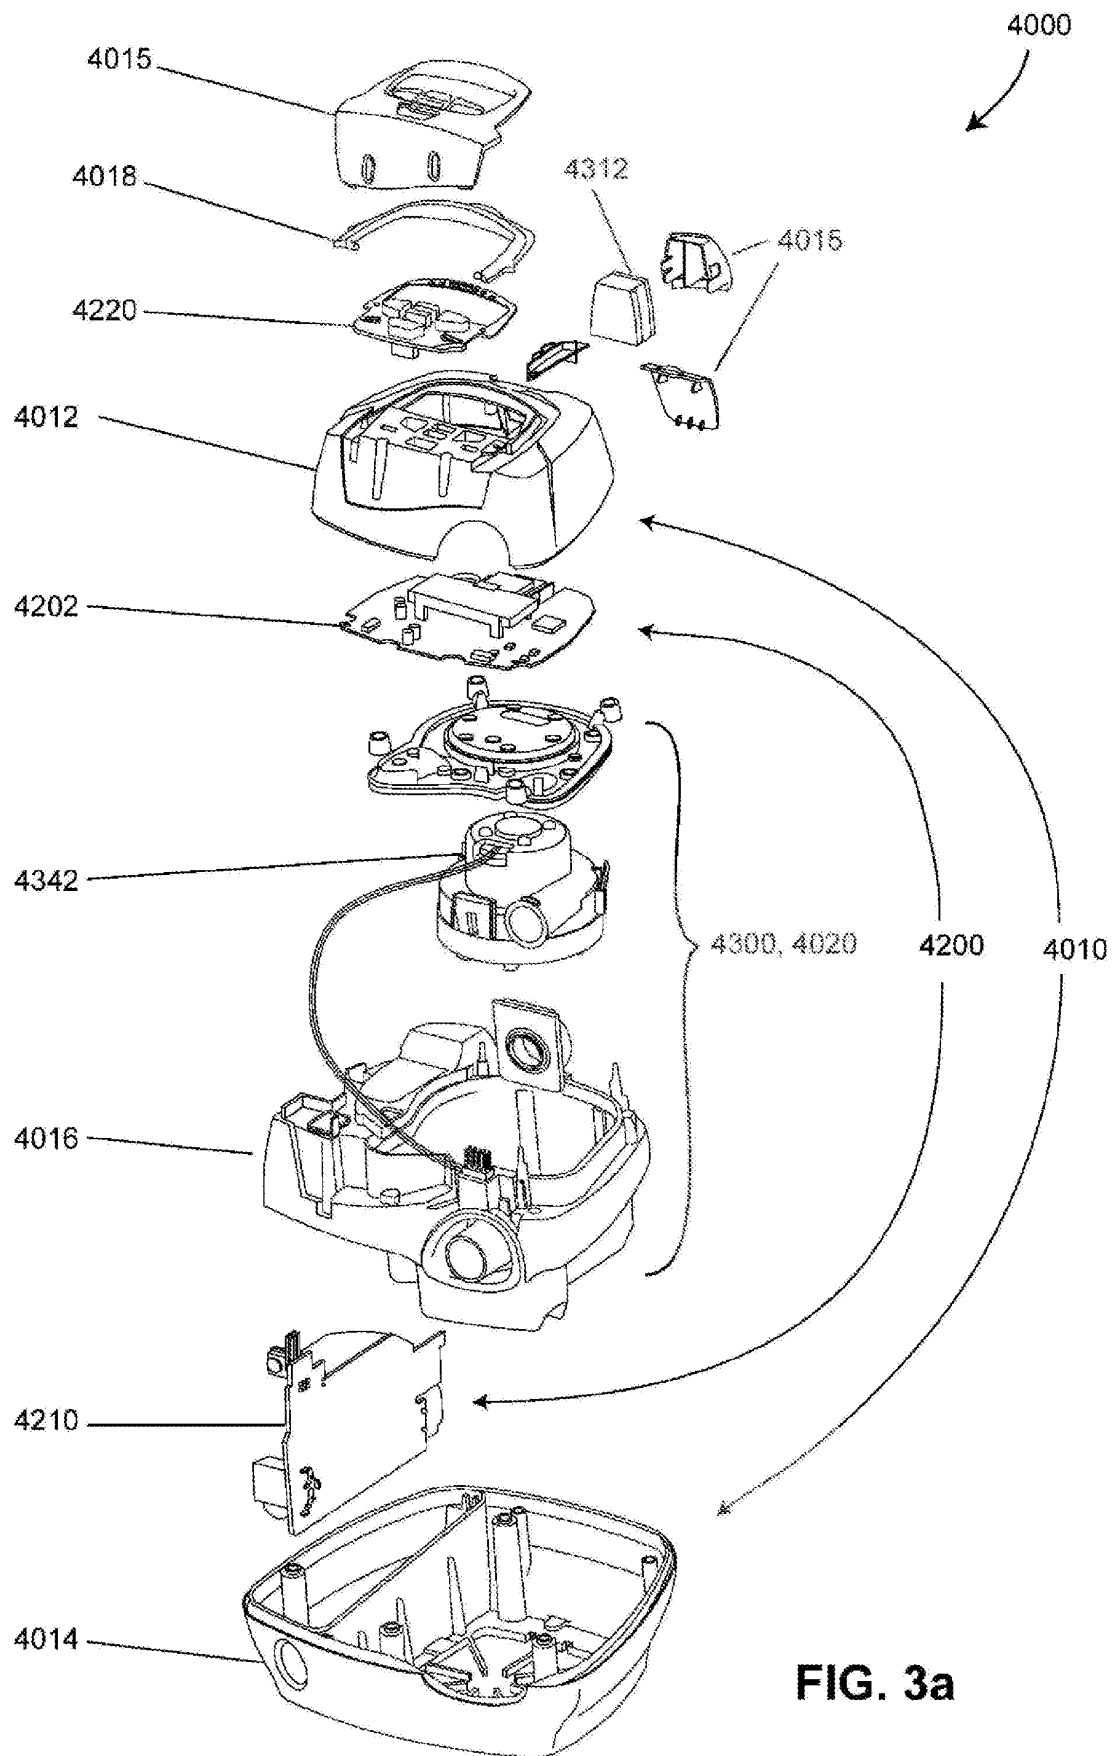
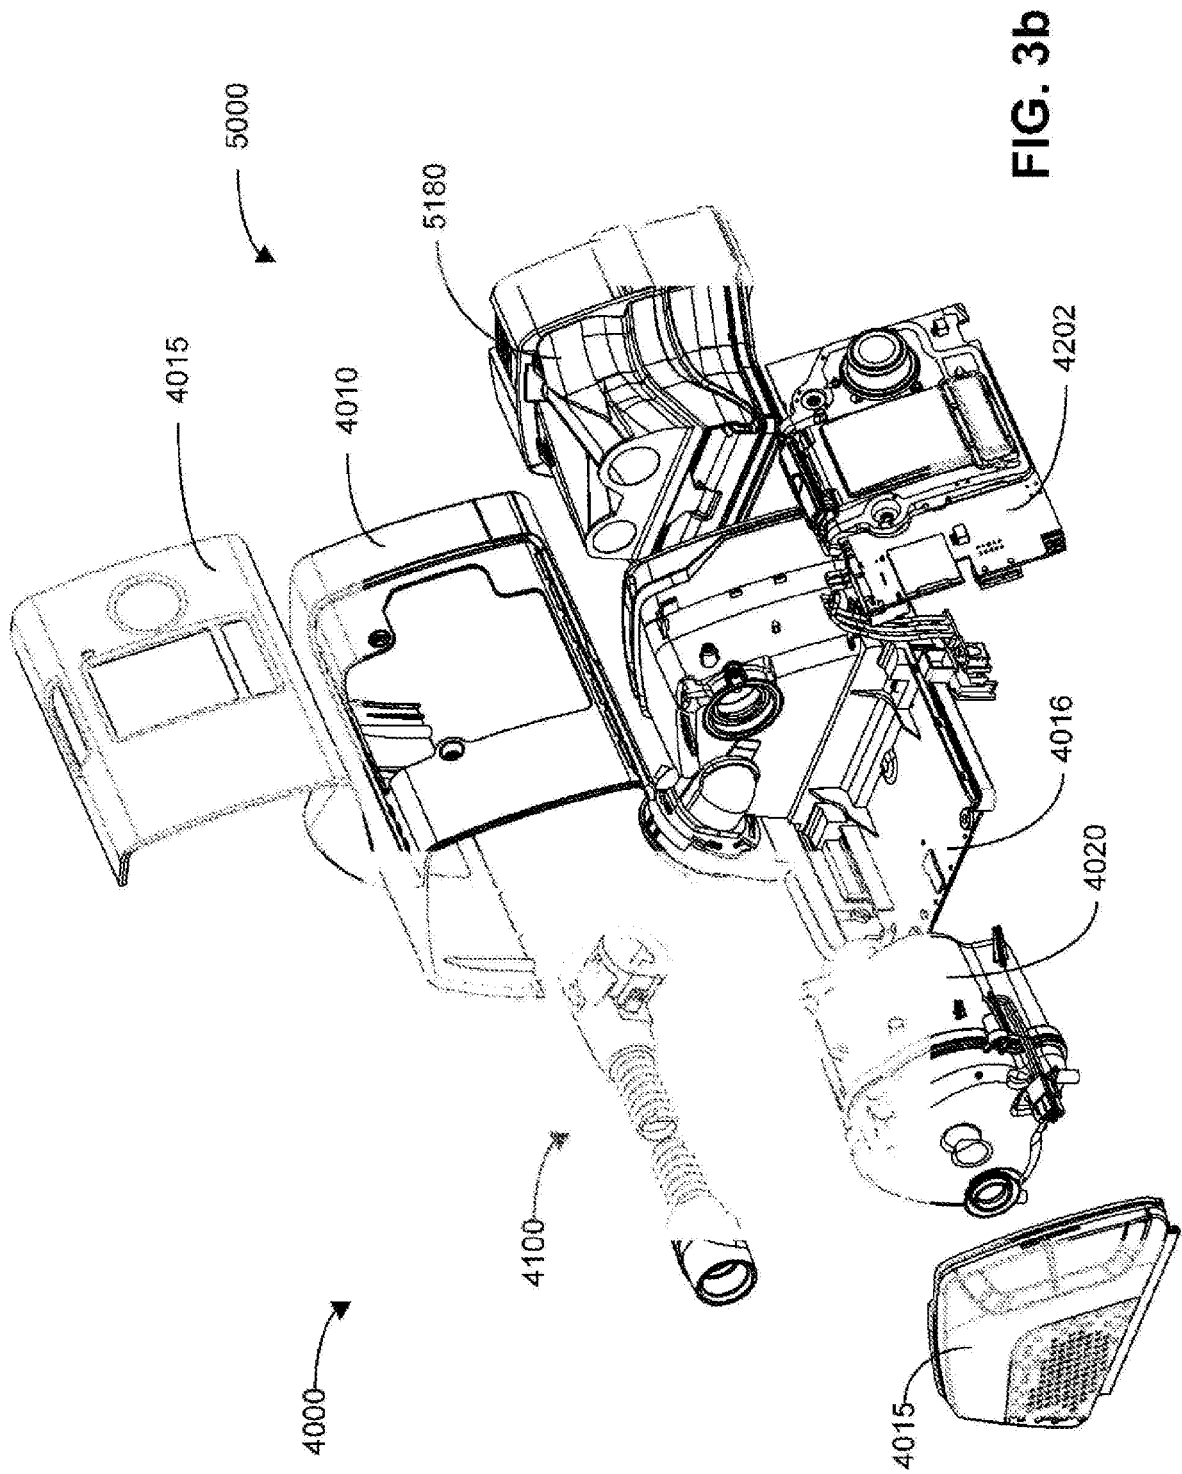


FIG. 3a



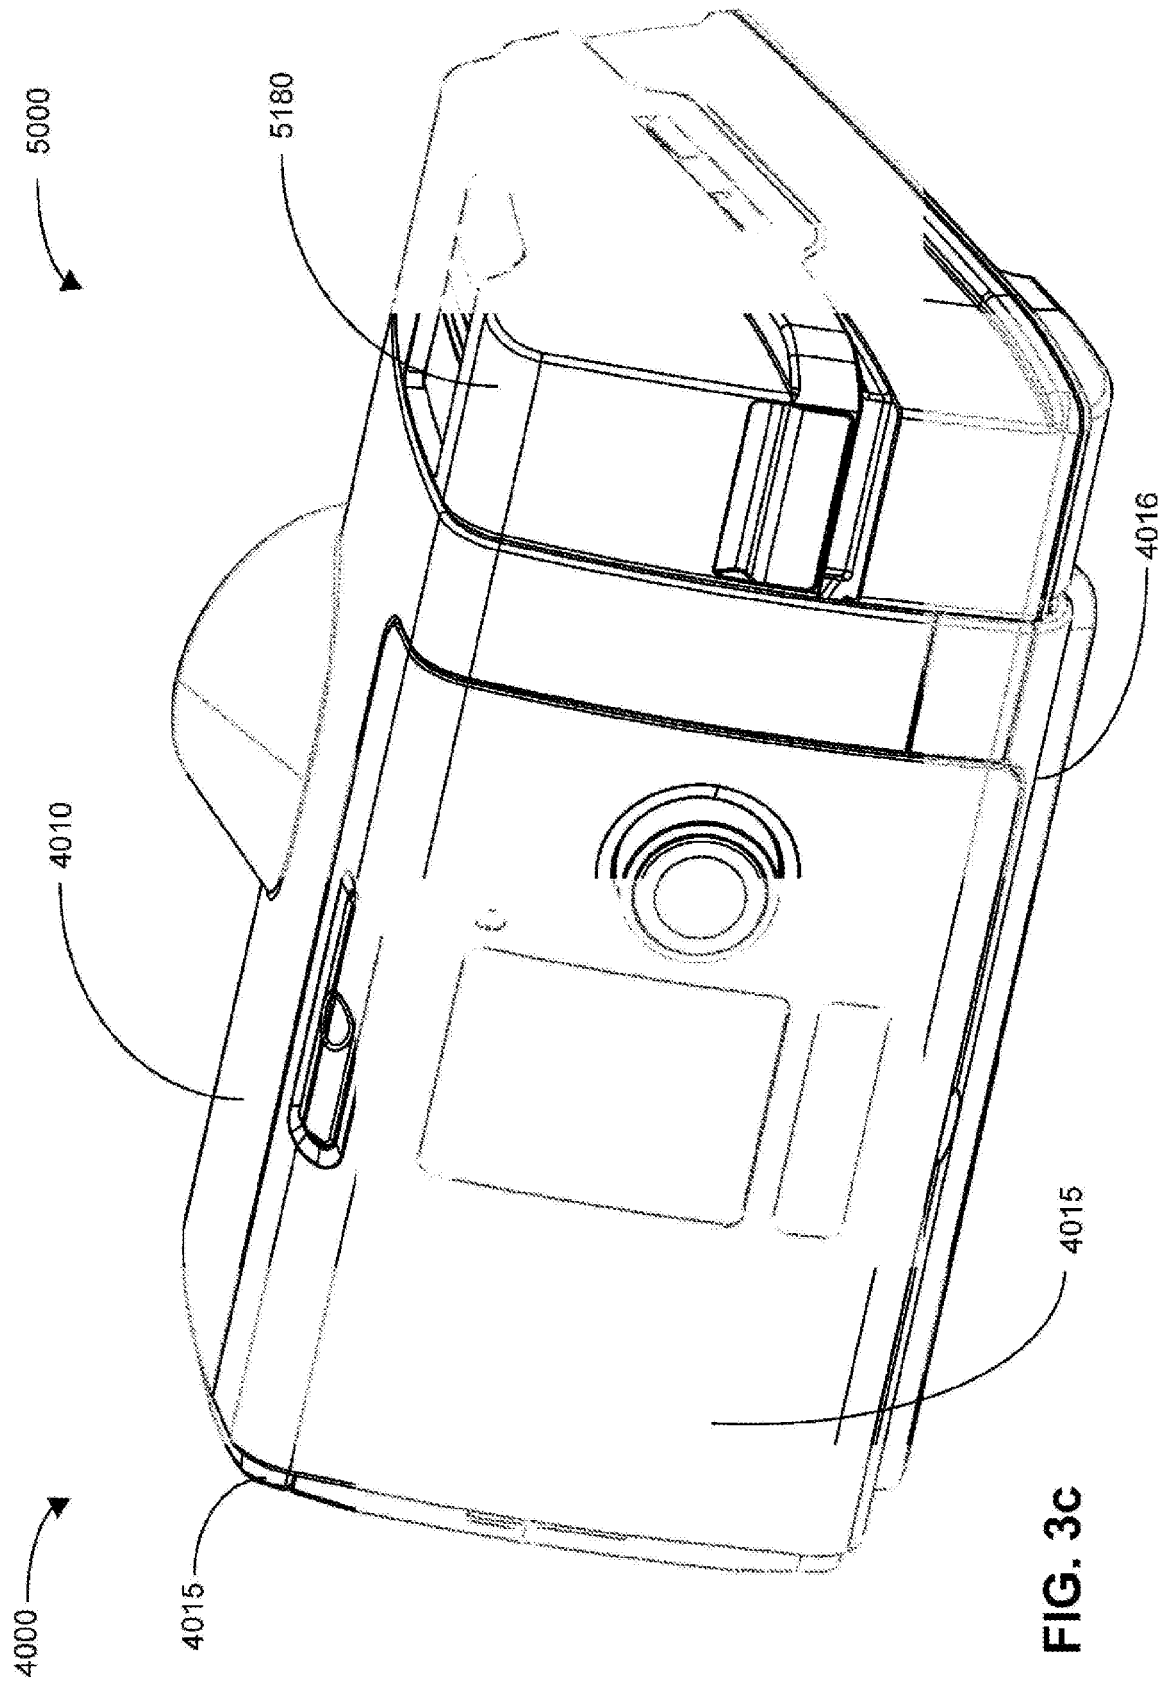


FIG. 3c

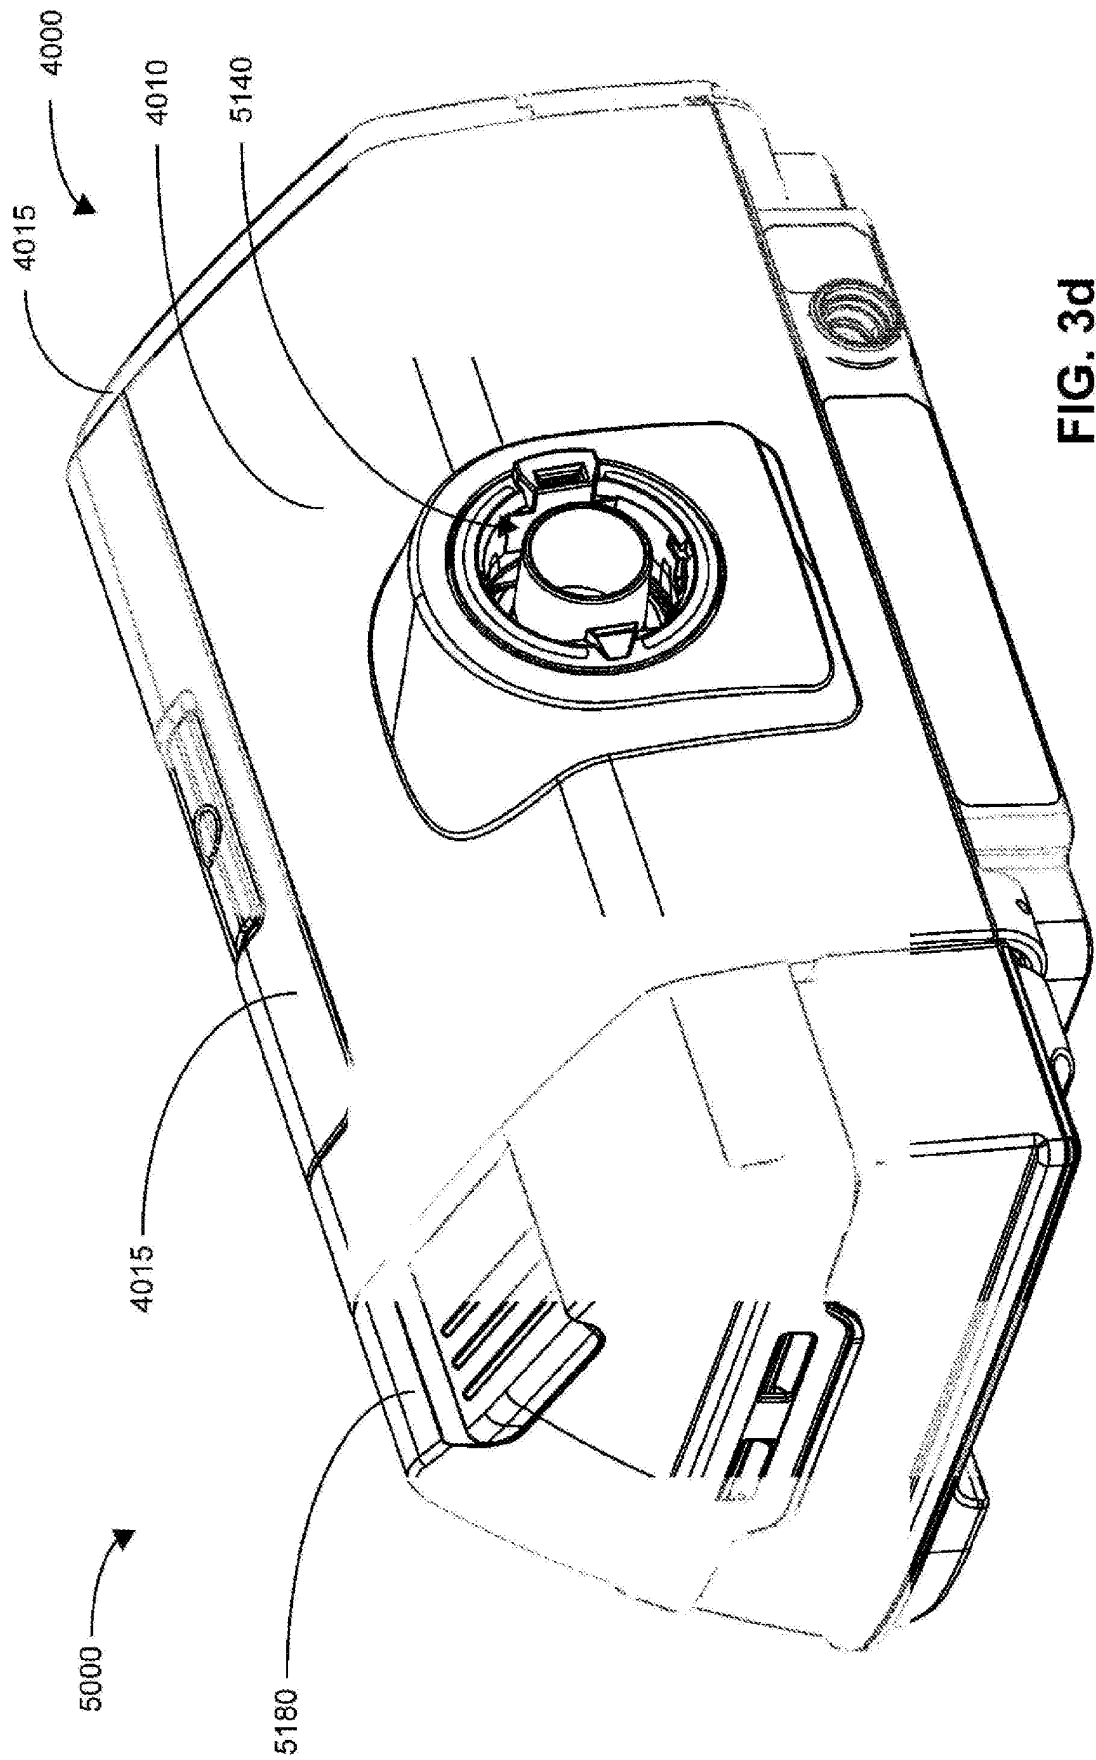


FIG. 3d

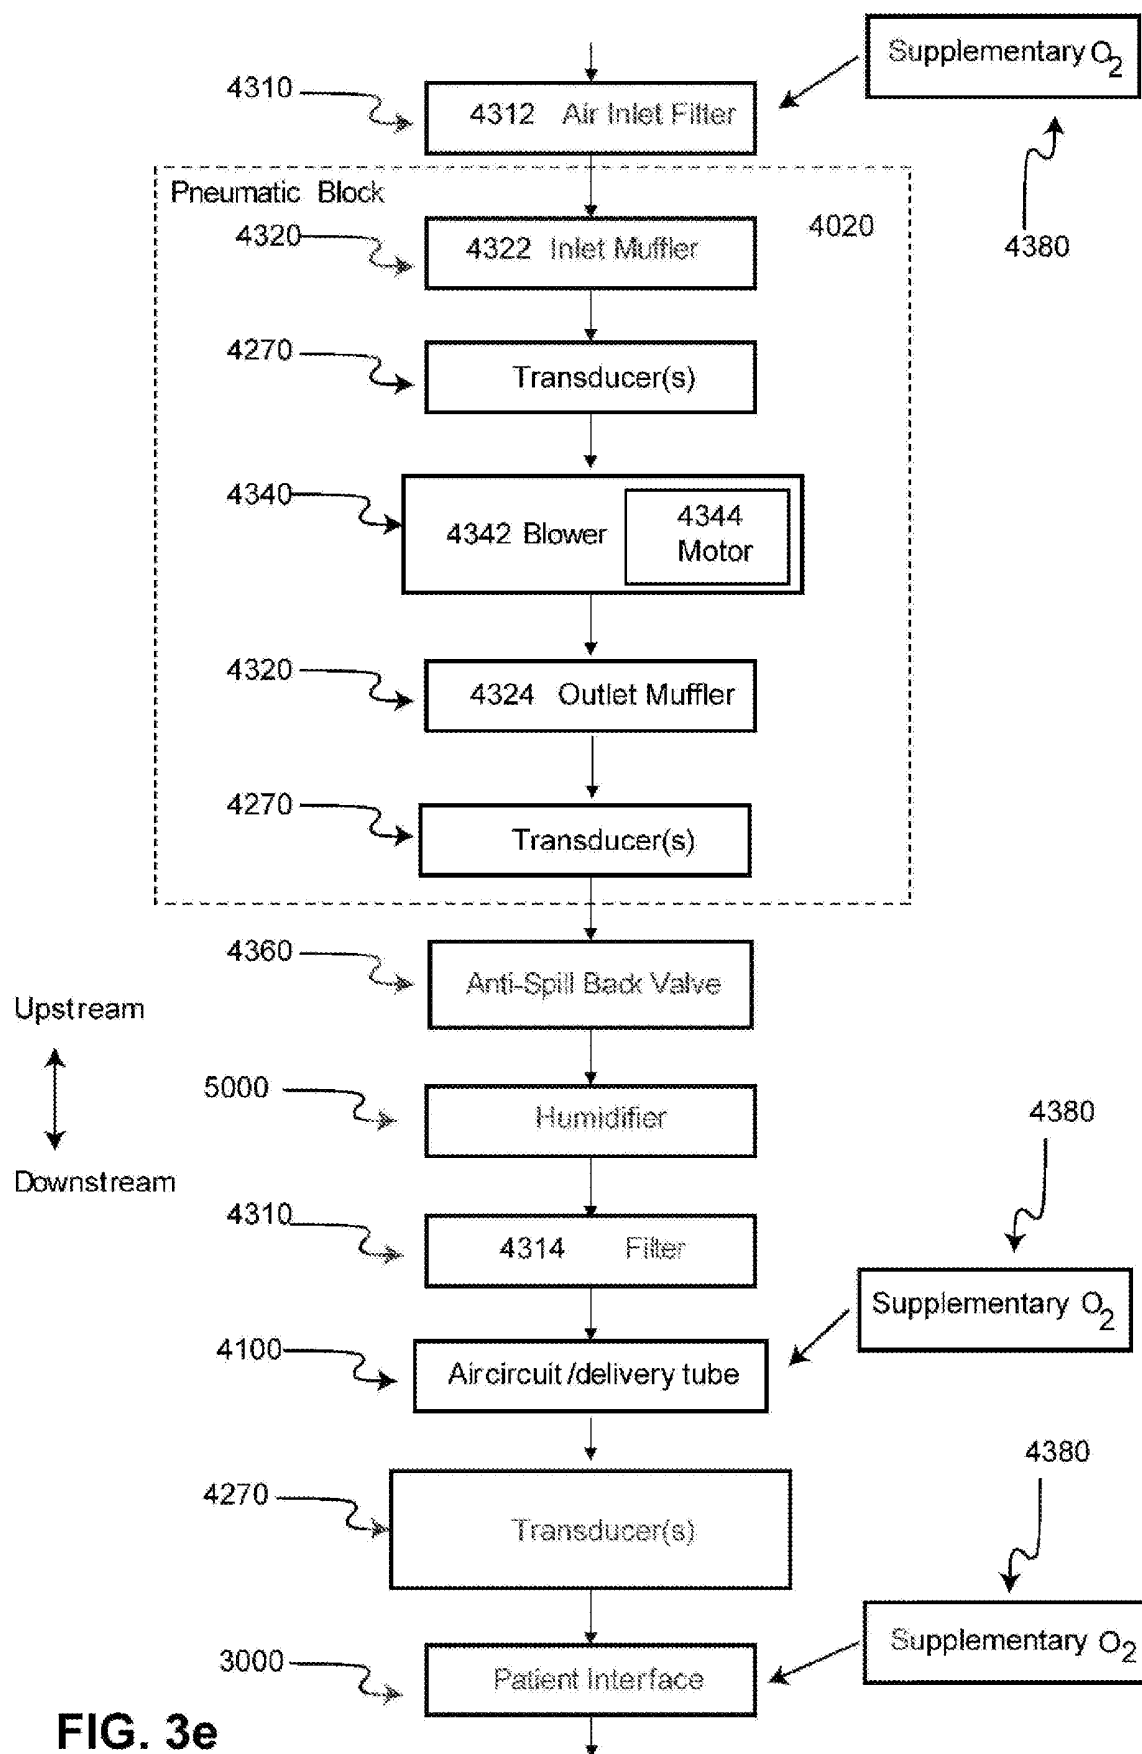


FIG. 3e

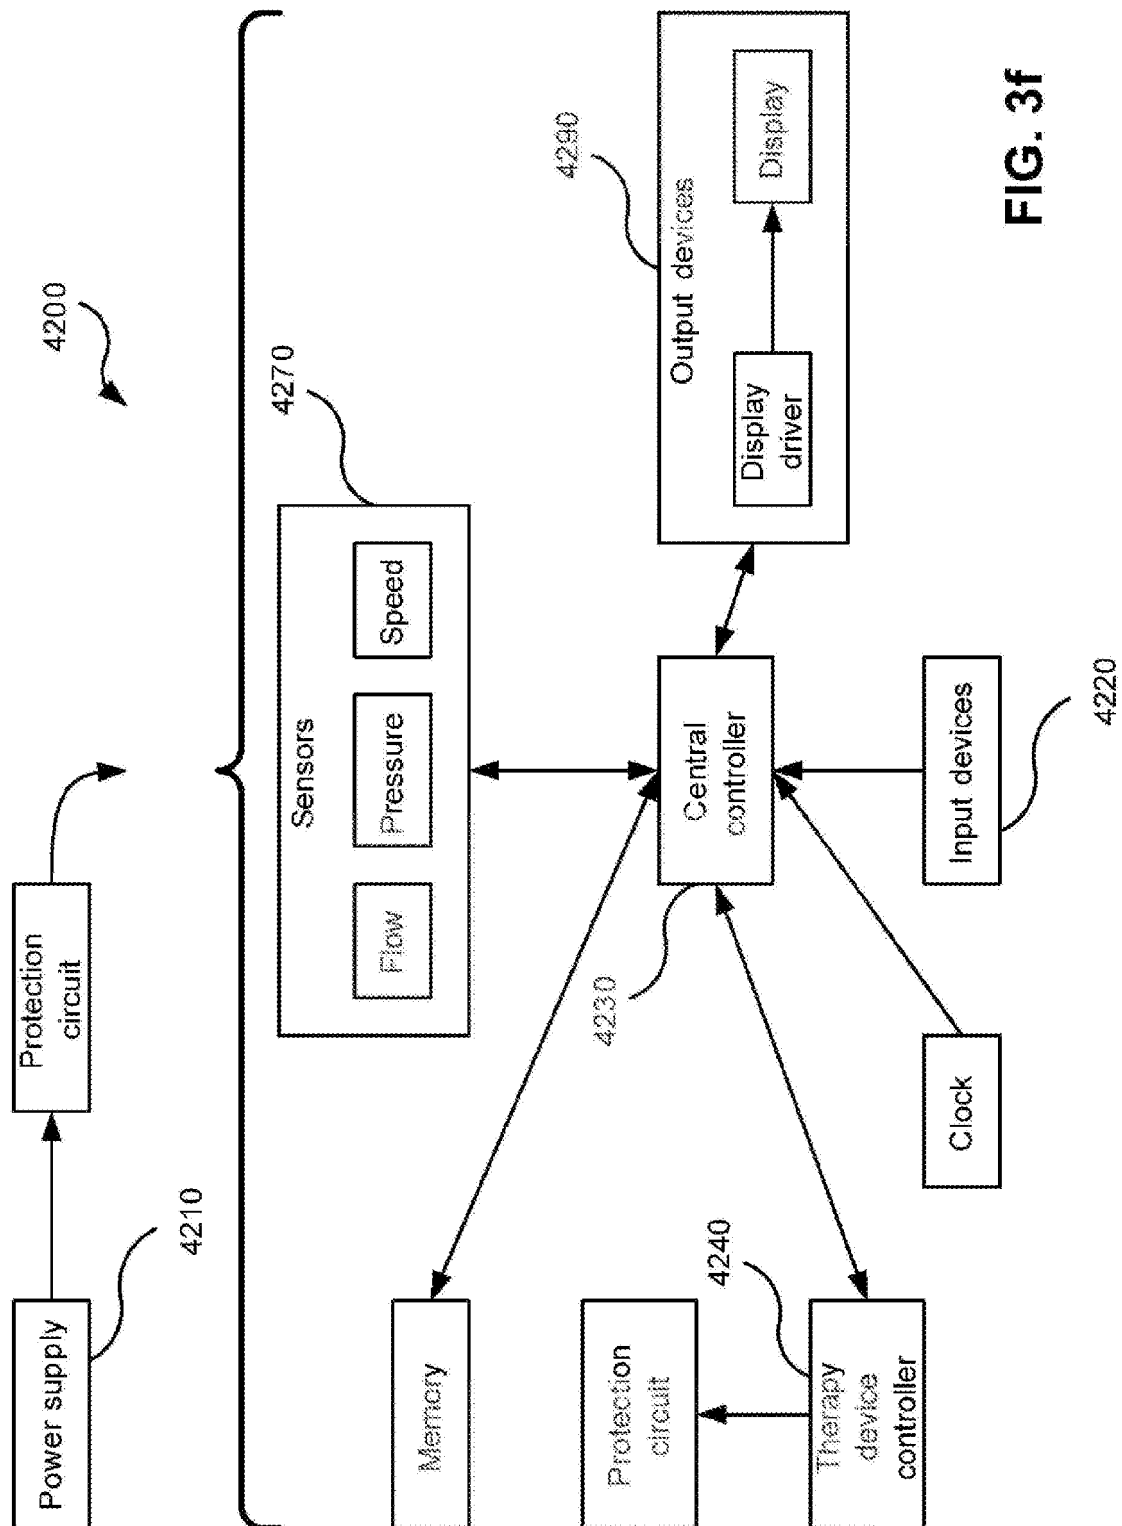


FIG. 3f

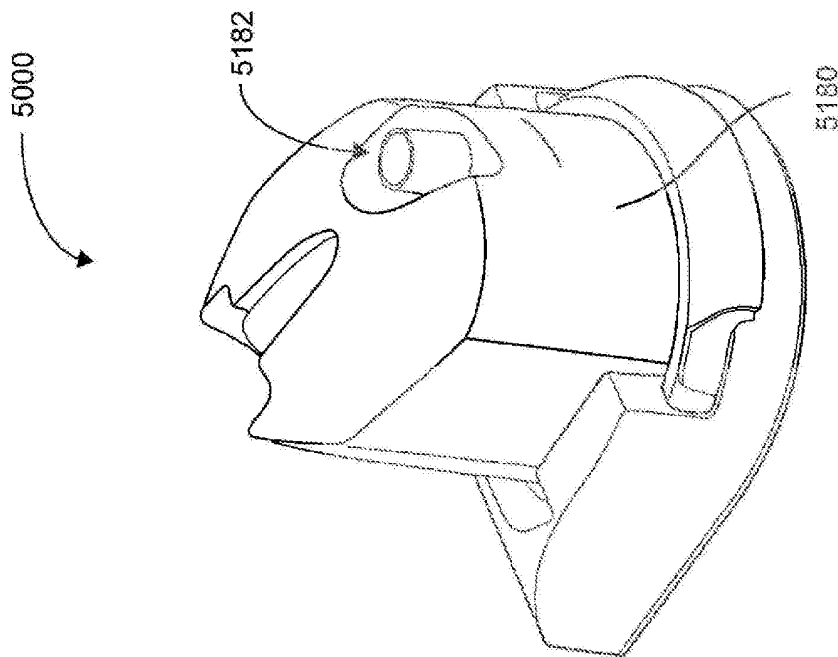


FIG. 3g

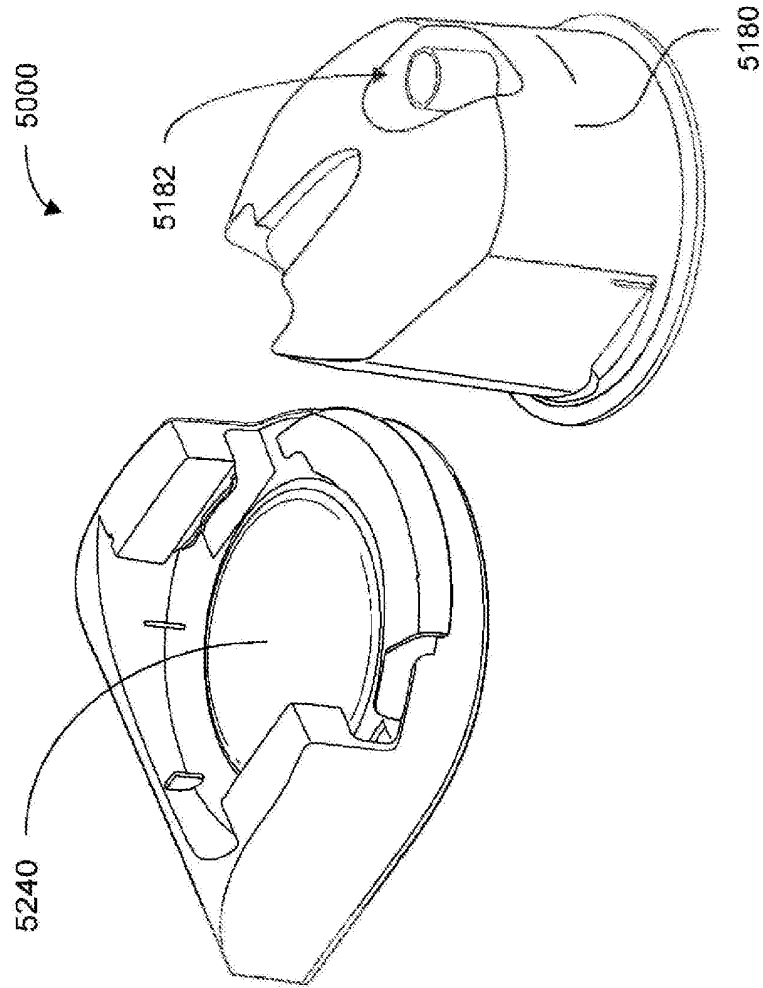
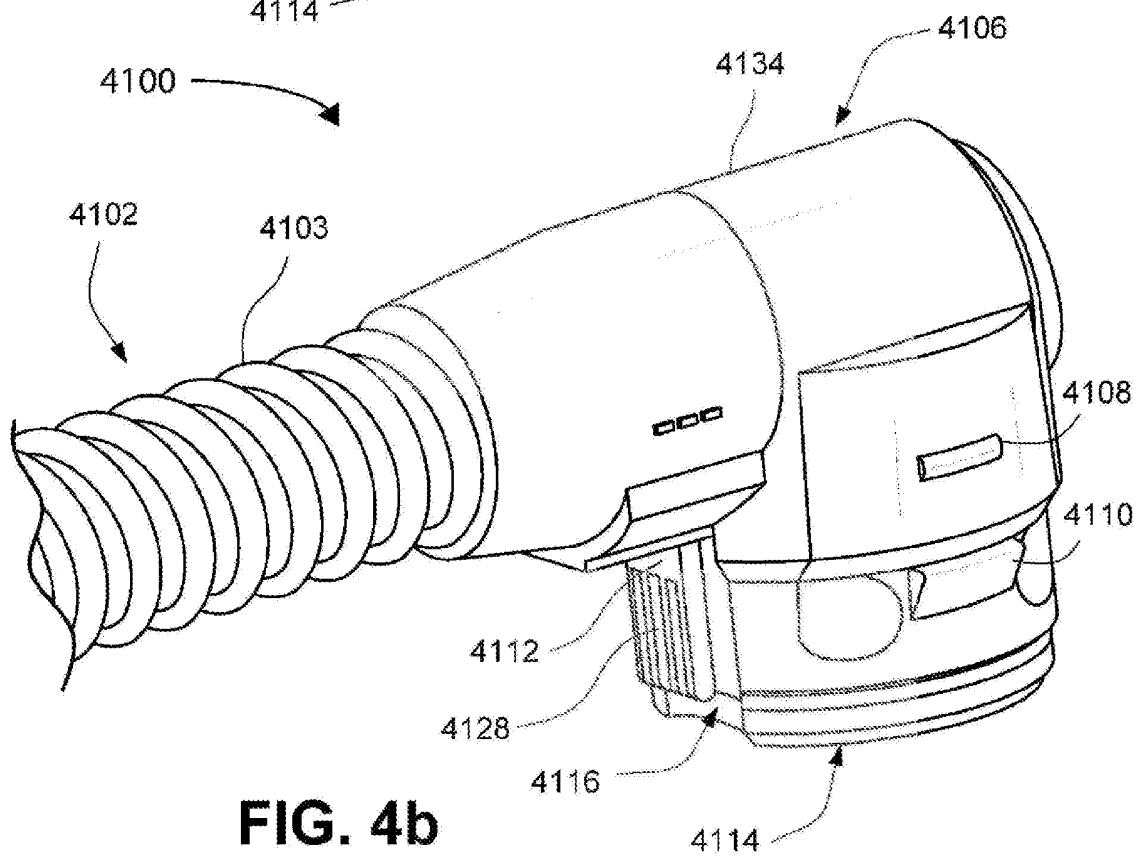
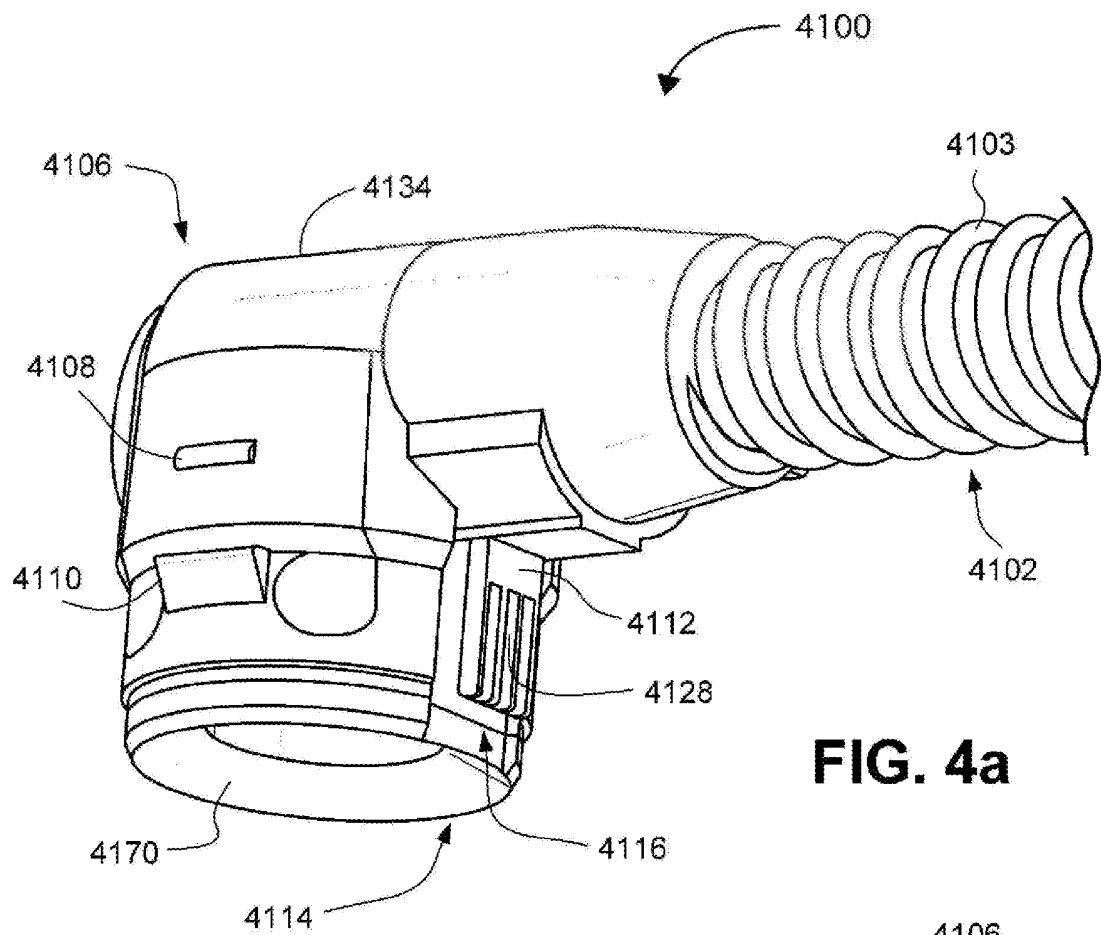


FIG. 3h



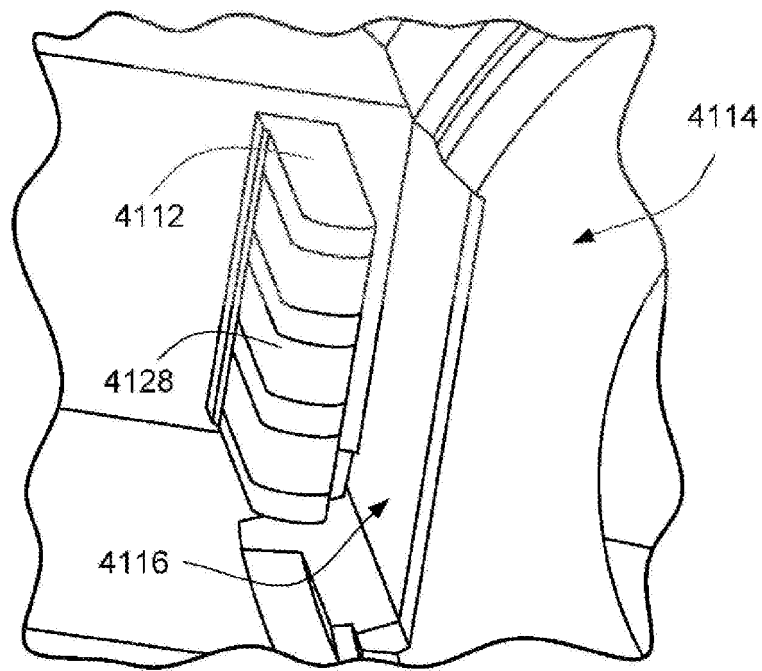


FIG. 4c

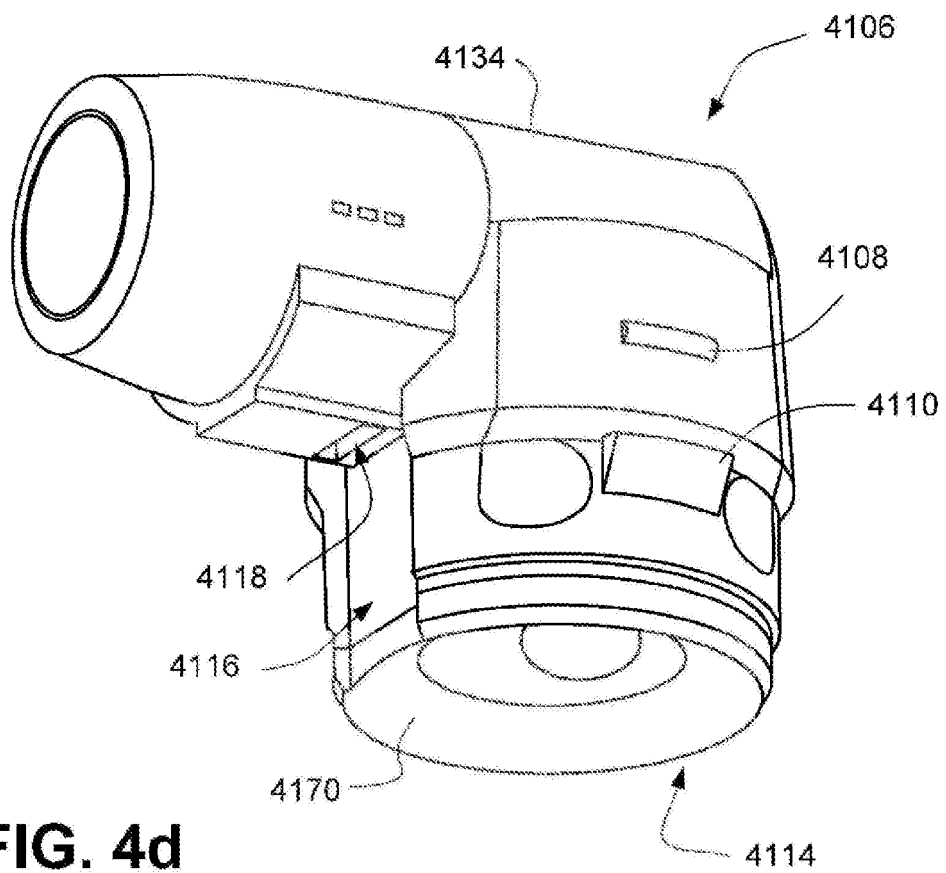


FIG. 4d

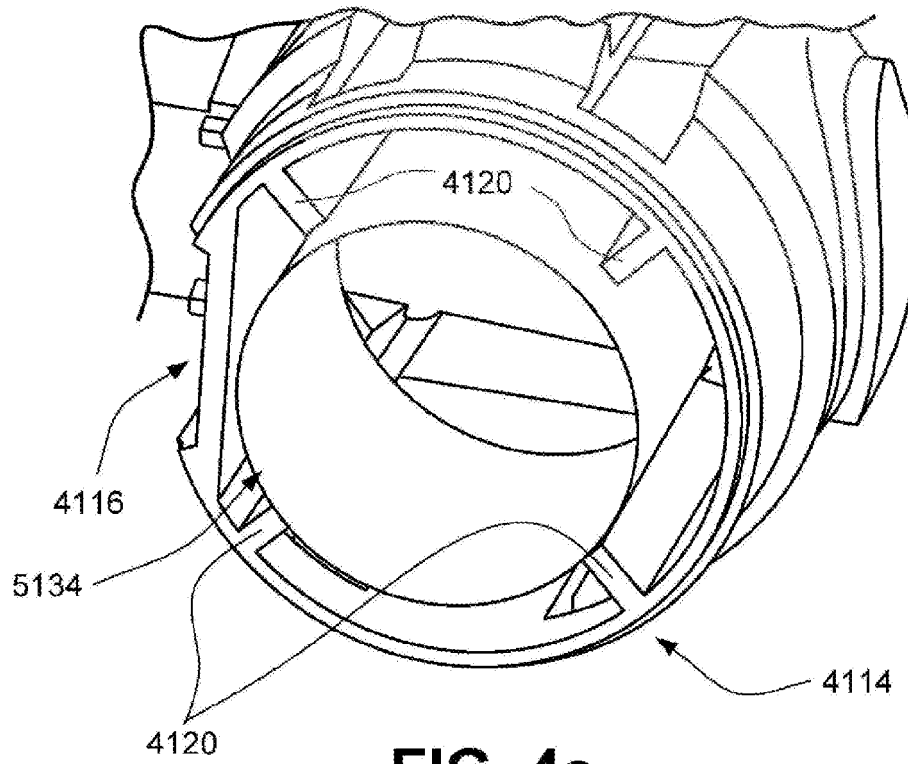


FIG. 4e

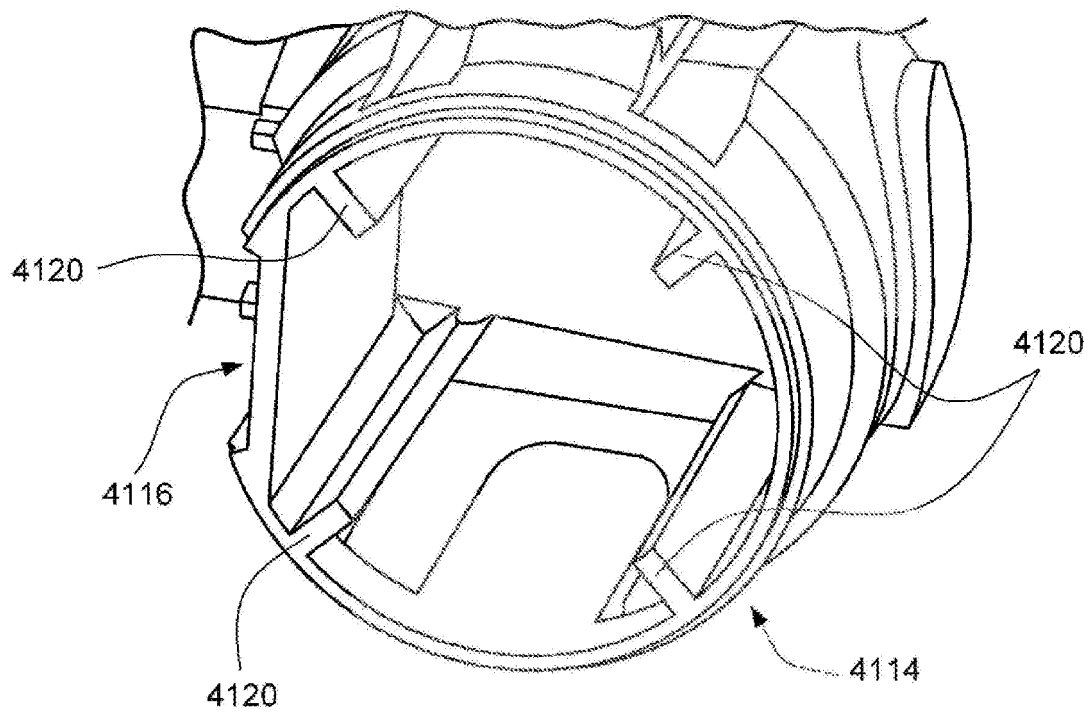


FIG. 4f

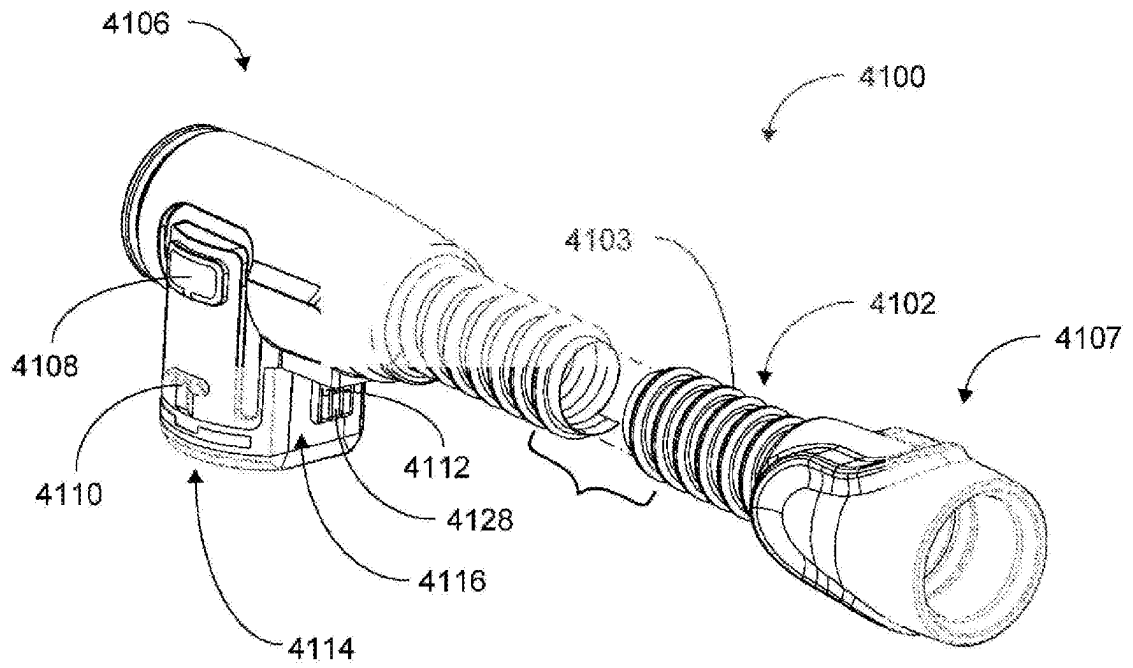


FIG. 4g

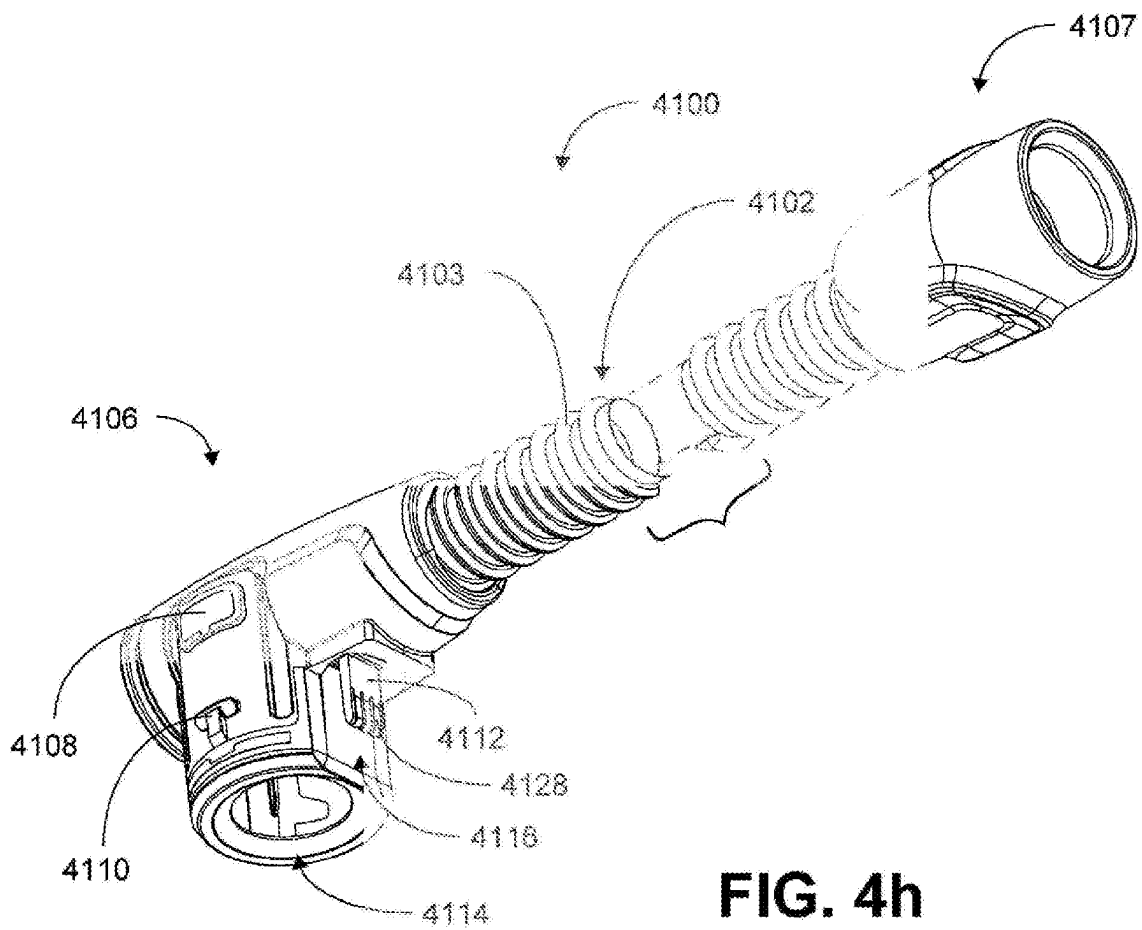
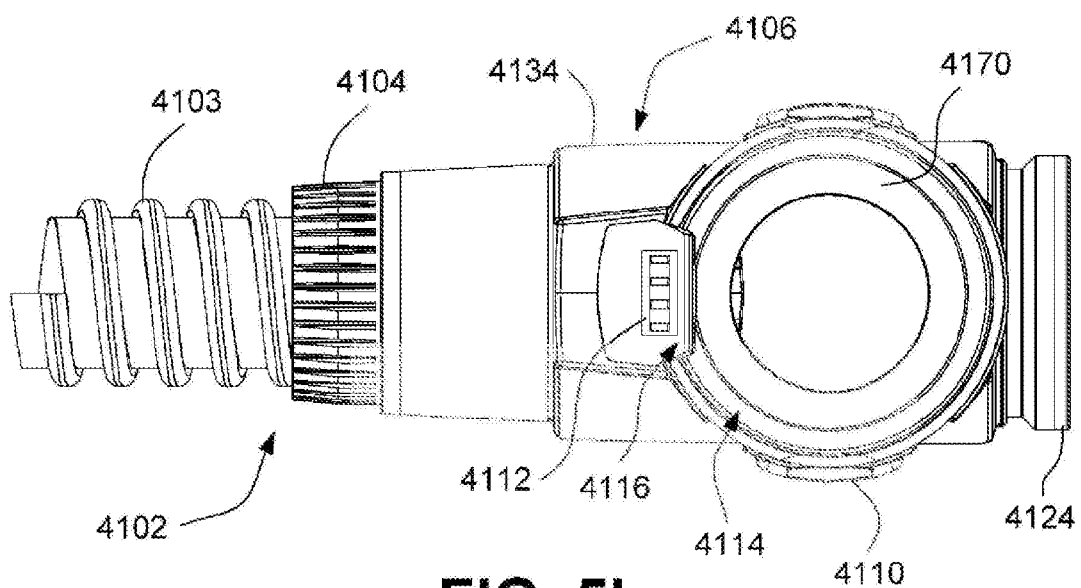
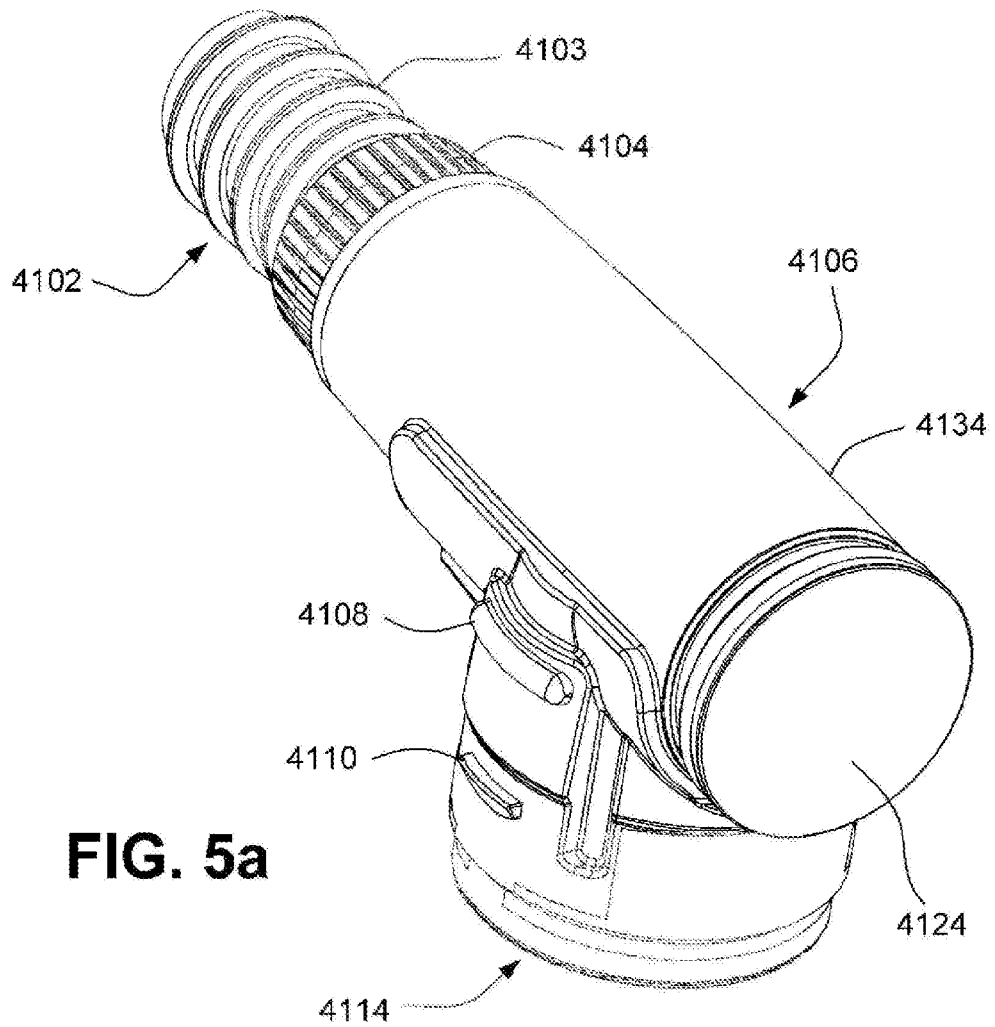
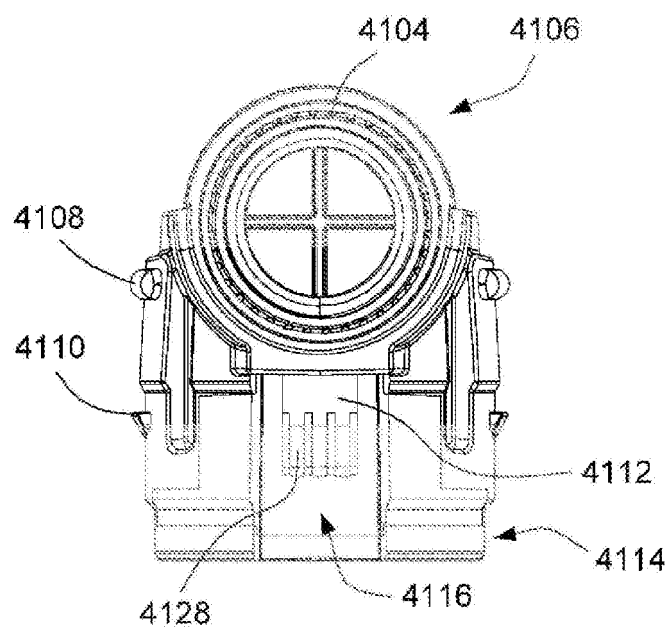
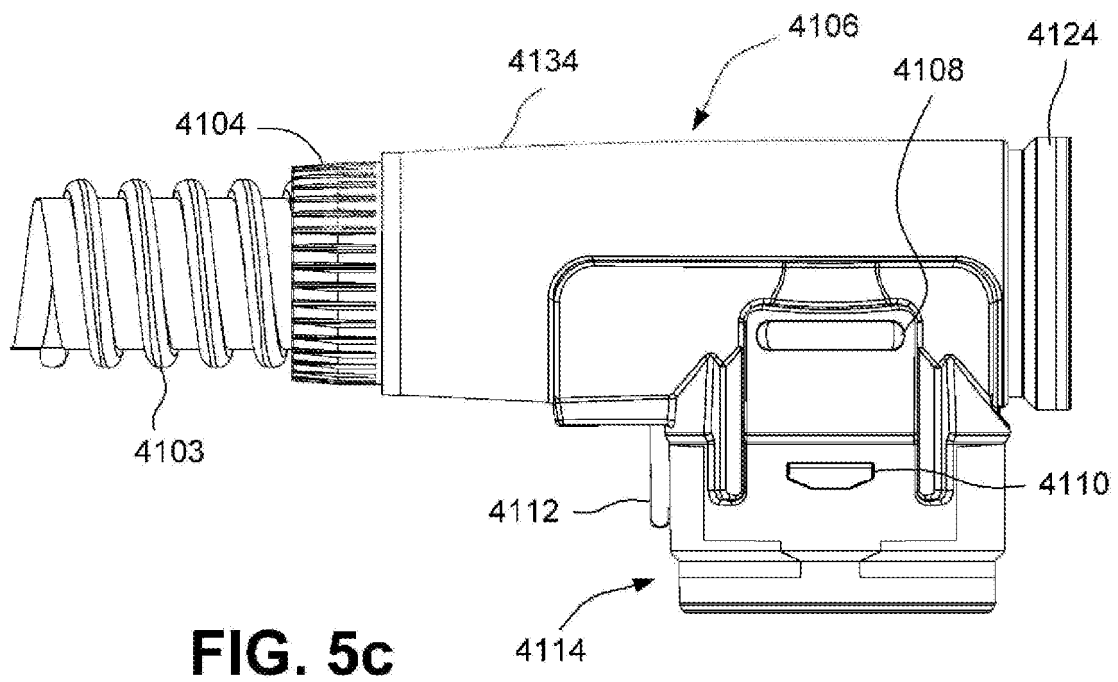


FIG. 4h





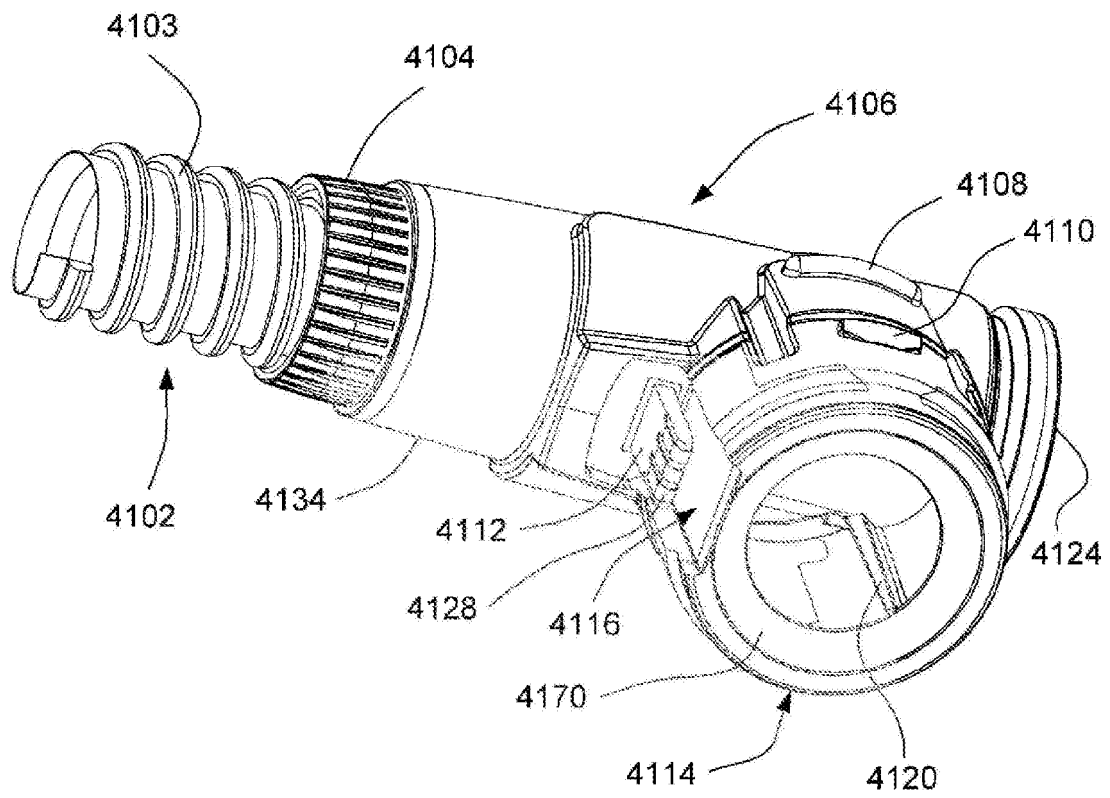
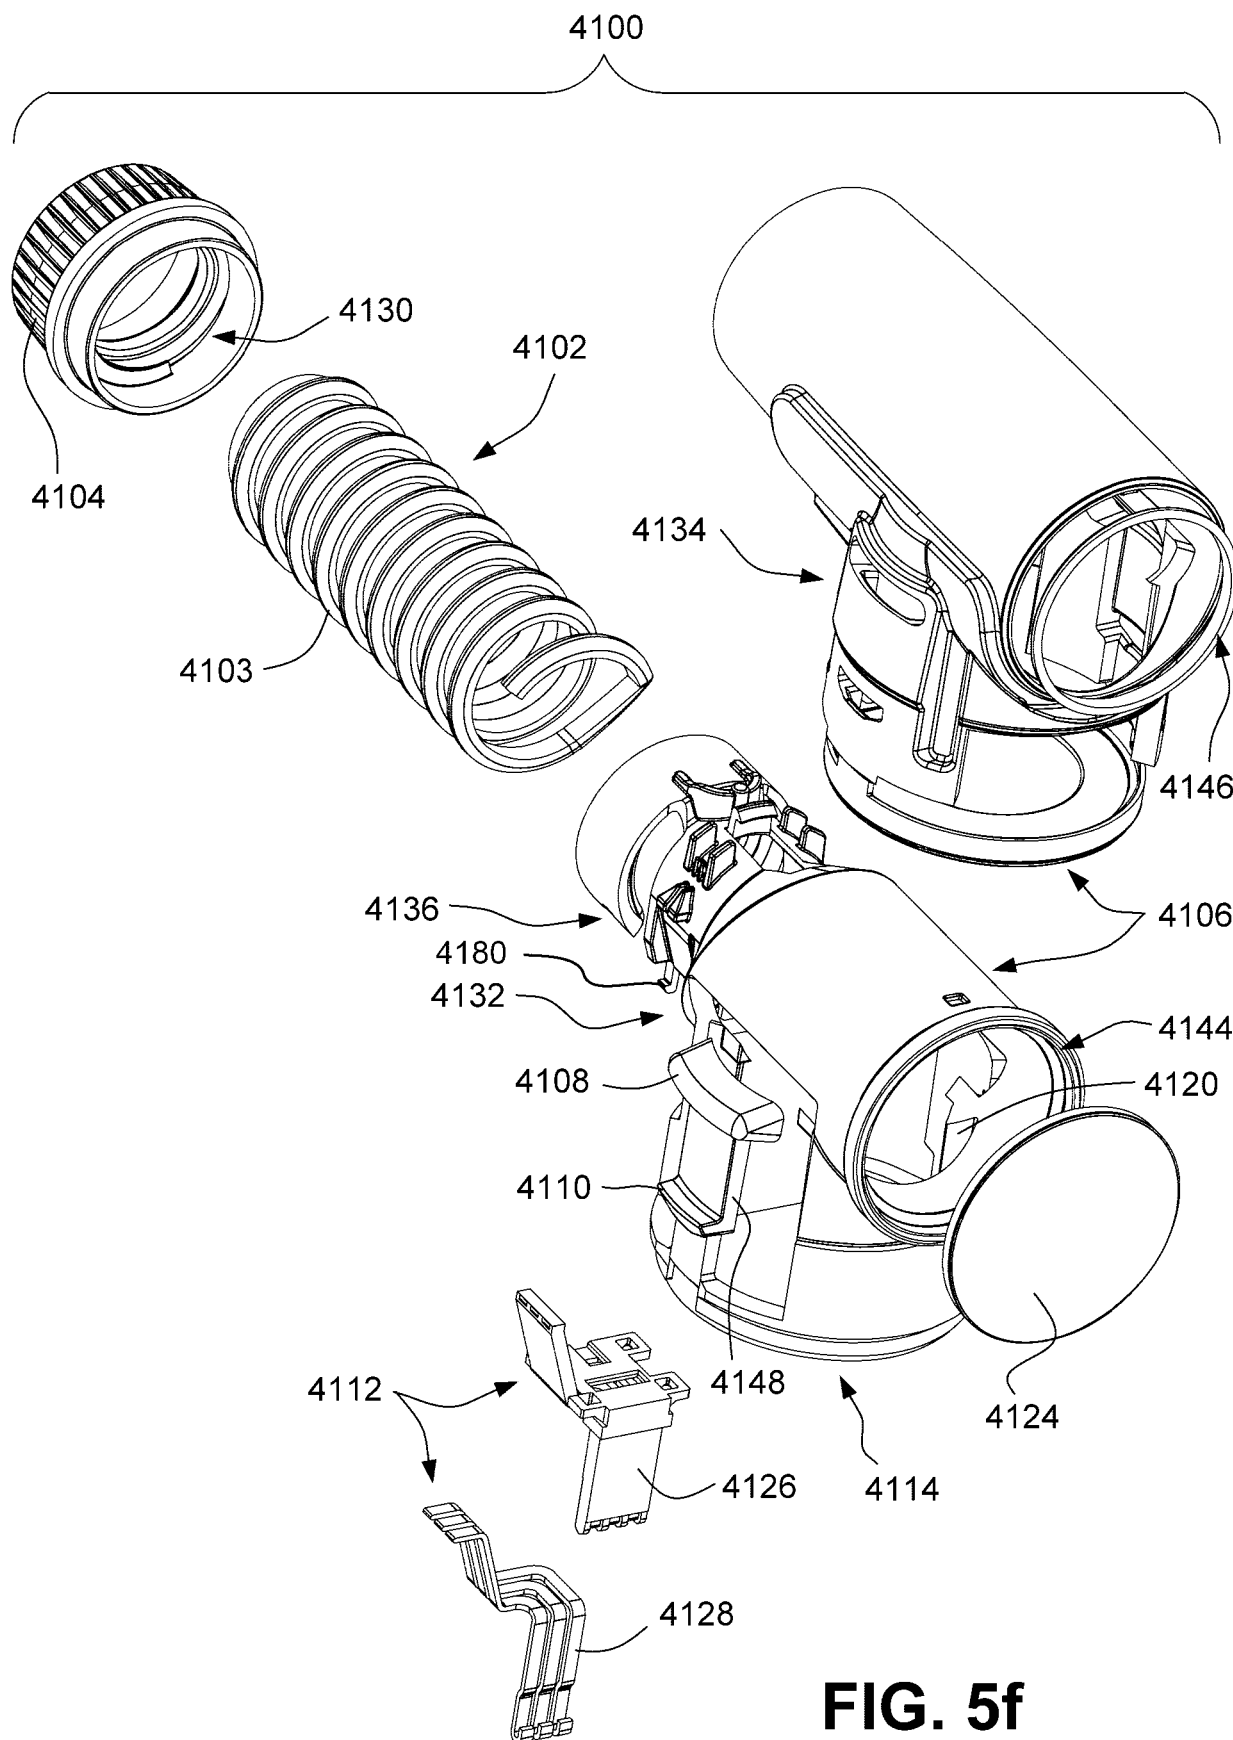
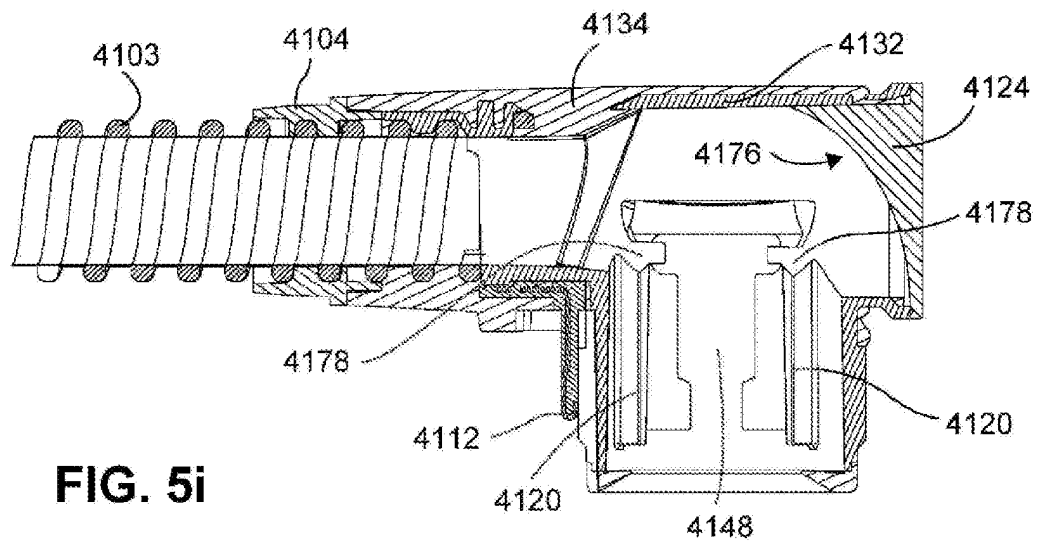
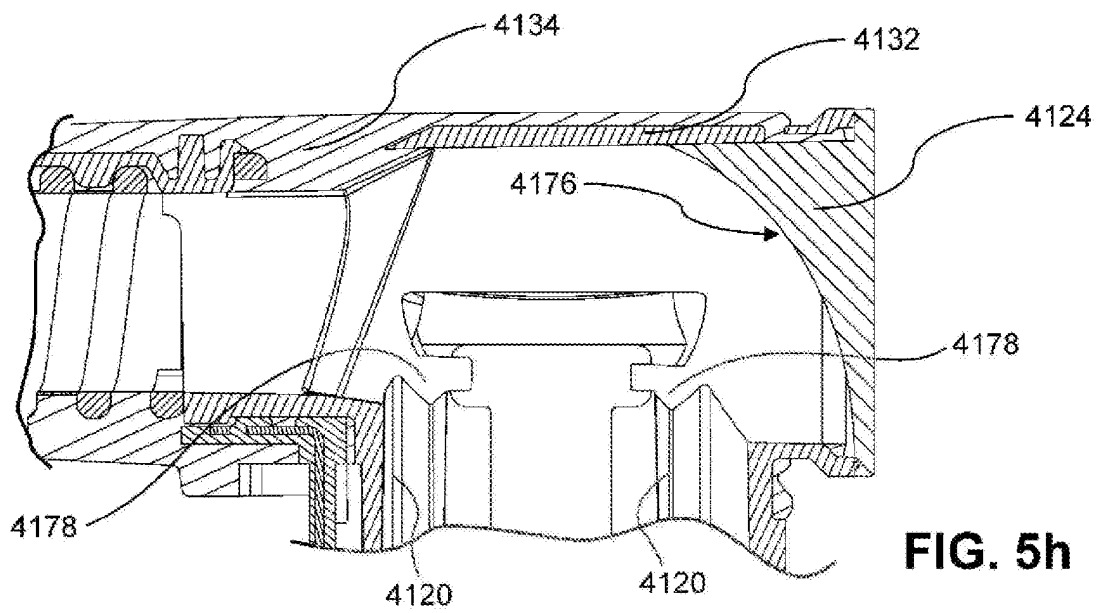
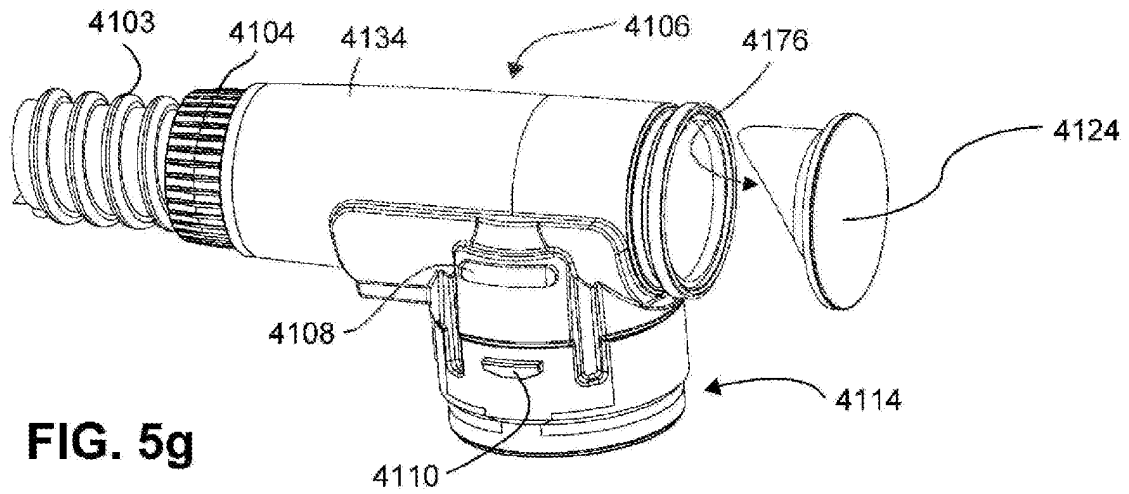


FIG. 5e





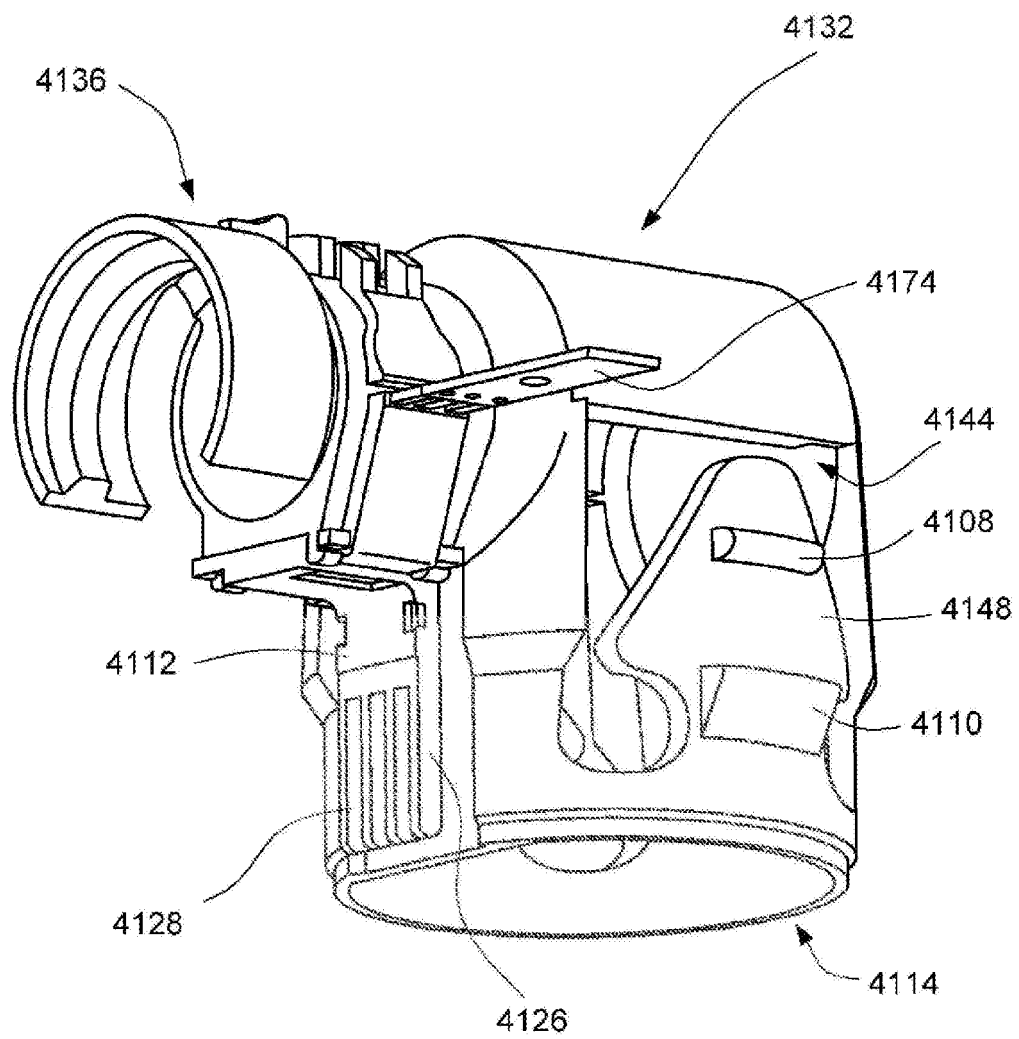
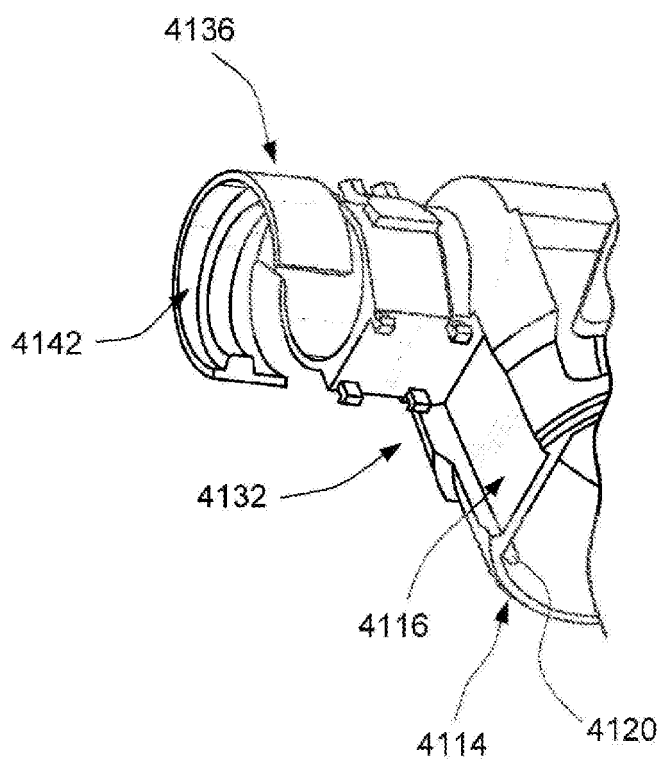
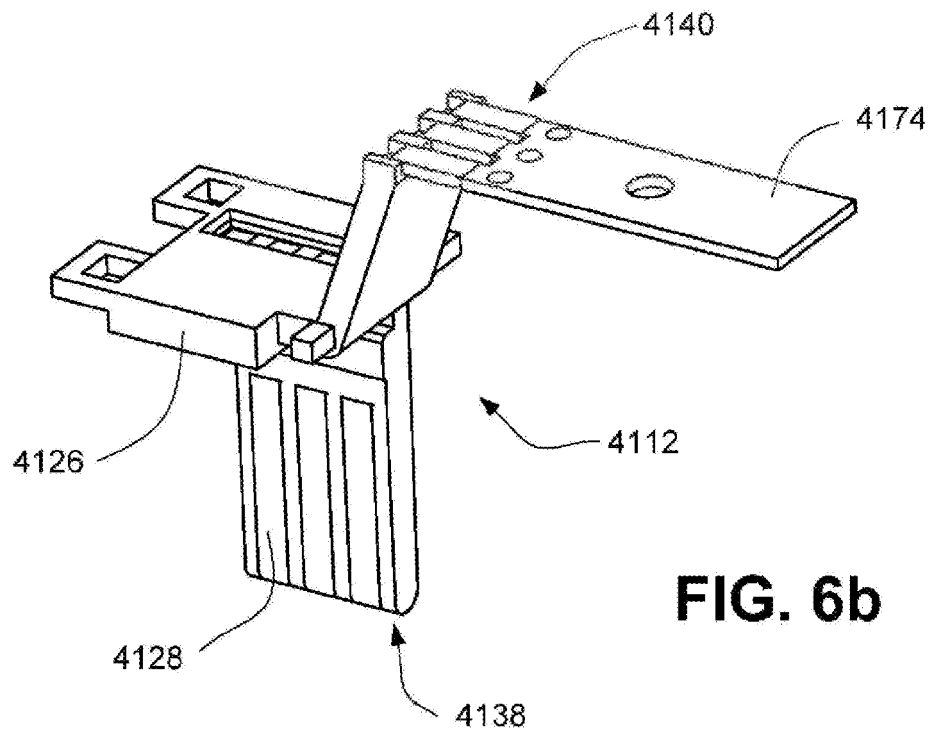


FIG. 6a



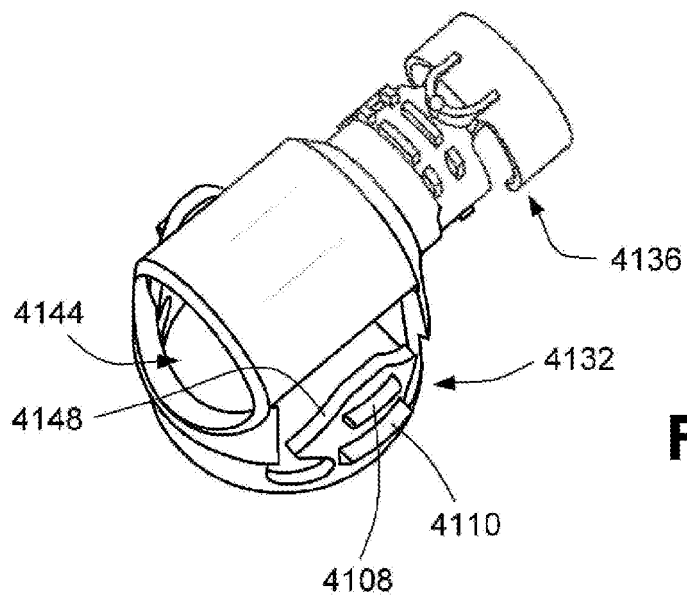


FIG. 6d

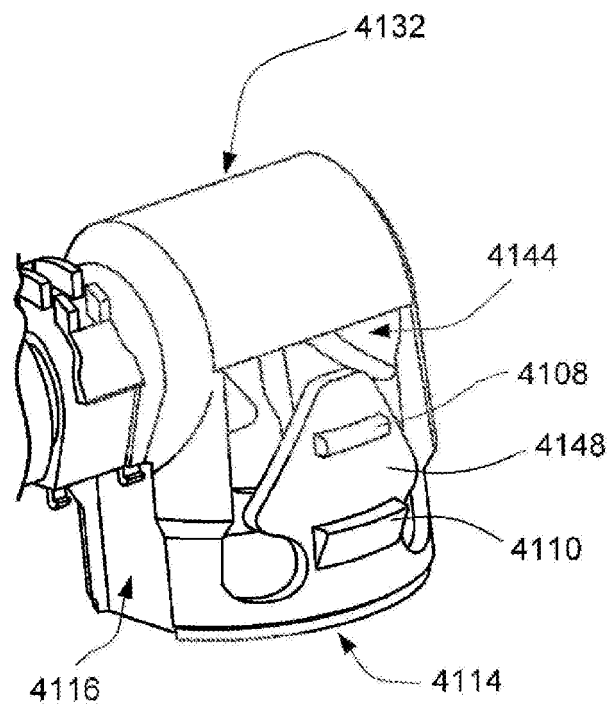
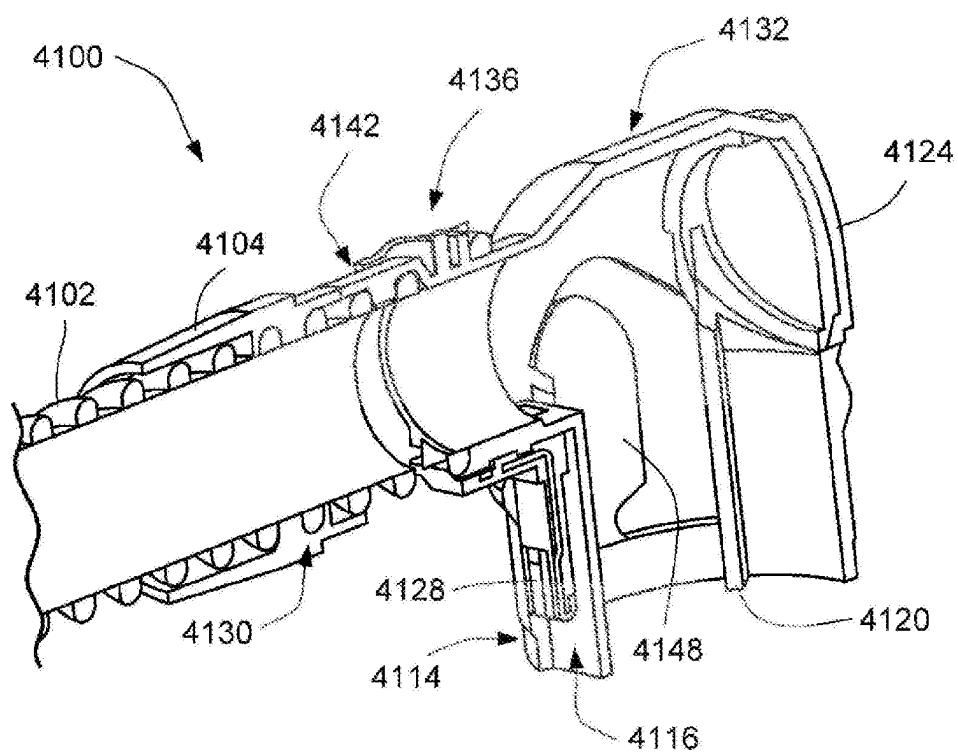
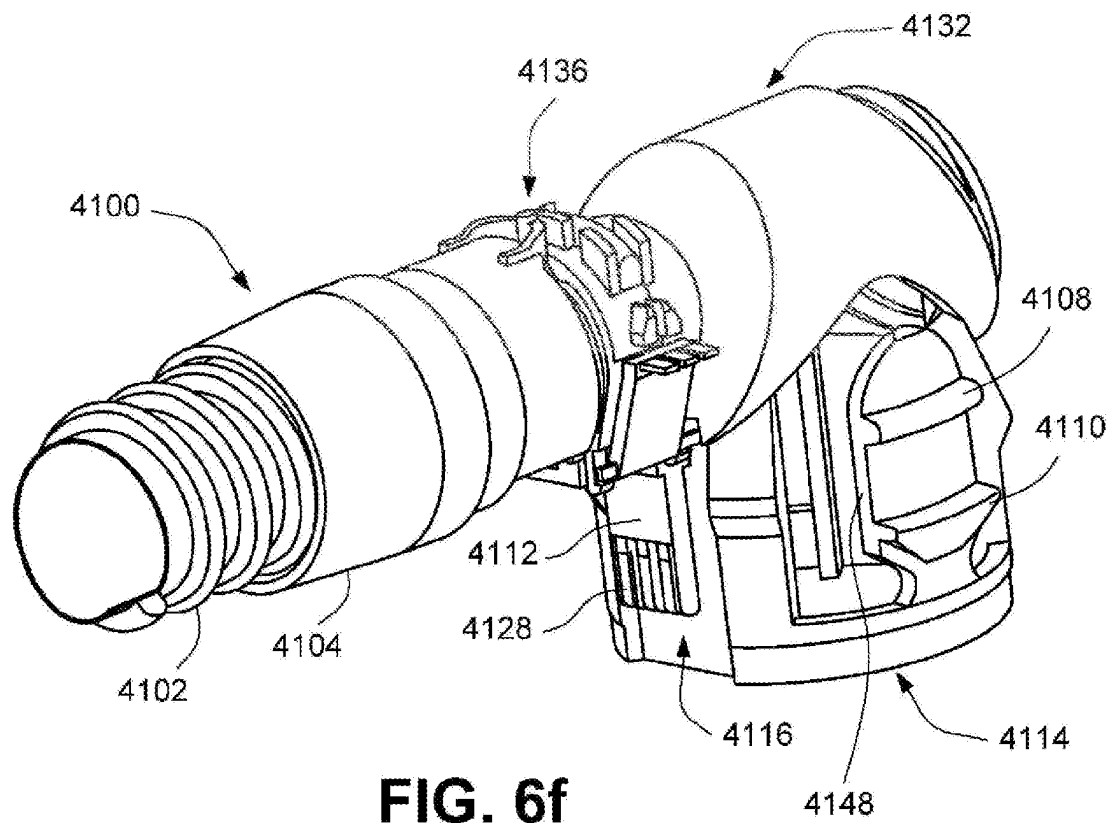
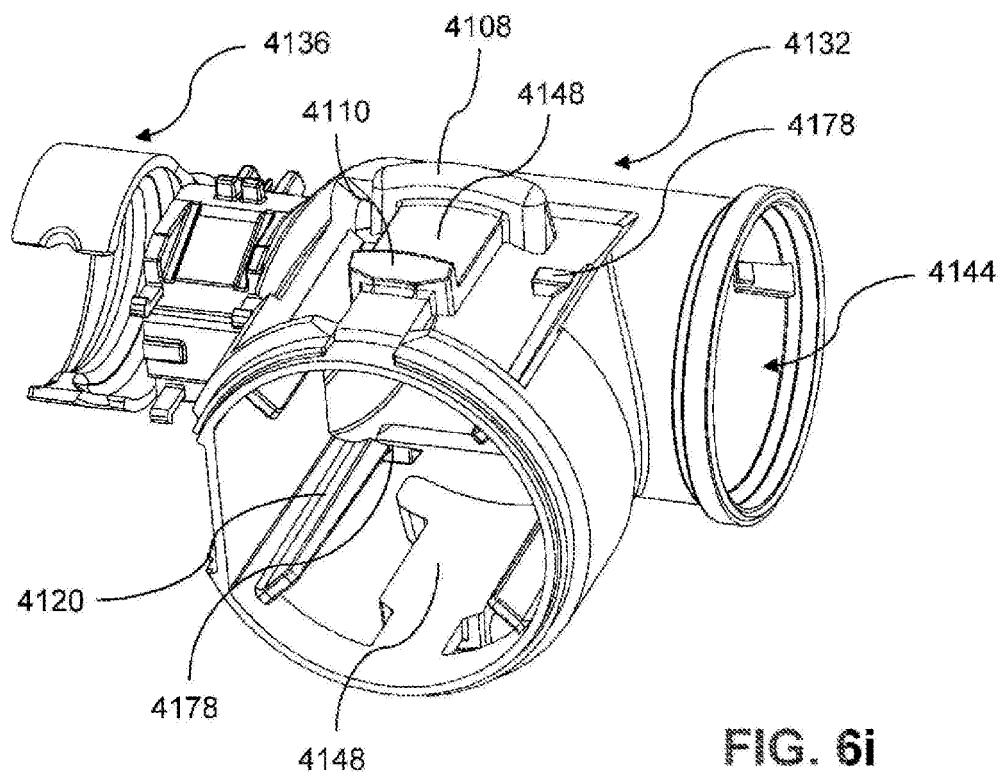
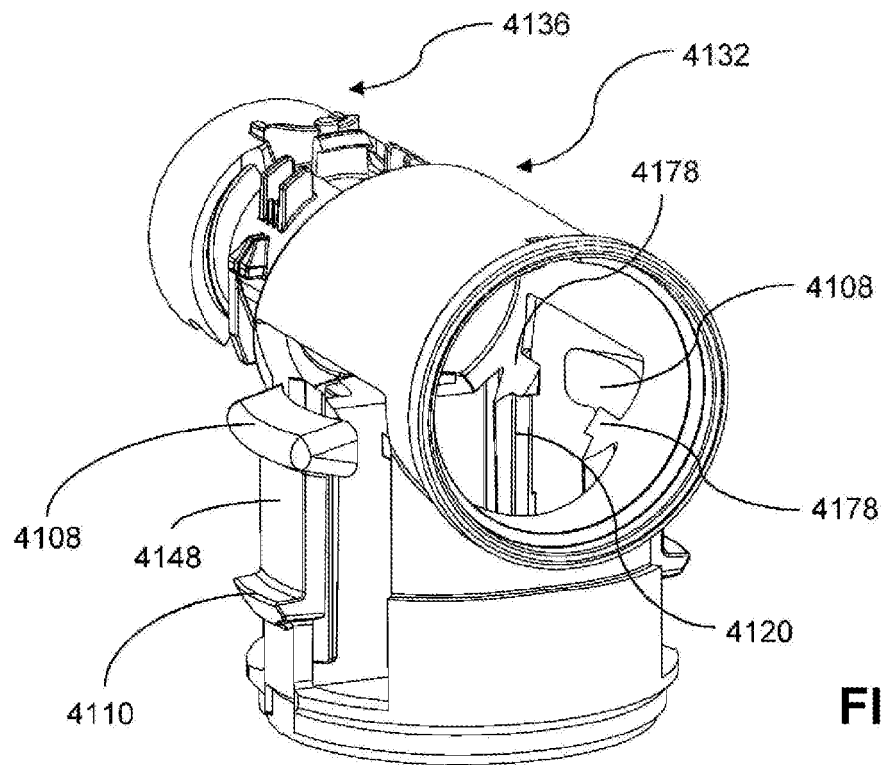


FIG. 6e





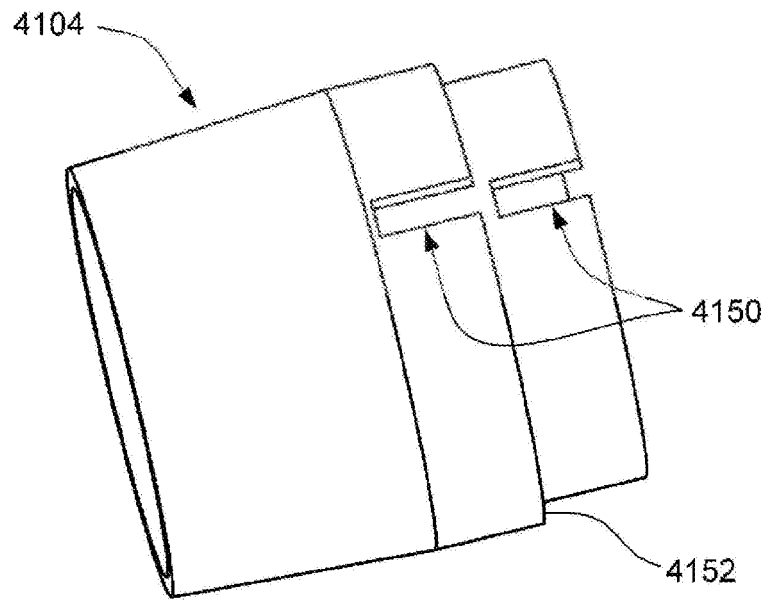


FIG. 7a

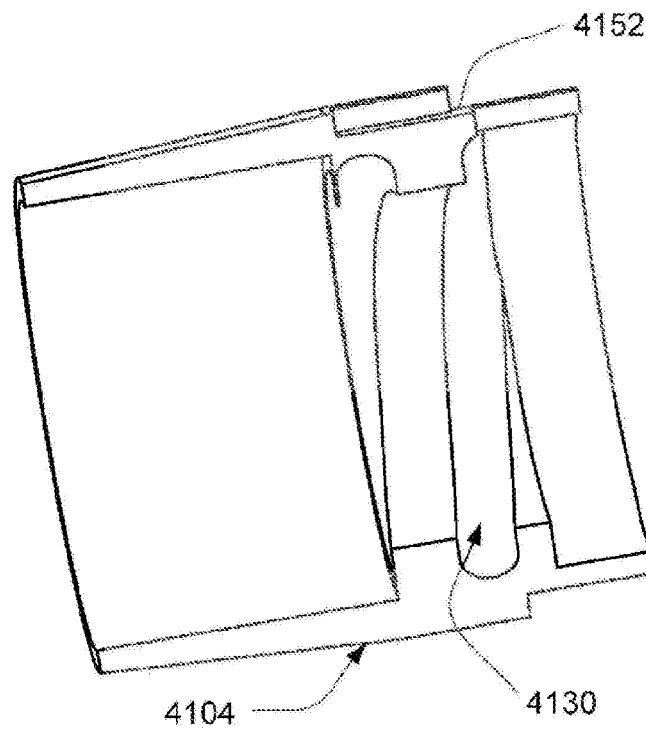


FIG. 7b

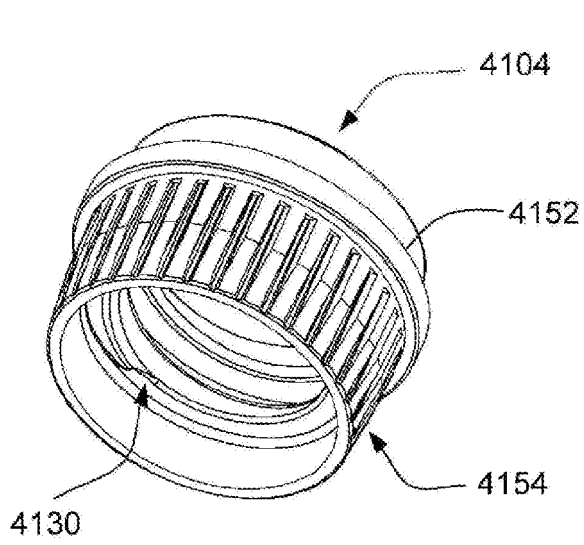


FIG. 7c

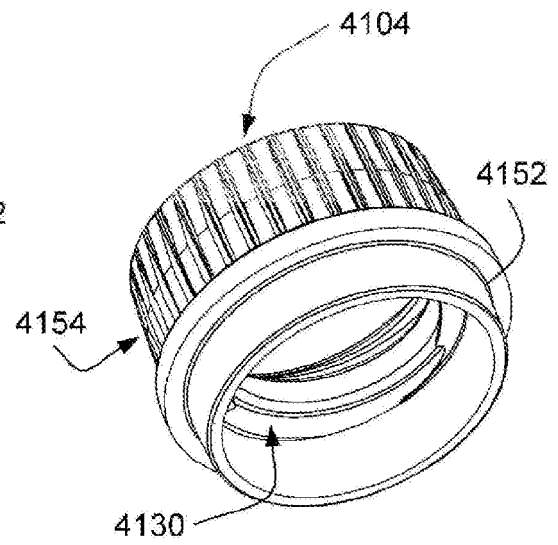


FIG. 7d

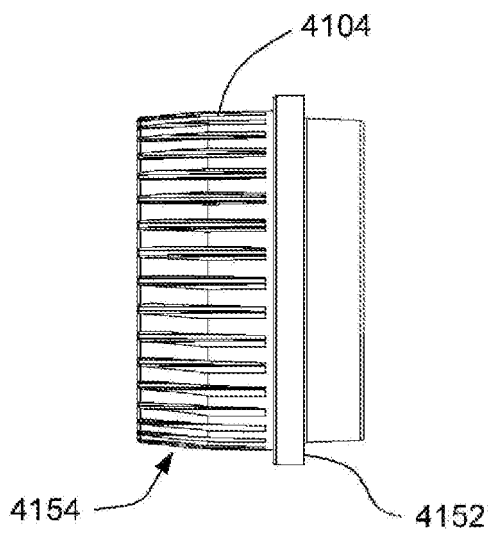


FIG. 7e

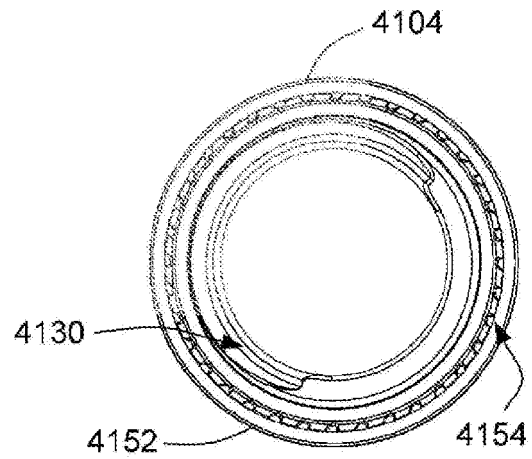


FIG. 7f

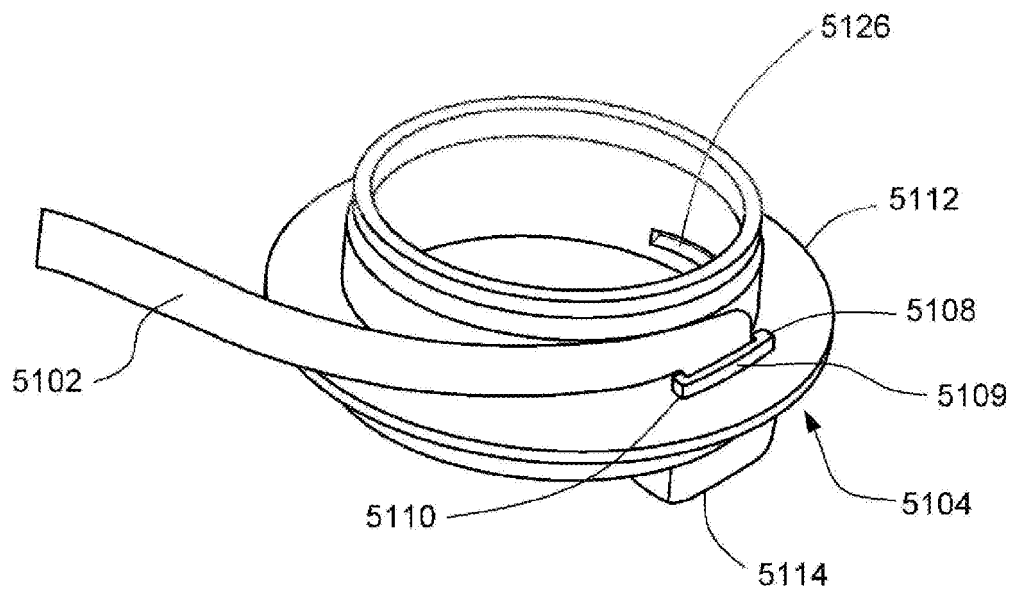


FIG. 8a

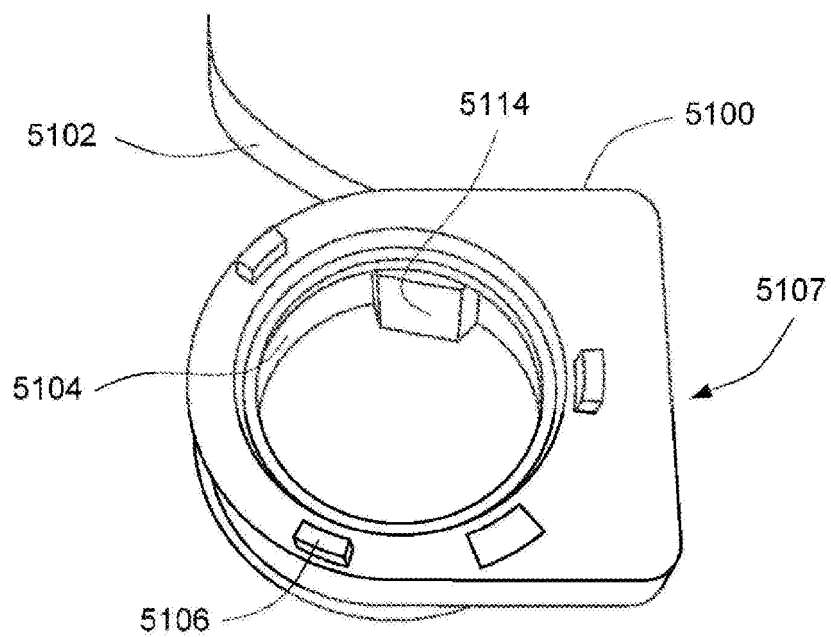


FIG. 8b

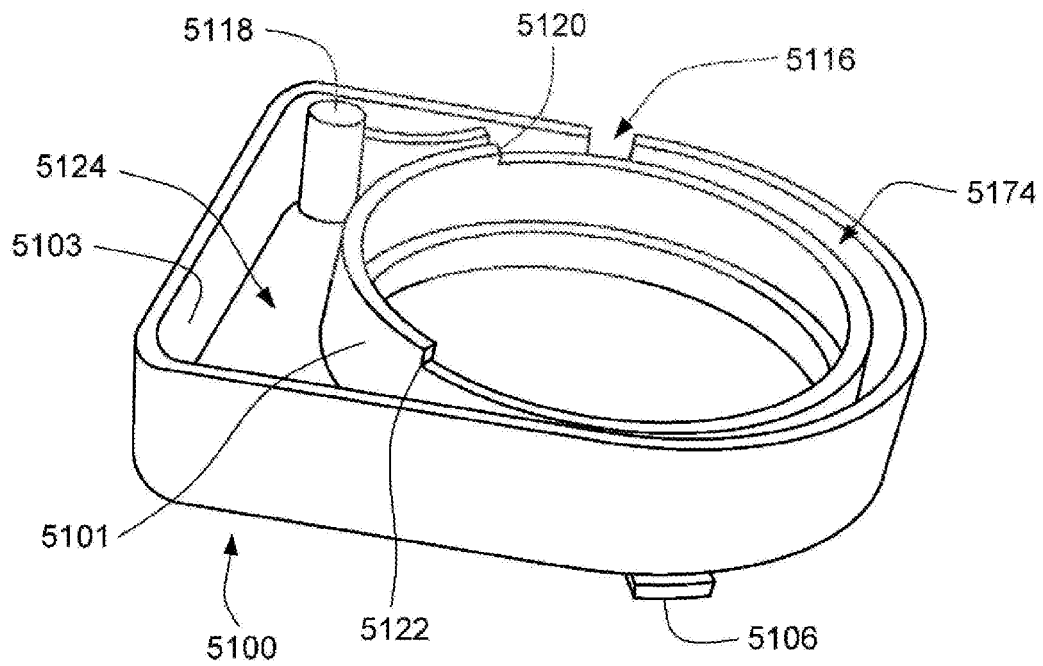


FIG. 8c

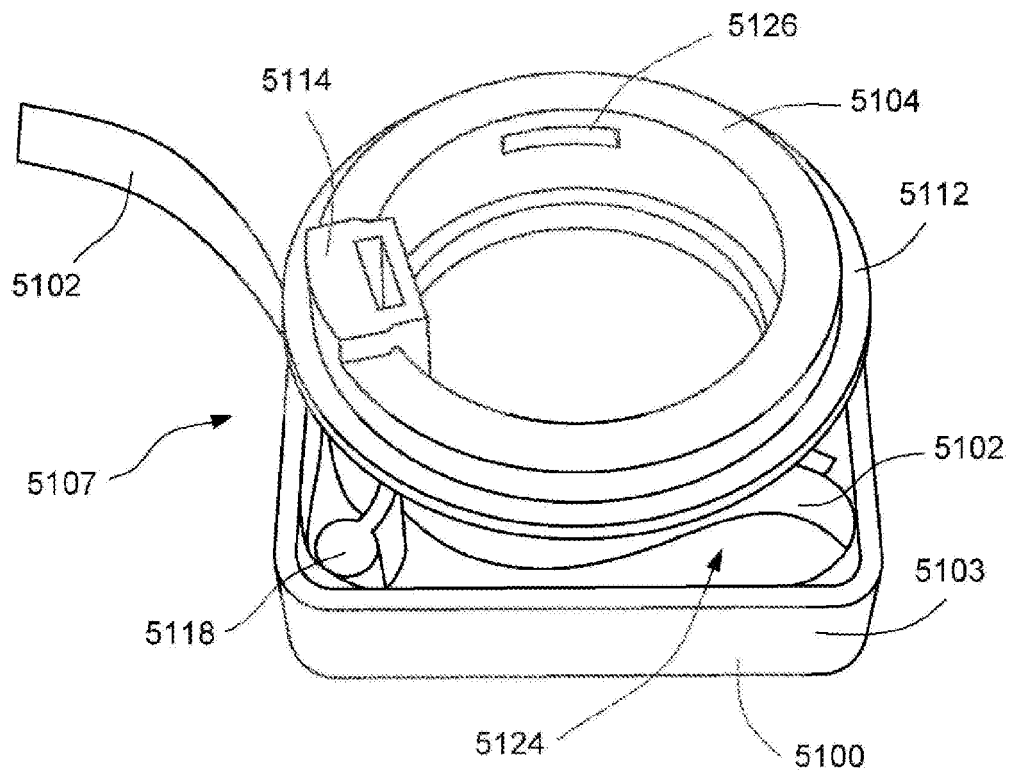
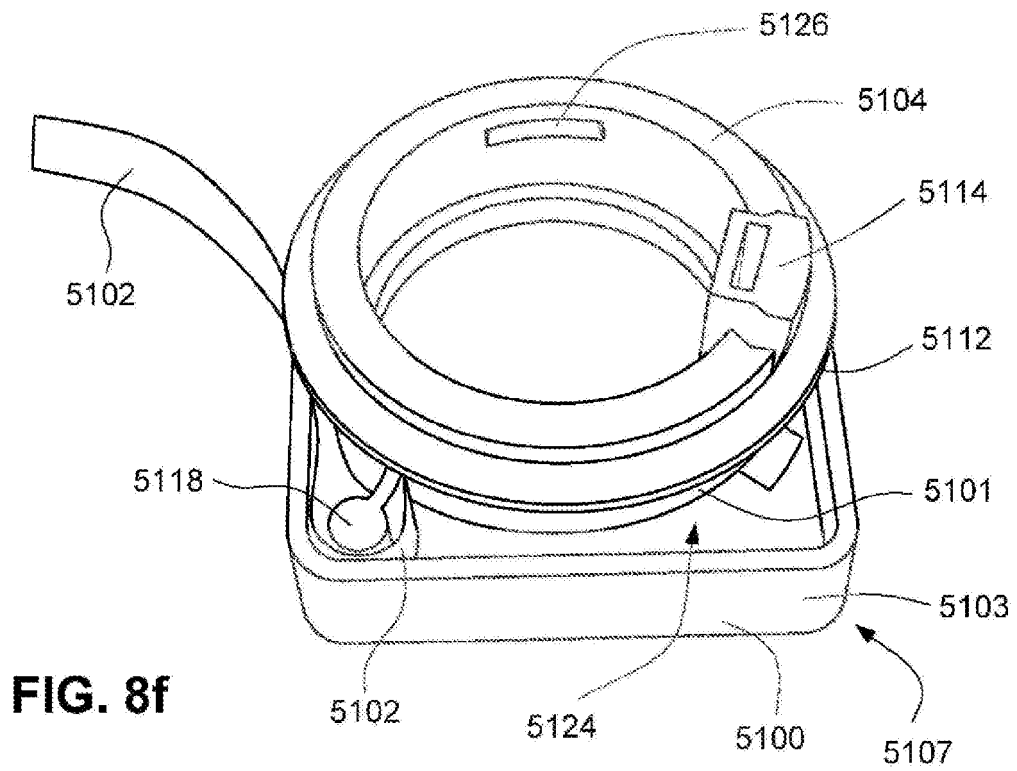
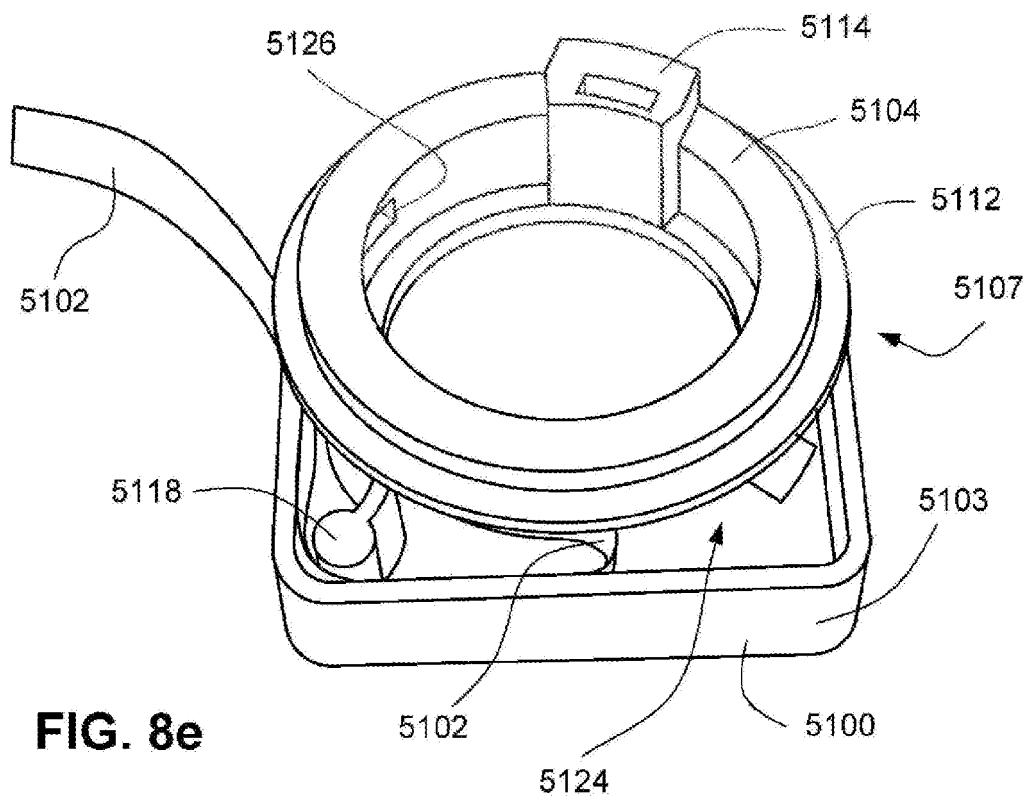


FIG. 8d



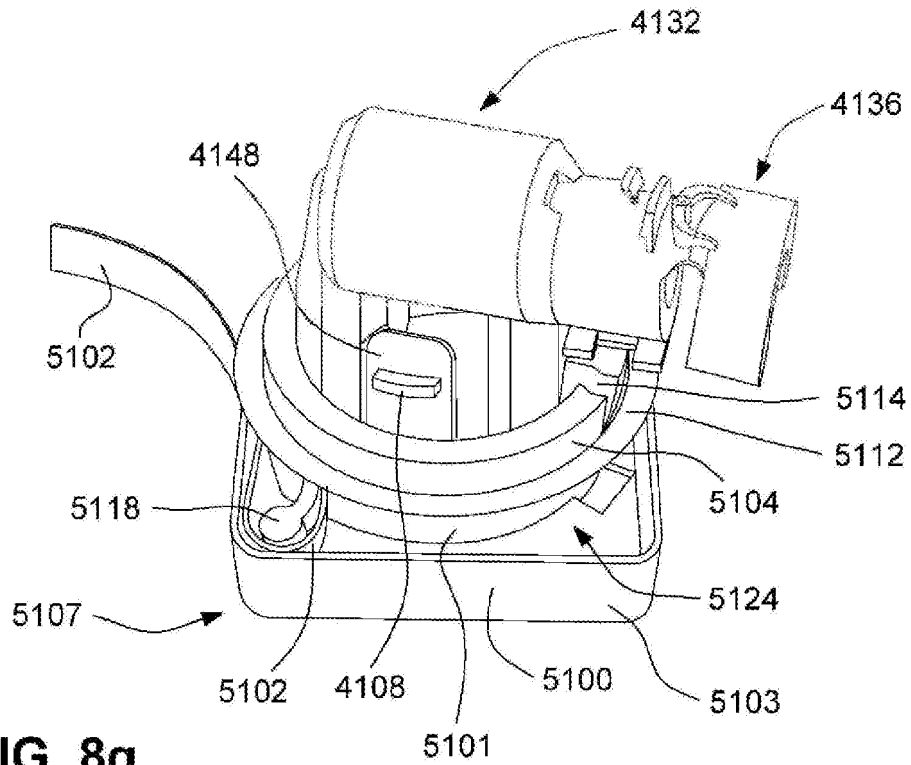


FIG. 8g

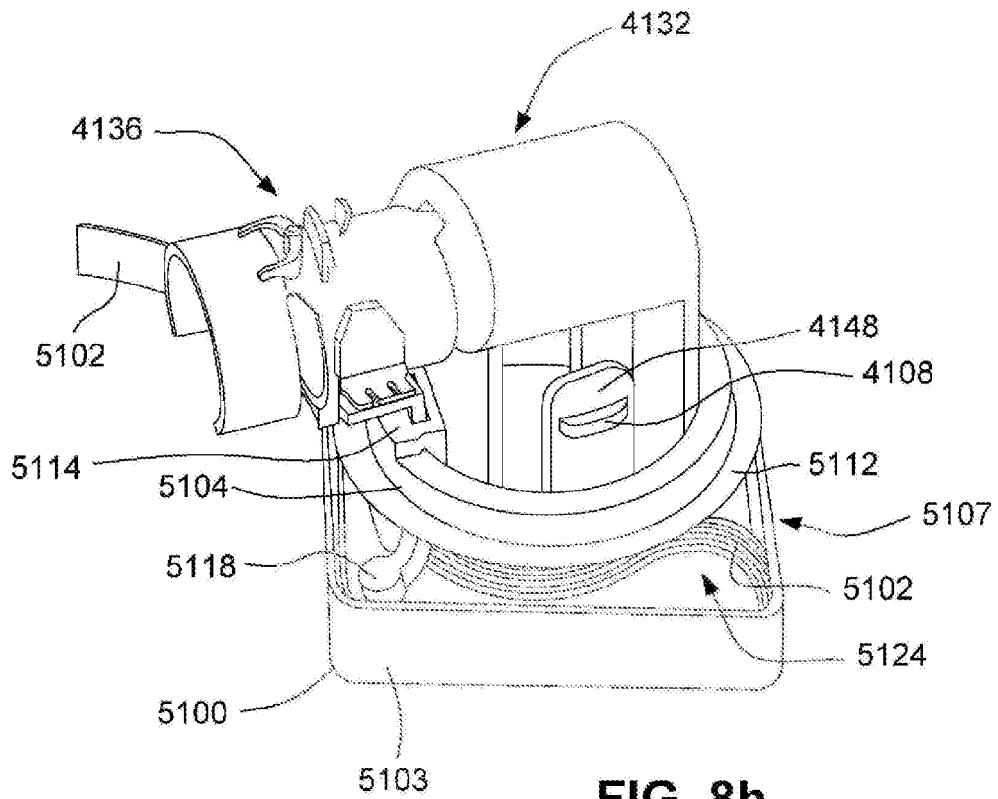


FIG. 8h

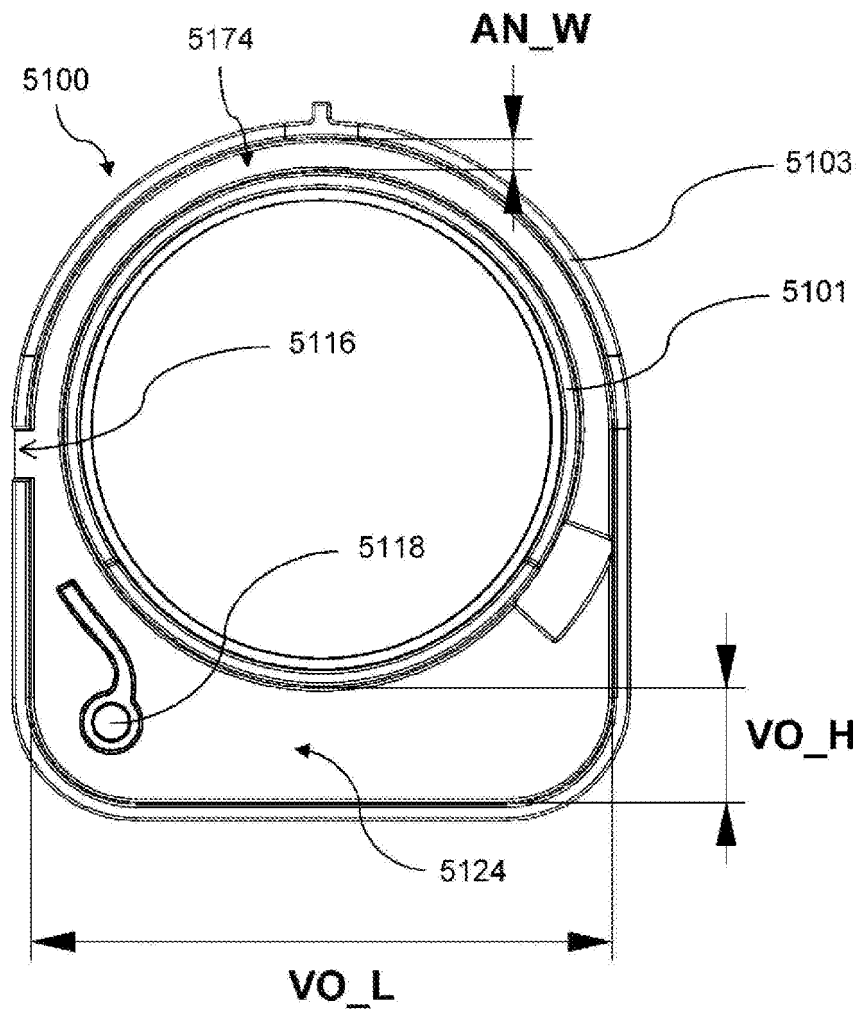


FIG. 8i

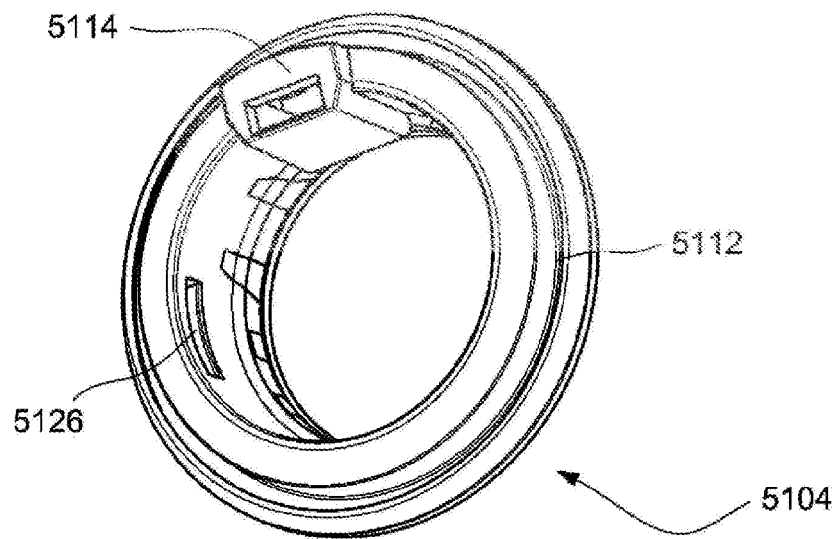


FIG. 9a

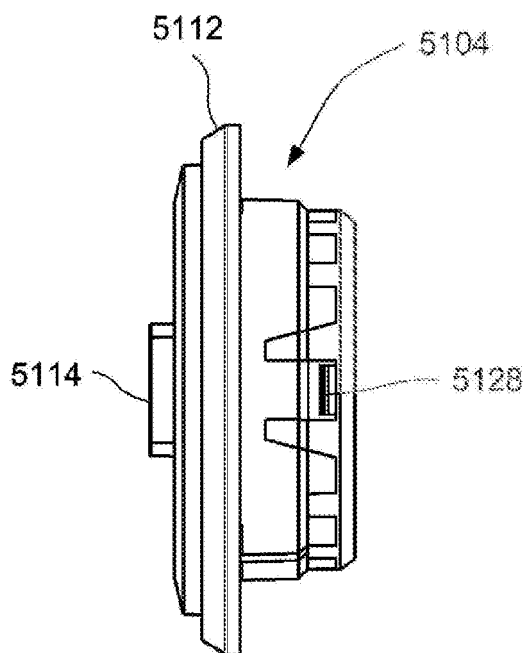


FIG. 9b

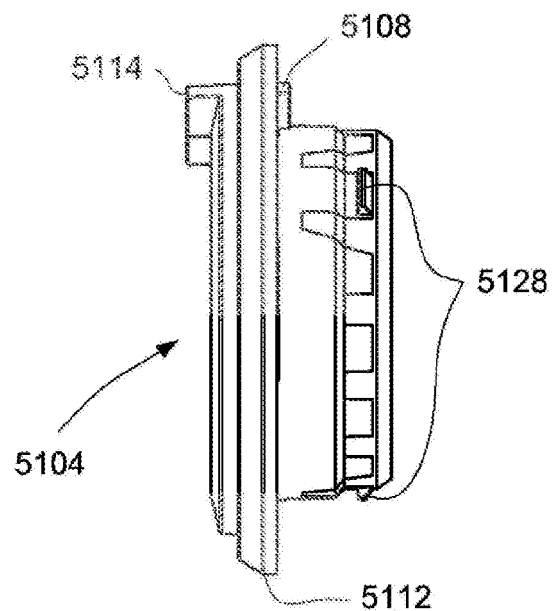


FIG. 9c

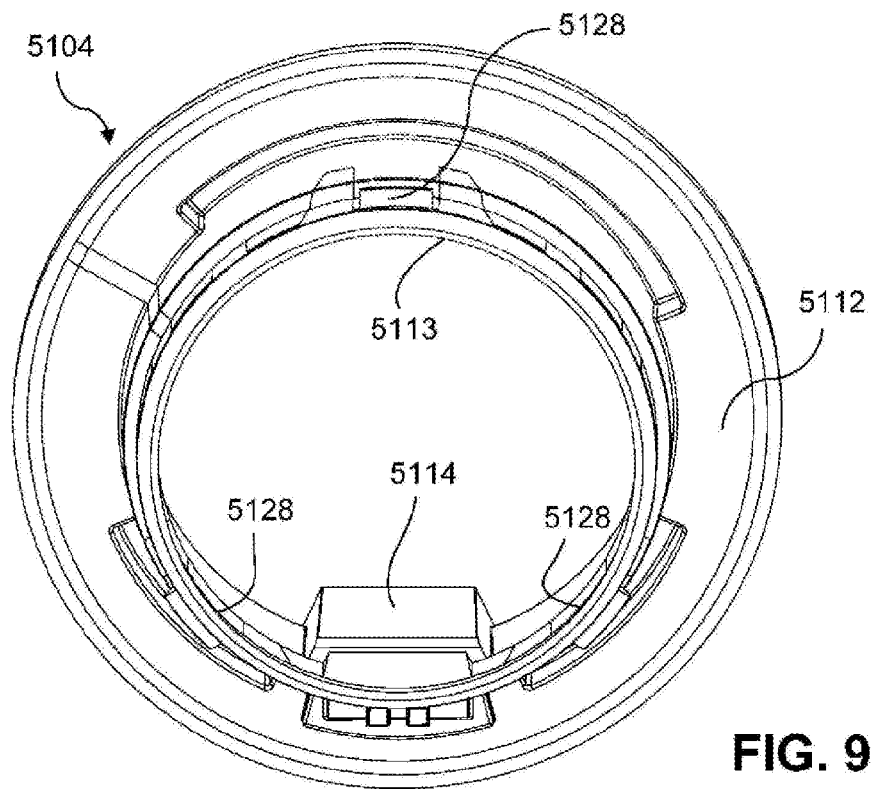


FIG. 9d

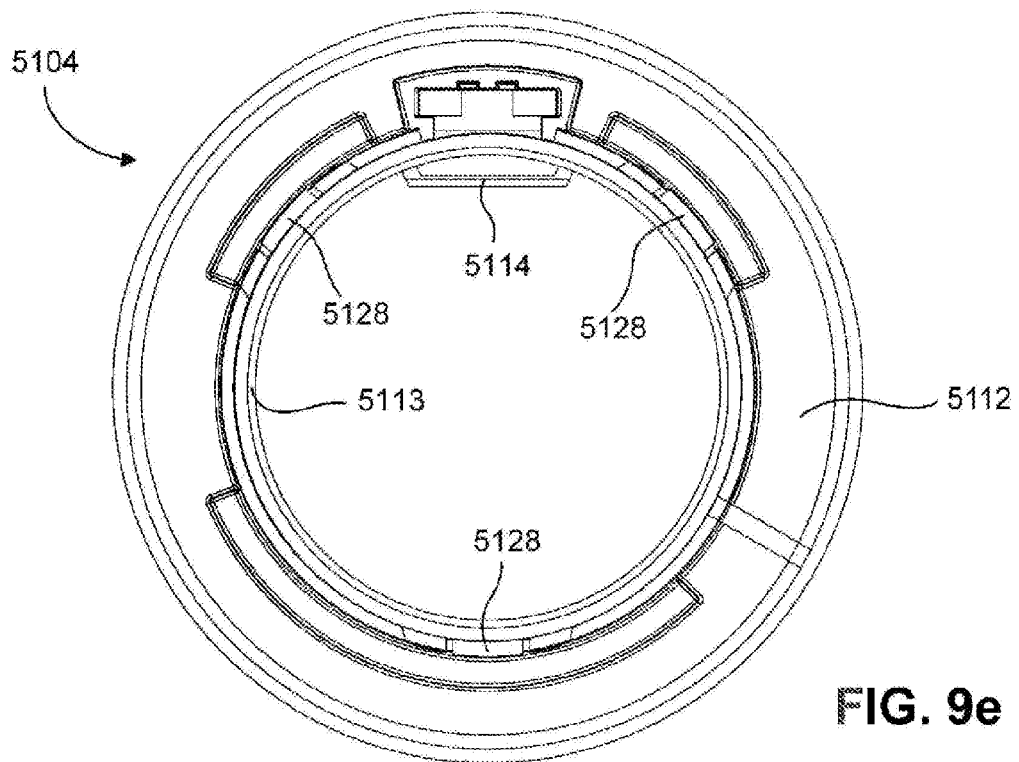
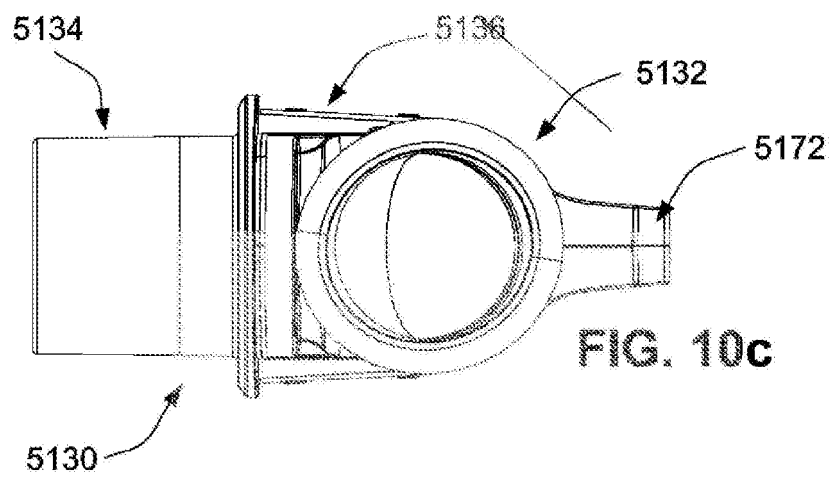
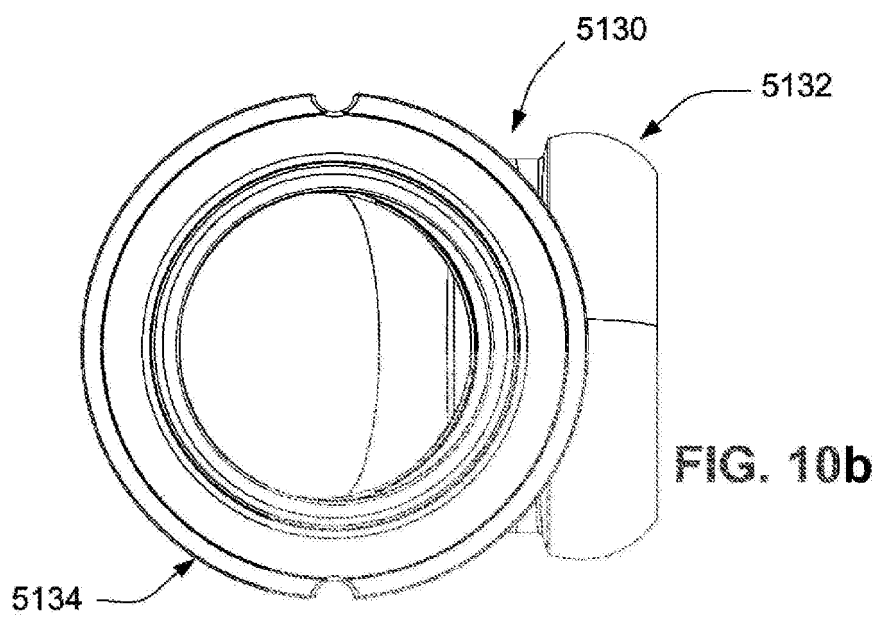
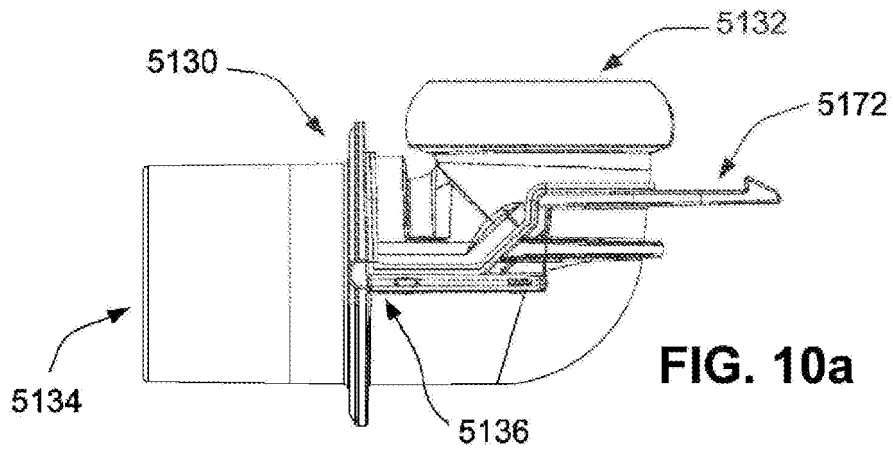


FIG. 9e



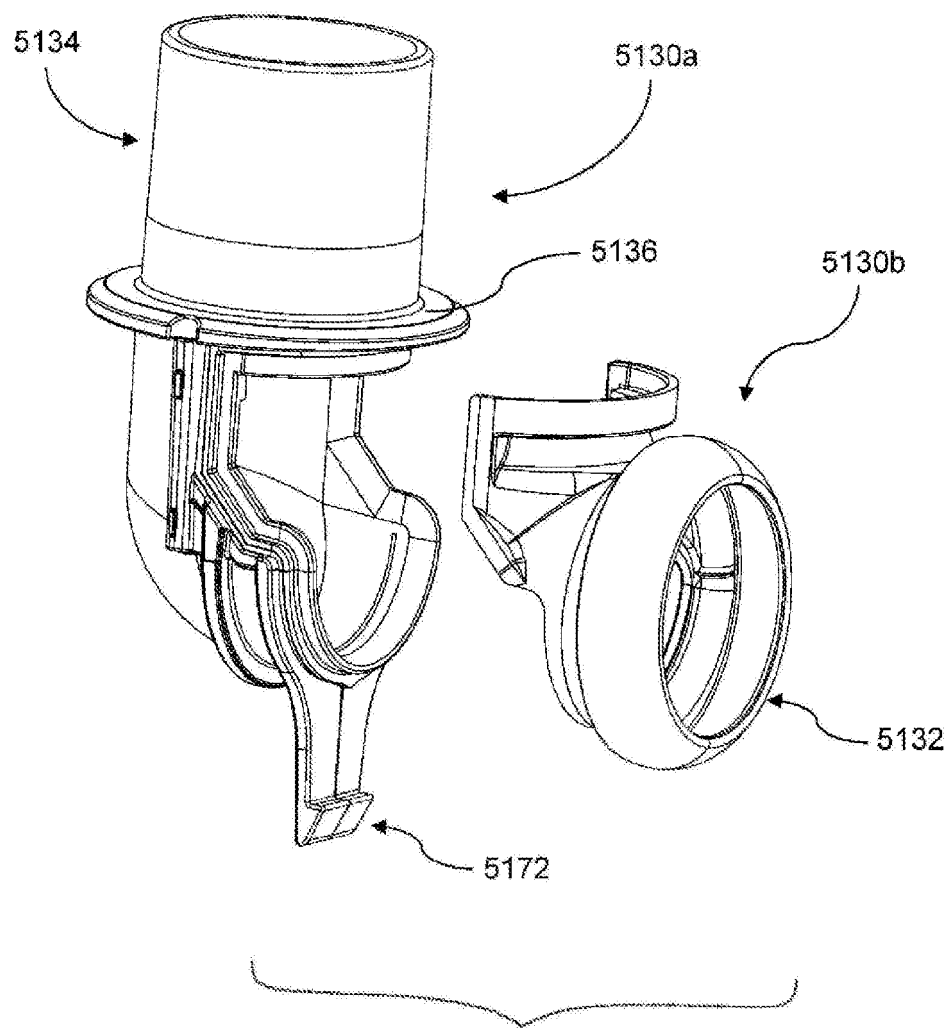


FIG. 10d

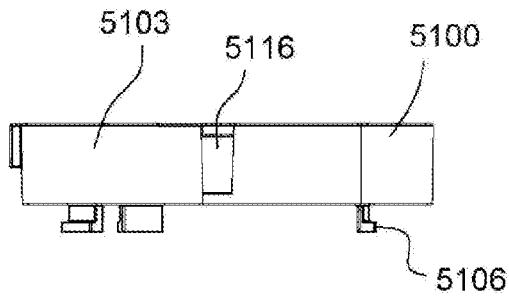


FIG. 11a

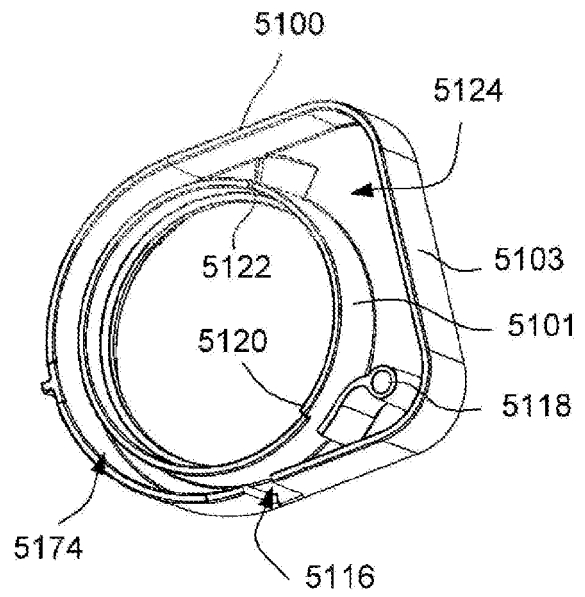


FIG. 11b

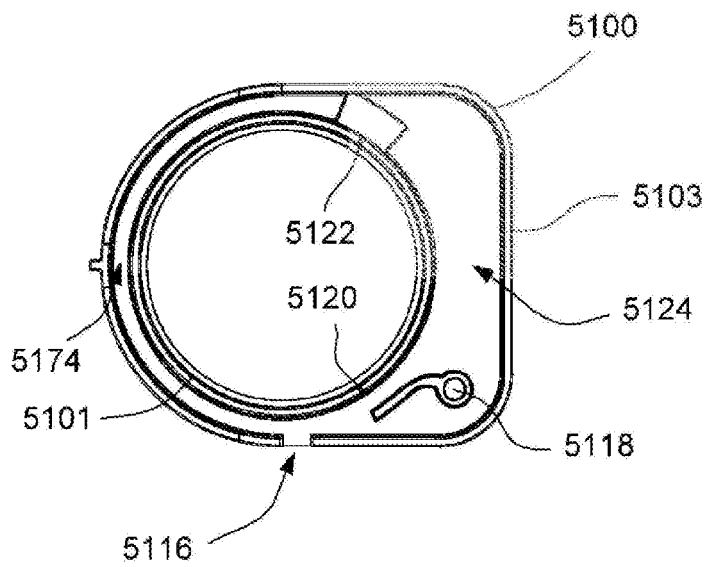


FIG. 11c

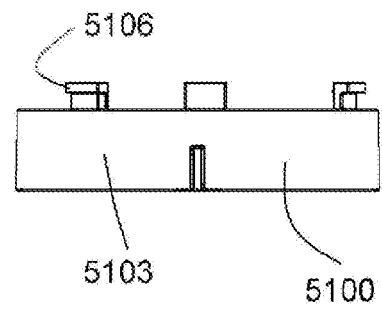


FIG. 11d

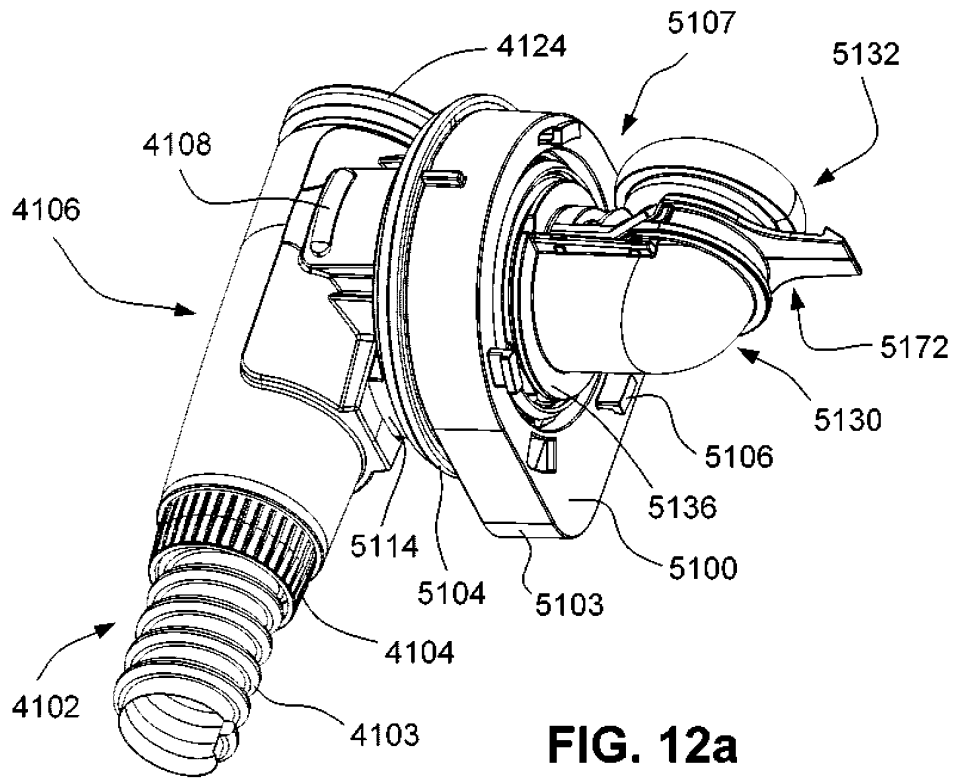


FIG. 12a

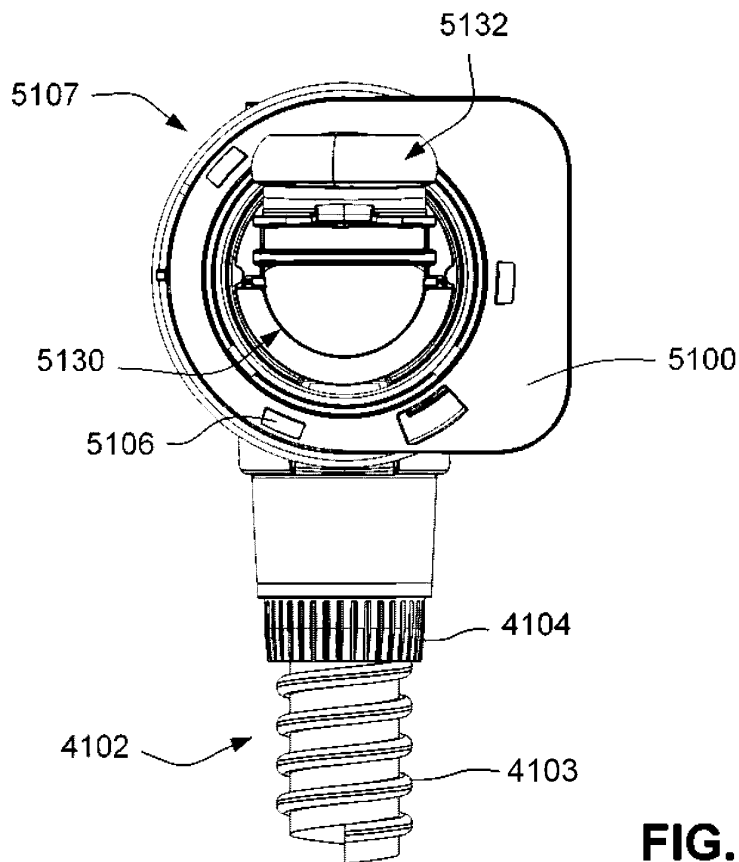
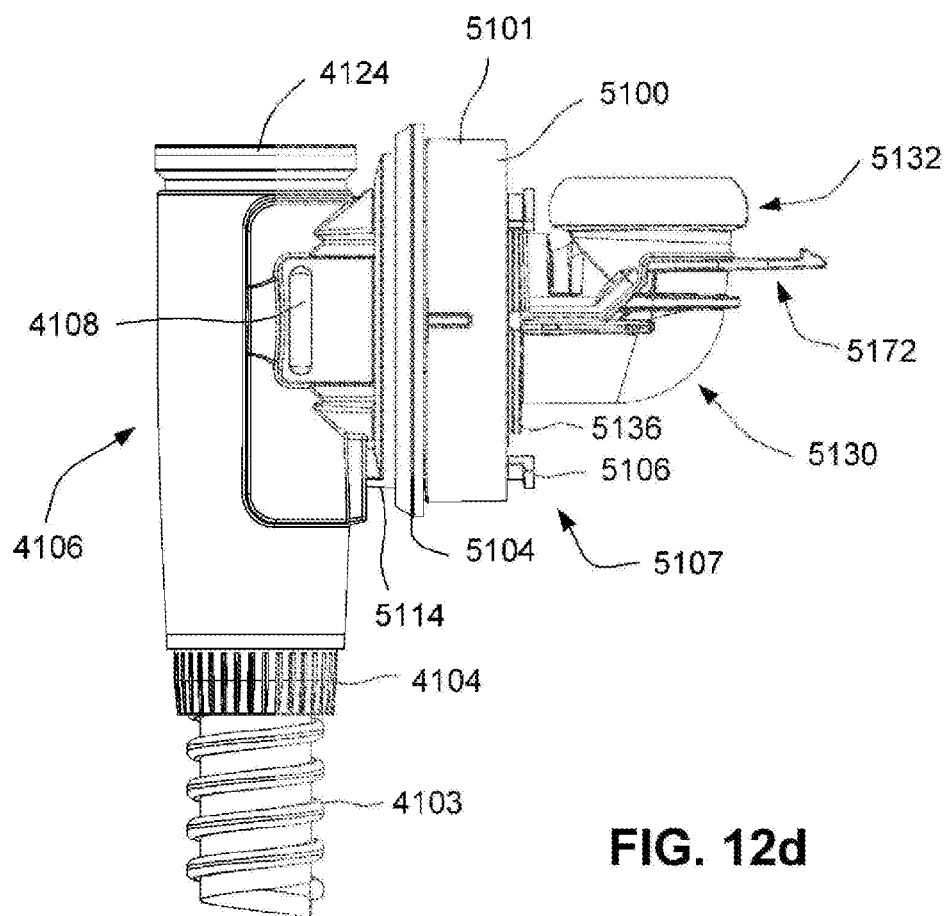
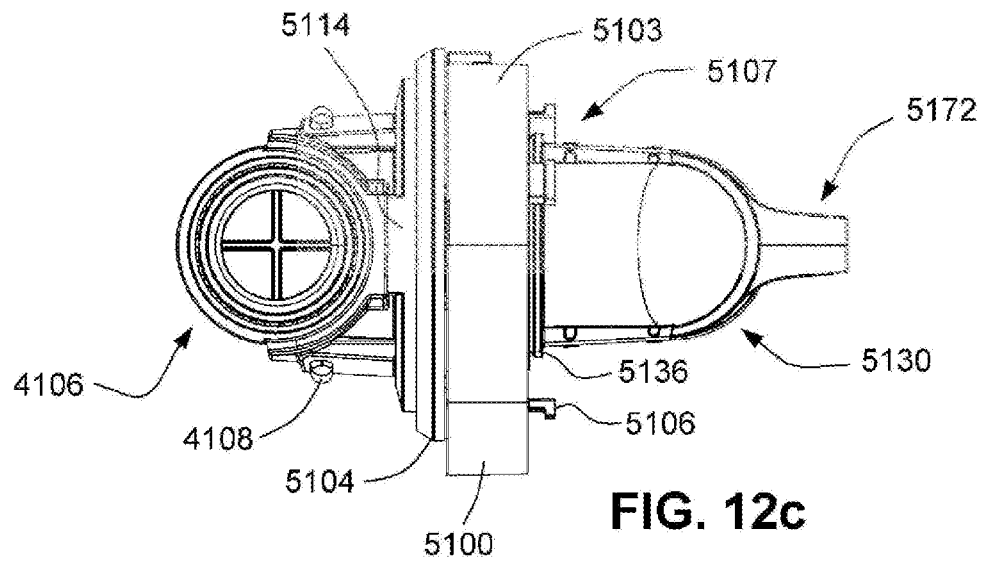


FIG. 12b

AMENDED SHEET



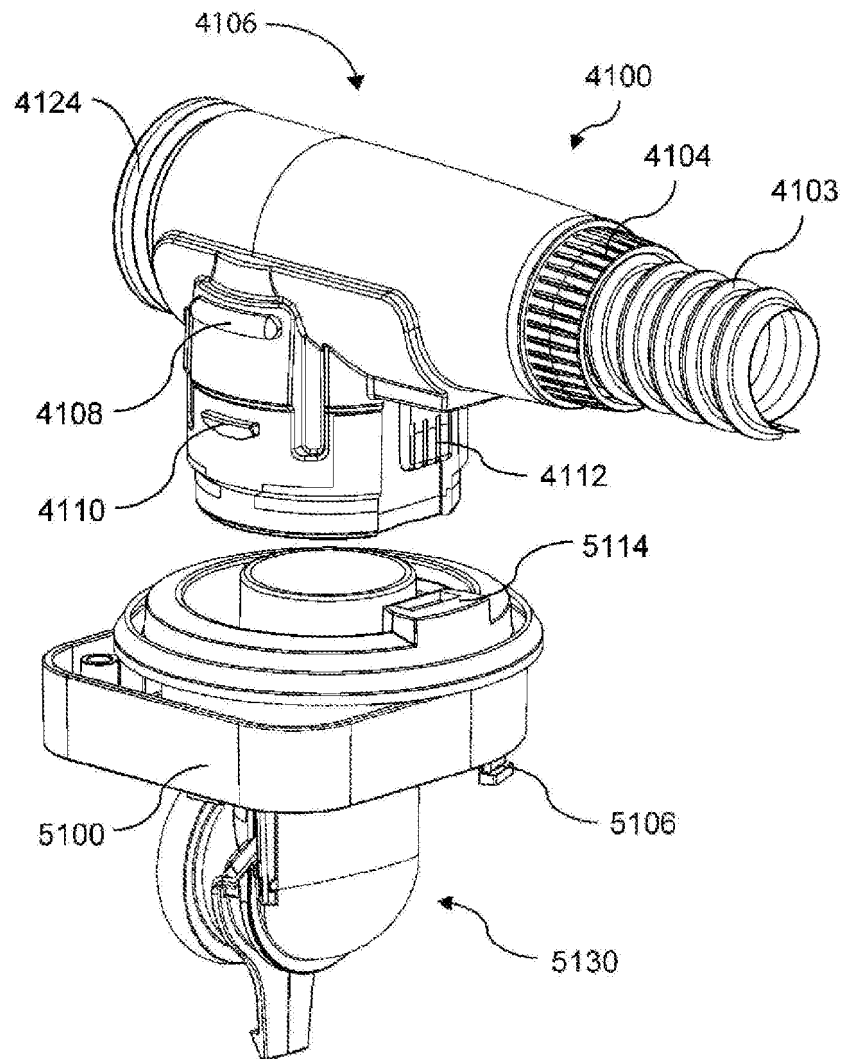


FIG. 12e

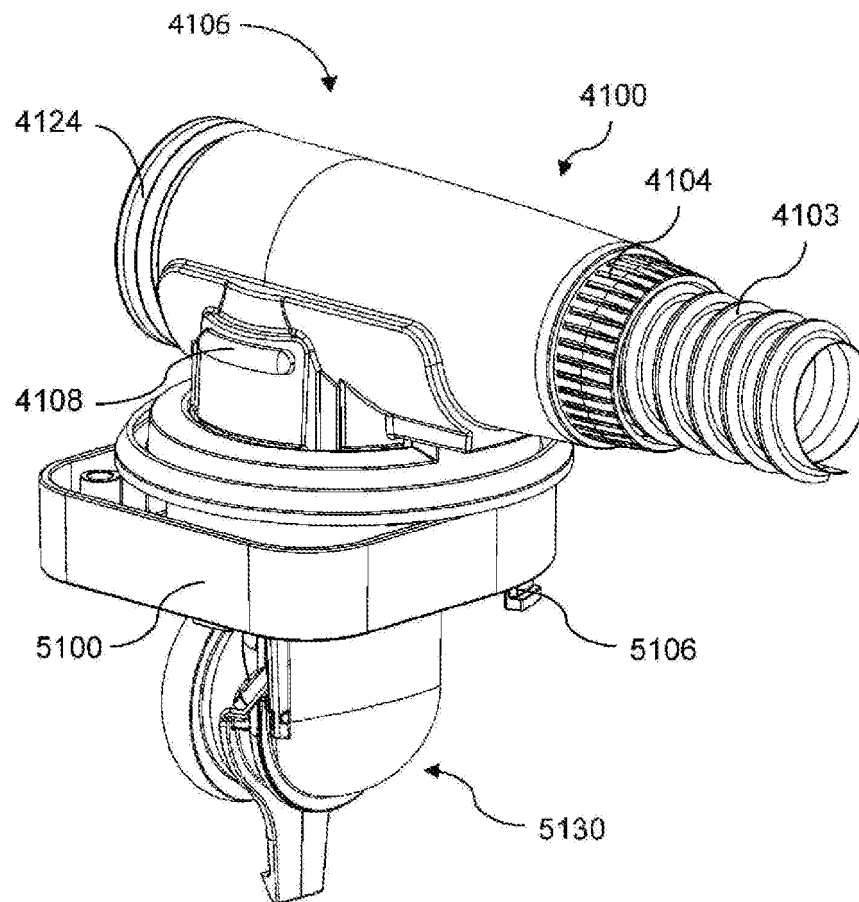


FIG. 12f

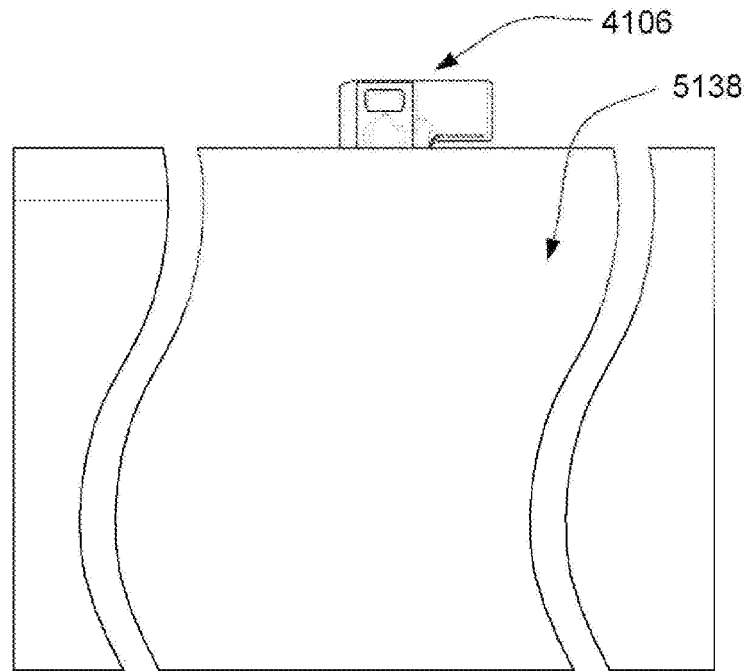


FIG. 13a

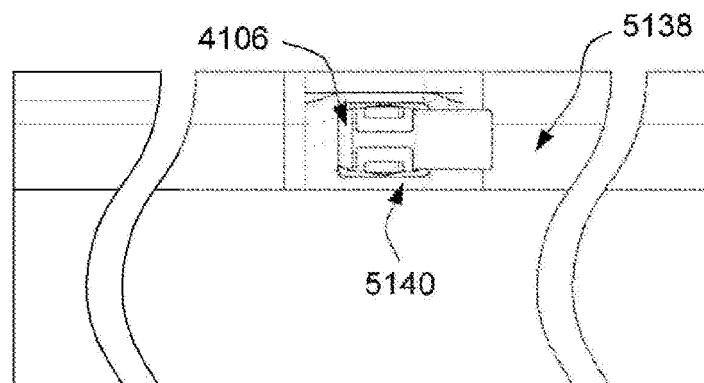


FIG. 13b

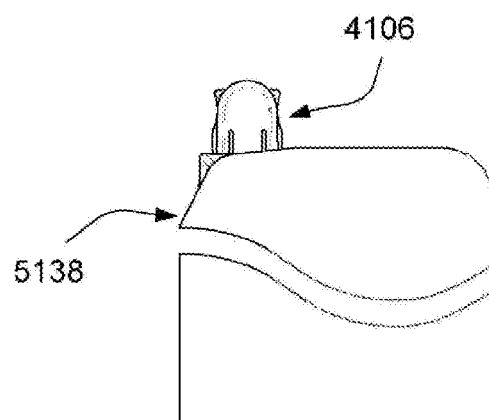


FIG. 13c

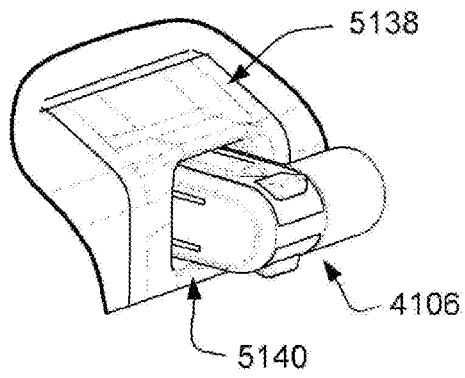


FIG. 13d

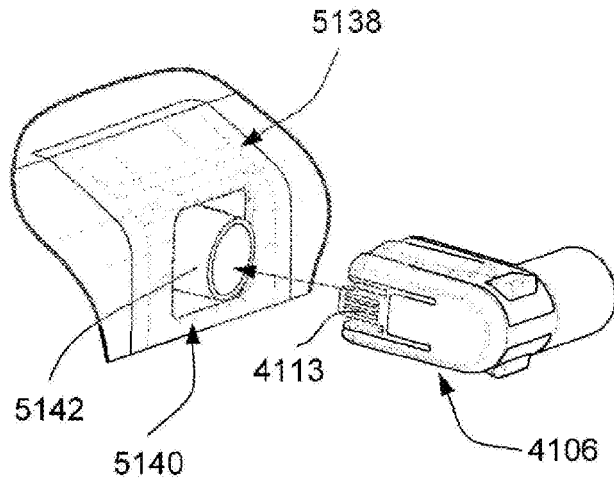


FIG. 13e

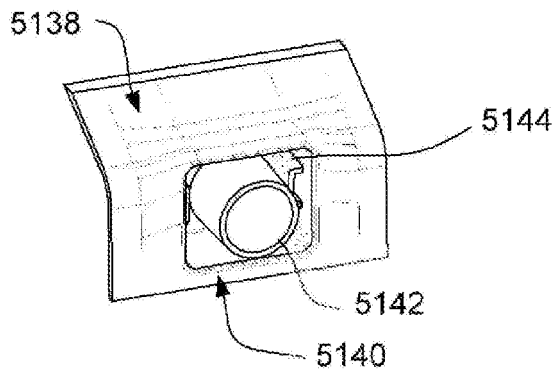


FIG. 13f

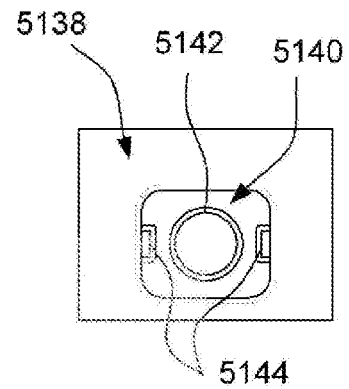


FIG. 13g

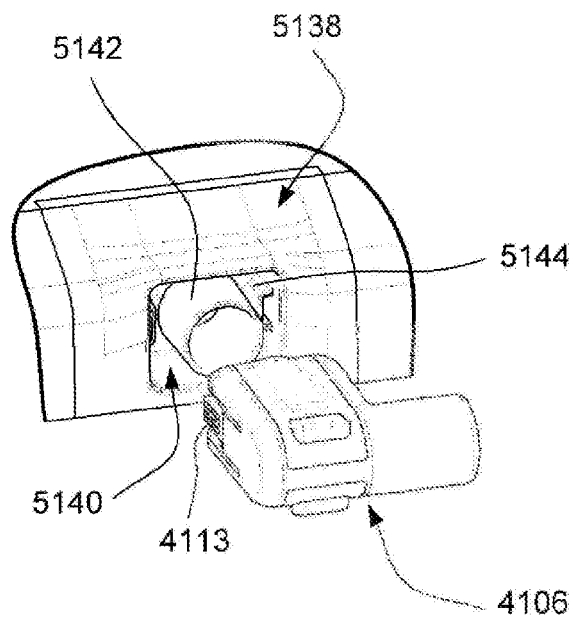


FIG. 13h

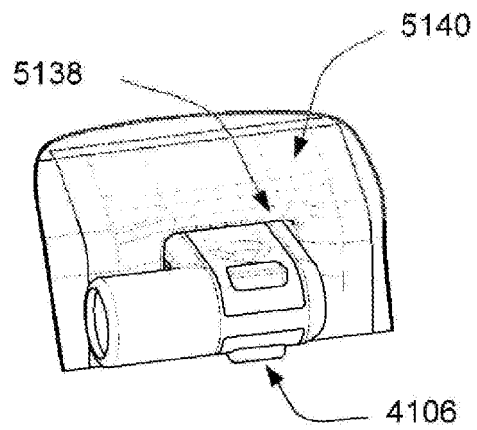


FIG. 13j

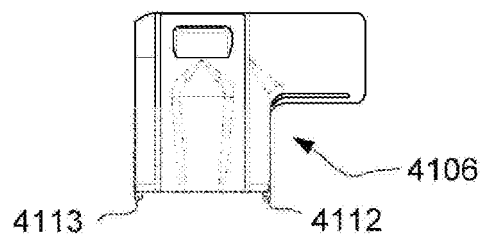


FIG. 13k




FIG. 13l




FIG. 13m

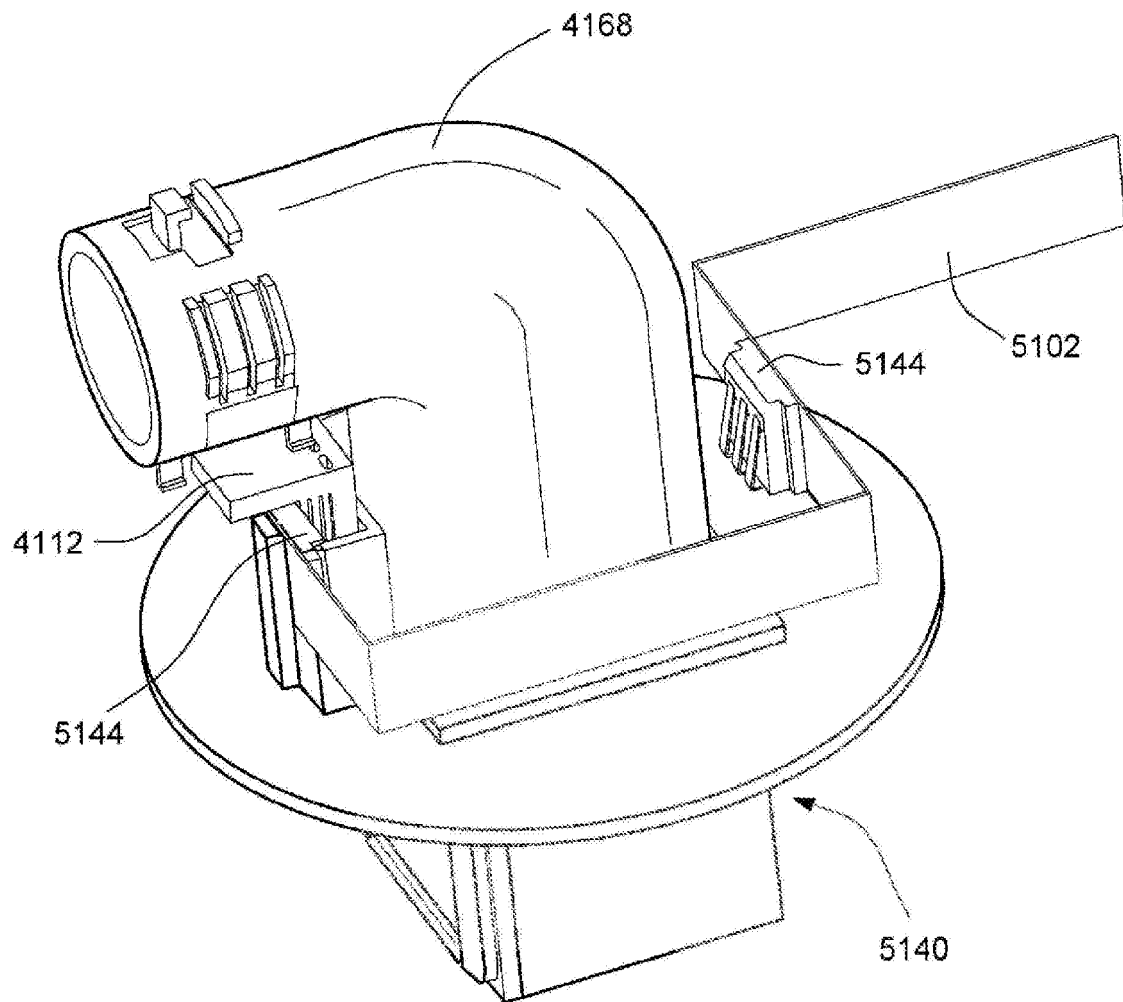


FIG. 13n

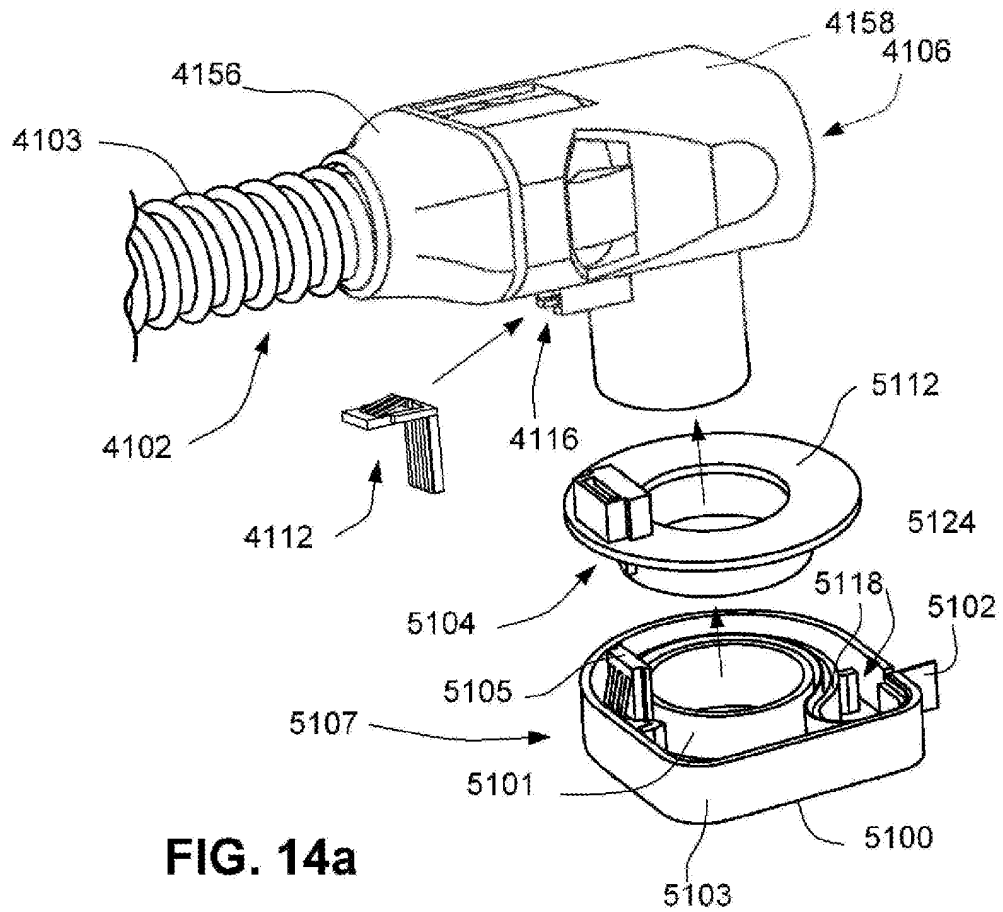


FIG. 14a

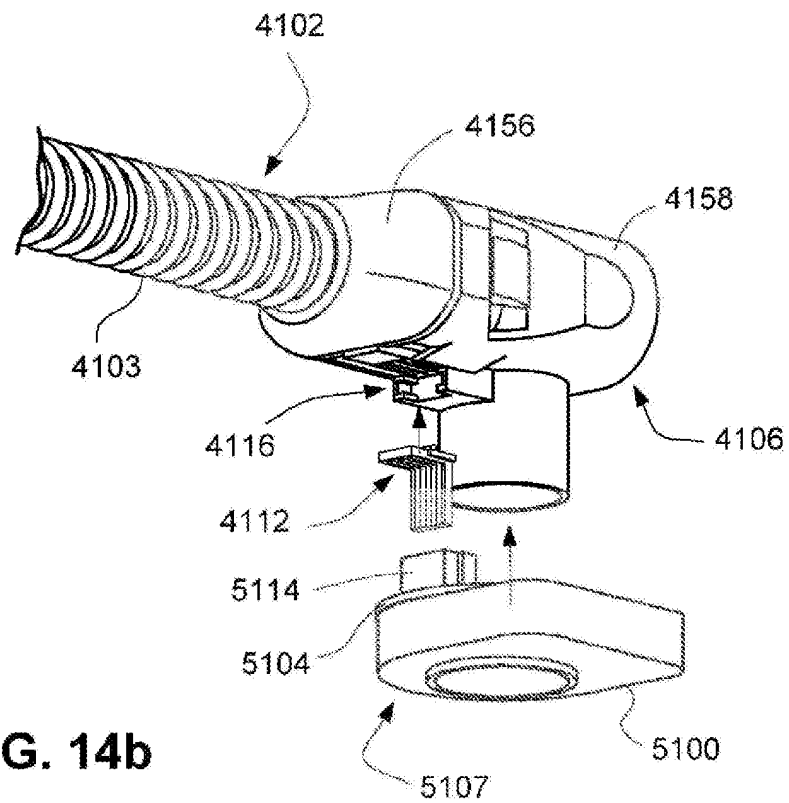


FIG. 14b

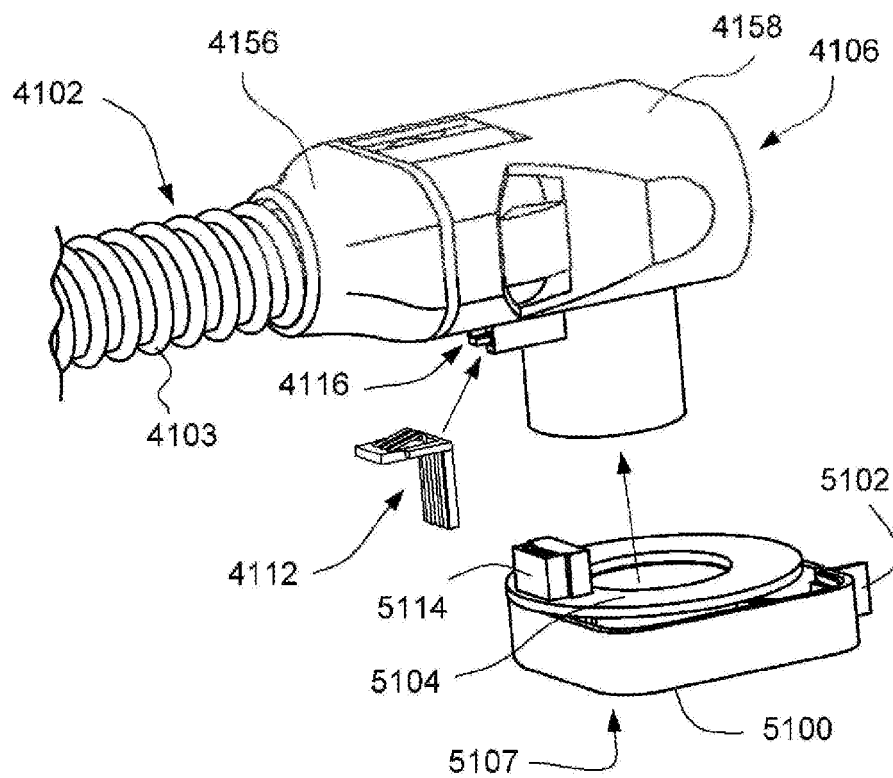


FIG. 14c

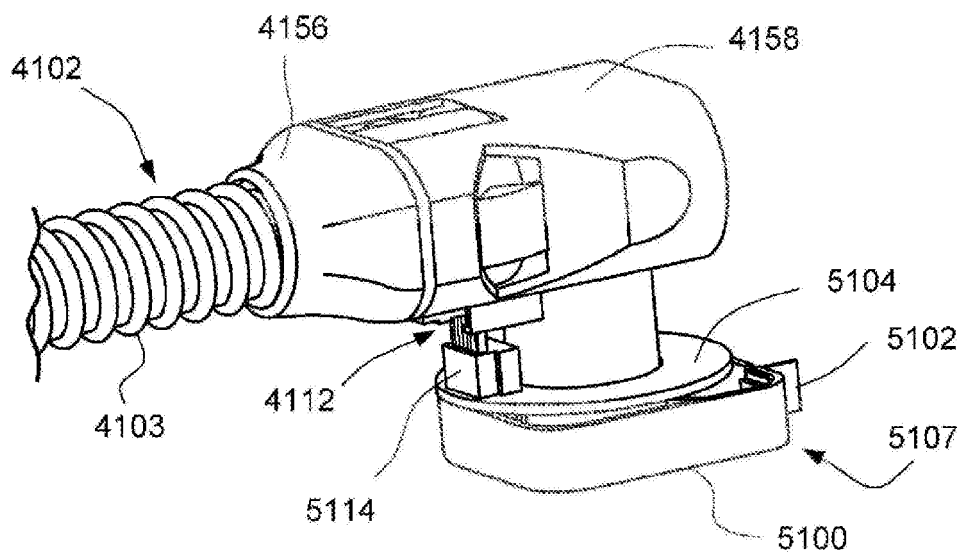
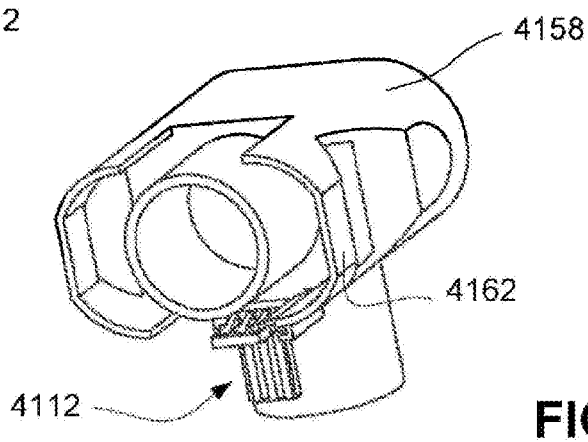
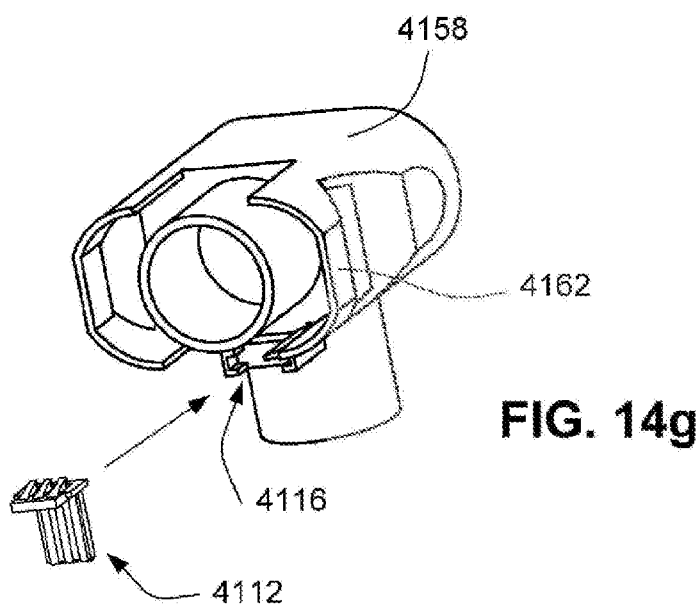
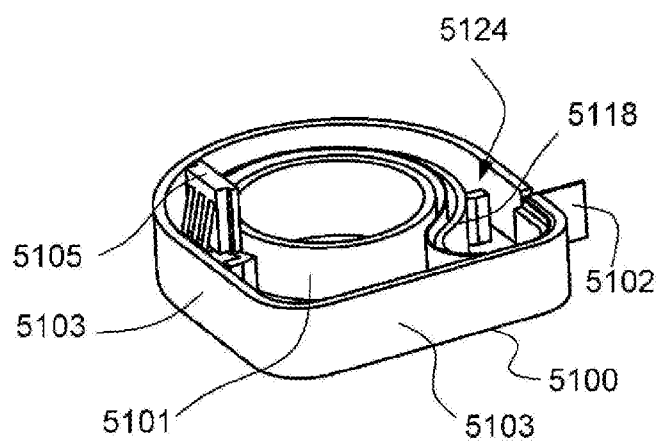
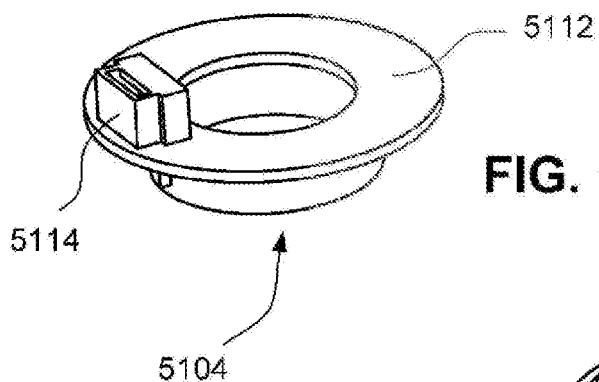


FIG. 14d



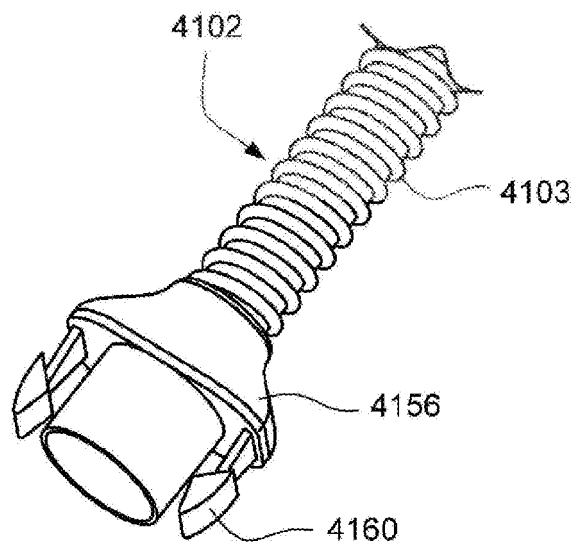


FIG. 14i

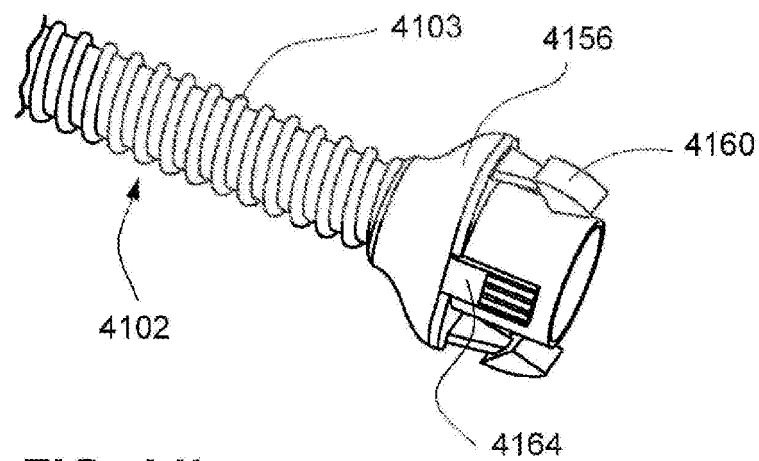


FIG. 14j

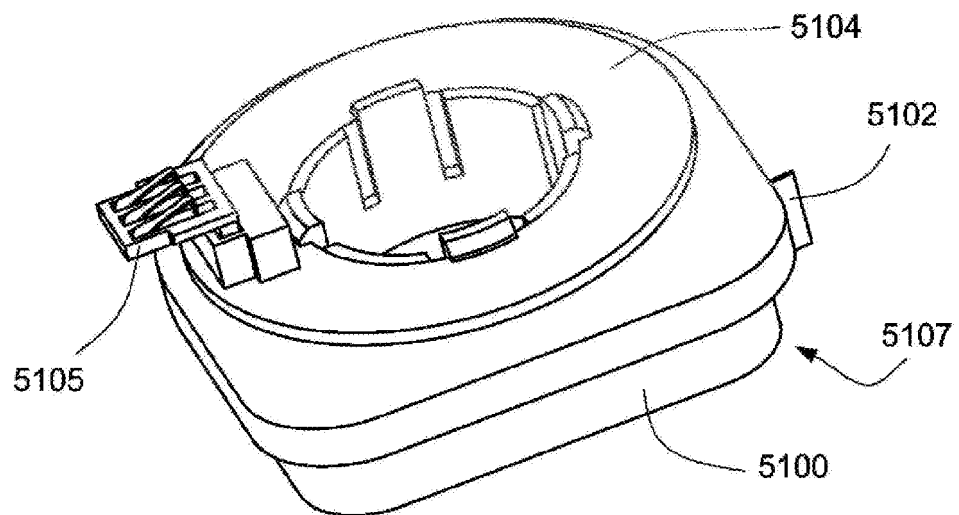


FIG. 15a

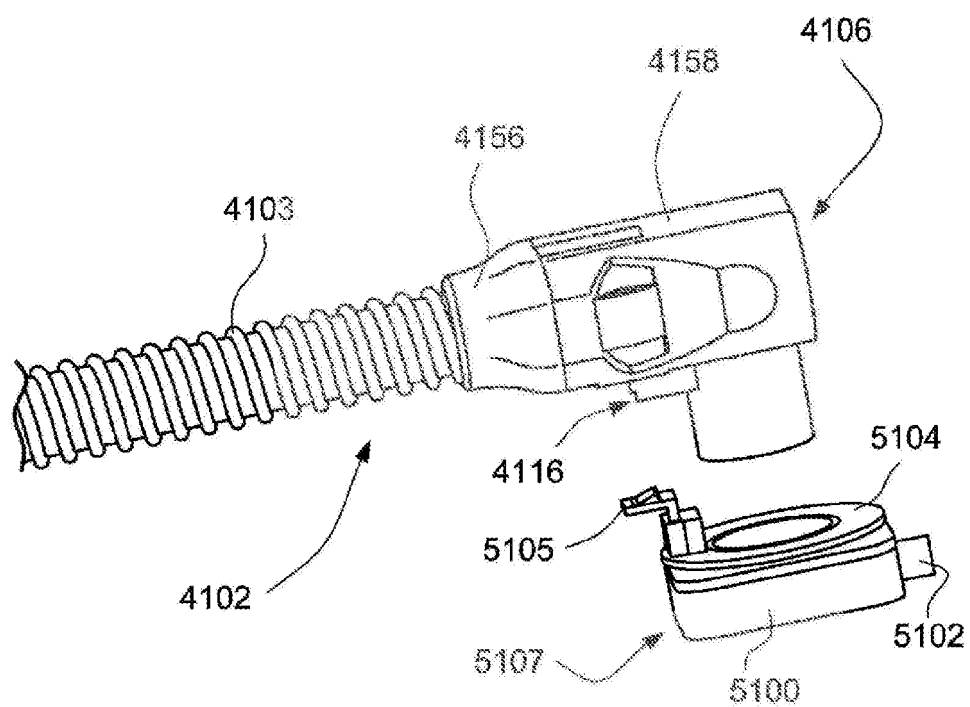
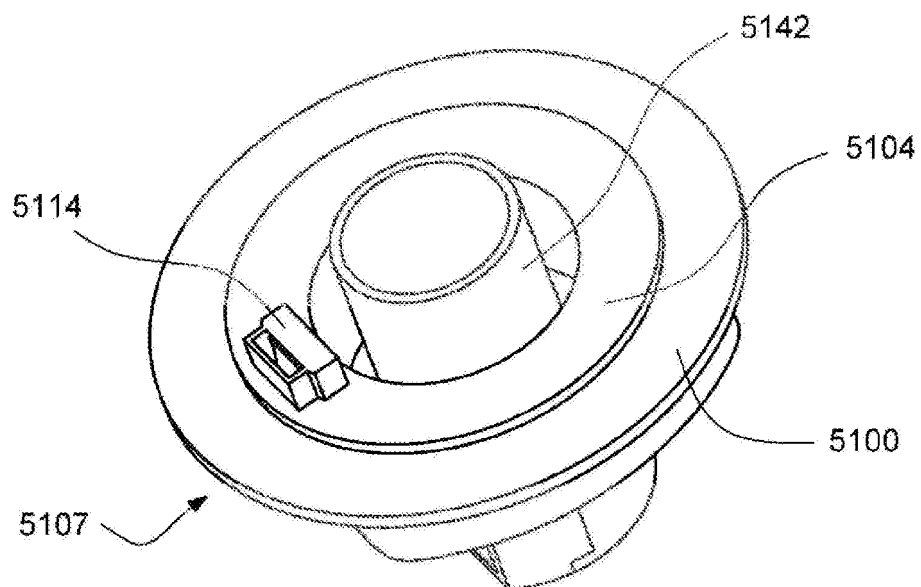
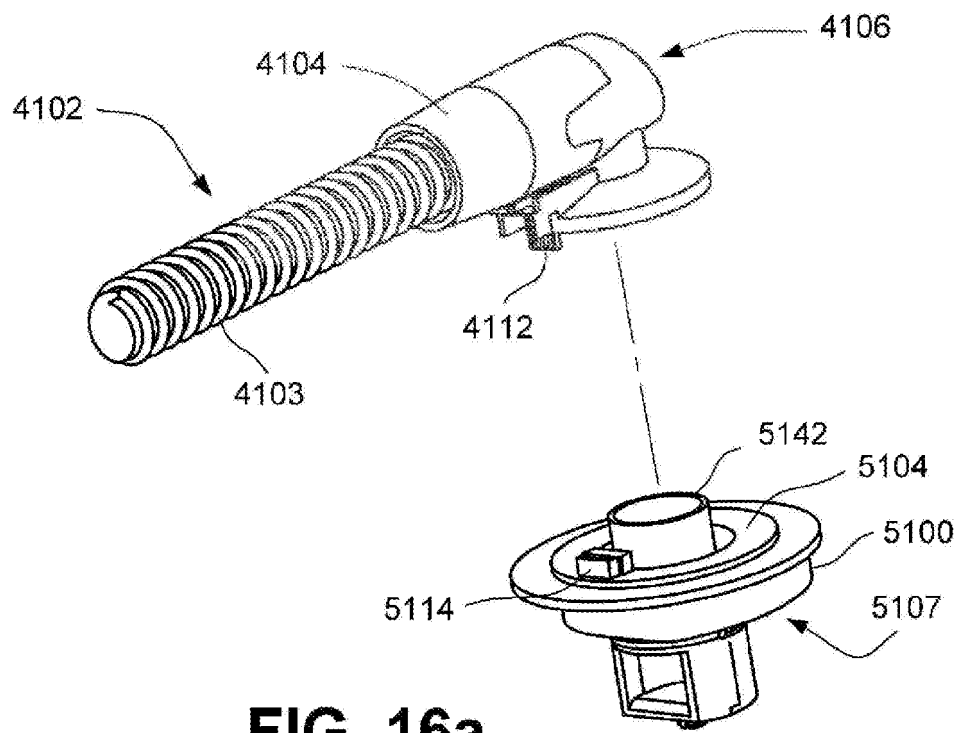


FIG. 15b



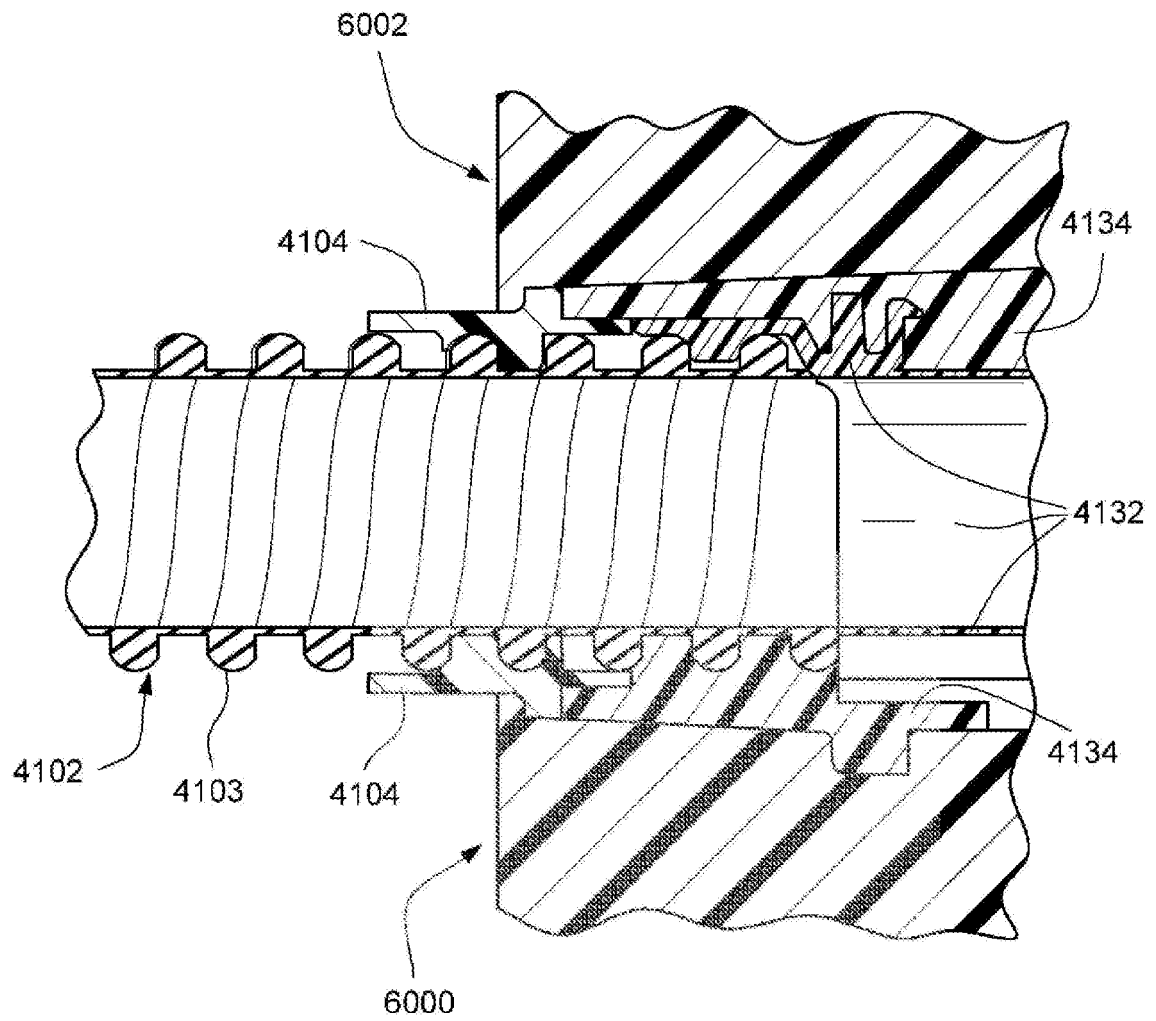


FIG. 17

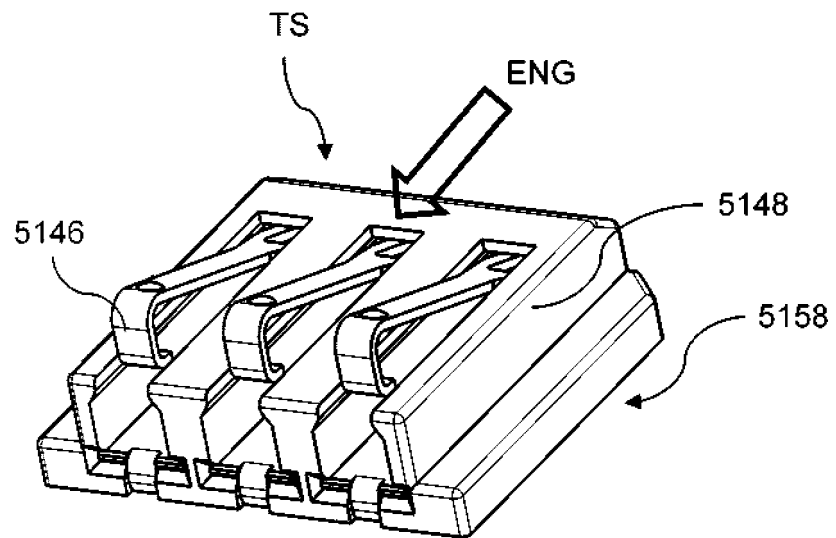


FIG. 18a

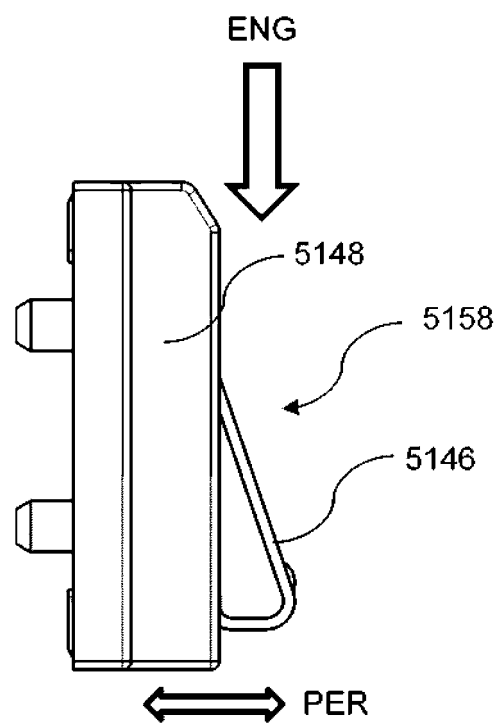


FIG. 18b

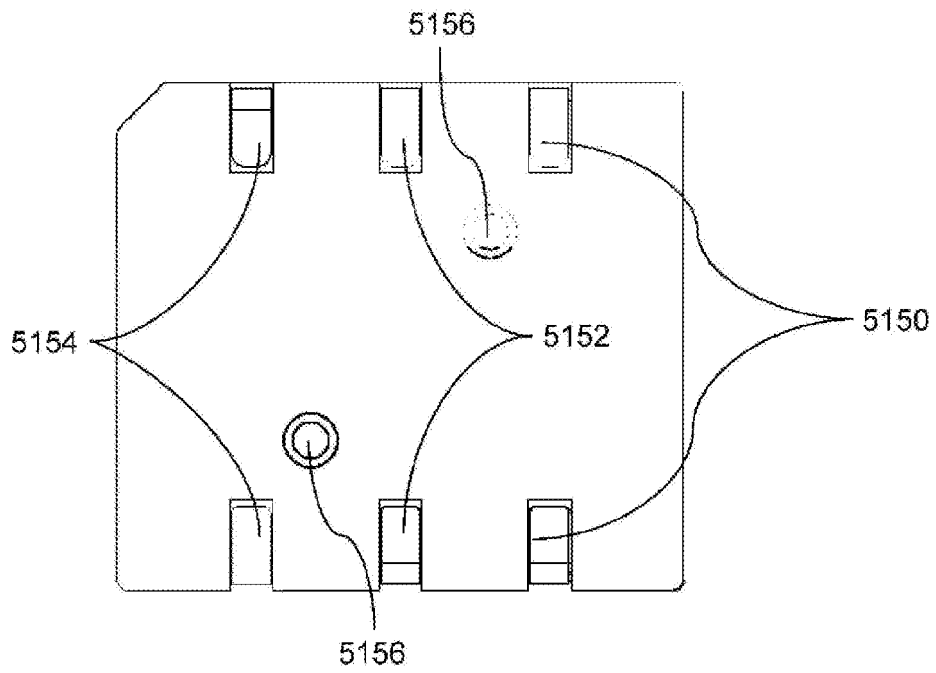


FIG. 18c

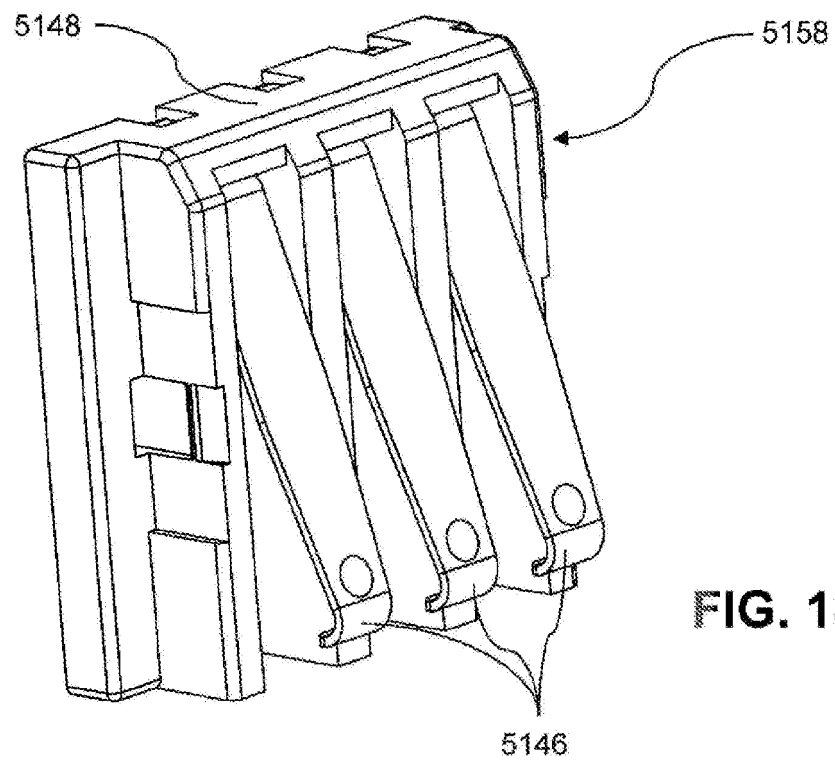


FIG. 18d

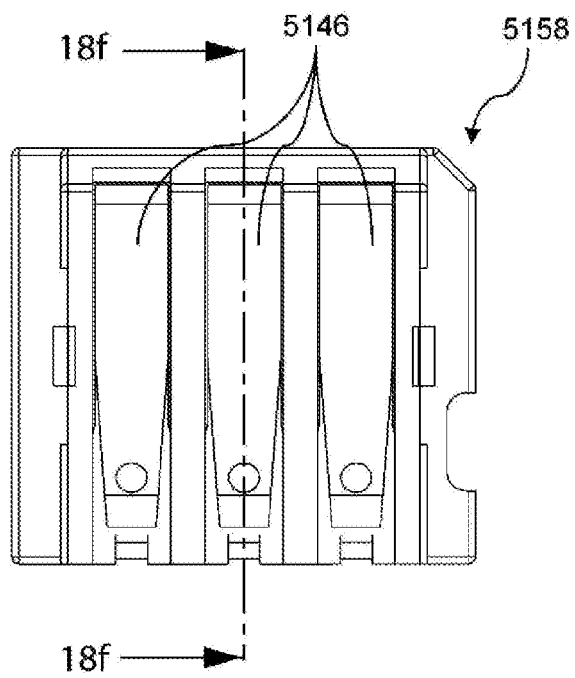


FIG. 18e

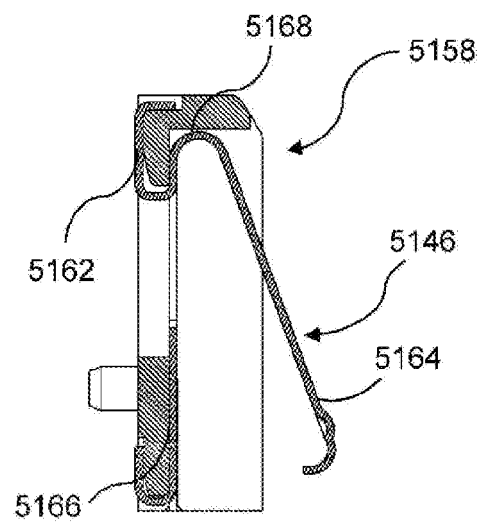


FIG. 18f

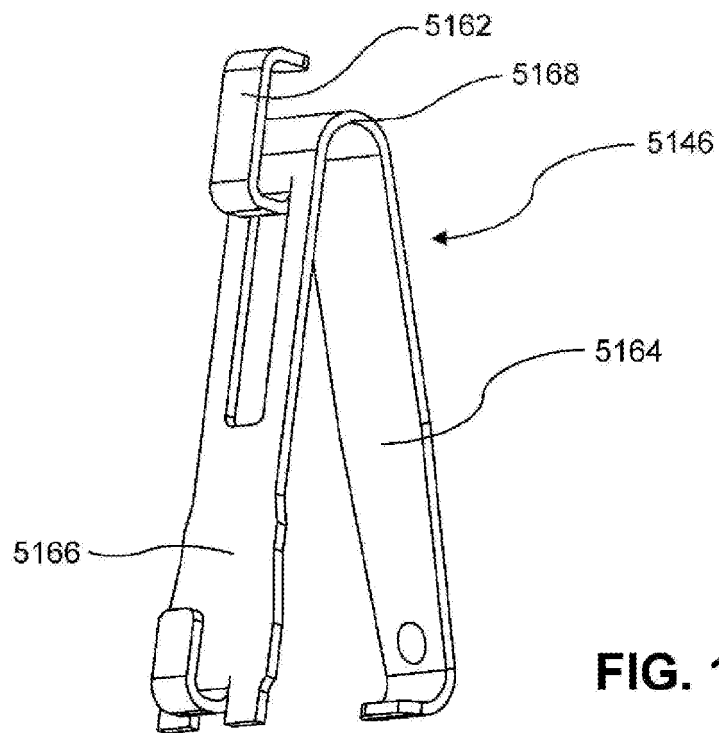


FIG. 18g

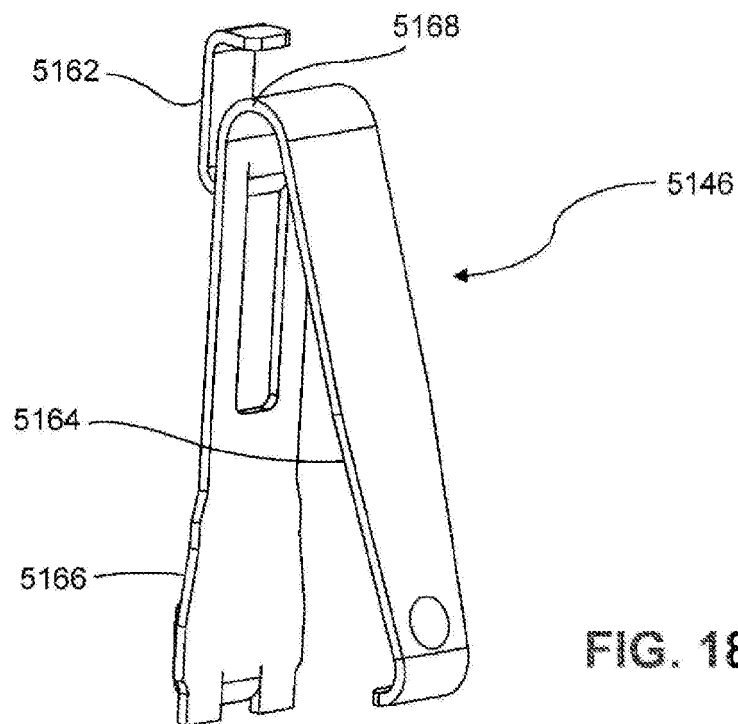


FIG. 18h

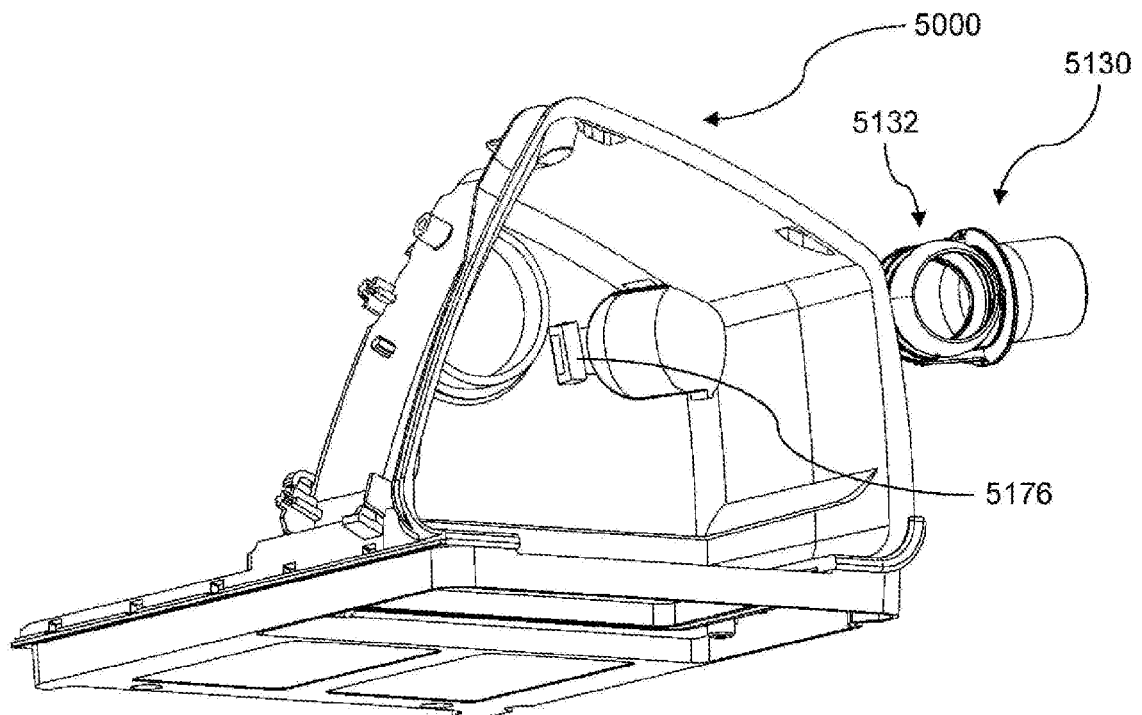


FIG. 19a

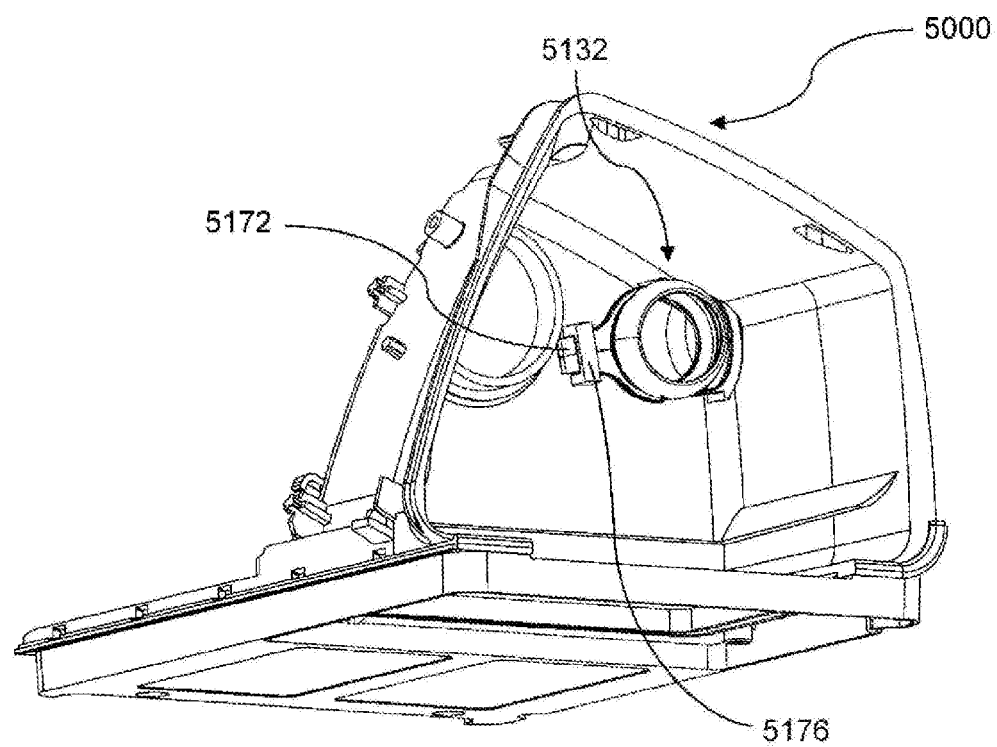


FIG. 19b

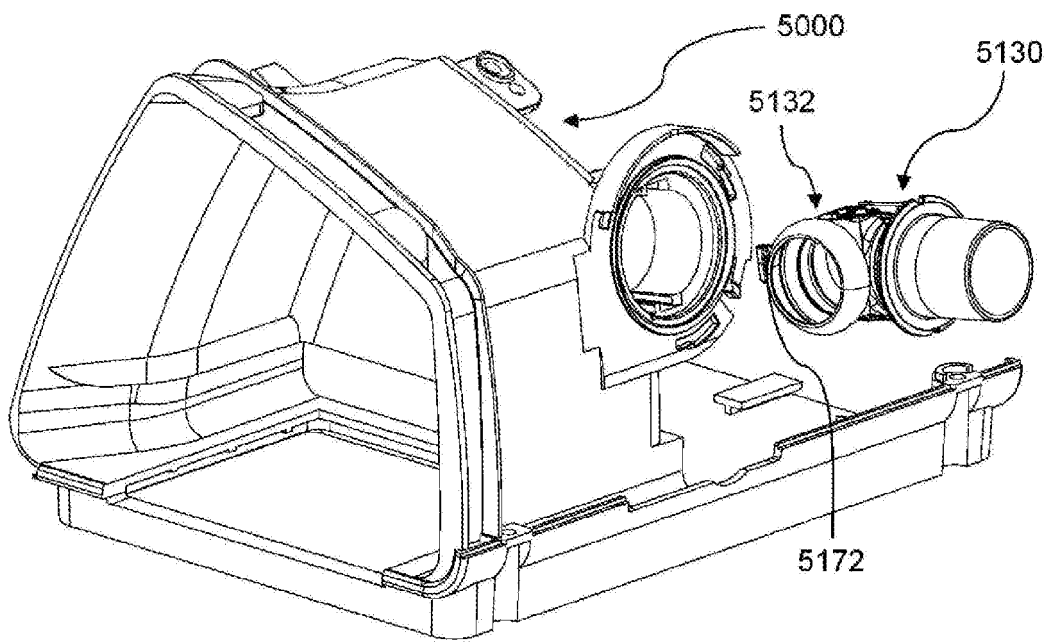


FIG. 19c

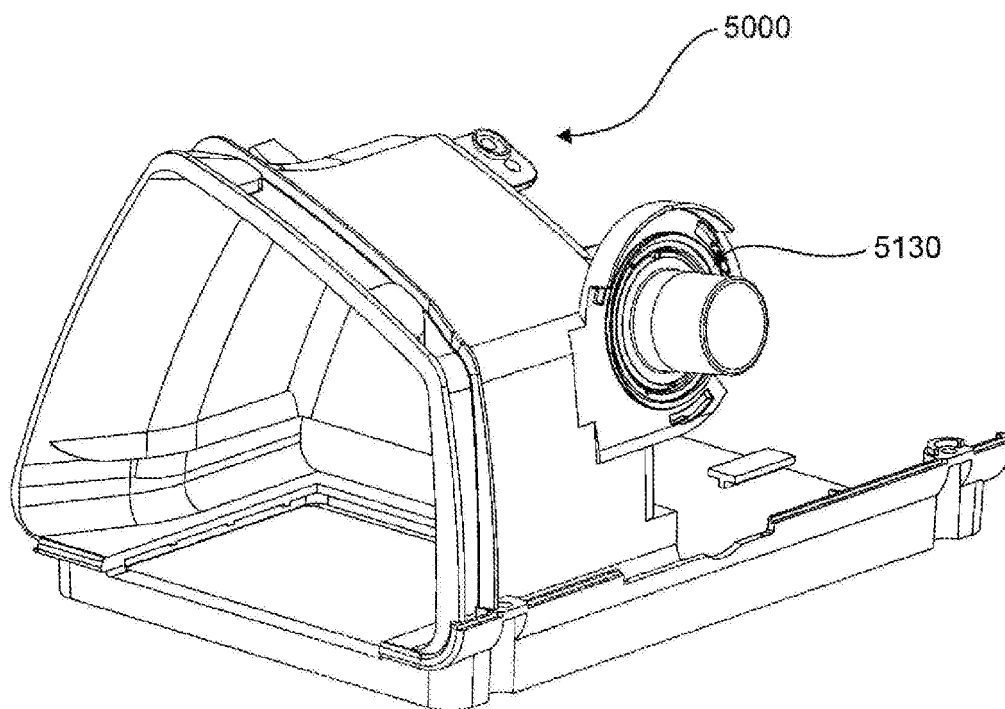


FIG. 19d

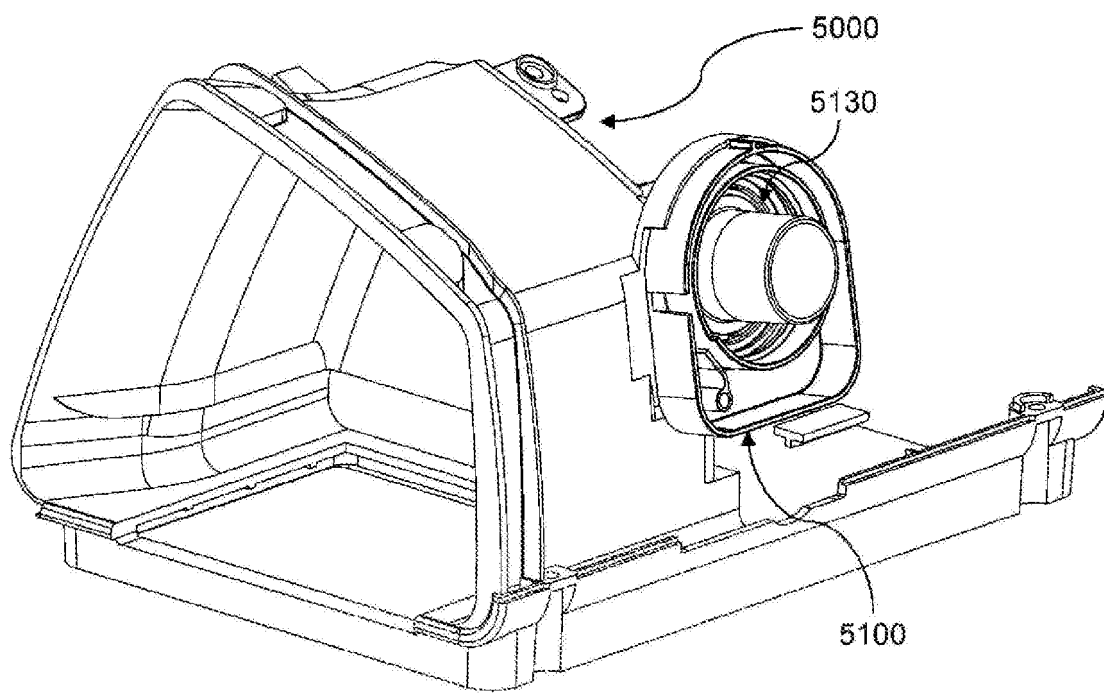


FIG. 19e

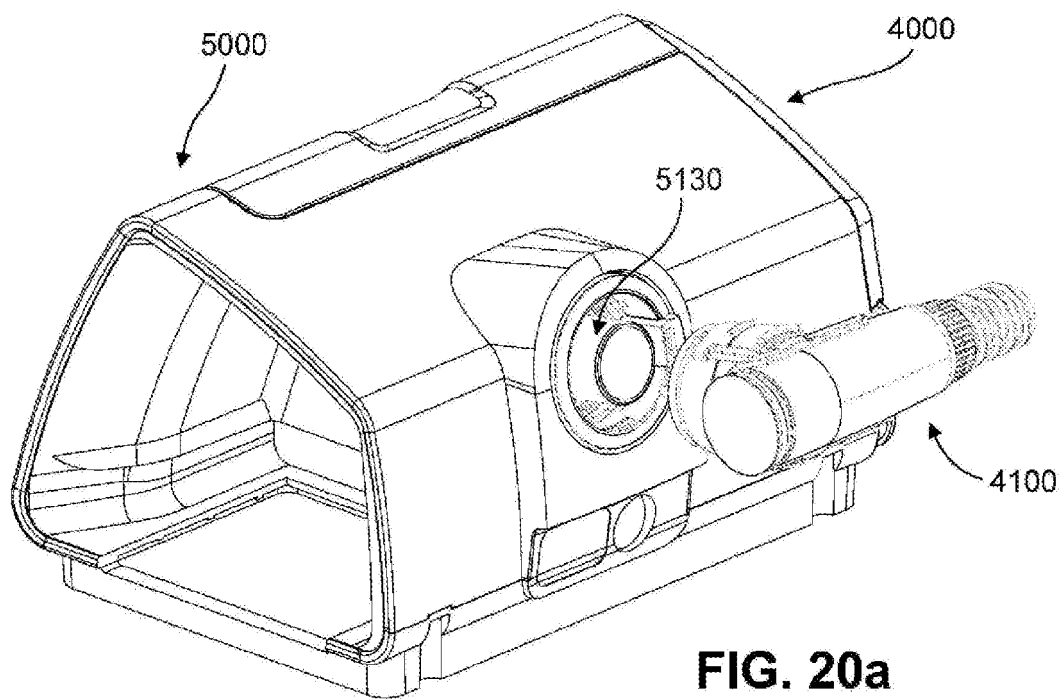


FIG. 20a

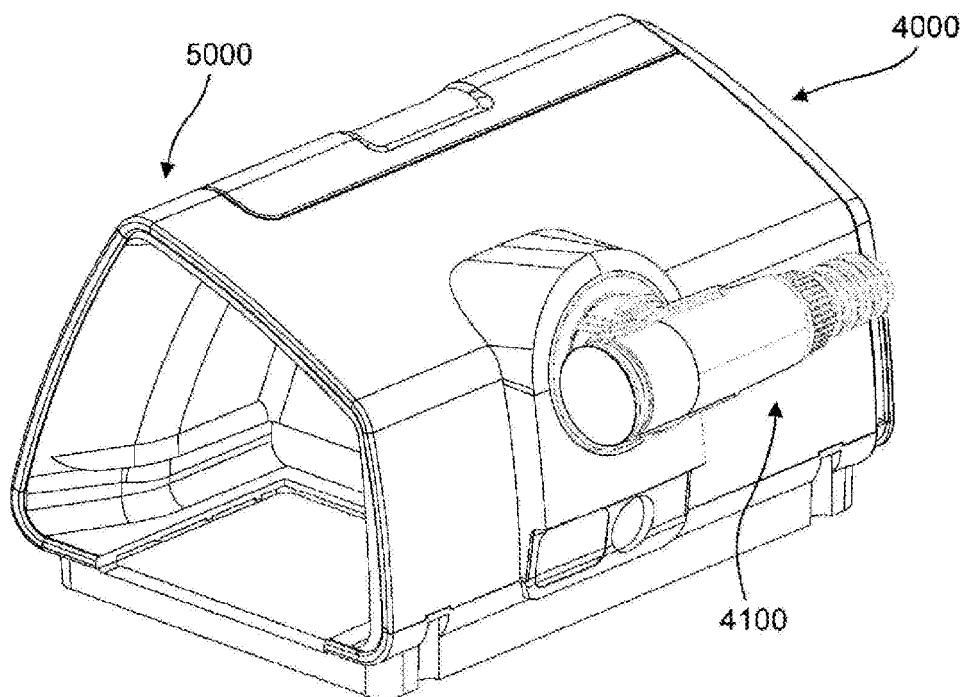


FIG. 20b

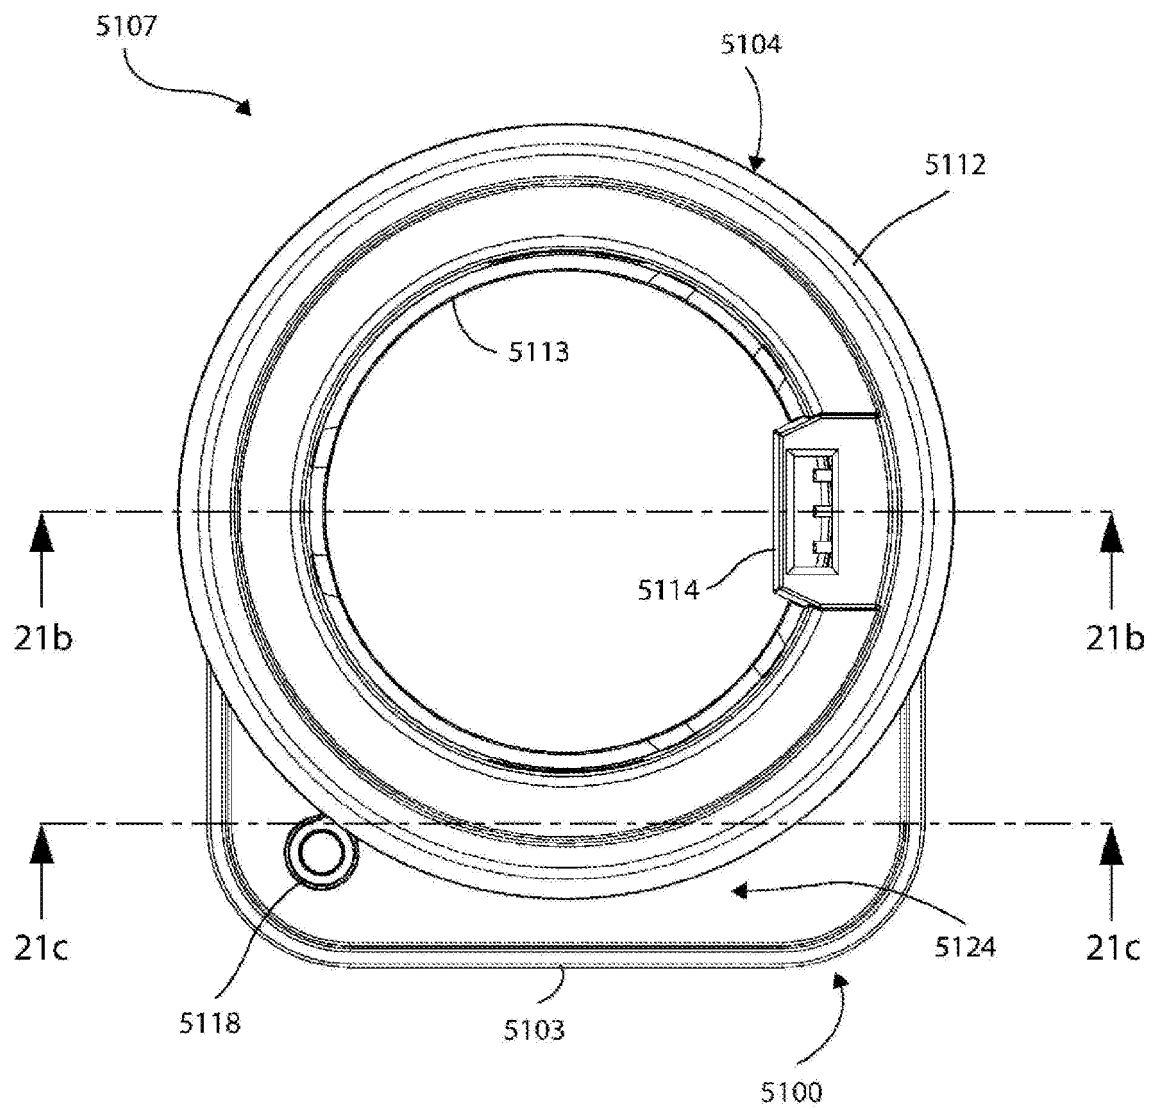
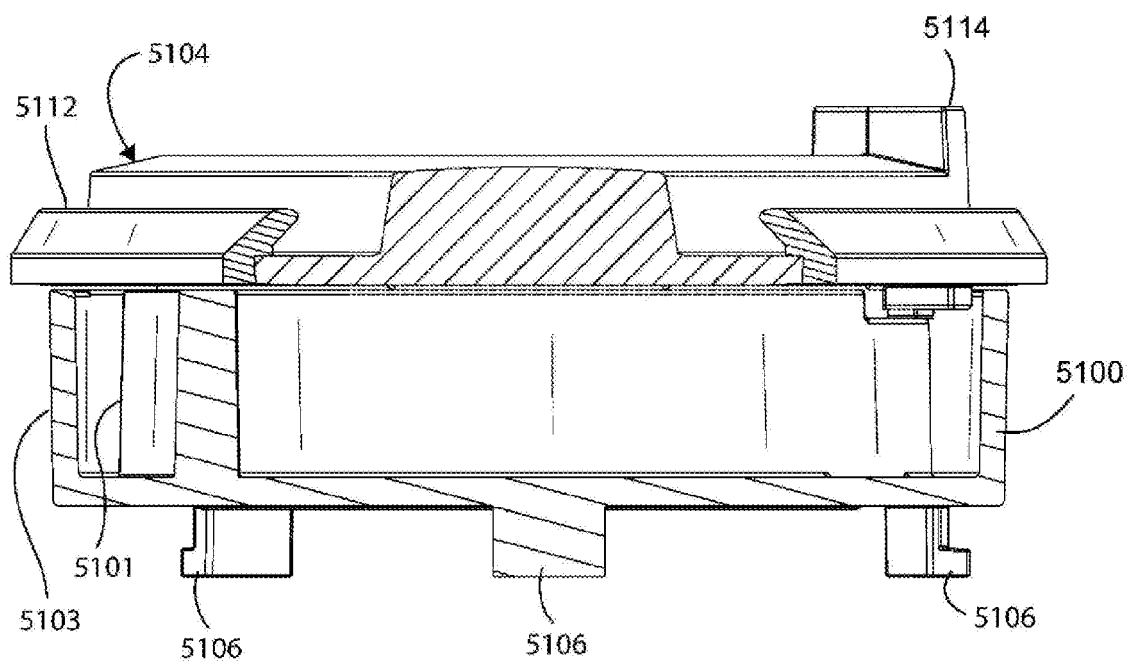
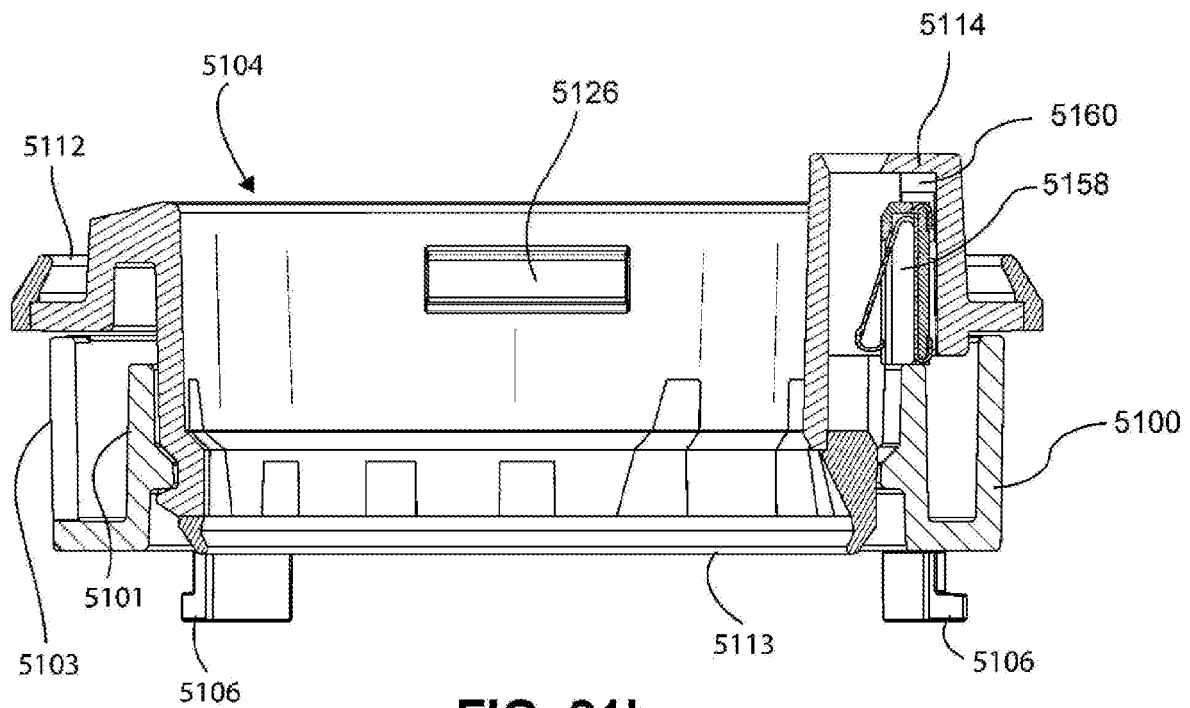


FIG. 21a



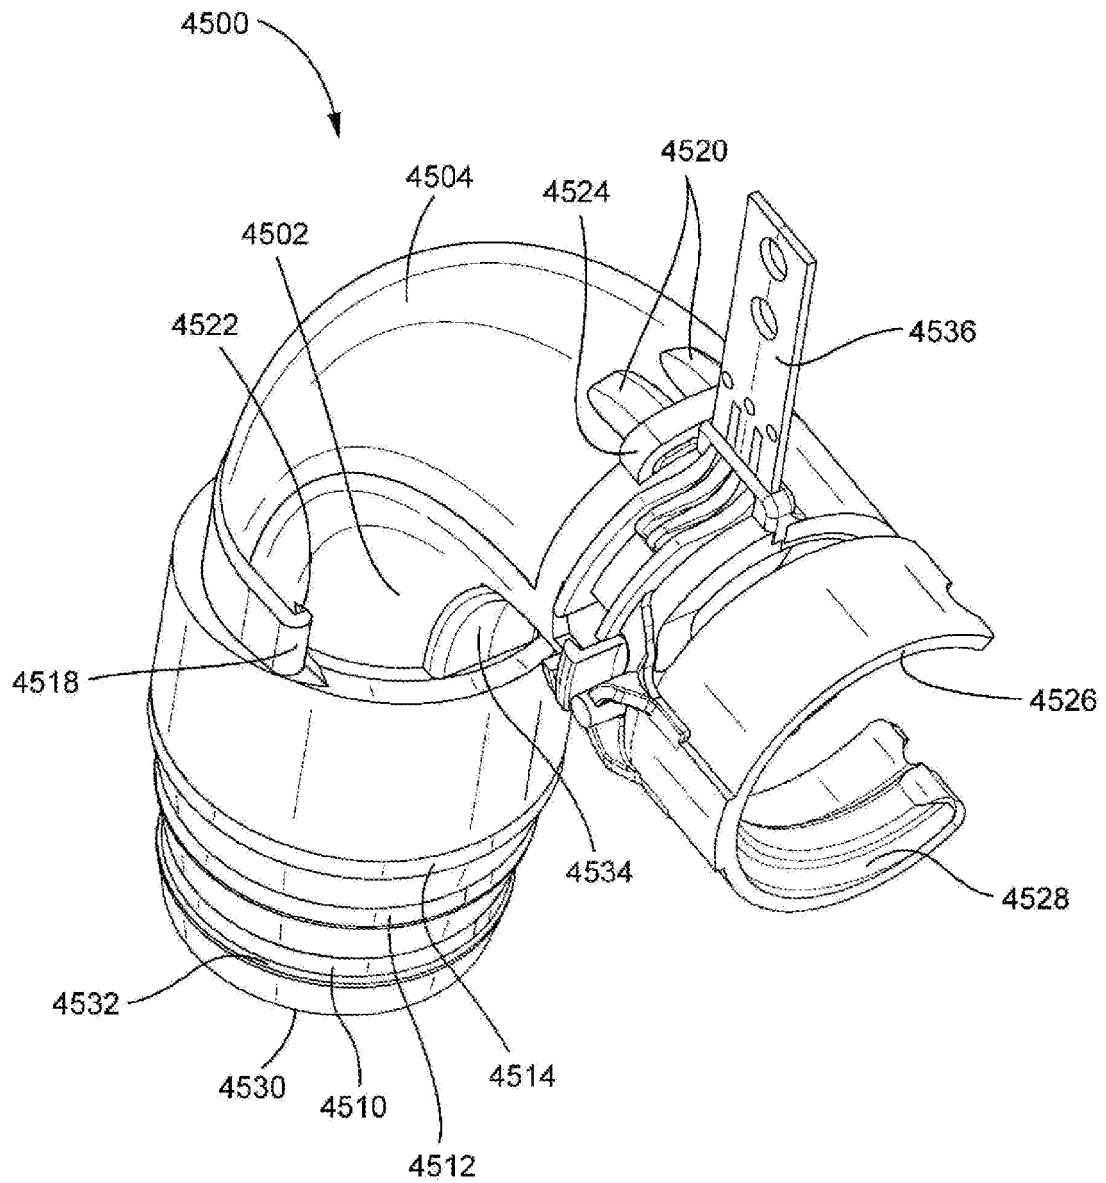


FIG. 22a

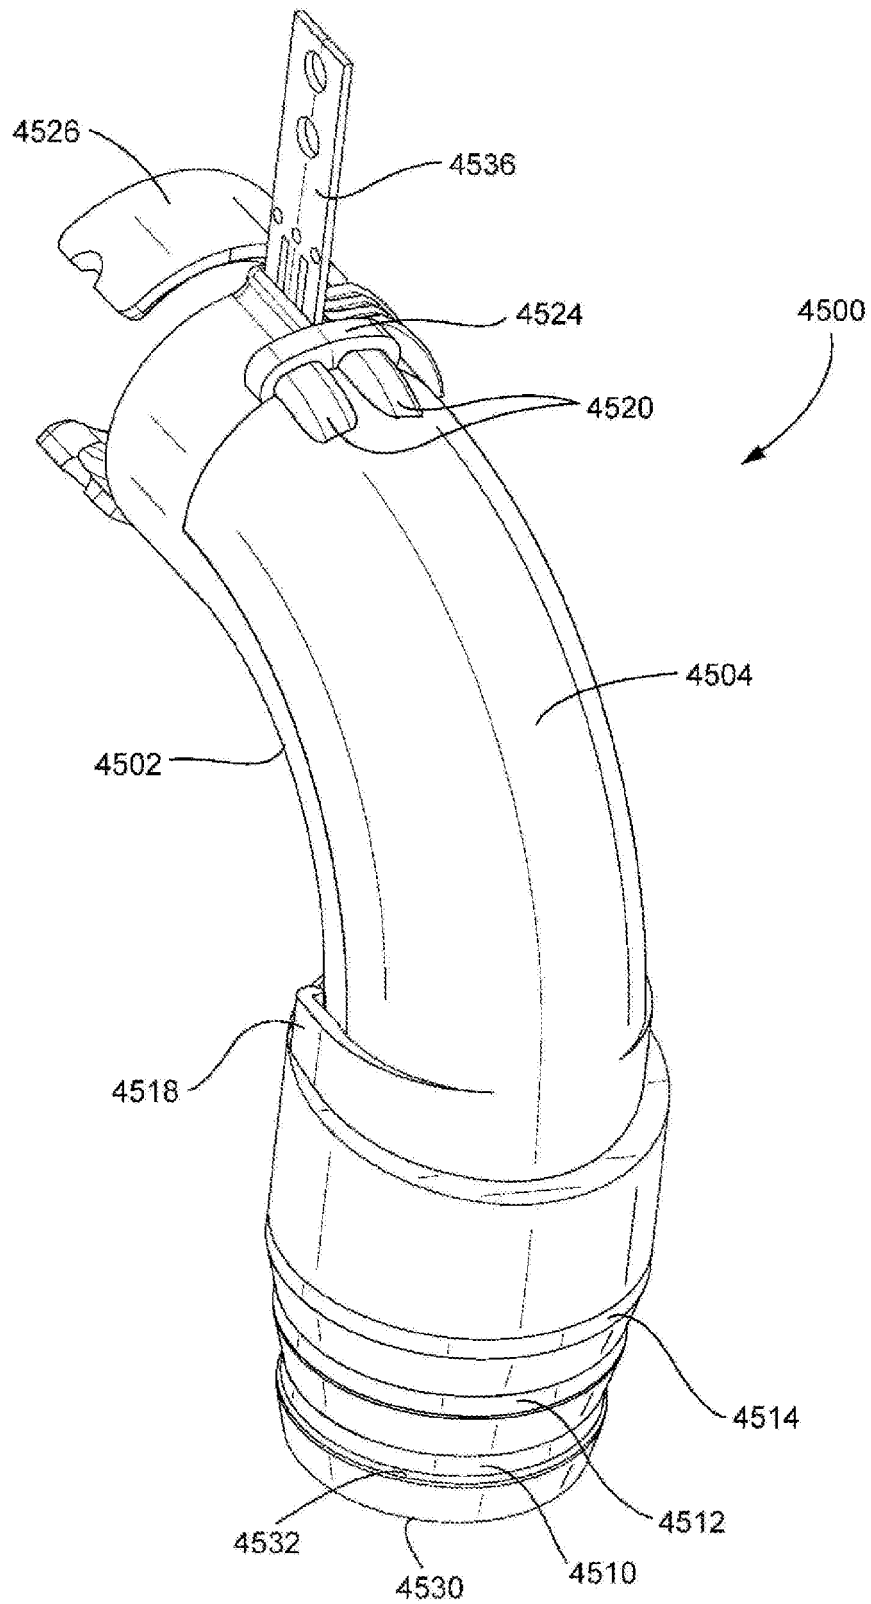


FIG. 22b

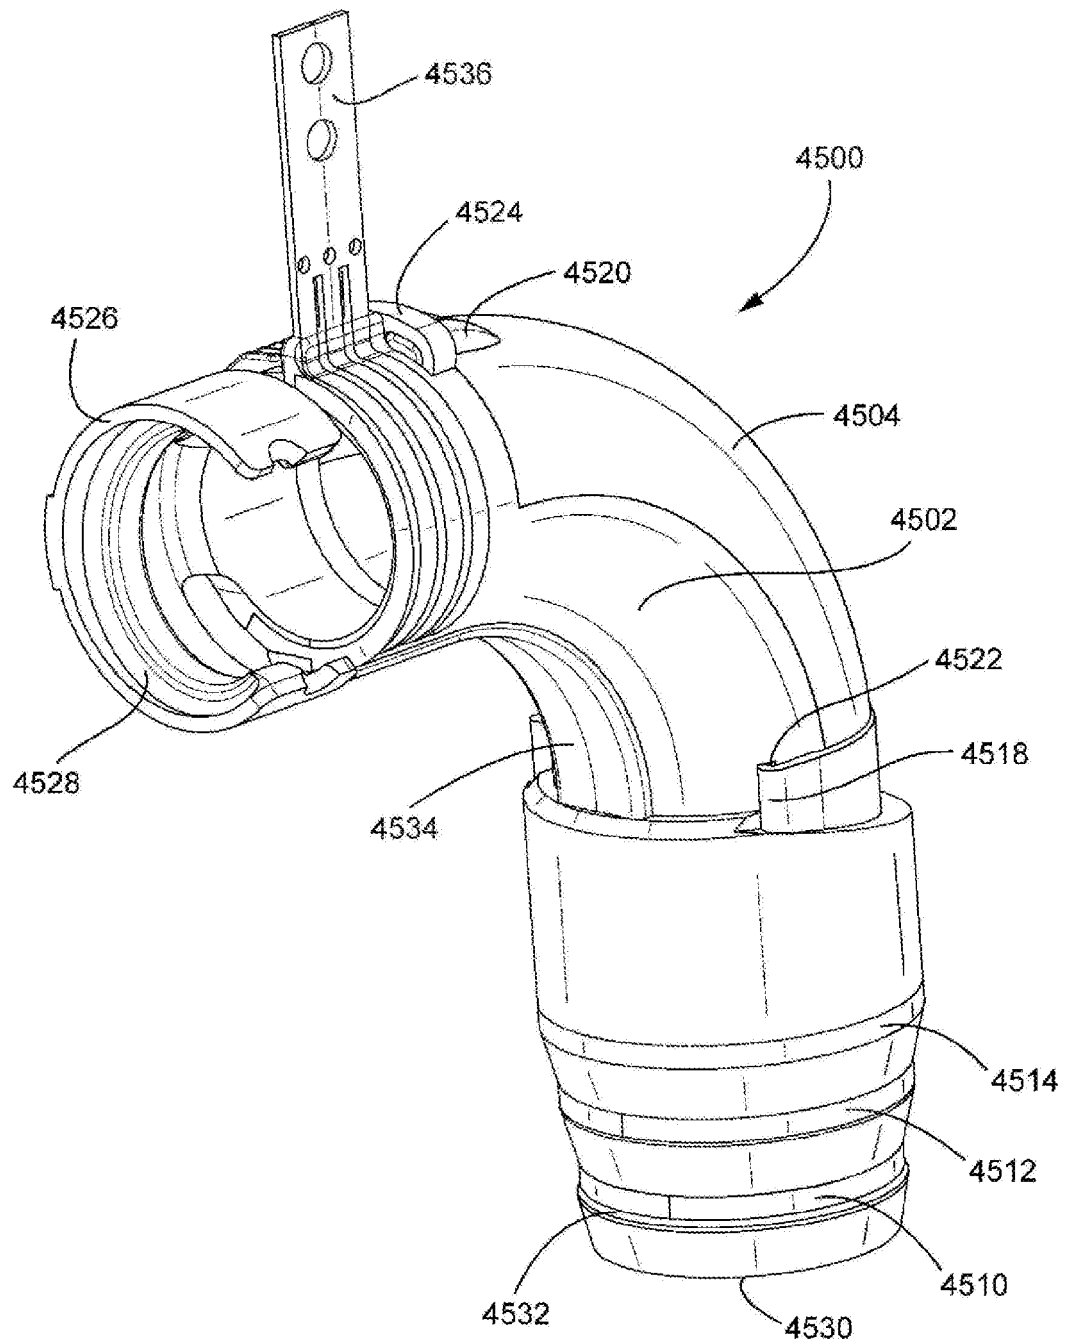


FIG. 22c

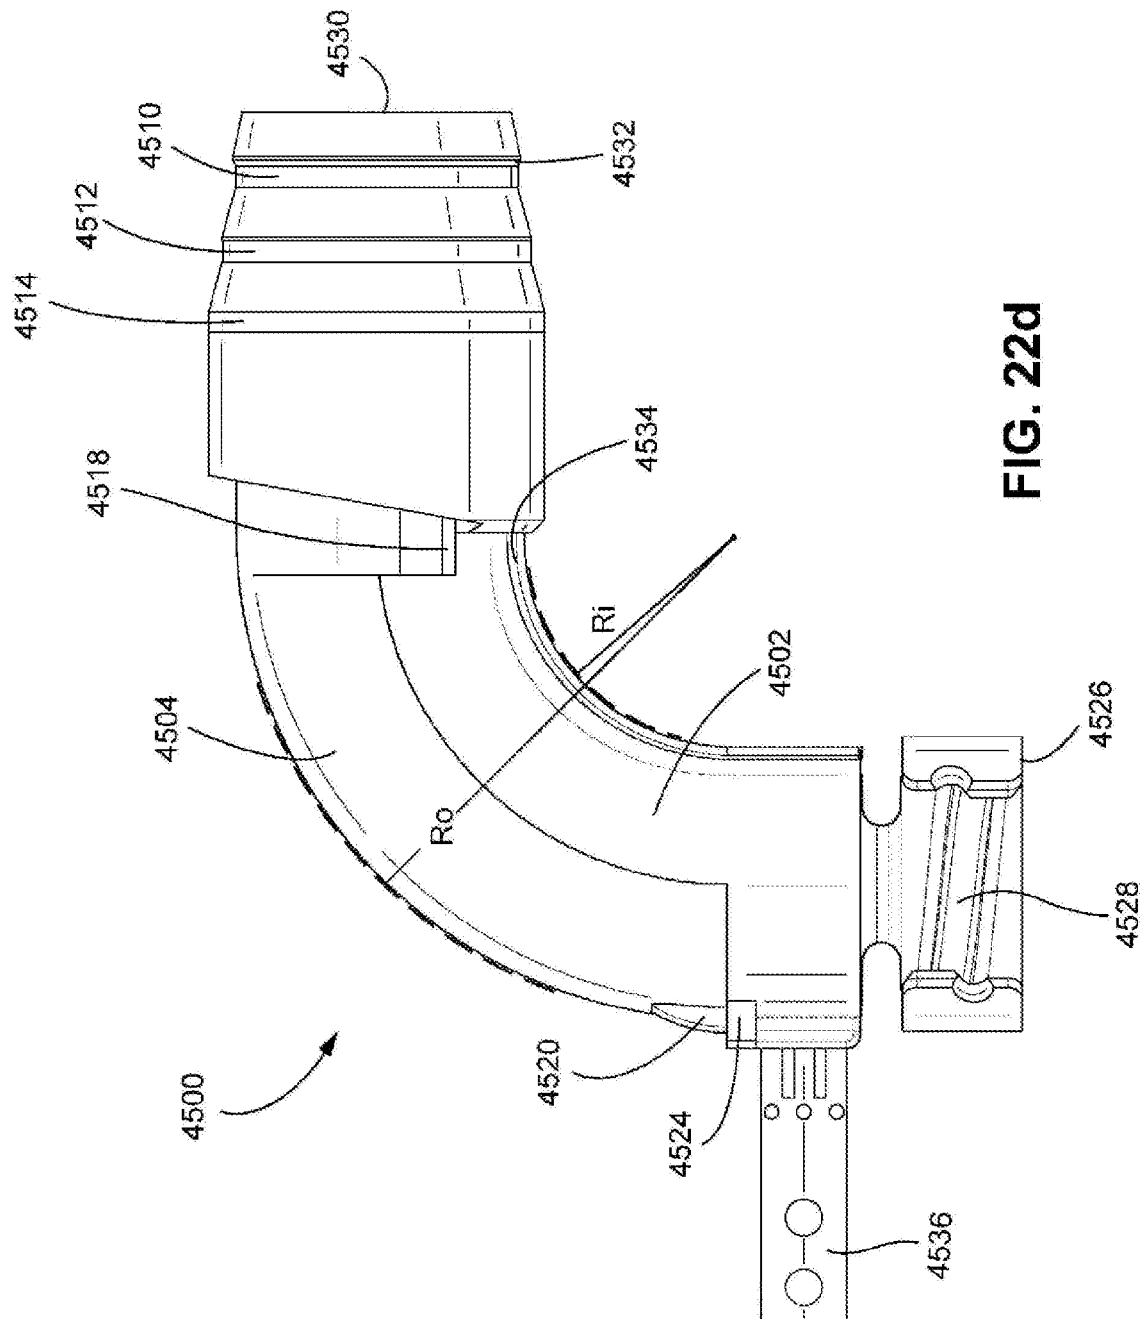
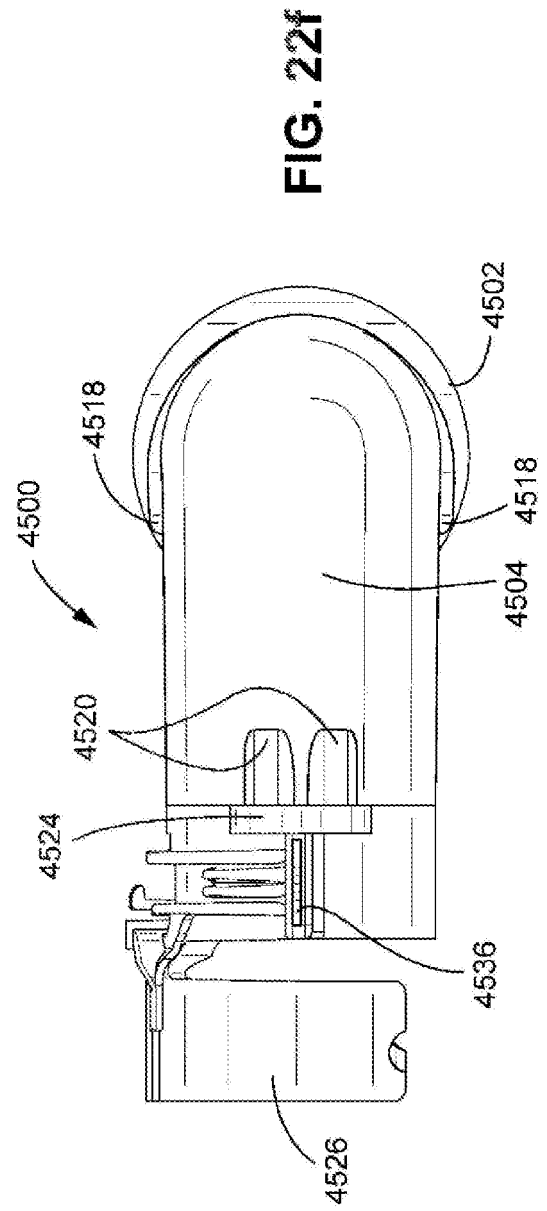
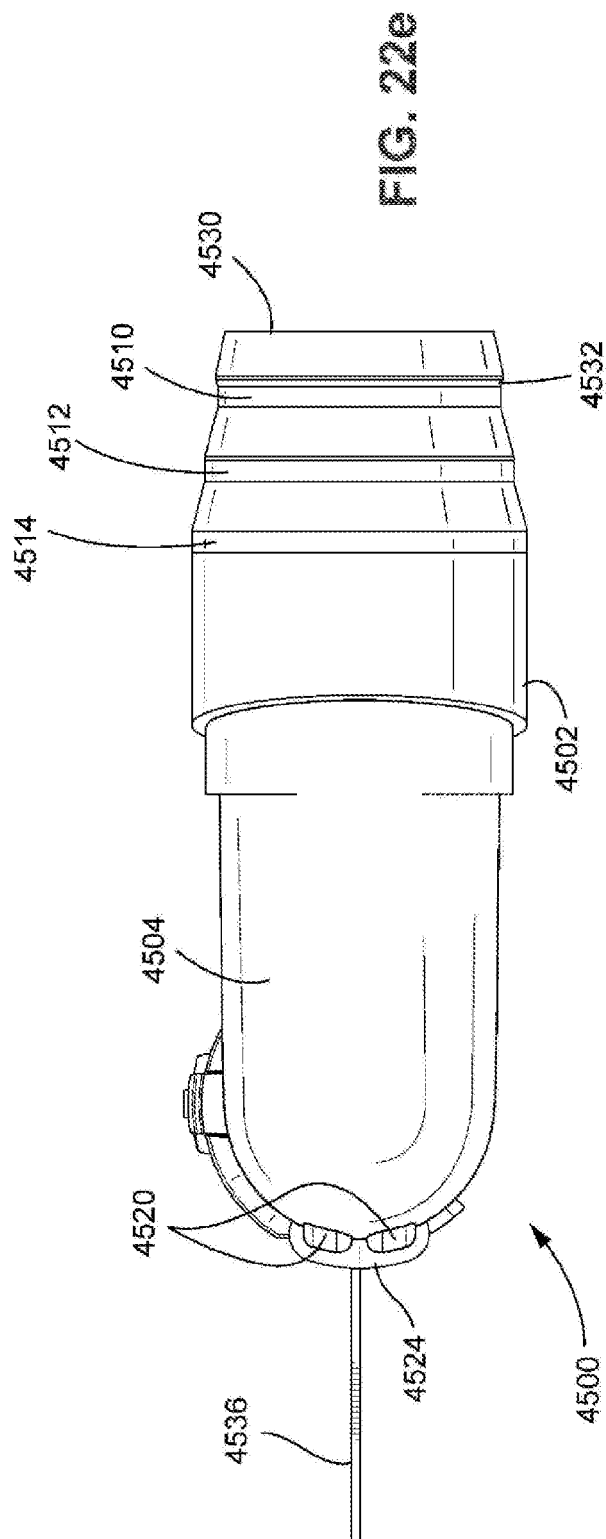


FIG. 22d



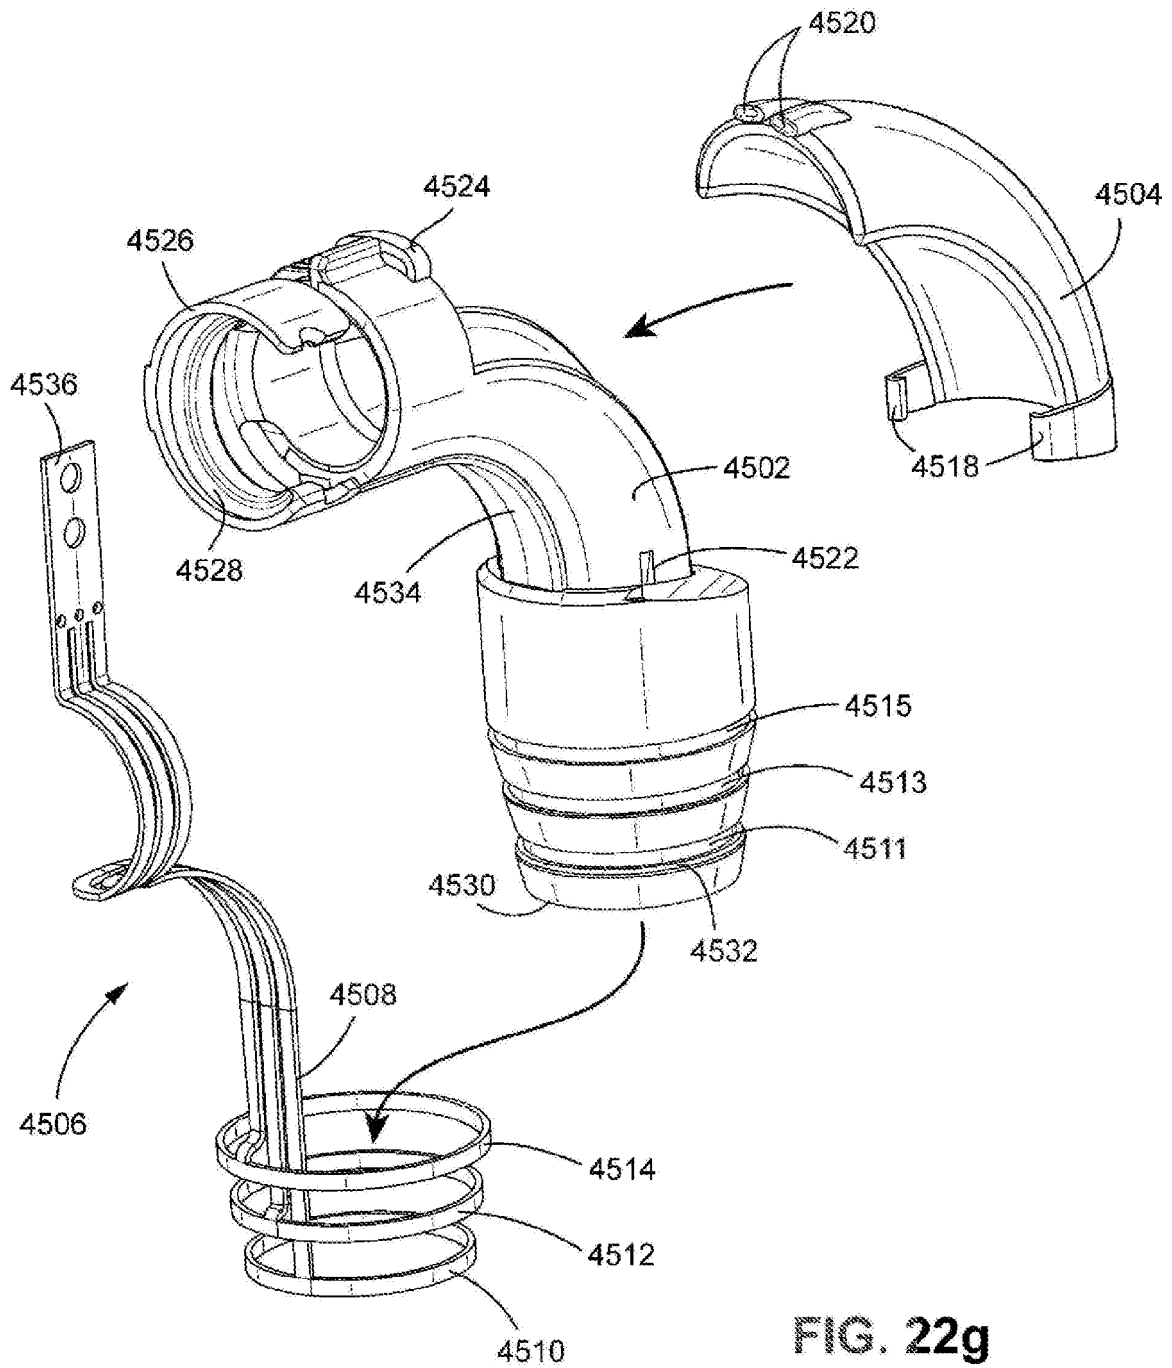


FIG. 22g

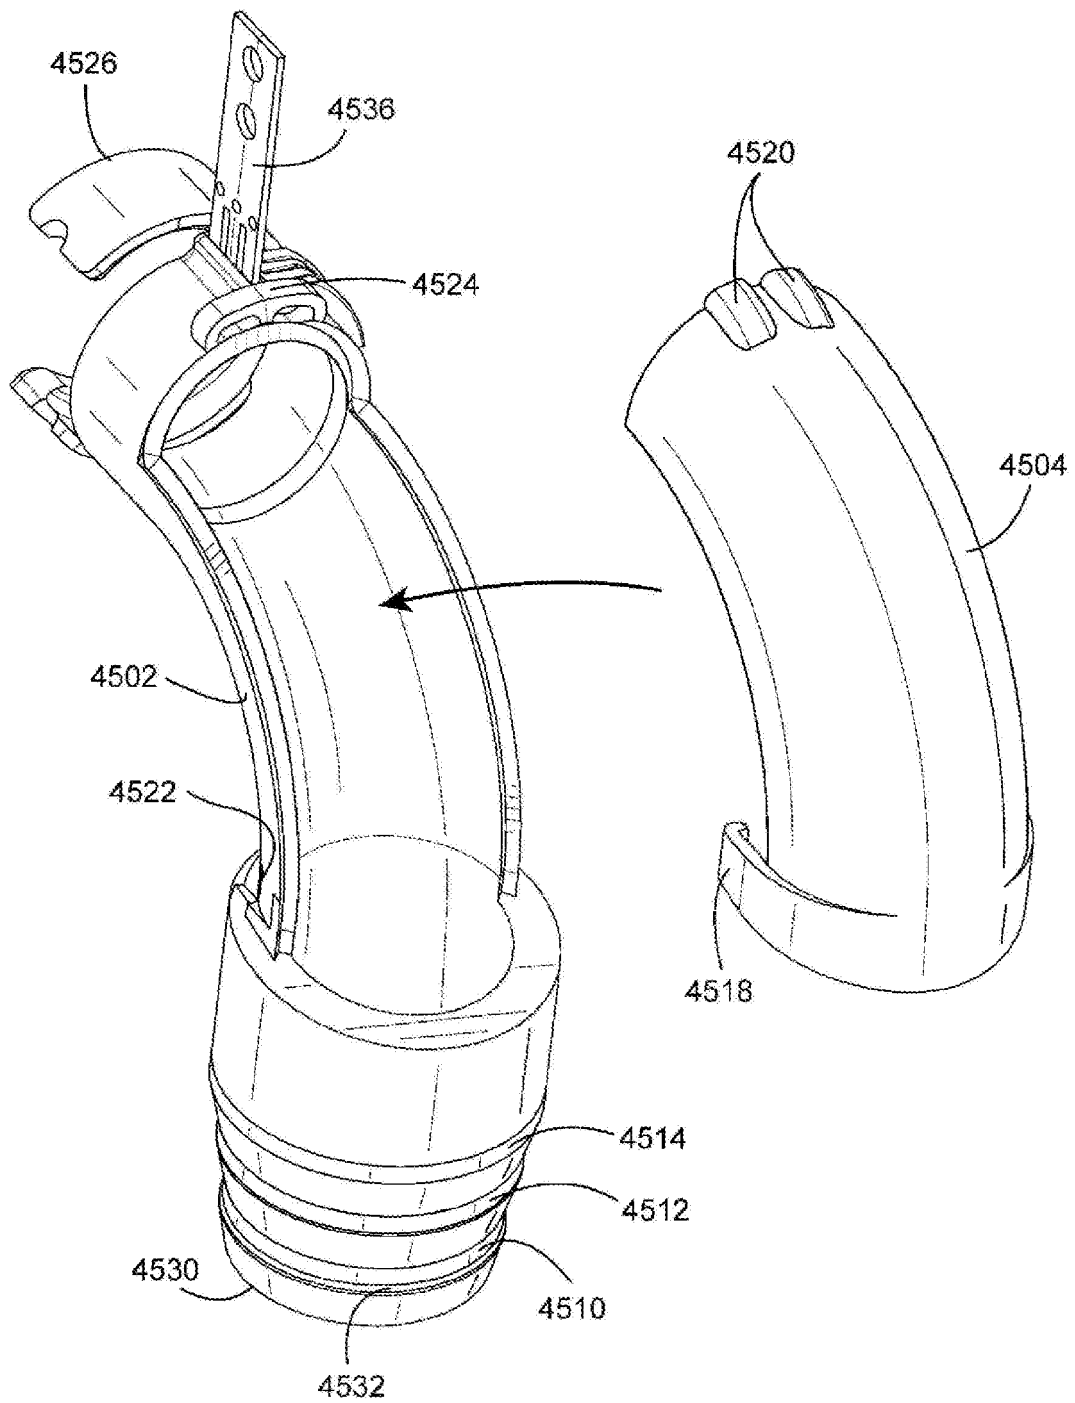


FIG. 22h

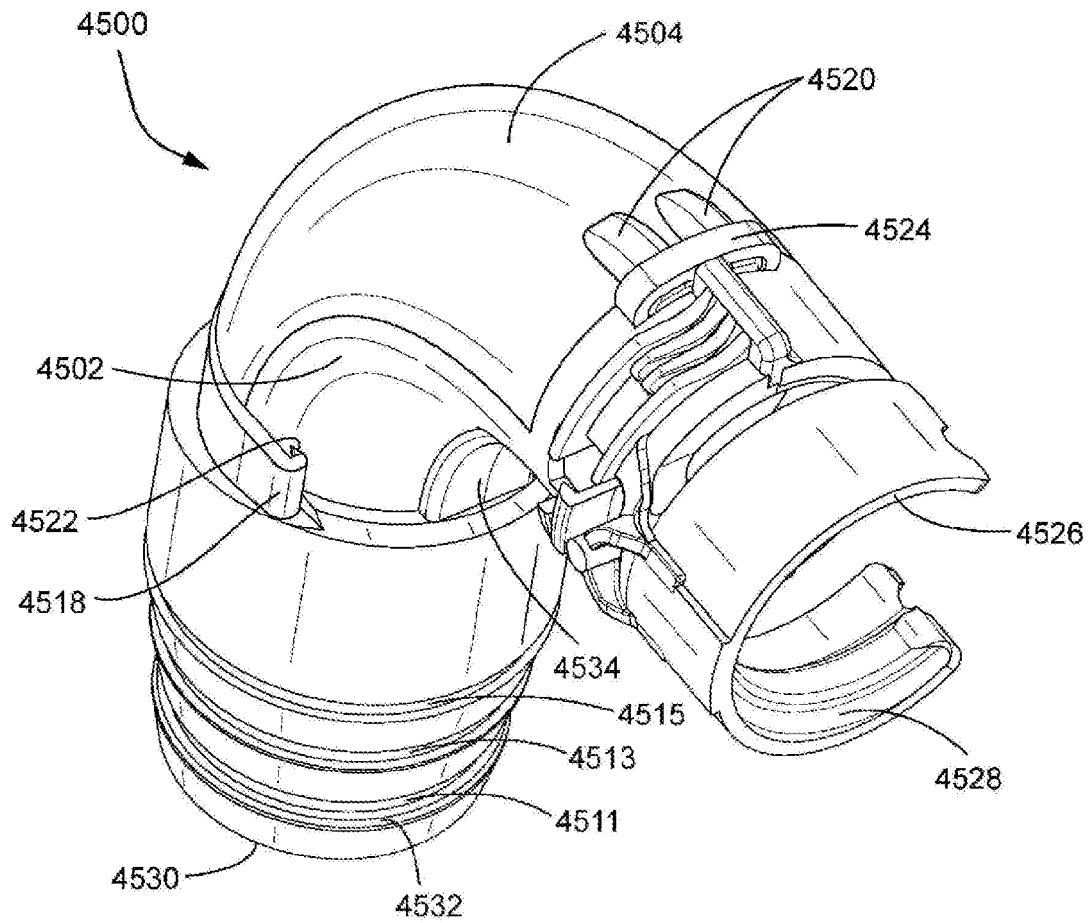


FIG. 23a

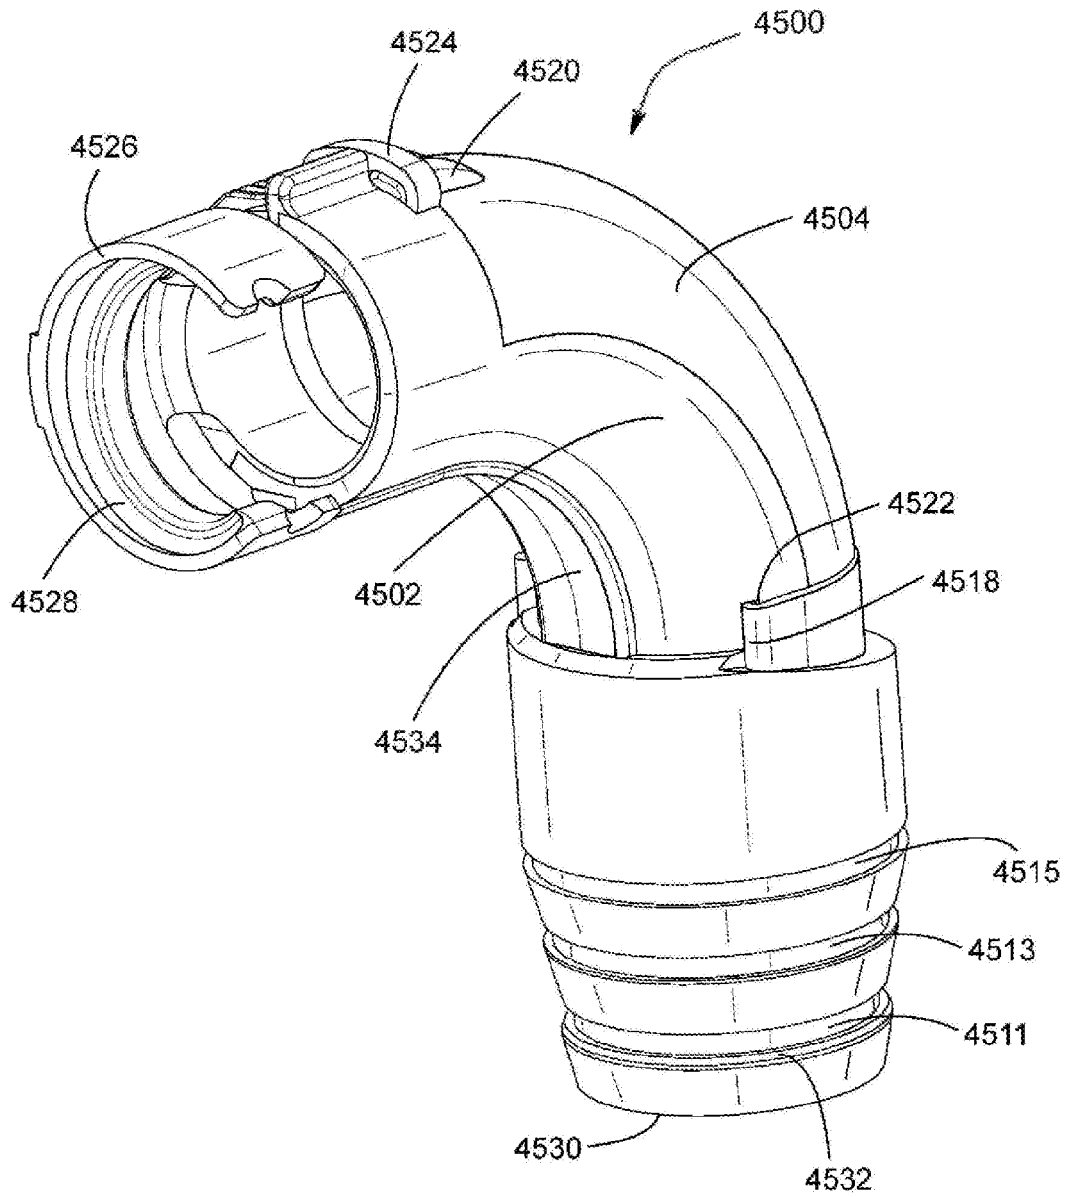


FIG. 23b

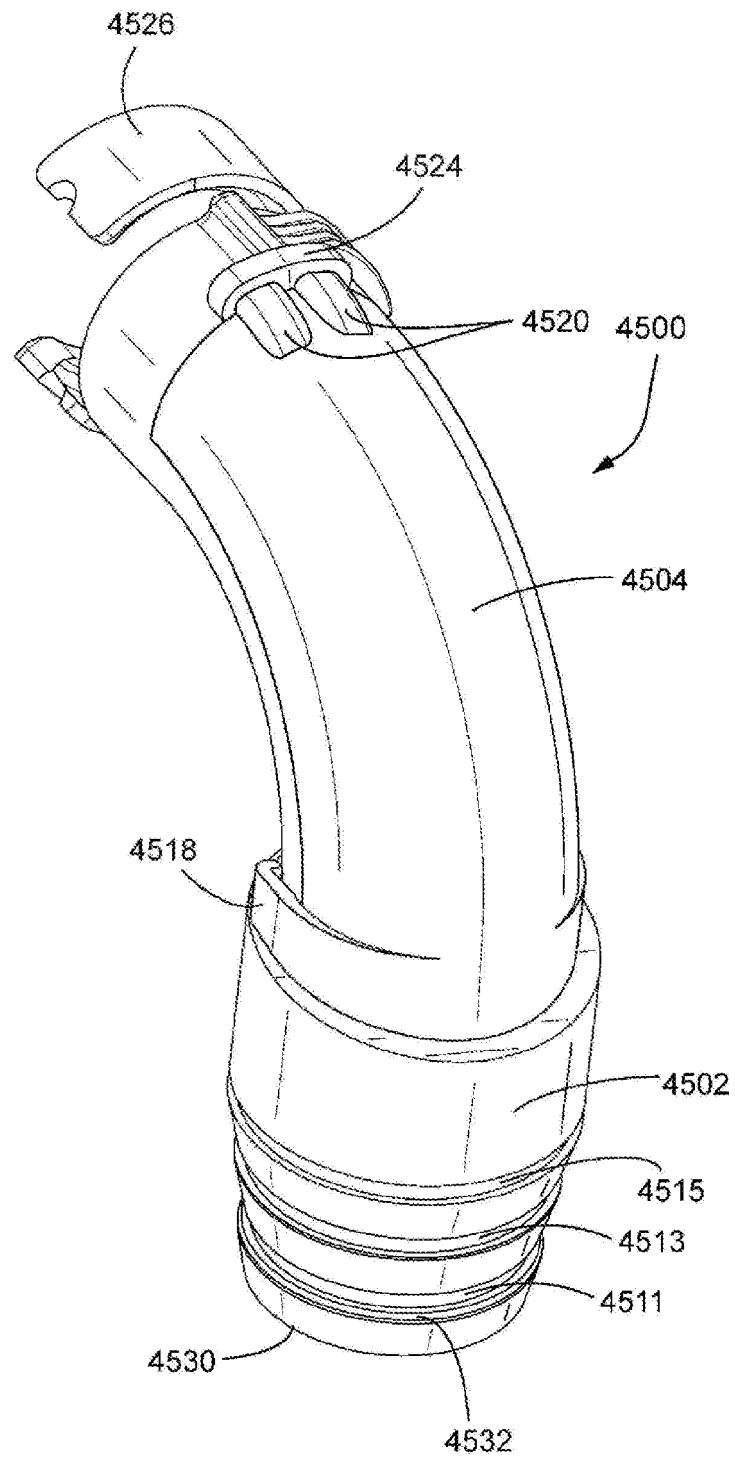
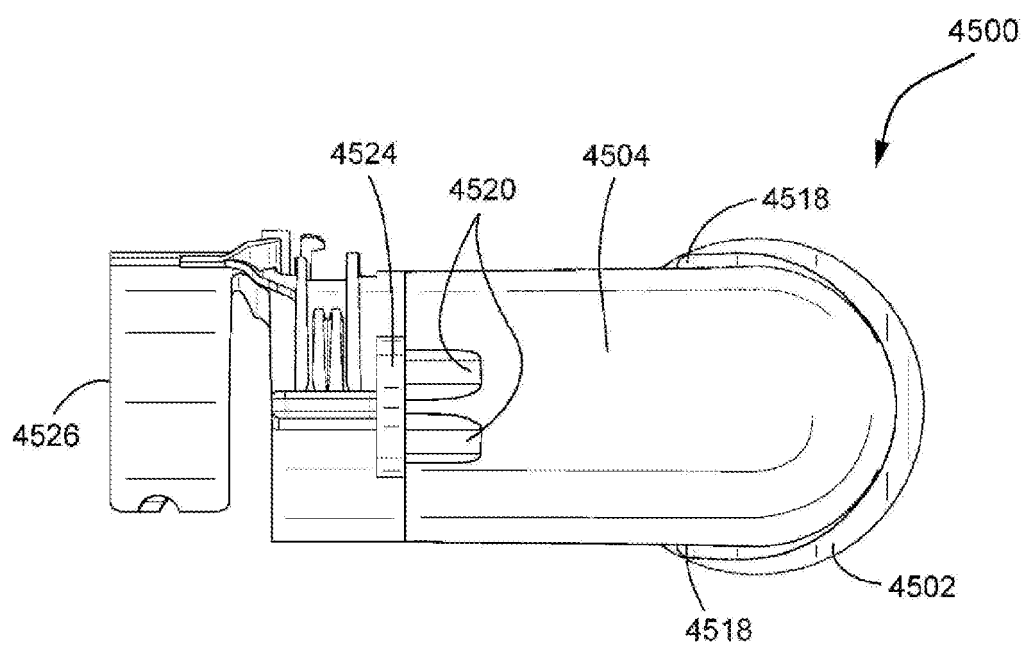
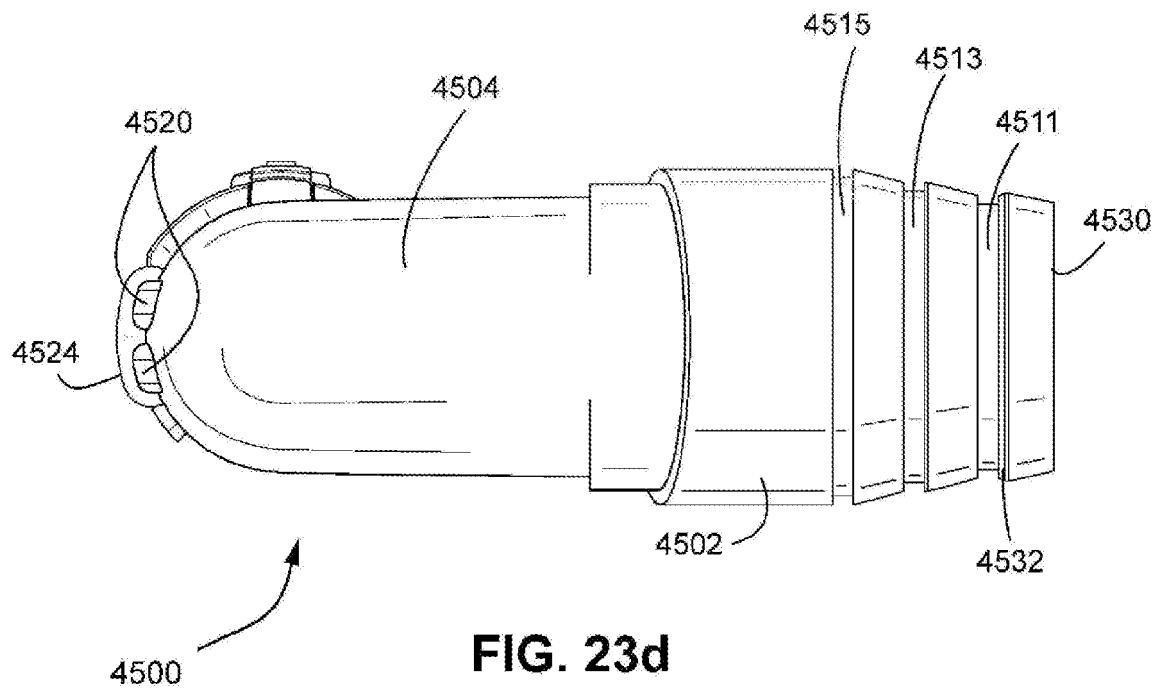


FIG. 23c



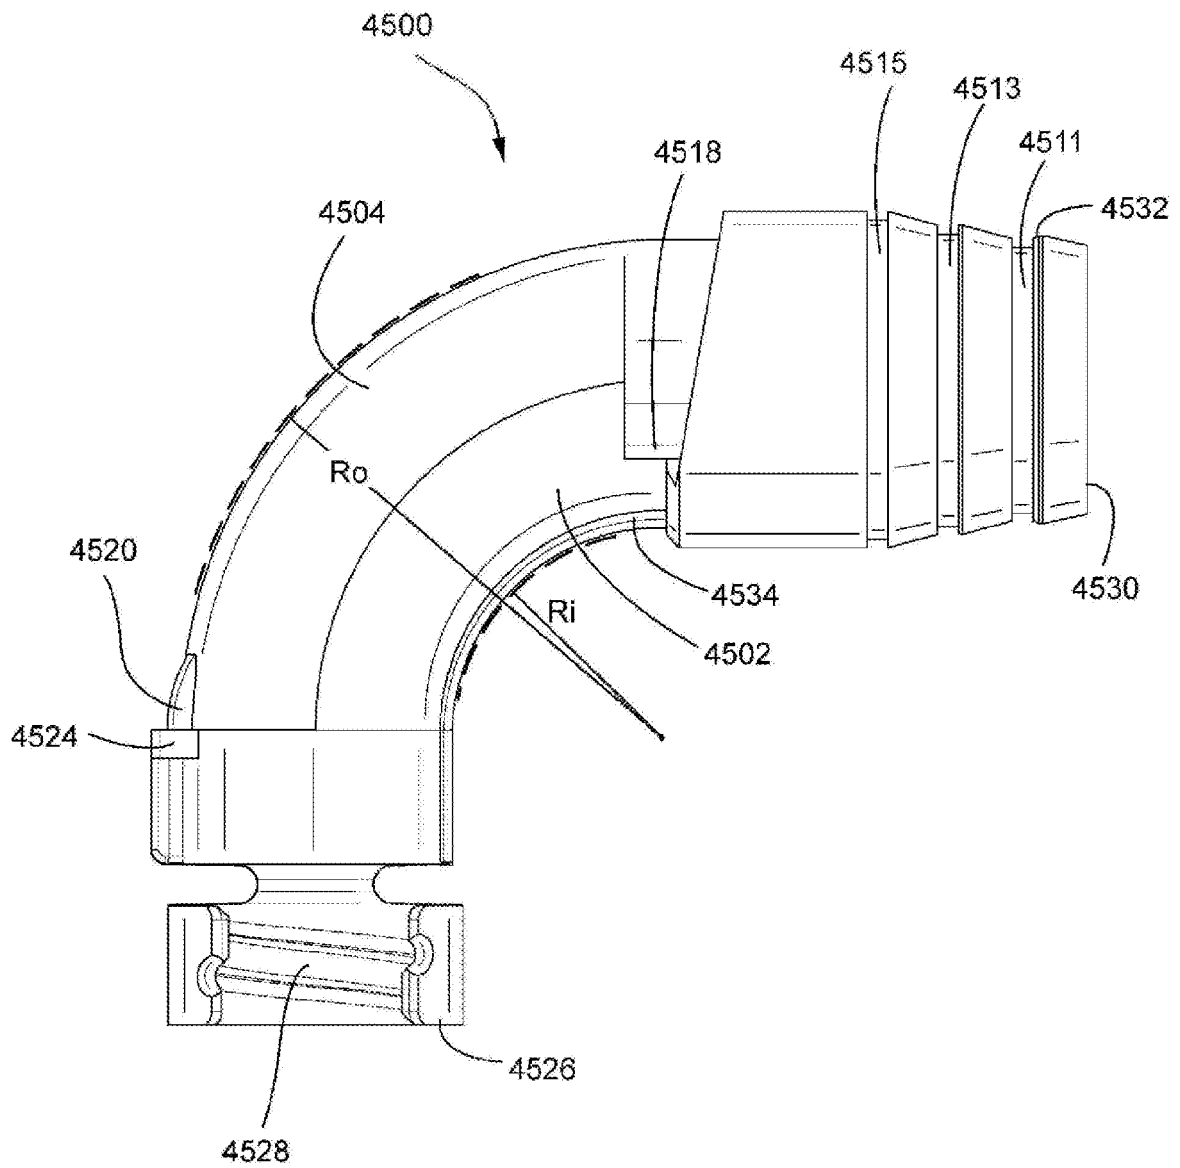


FIG. 23f

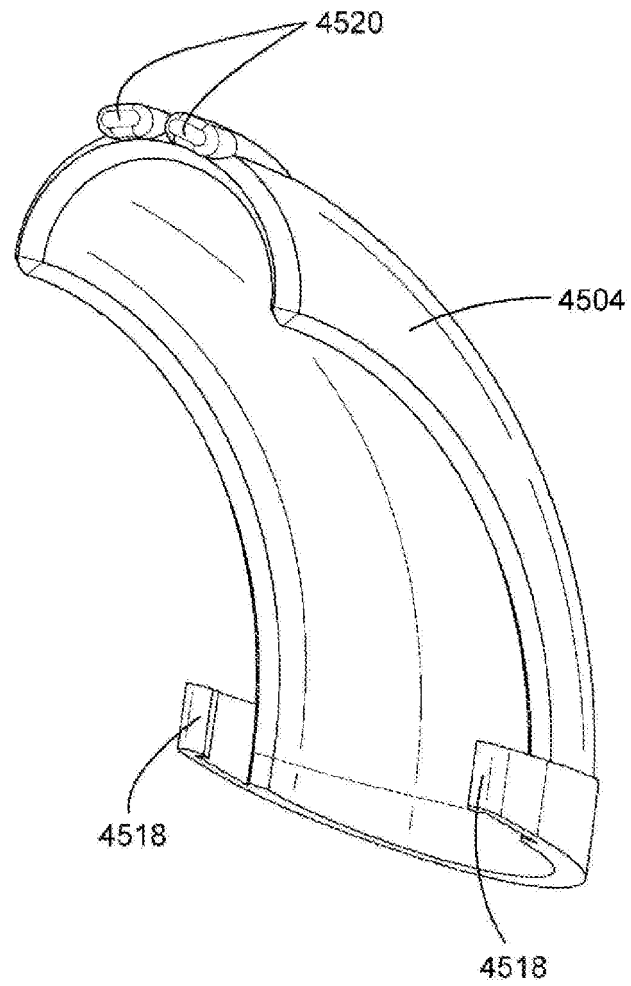
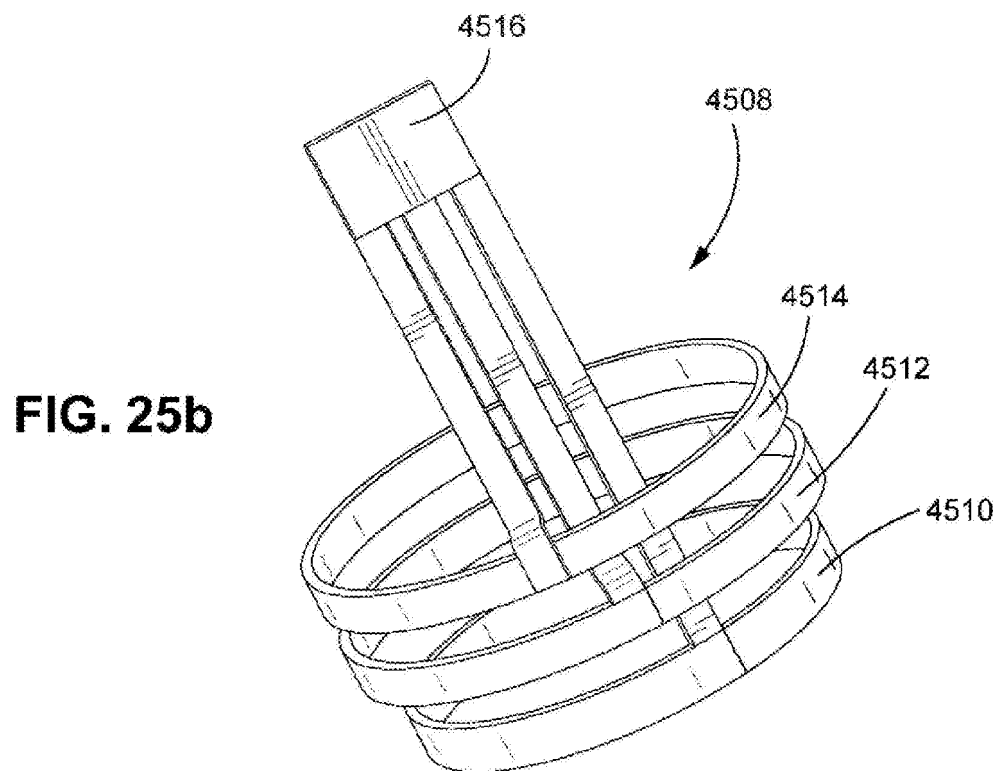
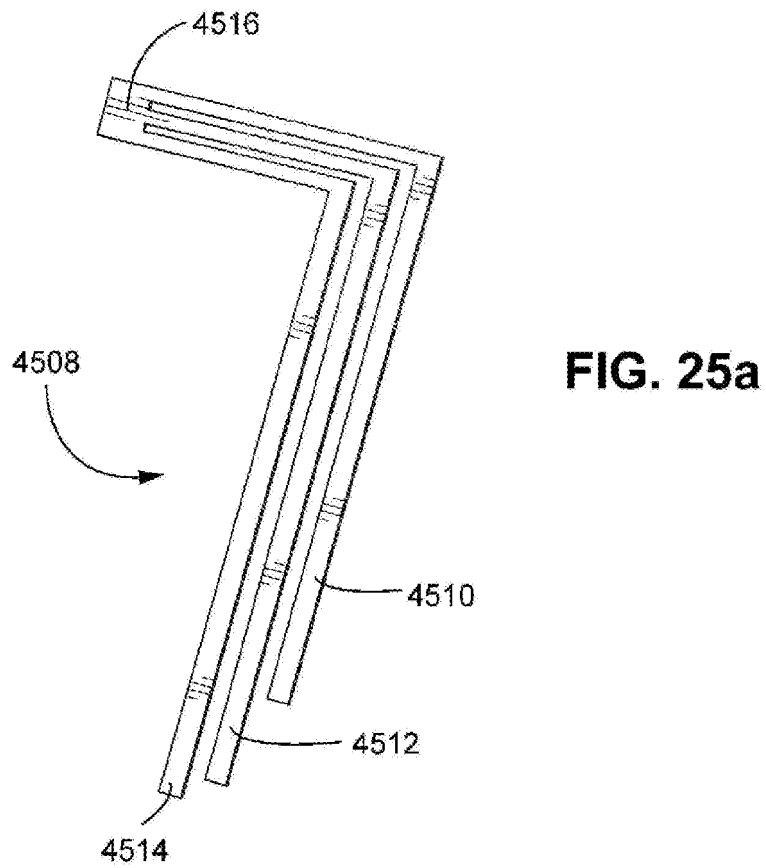


FIG. 24



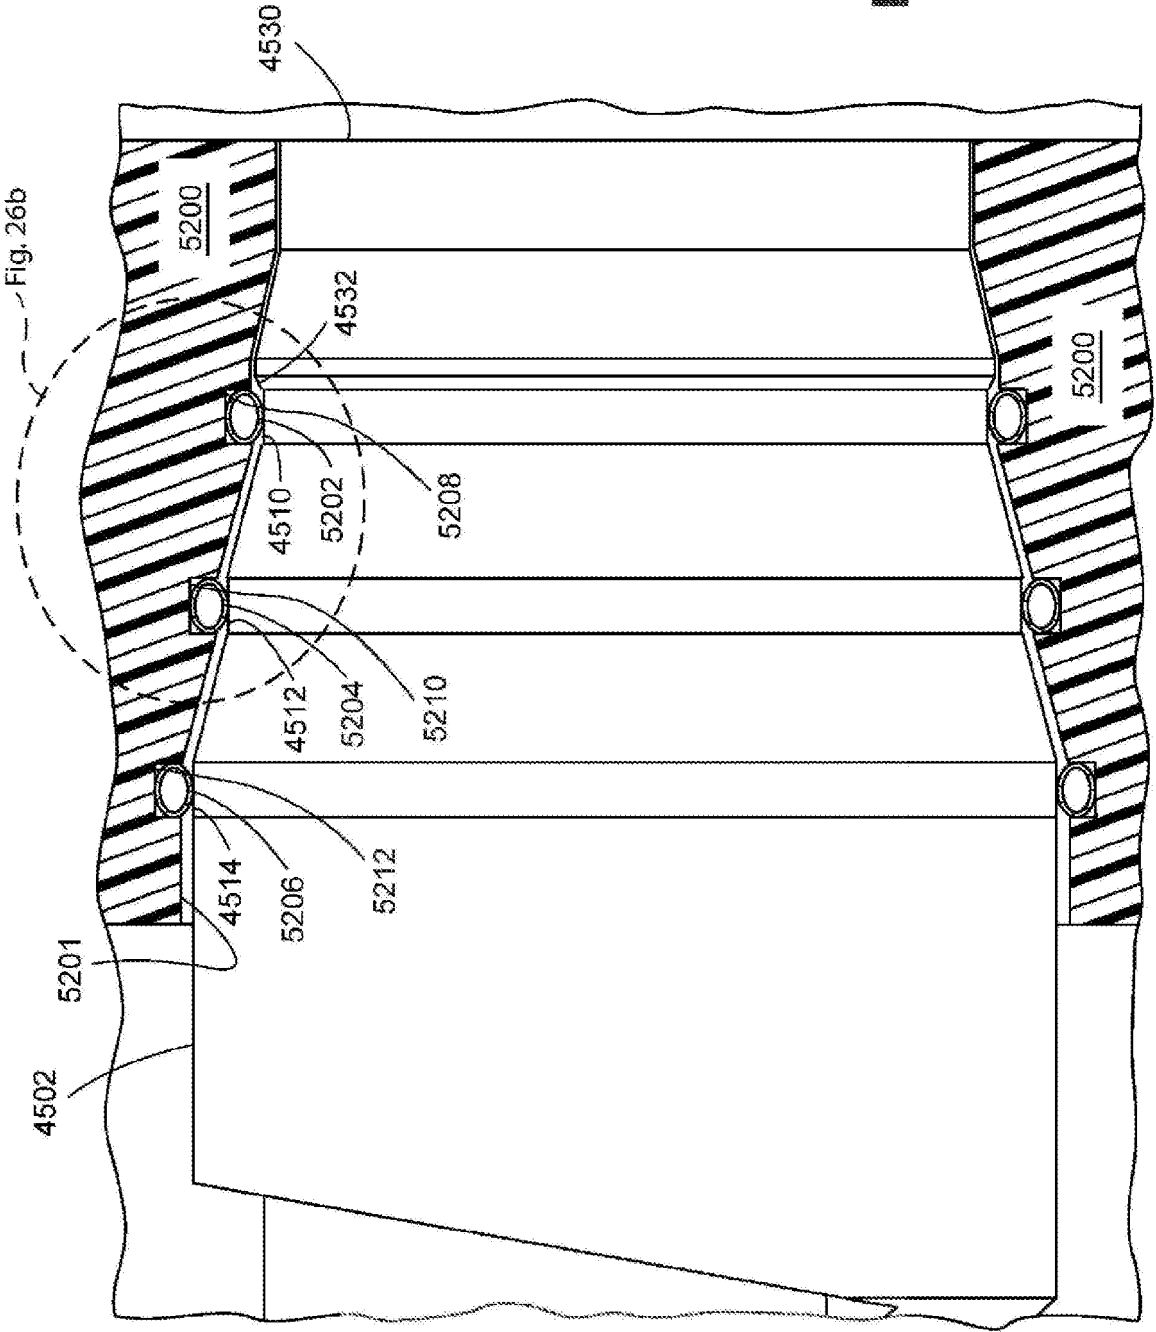


FIG. 26a

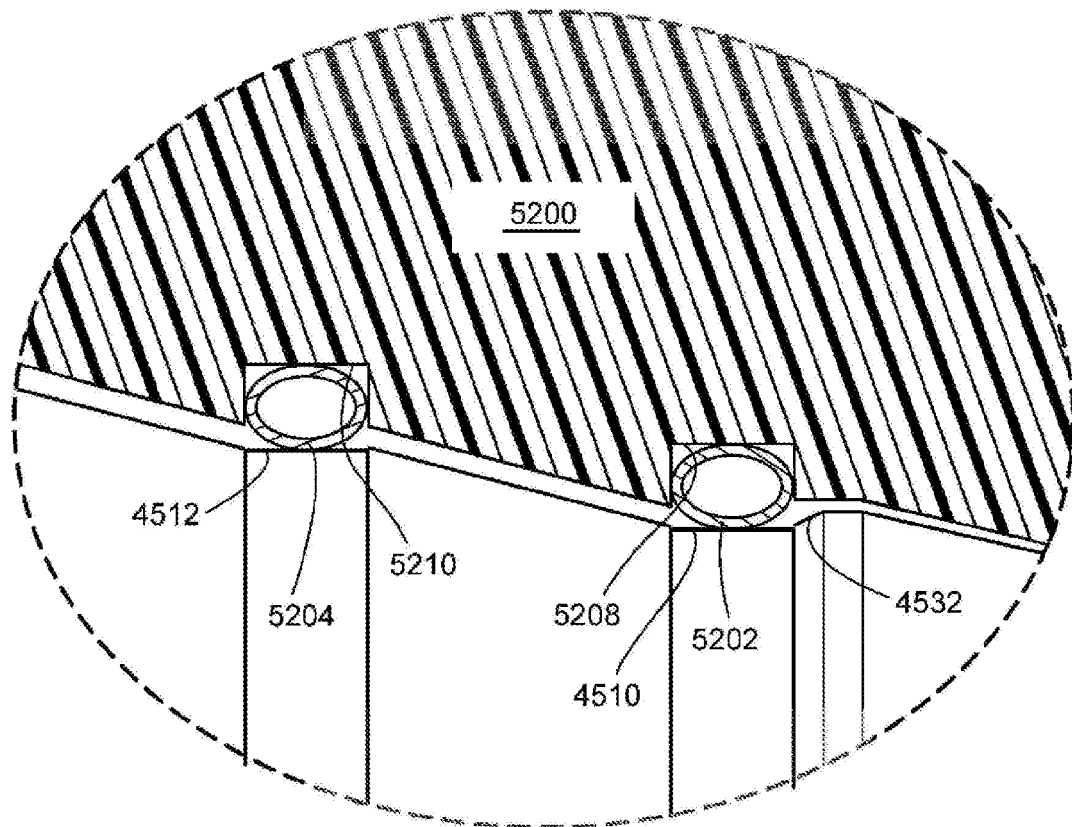


FIG. 26b

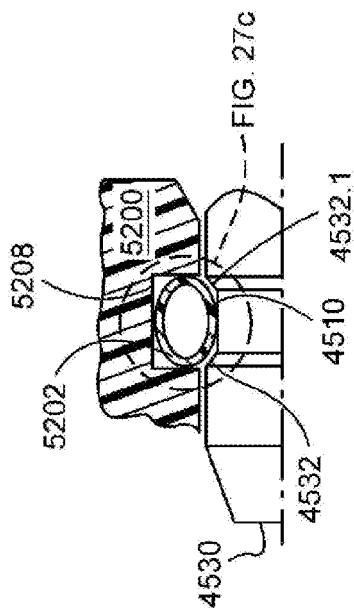


FIG. 27a

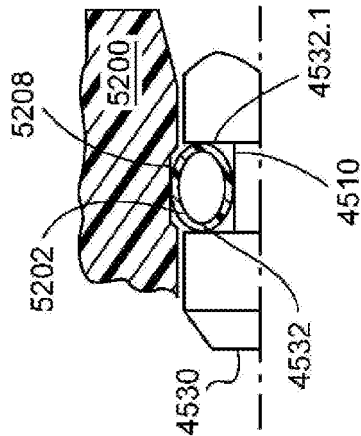


FIG. 27b

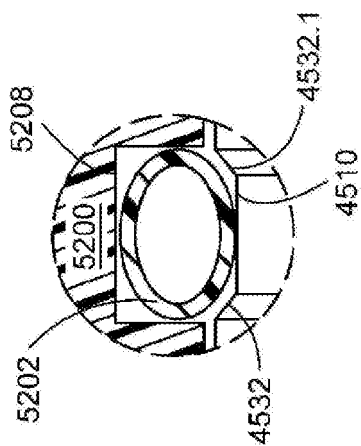


FIG. 27c

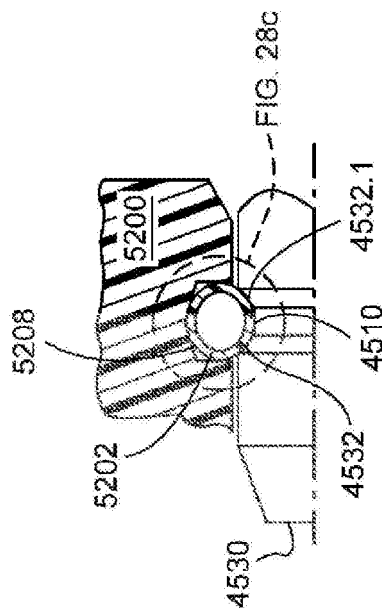


FIG. 28a

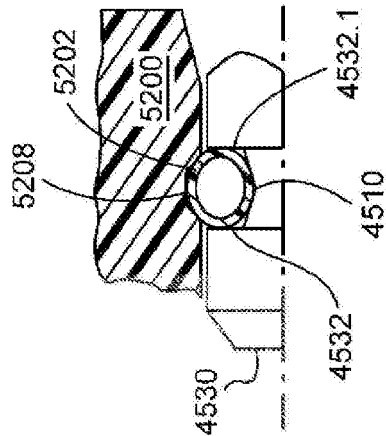


FIG. 28b

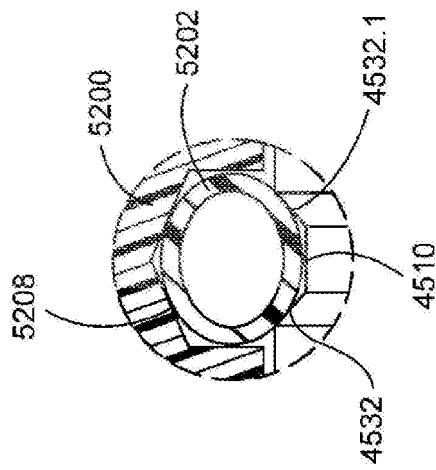
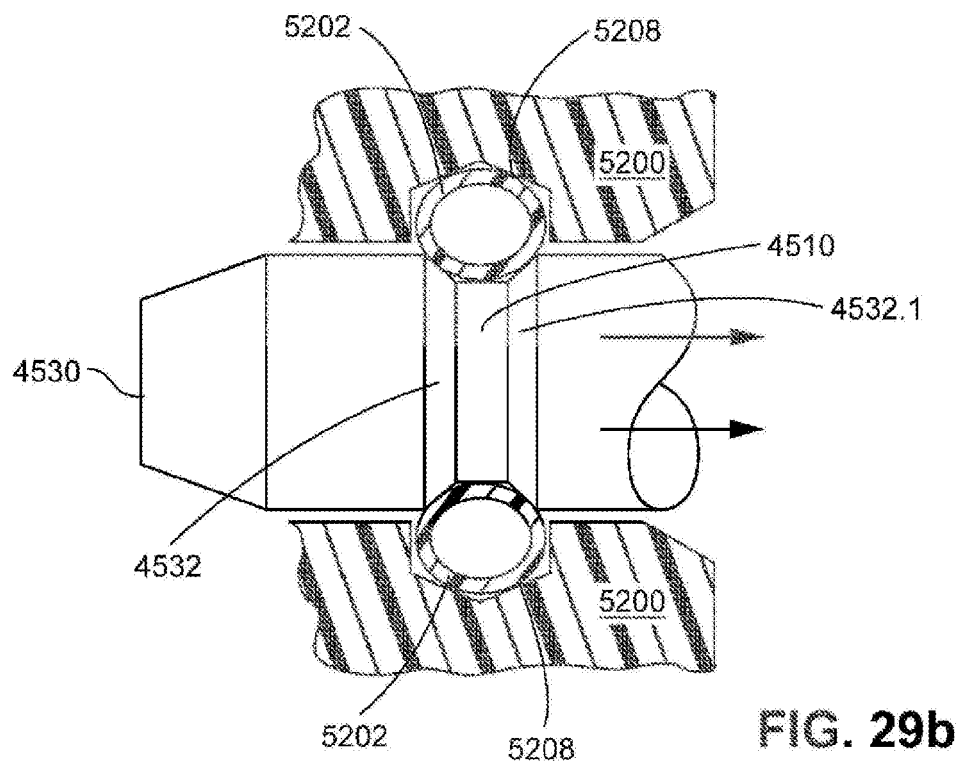
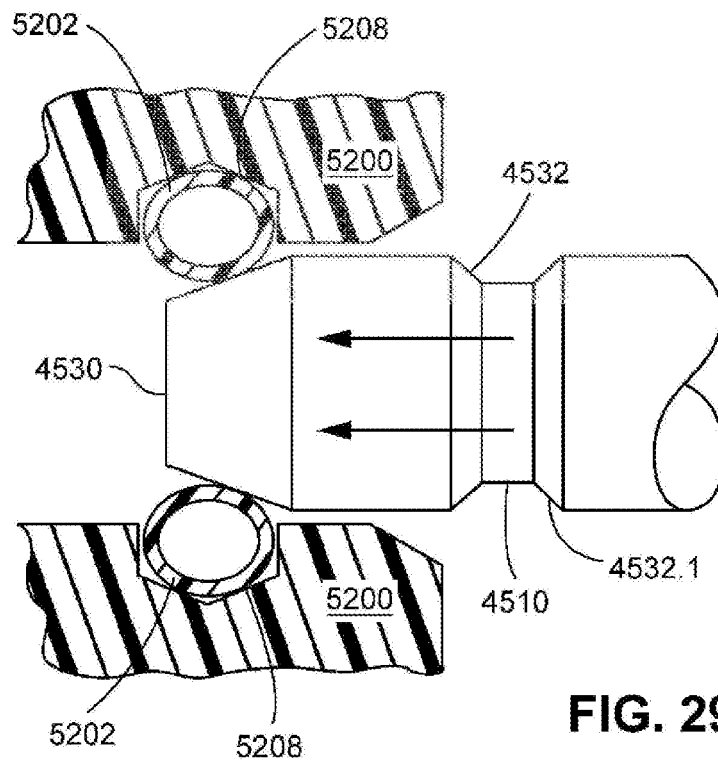


FIG. 28c



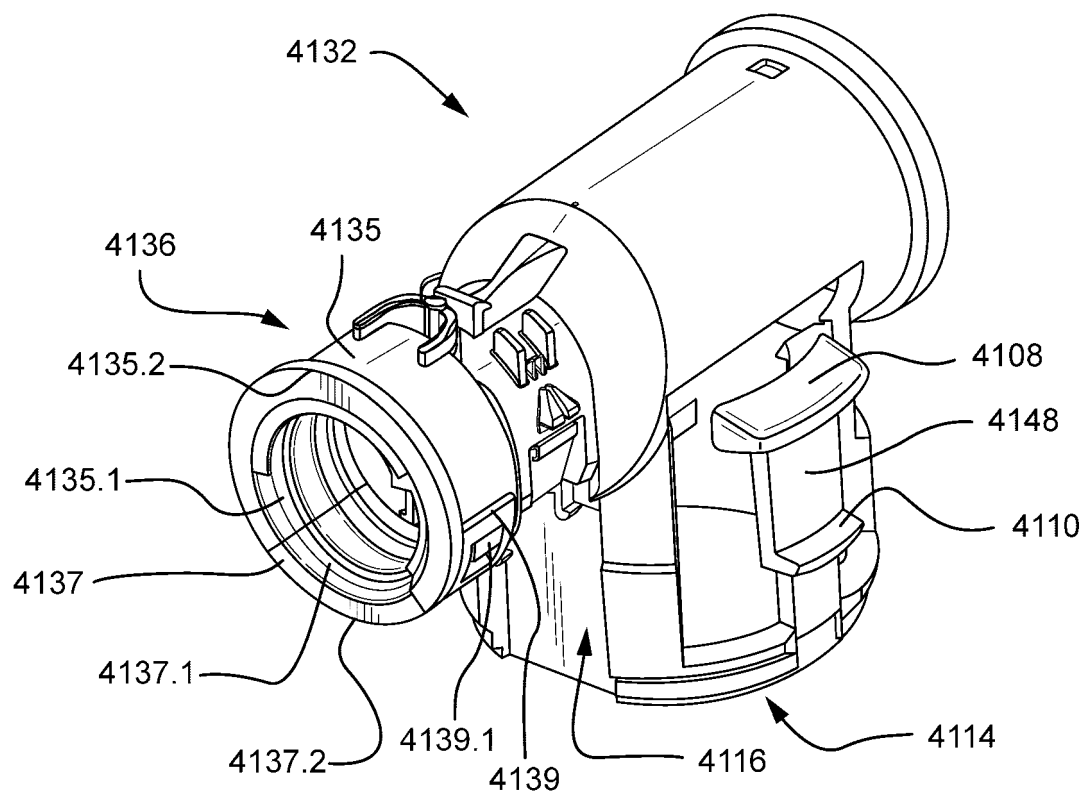


FIG. 30a

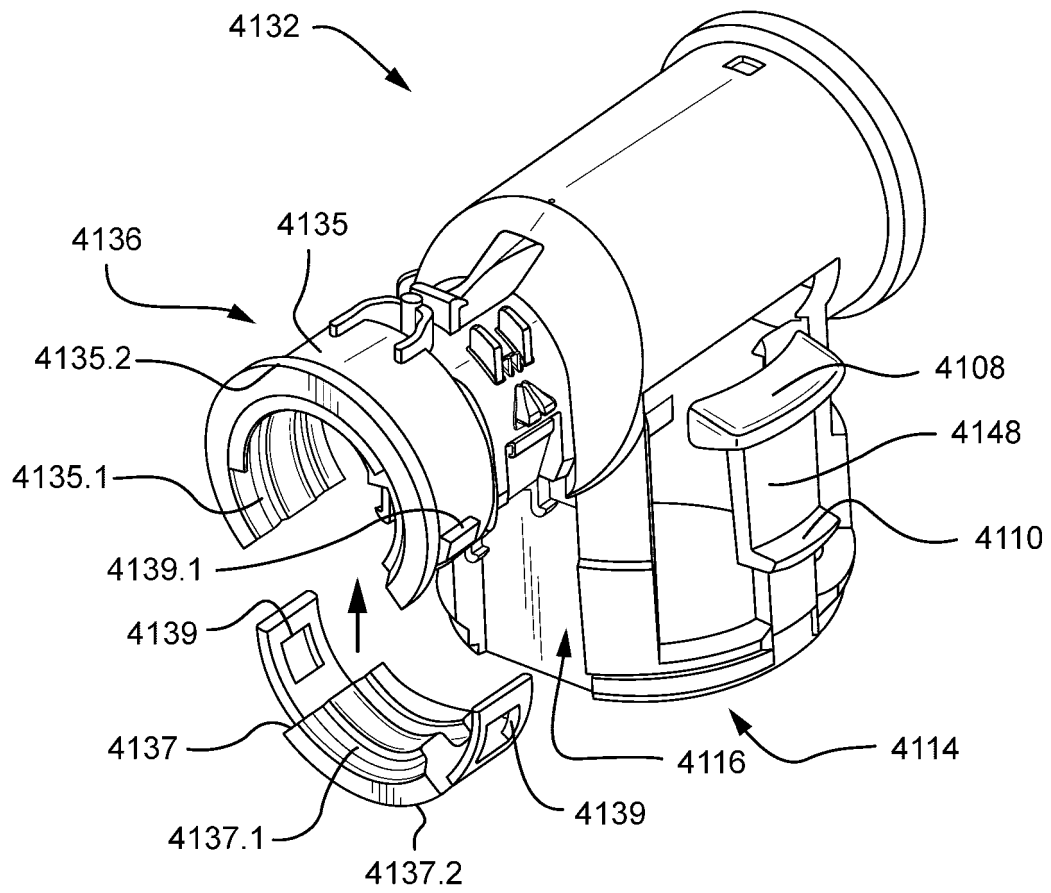


FIG. 30b

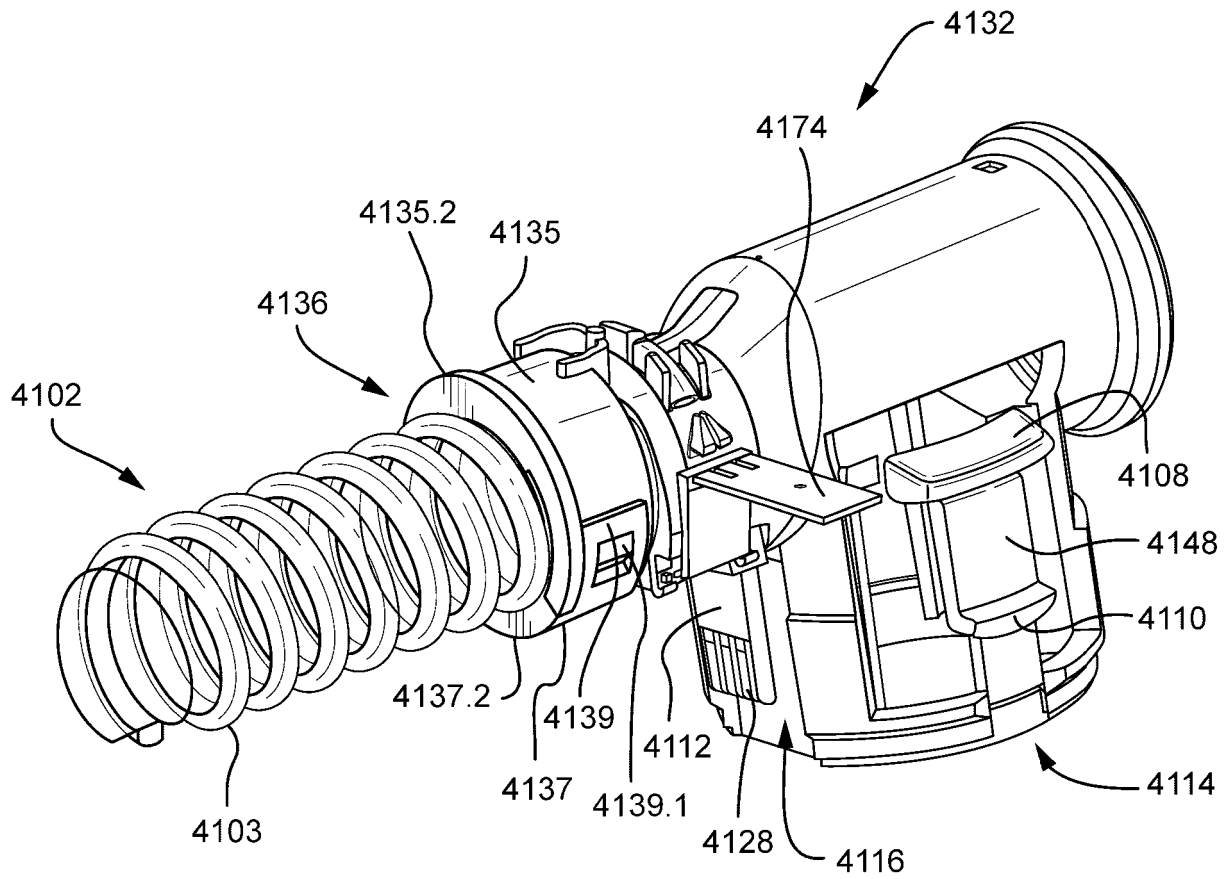


FIG. 30c

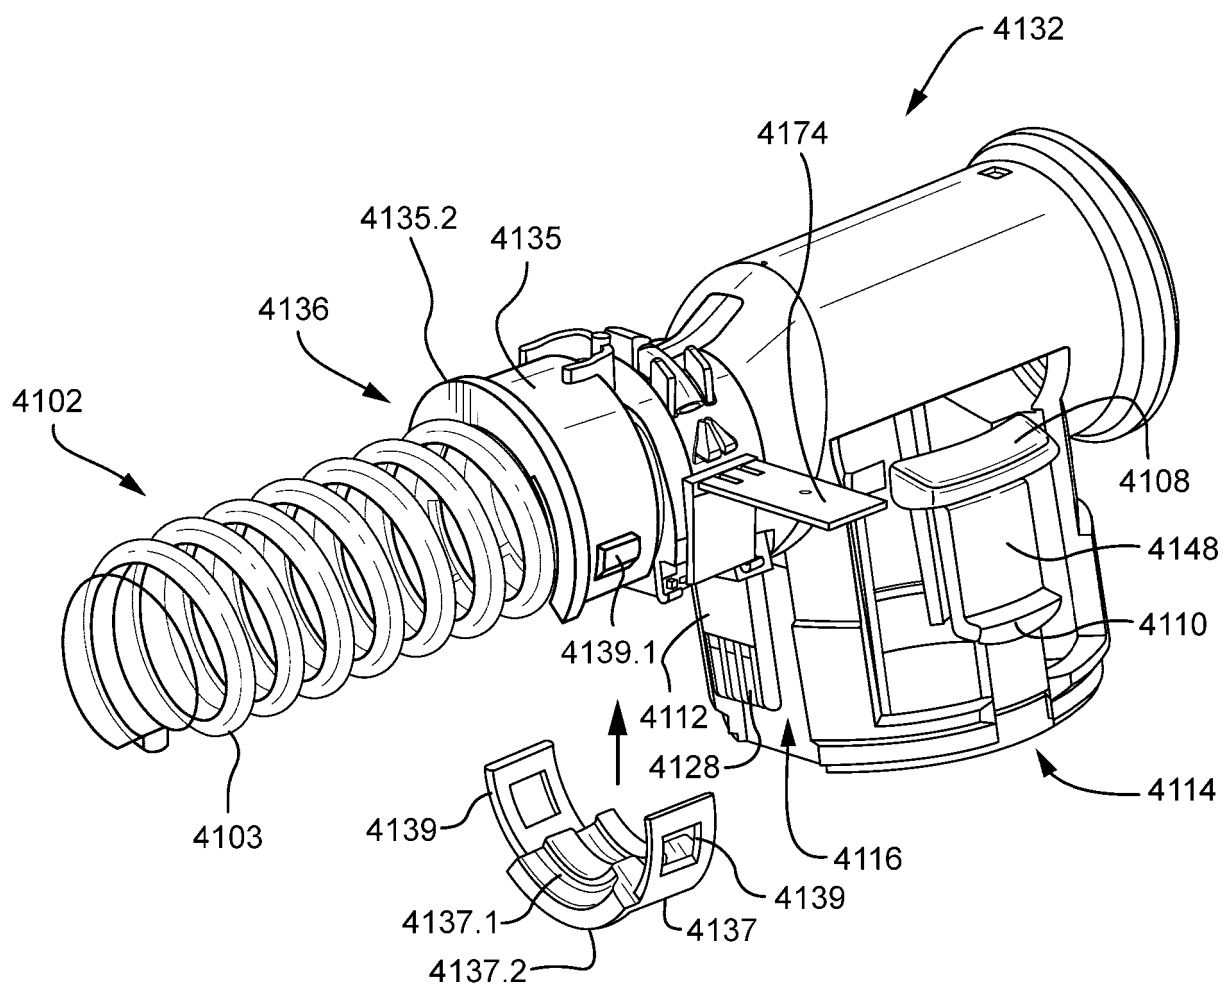


FIG. 30d

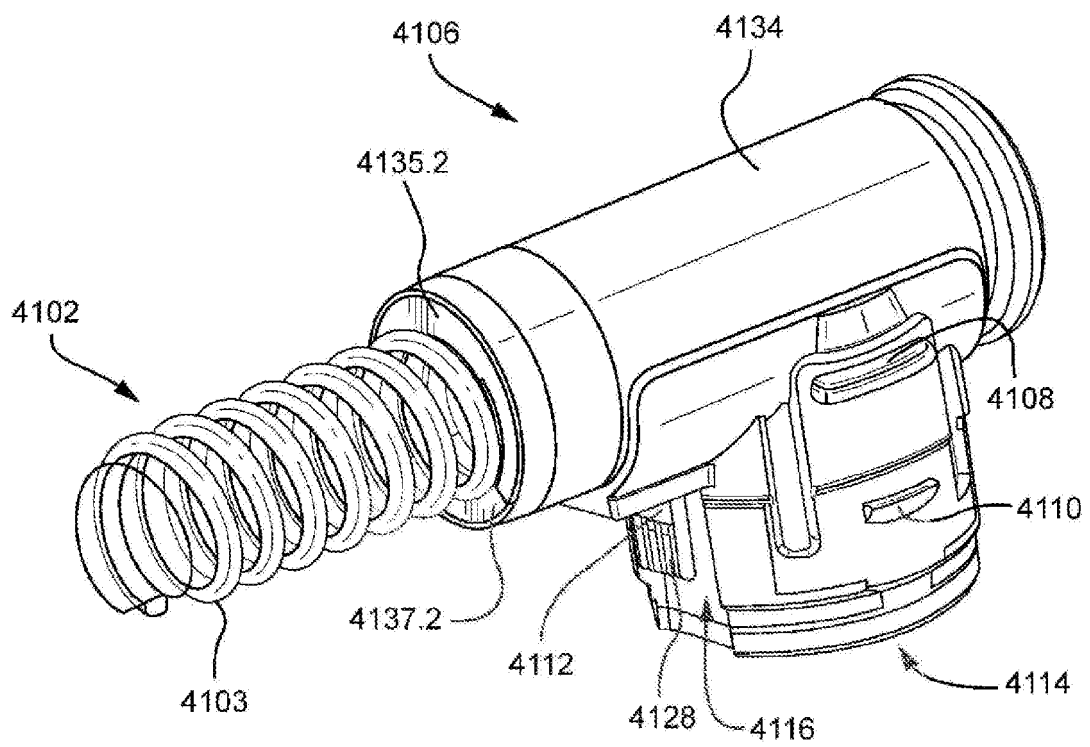


FIG. 30e

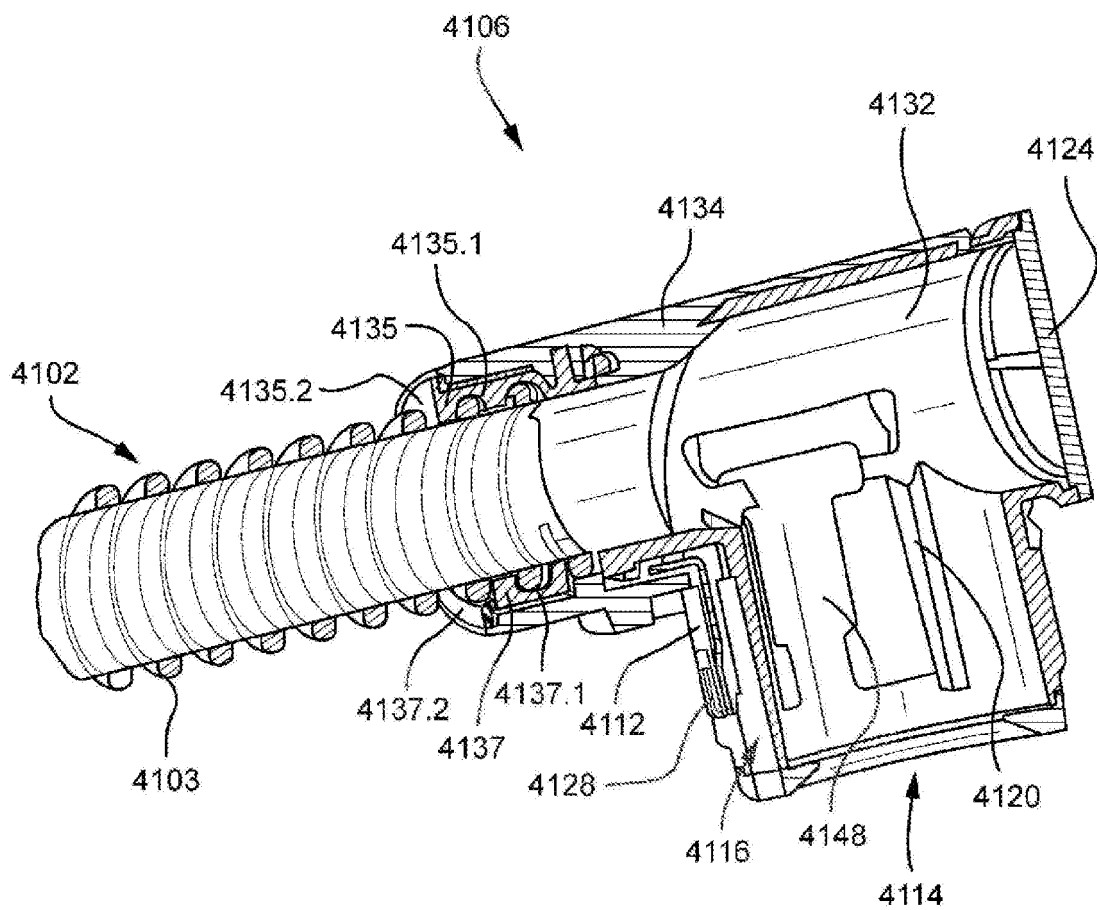


FIG. 30f

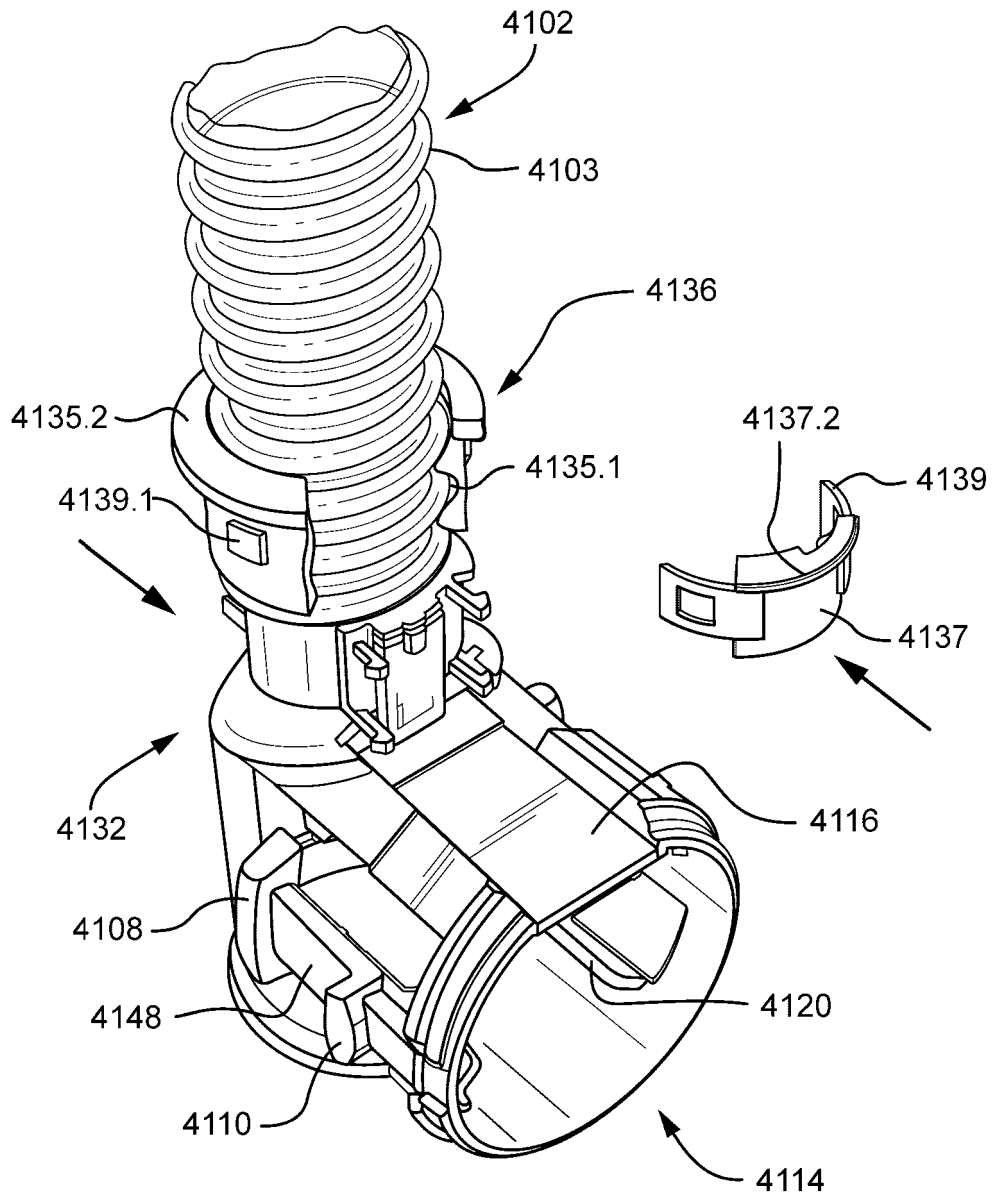


FIG. 30g

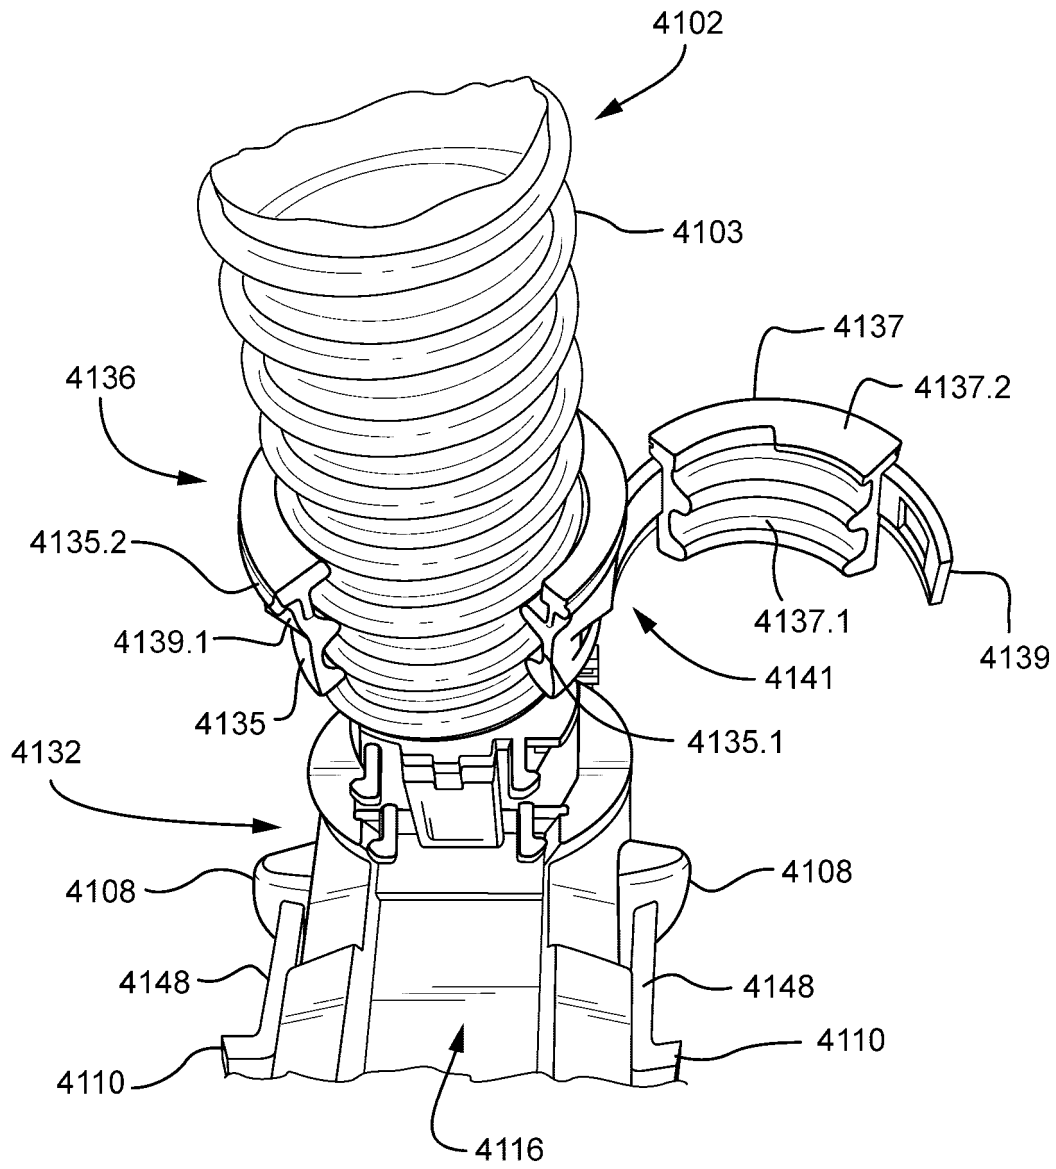


FIG. 30h

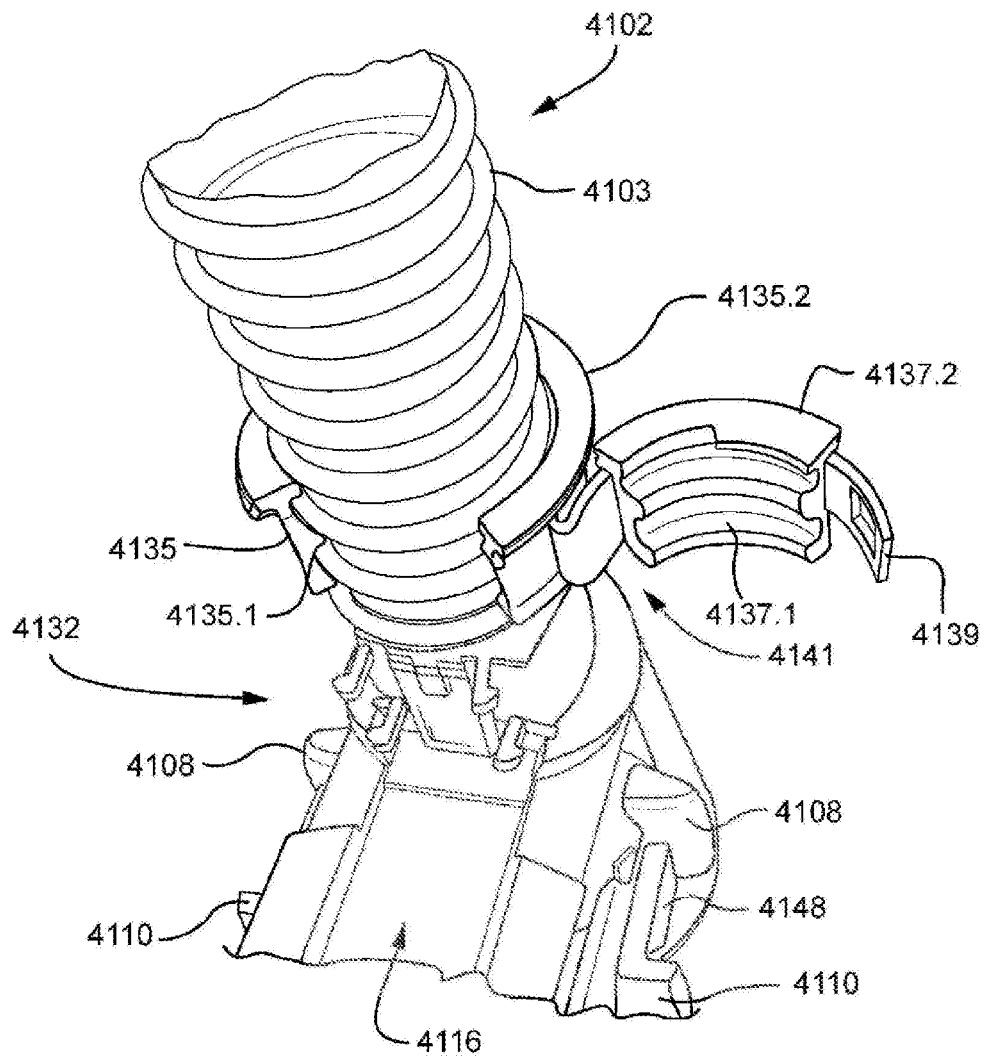


FIG. 30i

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 61838971 B [0001]
- US 61987245 B [0001]
- US 4944310 A, Sullivan [0006]
- US 6532959 B, Berthon-Jones [0007]
- WO 1998004310 A [0031]
- WO 2006074513 A [0031]
- WO 2010135785 A [0031]
- US 4782832 A, Trimble [0031]
- WO 2004073778 A [0032]
- US 20090044808 A [0032] [0037]
- WO 2005063328 A [0032]
- WO 2006130903 A [0032]
- WO 2009052560 A [0032]
- US 20100000534 A [0034]
- WO 1998034665 A [0037]
- WO 2000078381 A [0037]
- US 6581594 B [0037]
- US 20090050156 A [0037]
- WO 2012160477 A1 [0050]
- US 20110271956 A [0174]