

(19)



(11)

EP 3 024 765 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
09.09.2020 Bulletin 2020/37

(51) Int Cl.:
C02F 11/06 ^(2006.01) **F04B 15/02** ^(2006.01)
F04B 15/06 ^(2006.01) **F04B 23/04** ^(2006.01)

(21) Application number: **13889962.0**

(86) International application number:
PCT/US2013/052183

(22) Date of filing: **26.07.2013**

(87) International publication number:
WO 2015/012853 (29.01.2015 Gazette 2015/04)

(54) METHOD OF TRANSPORTING VISCOUS SLURRIES

VERFAHREN ZUM TRANSPORTIEREN VISKOSER AUFSCHLÄMMUNGEN

PROCÉDÉ DE TRANSPORT DE SUSPENSIONS VISQUEUSES

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
01.06.2016 Bulletin 2016/22

(60) Divisional application:
20189798.0

(73) Proprietor: **Renmatix Inc.**
King of Prussia, PA 19406 (US)

(72) Inventors:
• **SIMARD, Michel Adam**
Berwyn, Pennsylvania 19312 (US)

• **GERDES, Perry**
Kimberling City, Missouri 65686 (US)

(74) Representative: **Engstle, Verena et al**
Meissner Bolte
Patentanwälte Rechtsanwälte
Partnerschaft mbB
Bankgasse 3
90402 Nürnberg (DE)

(56) References cited:
WO-A1-2009/158615 WO-A1-2010/030196
WO-A2-2011/119753 JP-A- H06 156 725
JP-A- S60 209 431 JP-A- S62 131 096
JP-A- S63 152 799 US-A- 4 206 610
US-A1- 2006 096 163 US-A1- 2010 089 823
US-A1- 2012 282 655

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 024 765 B1

Description

FIELD OF THE INVENTION

[0001] The invention generally relates to methods of transporting viscous slurries. More particularly, the invention relates to methods of transporting viscous slurries at high pressures.

BACKGROUND OF THE INVENTION

[0002] There are many processes for converting biomass into useful products, such as fermentable sugars and other chemicals. Some of these biomass conversion processes require pumping biomass slurries to high pressures, such as about 500 psi to about 4000 psi or even higher. Processing biomass slurries at higher solids contents is more economical, because higher solids contents provide a higher output for a given plant size, as well as a lower processing cost, such as in heating, cooling, and concentration costs, because there is less water present. However, high solids content slurries typically are thick and viscous, and therefore are difficult, or sometimes impossible, to pump efficiently or effectively using conventional methods. WO 2011/119753 A2 describes a method of pumping a slurry in order to deactivate a biomass.

[0003] There are a limited number of high pressure pump technologies that can pump high solids content slurries to high pressure. These limitations are further exacerbated by the need for the pumps to handle high solids content slurries, which typically have high viscosities. Some have attempted to address these shortcomings by preheating the high solids content slurries in indirect contact heat exchangers. However, this solution often leads to fouling of the heater exchangers, thereby lowering operability, and has high attendant capital costs for the equipment. Furthermore, it is difficult to maintain a uniform temperature within the slurry in the heat exchangers. In addition, there is a significant pressure drop across the heat exchangers, which requires additional pumping power in an already difficult application.

[0004] Thus, there is an ongoing need for methods for pumping slurries to high pressures, especially for slurries having high solids contents or high viscosities. The methods of the present invention are directed toward these, as well as other, important ends.

SUMMARY OF THE INVENTION

[0005] In one embodiment, the invention is directed to methods, comprising, consisting of, or consisting essentially of:

providing a slurry at a first temperature and a first pressure, wherein said slurry comprises, consists of, or consists essentially of a liquid carrier and a solid; increasing said first pressure to a second pressure of about 50 psia to about 1250 psia, thereby forming

a first pressurized slurry; injecting a fluid into said first pressurized slurry, thereby forming a fluid-injected slurry, wherein said fluid-injected slurry has a second temperature greater than said first temperature, and said second temperature is about 100 °C to about 300 °C; and increasing said second pressure to a third pressure of greater than about 1250 psia, thereby forming a second pressurized slurry.

[0006] In another embodiment, the invention is directed to methods, comprising, consisting of, or consisting essentially of:

providing a slurry at a first temperature of about 1 °C to about 50 °C and a first pressure of about 14 psia to about 50 psia;

wherein said slurry comprises, consists of, or consists essentially of a liquid carrier and a solid; and

wherein said slurry has a viscosity of at least about 5,000 cP; injecting a fluid into said slurry to form a fluid-injected slurry;

wherein said fluid-injected slurry has a second temperature of less than about 100 °C; and wherein said second temperature is greater than said first temperature; and

increasing said first pressure to a second pressure of about 1000 psia to about 6000 psia, thereby forming a pressurized slurry.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

FIGURE 1 is a schematic diagram showing one embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0008] As employed above and throughout the disclosure, the following terms, unless otherwise indicated, shall be understood to have the following meanings.

[0009] As used herein, the singular forms "a," "an," and "the" include the plural reference unless the context clearly indicates otherwise.

[0010] While the present invention is capable of being embodied in various forms, the description below of several embodiments is made with the understanding that the present disclosure is to be considered as an exemplification of the invention, and is not intended to limit the invention to the specific embodiments illustrated. Head-

ings are provided for convenience only and are not to be construed to limit the invention in any manner. Embodiments illustrated under any heading may be combined with embodiments illustrated under any other heading.

[0011] The use of numerical values in the various quantitative values specified in this application, unless expressly indicated otherwise, are stated as approximations as though the minimum and maximum values within the stated ranges were both preceded by the word "about." In this manner, slight variations from a stated value can be used to achieve substantially the same results as the stated value. Also, the disclosure of ranges is intended as a continuous range including every value between the minimum and maximum values recited as well as any ranges that can be formed by such values. Also disclosed herein are any and all ratios (and ranges of any such ratios) that can be formed by dividing a recited numeric value into any other recited numeric value. Accordingly, the skilled person will appreciate that many such ratios, ranges, and ranges of ratios can be unambiguously derived from the numerical values presented herein and in all instances such ratios, ranges, and ranges of ratios represent various embodiments of the present invention.

[0012] A supercritical fluid is a fluid at a temperature above its critical temperature and at a pressure above its critical pressure. A supercritical fluid exists at or above its "critical point," the point of highest temperature and pressure at which the liquid and vapor (gas) phases can exist in equilibrium with one another. Above critical pressure and critical temperature, the distinction between liquid and gas phases disappears. A supercritical fluid possesses approximately the penetration properties of a gas simultaneously with the solvent properties of a liquid. Accordingly, supercritical fluid extraction has the benefit of high penetrability and good solvation.

[0013] Reported critical temperatures and pressures include: for pure water, a critical temperature of about 374.2°C, and a critical pressure of about 221 bar; for carbon dioxide, a critical temperature of about 31°C and a critical pressure of about 72.9 atmospheres (about 1072 psig). Near-critical water has a temperature at or above about 300°C and below the critical temperature of water (374.2°C), and a pressure high enough to ensure that all fluid is in the liquid phase. Sub-critical water has a temperature of less than about 300°C and a pressure high enough to ensure that all fluid is in the liquid phase. Sub-critical water temperature may be greater than about 250°C and less than about 300°C, and in many instances sub-critical water has a temperature between about 250°C and about 280°C. The term "hot compressed water" is used interchangeably herein for water that is at or above its critical state, or defined herein as near-critical or sub-critical, or any other temperature above about 50°C (e.g., above about 100 °C, above about 150 °C, or above about 200 °C) but less than subcritical, and at pressures such that water is in a liquid state.

[0014] As used herein, a fluid which is "supercritical"

(e.g. supercritical water, supercritical CO₂, etc.) indicates a fluid which would be supercritical if present in pure form under a given set of temperature and pressure conditions. For example, "supercritical water" indicates water present at a temperature of at least about 374.2°C and a pressure of at least about 221 bar, whether the water is pure water, or present as a mixture (e.g. water and ethanol, water and CO₂, etc). Thus, for example, "a mixture of sub-critical water and supercritical carbon dioxide" indicates a mixture of water and carbon dioxide at a temperature and pressure above that of the critical point for carbon dioxide but below the critical point for water, regardless of whether the supercritical phase contains water and regardless of whether the water phase contains any carbon dioxide. For example, a mixture of sub-critical water and supercritical CO₂ may have a temperature of about 250°C to about 280°C and a pressure of at least about 225 bar.

[0015] As used herein, "slurry" refers to a mixture of solid particles in a liquid. In some embodiments, instead of a slurry, the methods of the invention can be performed with a solution comprising dissolved solids. In some embodiments of the invention, a slurry is used in the inventive methods, and the slurry contains both insoluble solids and dissolved solids.

[0016] As used herein, "continuous" indicates a process which is uninterrupted for its duration, or interrupted, paused or suspended only momentarily relative to the duration of the process. Treatment of biomass is "continuous" when biomass is fed into the apparatus without interruption or without a substantial interruption, or processing of said biomass is not done in a batch process.

[0017] As used herein, the term "biomass" means a renewable energy source generally comprising carbon-based biological material derived from recently-living organisms. The organisms may have been plants, animals, fungi, etc. Examples of biomass include without limitation wood, lignocellulosic biomass, waste feedstocks, manufacturing waste (wood residues such as sawmill and paper mill discards), agricultural residues (including corn stover, sugarcane bagasse, rice hulls, oat hulls, etc.), food waste, plastic, black liquor (a byproduct of wood pulping processes), etc. Wood can be, for example, hardwood, softwood, annual fibers, and combinations thereof. Biomass typically comprises cellulose, hemicellulose, and lignin. Any suitable type of biomass can be used as a feedstock for the invention described herein. Starch or any other type of natural or synthetic polymer or oligomer may also be used in the inventive process. Fossil fuels are generally not considered biomass even though ultimately derived from carbon-based biological material. The term "biomass" as used herein does not include fossil fuel sources.

[0018] As used herein, "fractionated biomass" refers to biomass, as defined herein, that has been subjected to a treatment process, whereby hemicellulose has been at least partially removed.

[0019] As used herein, "lignocellulosic biomass or a component part thereof" refers to plant biomass containing cellulose, hemicellulose, and lignin from a variety of sources, including, without limitation (1) agricultural residues (including corn stover and sugarcane bagasse), (2) dedicated energy crops, (3) wood residues (including sawmill and paper mill discards), and (4) municipal waste, and their constituent parts including without limitation, lignocellulose biomass itself, lignin, C₆ saccharides (including cellulose, cellobiose, C₆ oligosaccharides, C₆ monosaccharides, and C₅ saccharides (including hemicellulose, C₅ oligosaccharides, and C₅ monosaccharides).

[0020] As used herein, "polysaccharide" refers to linear or branched carbohydrate molecules of the same or different monosaccharide units joined together by glycosidic bonds having the general formula of C_x(H₂O)_y, where x is about 200 to about 18,000 or higher. Typically, natural polysaccharides present in biomass are composed of a long chain of C₅ and/or C₆ sugars. For example, when a polysaccharide is composed of C₆ monosaccharides, the general formula of a polysaccharide can be represented as (C₆H₁₀O₅)_n, where n is about 30 to about 3000 or more (*i.e.*, the number of hexose monomers in the polysaccharide).

[0021] As used herein, "oligosaccharide" refers to linear or branched carbohydrate molecules of the same or different monosaccharide units joined together by glycosidic bonds having the general formula of C_x(H₂O)_y, where x is about 2 to about 200. Oligosaccharides can be thought of as shorter chain polysaccharides, *i.e.*, polysaccharides simply having less monomers in the polymeric chain. When an oligosaccharide is composed of C₆ monosaccharides, the general formula of an oligosaccharide can be represented as (C₆H₁₀O₅)_n, where n is about 2 to about 30 (*i.e.*, the number of hexose monomers in the oligosaccharide).

[0022] As used herein, "monosaccharide" refers to any of the class of sugars that cannot be hydrolyzed to give a simpler sugar. Monosaccharides typically are C₅ (*e.g.*, xylose) and C₆ sugars (*e.g.*, glucose), but may also include monosaccharides having other numbers of carbon, such as C₂, C₃, C₄, C₇, C₈, and so on.

[0023] As used herein, "C₁-C₅ alcohols" refers to linear or branched C₁-C₅ alkanes having one or more hydroxyl groups, or cyclic C₃-C₅ alkanes having one or more hydroxyl groups, including methanol, ethanol, 1-propanol, 2-propanol, 1,3-propanediol, cyclopropanol, 1-butanol, 2-butanol, cyclobutanol, 1,4-butanediol, 1-pentanol, 2-pentanol, 3-pentanol, 1,5-pentanediol, cyclopentanol, and combinations thereof.

[0024] As used herein, "water-miscible organic solvents" refers to organic solvents that are miscible with water at room temperature, including C₁-C₅ alcohols, acetaldehyde, acetic acid, acetone, acetonitrile, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, 2-butoxyethanol, butyric acid, diethanolamine, diethylenetriamine, dimethylformamide, dimethoxyethane, dimethyl sulfox-

ide, 1,4-dioxane, ethylamine, ethylene glycol, formic acid, furfuryl alcohol, glycerol, methyl diethanolamine, methyl isocyanide, 1,3-propanediol, 1,5-pentanediol, propanoic acid, propylene glycol, pyridine, tetrahydrofuran, triethylene glycol, and combinations thereof. Water-miscible organic solvents may be completely or substantially miscible with water. For example, as used herein, a water-miscible organic solvent that is "substantially miscible" with water means that, when the water-miscible organic solvent is added to water, at least about 50 wt.% (*e.g.*, at least about 60 wt.%, at least about 70 wt.%, at least about 80 wt.%, at least about 90 wt.%, or at least about 99 wt.%) of the water-miscible organic solvent is miscible with water. As used herein, a water-miscible organic solvent that is "completely miscible" with water means that about 100 wt.% of the organic solvent is miscible with water. In contrast, "water-immiscible organic solvents" refers to organic solvents that are not completely or substantially miscible with water, as defined herein.

[0025] Accordingly, in one embodiment, the invention is directed to methods, comprising, consisting of, or consisting essentially of:

providing a slurry at a first temperature and a first pressure, wherein said slurry comprises, consists of, or consists essentially of a liquid carrier and a solid; increasing said first pressure to a second pressure of about 50 psia to about 1250 psia, thereby forming a first pressurized slurry;

injecting a fluid into said first pressurized slurry, thereby forming a fluid-injected slurry, wherein said fluid-injected slurry has a second temperature greater than said first temperature, and said second temperature is about 100 °C to about 300 °C; and increasing said second pressure to a third pressure of greater than about 1250 psia, thereby forming a second pressurized slurry.

[0026] In another embodiment, the invention is directed to methods, comprising, consisting of, or consisting essentially of:

providing a slurry at a first temperature of about 1 °C to about 50 °C and a first pressure of about 14 psia to about 50 psia;

wherein said slurry comprises, consists of, or consists essentially of a liquid carrier and a solid; and

wherein said slurry has a viscosity of at least about 5,000 cP;

injecting a fluid into said slurry to form a fluid-injected slurry;

wherein said fluid-injected slurry has a second temperature of less than about 100 °C; and wherein said second temperature is greater than

said first temperature; and

increasing said first pressure to a second pressure of about 1000 psia to about 6000 psia, thereby forming a pressurized slurry.

[0027] In some embodiments of the invention, the slurry has a solids content of about 5 wt.% or more, e.g., about 6 wt.% or more, about 7 wt.% or more, about 8 wt.% or more, about 9 wt.% or more, about 10 wt.% or more, about 11 wt.% or more, about 12 wt.% or more, about 13 wt.% or more, about 14 wt.% or more, about 15 wt.% or more, about 16 wt.% or more, about 17 wt.% or more, about 18 wt.% or more, about 19 wt.% or more, about 20 wt.% or more, about 21 wt.% or more, about 22 wt.% or more, about 23 wt.% or more, about 24 wt.% or more, about 25 wt.% or more, about 26 wt.% or more, about 27 wt.% or more, about 28 wt.% or more, about 29 wt.% or more, or about 30 wt.% or more, based on the total weight of the slurry. Alternatively, or in addition, the slurry has a solids content of about 31 wt.% or less, e.g., about 30 wt.% or less, about 29 wt.% or less, about 28 wt.% or less, about 27 wt.% or less, about 26 wt.% or less, about 25 wt.% or less, about 24 wt.% or less, about 23 wt.% or less, about 22 wt.% or less, about 21 wt.% or less, about 20 wt.% or less, about 19 wt.% or less, about 18 wt.% or less, about 17 wt.% or less, about 16 wt.% or less, about 15 wt.% or less, about 14 wt.% or less, about 13 wt.% or less, about 12 wt.% or less, about 11 wt.% or less, about 10 wt.% or less, about 9 wt.% or less, about 8 wt.% or less, about 7 wt.% or less, or about 6 wt.% or less, based on the total weight of the slurry. Thus, the slurry can have a solids content bounded by any two of the foregoing endpoints. For example, the slurry can have a solids content of about 15 wt.% to about 21 wt.%, about 9 wt.% to about 16 wt.%, or about 22 wt.% to about 31 wt.%, based on the total weight of the slurry. In a preferred embodiment, the solids content of the slurry is about 10 wt.% to about 30 wt.%, more preferably about 15 wt.% to about 25 wt.%, and most preferably about 19 wt.% to about 21 wt.%. The solids content, as used herein, may refer to the slurry, the first pressurized slurry, the fluid-injected slurry, and/or the second pressurized slurry.

[0028] In some embodiments of the invention, the fluid that is injected comprises, consists of, or consists essentially of vapor, saturated vapor, superheated vapor, or combinations thereof. The fluid may be a single component, such as pure water, or a mixture of different components, such as water and ethanol (e.g., a C₁-C₅ alcohol). In the case of a fluid that is a mixture, it is possible for one of the components to be in one state while the other component(s) is (are) in a different state(s). For example, in a mixture of water and ethanol, at certain temperatures and pressures the ethanol may be in a superheated vapor state and the water may be in a saturated vapor state. A component that is a "vapor" indicates that the component would be in a vapor state, if present in pure form. A com-

ponent that is a "saturated vapor" indicates that the component would be in a saturated vapor state, if present in pure form. A component that is a "superheated vapor" indicates that the component would be in a superheated vapor state, if present in pure form.

[0029] In some embodiments of the invention, the fluid that is injected comprises, consists of, or consists essentially of steam, saturated steam, or superheated steam, either as a single component, such as pure water, or as a mixture of water with at least one second component, such as water and ethanol (i.e., a C₁-C₅ alcohol). In the case of a fluid that is a mixture, it is possible for one of the components to be in one state while the other component(s) is (are) in a different state(s). For example in a mixture of water and ethanol, at certain temperatures and pressures, ethanol may be in a superheated vapor state and water may be in a saturated steam state. A component that is "steam" indicates that the water component would be steam, if present in pure form. A component that is a "saturated steam" indicates that the water component would be in a saturated steam state, if present in pure form. A water component that is "superheated steam" indicates that the water component would be in superheated steam state, if present in pure form.

[0030] In some embodiments of the invention, the fluid that is injected is specifically produced for the purpose of injection (e.g., by a steam boiler). In some embodiments, the fluid that is injected is a byproduct of a process performed at the same site or at a nearby site, and the recovered fluid is employed in the inventive process as a means to reuse and conserve energy. In some embodiments, the fluid that is injected is a mixture of purposely produced fluid and a recovered fluid.

[0031] In some embodiments, a method of the invention may further comprise adding to at least one of said slurry, said first pressurized slurry, said fluid-injected slurry, and said second pressurized slurry a component selected from the group consisting of helium, nitrogen, argon, oxygen, carbon dioxide, carbon monoxide, sulfur dioxide, hydrogen chloride, hydrogen, and combinations thereof. As used herein, nitrogen, oxygen, and hydrogen refer to the molecular species, not the elements. As used herein, the component is purposefully added to the specified version of the slurry. Components (e.g., oxygen and/or nitrogen) that are naturally dissolved in the specified version of the slurry, for example, as a result of the presence of oxygen and nitrogen in the atmosphere, are not included in the definition of adding one or more of the components to the specified version of the slurry, as used herein.

[0032] In some embodiments of the invention, at least one of the steps of increasing the first pressure to the second pressure and increasing the second pressure to the third pressure comprises using at least one pressurizing device selected from the group consisting of a pump, a screw feeder, a mechanical pressurizing device, and combinations thereof.

[0033] In some embodiments of the invention, at least

one of said slurry and said first pressurized slurry has a first viscosity. The first viscosity typically is quite viscous as compared to the viscosity of pure water. By way of illustration, at 25 °C, biomass slurries have a calculated viscosity of about 1,000,000 cP at a solids content of about 15 wt.%, a calculated viscosity of about 3,300,000 cP at a solids content of about 20 wt.%, and a calculated viscosity of about 7,100,000 cP at a solids content of about 25 wt.%. As described elsewhere herein, it is desirable to process biomass slurries at high solids contents to increase throughput and efficiency, as well as to conserve energy. However, biomass slurries can become extremely thick at solids contents of about 17-18 wt.%, and thus it is difficult to pump and process slurry at solids contents of 17-18 wt.% and above. The present invention, however, overcomes the problems associated with pumping such high solids content slurries having high viscosities. Regardless of the solids content of a slurry, the invention can benefit the pumping and processing of any viscous liquid (e.g., viscous slurry) having a first viscosity of about 5,000 cP or more, e.g., about 10,000 cP or more, about 15,000 cP or more, about 20,000 cP or more, about 25,000 cP or more, about 30,000 cP or more, about 35,000 cP or more, about 40,000 cP or more, about 45,000 cP or more, about 50,000 cP or more, about 55,000 cP or more, about 60,000 cP or more, about 65,000 cP or more, about 70,000 cP or more, about 75,000 cP or more, about 80,000 cP or more, about 85,000 cP or more, about 90,000 cP or more, about 95,000 cP or more, about 100,000 cP or more, about 150,000 cP or more, about 200,000 cP or more, about 250,000 cP or more, about 300,000 cP or more, about 350,000 cP or more, about 400,000 cP or more, about 450,000 cP or more, about 500,000 cP or more, about 600,000 cP or more, about 700,000 cP or more, about 800,000 cP or more, about 900,000 cP or more, about 1,000,000 cP or more, about 1,200,000 cP or more, about 1,400,000 cP or more, about 1,600,000 cP or more, about 1,800,000 cP or more, about 2,000,000 cP or more, about 2,200,000 cP or more, about 2,400,000 cP or more, about 2,600,000 cP or more, about 2,800,000 cP or more, about 3,000,000 cP or more, about 3,500,000 cP or more, about 4,000,000 cP or more, about 4,500,000 cP or more, about 5,000,000 cP or more, about 5,500,000 cP or more, about 6,000,000 cP or more, about 6,500,000 cP or more, about 7,000,000 cP or more, about 7,500,000 cP or more, about 8,000,000 cP or more, about 8,500,000 cP or more, about 9,000,000 cP or more, or about 9,500,000 cP or more. Alternatively, or in addition, regardless of the solids content of a slurry, the invention can benefit the pumping and processing of any viscous liquid (e.g., viscous slurry) having a first viscosity of about 10,000,000 cP or less, e.g., about 9,500,000 cP or less, about 9,000,000 cP or less, about 8,500,000 cP or less, about 8,000,000 cP or less, about 7,500,000 cP or less, about 7,000,000 cP or less, about 6,500,000 cP or less, about 6,000,000 cP or less, about 5,500,000 cP or less, about 5,000,000 cP or less, about 4,500,000 cP or less, about 4,000,000 cP or

less, about 3,500,000 cP or less, about 3,000,000 cP or less, about 2,800,000 cP or less, about 2,600,000 cP or less, about 2,400,000 cP or less, about 2,200,000 cP or less, about 2,000,000 cP or less, about 1,800,000 cP or less, about 1,600,000 cP or less, about 1,400,000 cP or less, about 1,400,000 cP or less, about 1,200,000 cP or less, about 1,000,000 cP or less, about 900,000 cP or less, about 800,000 cP or less, about 700,000 cP or less, about 600,000 cP or less, about 500,000 cP or less, about 450,000 cP or less, about 400,000 cP or less, about 350,000 cP or less, about 300,000 cP or less, about 250,000 cP or less, about 200,000 cP or less, about 150,000 cP or less, about 100,000 cP or less, about 95,000 cP or less, about 90,000 cP or less, about 85,000 cP or less, about 80,000 cP or less, about 75,000 cP or less, about 70,000 cP or less, about 65,000 cP or less, about 60,000 cP or less, about 55,000 cP or less, about 50,000 cP or less, about 45,000 cP or less, about 40,000 cP or less, about 35,000 cP or less, about 30,000 cP or less, about 25,000 cP or less, about 20,000 cP or less, about 15,000 cP or less, or about 10,000 cP or less. Thus, the first viscosity can be bounded by any two of the foregoing endpoints. For example, the first viscosity can be about 15,000 cP to about 1,200,000 cP, about 35,000 cP to about 85,000 cP, or about 1,000,000 cP to about 8,000,000 cP.

[0034] Injecting a fluid into the slurry or the first pressurized slurry results in a fluid-injected slurry having a second viscosity. The second viscosity typically is lower than the first viscosity. In some embodiments of the invention, the fluid-injected slurry has a second viscosity that is no more than about 80%, e.g., no more than about 75%, 70%, 65%, 60%, 55%, 50%, 45%, 40%, 35%, 30%, 25%, 20%, 15%, 10%, or 5%, of the first viscosity. In a preferred embodiment, the second viscosity is about 15% to about 20% of the first viscosity. By way of illustration, at 200 °C (e.g., after fluid injection), biomass slurries have a calculated viscosity of about 170,000 cP at a solids content of about 15 wt.%, a calculated viscosity of about 560,000 cP at a solids content of about 20 wt.%, and a calculated viscosity of about 1,200,000 cP at a solids content of about 25 wt.%. The values (in cP) of the second viscosity can be calculated by multiplying any of the percentages disclosed hereinabove by any of the first viscosity values. For example, when the first viscosity is about 3,000,000 cP to about 4,000,000, a second viscosity that is about 20% of the first viscosity can be calculated to be about 600,000 cP to about 800,000 cP. Any second viscosity value (in cP) that can be calculated in this manner is considered to be inherently disclosed herein.

[0035] The slurry can have any suitable first pressure. In some embodiments of the invention, the first pressure is about 14 psia to about 50 psia. For example, the first pressure is about 14 psia or more, e.g., about 15 psia or more, about 20 psia or more, about 25 psia or more, about 30 psia or more, about 35 psia or more, about 40 psia or more, or about 45 psia or more. Alternatively, or

in addition, the first pressure is about 50 psia or less, e.g., about 45 psia or less, about 40 psia or less, about 35 psia or less, about 30 psia or less, about 25 psia or less, about 20 psia or less, or about 15 psia or less. In a preferred embodiment, the first pressure is about 14.7 psia (i.e., the ambient pressure at sea level).

[0036] The first pressurized slurry can have any suitable second pressure, provided that the second pressure is greater than the first pressure. In some embodiments of the invention, the second pressure is about 50 psia to about 1250 psia. For example, the second pressure is about 50 psia or more, e.g., about 75 psia or more, about 100 psia or more, about 125 psia or more, about 150 psia or more, about 175 psia or more, about 200 psia or more, about 225 psia or more, about 250 psia or more, about 275 psia or more, about 300 psia or more, about 325 psia or more, about 350 psia or more, about 375 psia or more, about 400 psia or more, about 425 psia or more, about 450 psia or more, about 475 psia or more, about 500 psia or more, about 525 psia or more, about 550 psia or more, about 575 psia or more, about 600 psia or more, about 750 psia or more, about 800 psia or more, about 850 psia or more, about 900 psia or more, about 950 psia or more, about 1000 psia or more, about 1050 psia or more, about 1100 psia or more, about 1150 psia or more, or about 1200 psia or more. Alternatively, or in addition, the second pressure is about 1250 psia or less, e.g., about 1200 psia or less, about 1150 psia or less, about 1100 psia or less, about 1050 psia or less, about 1000 psia or less, about 950 psia or less, about 900 psia or less, about 850 psia or less, about 800 psia or less, about 750 psia or less, about 700 psia or less, about 650 psia or less, about 600 psia or less, about 575 psia or less, about 550 psia or less, about 500 psia or less, about 475 psia or less, about 450 psia or less, about 425 psia or less, about 400 psia or less, about 375 psia or less, about 350 psia or less, about 325 psia or less, about 300 psia or less, about 275 psia or less, about 250 psia or less, about 225 psia or less, about 200 psia or less, about 175 psia or less, about 150 psia or less, about 125 psia or less, about 100 psia or less, or about 75 psia or less. Thus, the second pressure can be bounded by any two of the foregoing endpoints. For example, the second pressure can be about 100 psia to about 850 psia, about 200 psia to about 575 psia, or about 450 psia to about 600 psia. In a preferred embodiment, the second pressure is about 70 psia to about 600 psia, more preferably about 200 psia to about 250 psia, and most preferably about 225 psia.

[0037] The second pressurized slurry can have any suitable third pressure, provided that the third pressure is higher than the second pressure. In some embodiments of the invention, the third pressure is greater than about 1250 psia. For example, the third pressure is about 1,200 psia or more, e.g., about 1,400 psia or more, about 1,600 psia or more, about 1,800 psia or more, about 2,000 psia or more, about 2,200 psia or more, about 2,400 psia or more, about 2,600 psia or more, about 2,800 psia or more, about 3,000 psia or more, about

3,200 psia or more, about 3,400 psia or more, about 3,600 psia or more, about 3,800 psia or more, about 4,000 psia or more, about 4,200 psia or more, about 4,400 psia or more, about 4,600 psia or more, about 4,800 psia or more, about 5,000 psia or more, about 5,200 psia or more, about 5,400 psia or more, about 5,600 psia or more, or about 5,800 psia or more. Alternatively, or in addition, the third pressure is about 6,000 psia or less, e.g., about 5,800 psia or less, about 5,600 psia or less, about 5,400 psia or less, about 5,200 psia or less, about 5,000 psia or less, about 4,800 psia or less, about 4,600 psia or less, about 4,400 psia or less, about 4,200 psia or less, about 4,000 psia or less, about 3,800 psia or less, about 3,600 psia or less, about 3,400 psia or less, about 3,200 psia or less, about 3,000 psia or less, about 2,800 psia or less, about 2,600 psia or less, about 2,400 psia or less, about 2,200 psia or less, about 2,000 psia or less, about 1,800 psia or less, about 1,600 psia or less, or about 1,400 psia or less. Thus, the third pressure can be bounded by any two of the foregoing endpoints. For example, the third pressure can be about 2,200 psia to about 2,800 psia, about 2,600 psia to about 6,000 psia, or about 3,000 psia to about 5,600 psia. In a preferred embodiment, the third pressure is about 2,000 to about 6,000 psia, more preferably about 3,200 psia to about 3,400 psia.

[0038] In some embodiments of the invention, prior to the injecting step, the fluid has a fourth pressure and a fourth temperature. In some embodiments, the fourth pressure is a saturation vapor pressure of the fluid at the fourth temperature. The fourth pressure typically is higher than the second pressure, such that the fluid can be injected into the first pressurized slurry. In some embodiments, the fourth pressure is about 1% (e.g., about 2%, 3%, 4%, 5%, 6%, 7%, 8%, 9%, 10%, 15%, 20%, 25%, 30%, 35%, 40%, 45%, 50%, 55%, 60%, 65%, 70%, 75%, or 80%) higher than the second pressure. Preferably, the fourth pressure is about 5% higher than the second pressure. Additionally, any of the foregoing percentages can be used as endpoints in a range. For example, the fourth pressure can be about 5% to about 45%, about 15% to about 30%, or about 3% to about 75% higher than the second pressure.

[0039] In some embodiments of the invention, the fluid-injected slurry is under a pressure sufficient to keep the fluid-injected slurry in a substantially liquid state.

[0040] The slurry can have any suitable first temperature. In some embodiments of the invention, the first temperature is about 1 °C to about 50 °C. For example, the first temperature is about 1 °C or more, e.g., about 5 °C or more, about 10 °C or more, about 15 °C or more, about 20 °C or more, about 25 °C or more, about 30 °C or more, about 35 °C or more, about 40 °C or more, or about 45 °C or more. Alternatively, or in addition, the first temperature is about 50 °C or less, e.g., about 45 °C or less, about 40 °C or less, about 35 °C or less, about 30 °C or less, about 25 °C or less, about 20 °C or less, about 15 °C or less, about 10 °C or less, or about 5 °C or less.

Thus, the first temperature can be bound by any two of the foregoing endpoints. For example, the first temperature can be about 5 °C to about 45 °C, about 20 °C to about 35 °C, or about 15 °C to about 50 °C. In a preferred embodiment, the first temperature is about 20 °C to about 25 °C.

[0041] The fluid-injected slurry can have any suitable second temperature. In some embodiments of the invention, the second temperature is about 100 °C to about 300 °C. For example, the second temperature is about 100 °C or more, e.g., about 110 °C or more, about 120 °C or more, about 130 °C or more, about 140 °C or more, about 150 °C or more, about 160 °C or more, about 170 °C or more, about 180 °C or more, about 190 °C or more, about 200 °C or more, about 210 °C or more, about 220 °C or more, about 230 °C or more, about 240 °C or more, about 250 °C or more, about 260 °C or more, about 270 °C or more, about 280 °C or more, or about 290 °C or more. Alternatively, or in addition, the second temperature is about 300 °C or less, e.g., about 290 °C or less, about 280 °C or less, about 270 °C or less, about 260 °C or less, about 250 °C or less, about 240 °C or less, about 230 °C or less, about 220 °C or less, about 210 °C or less, about 200 °C or less, about 190 °C or less, about 180 °C or less, about 170 °C or less, about 160 °C or less, about 150 °C or less, about 140 °C or less, about 130 °C or less, about 120 °C or less, or about 110 °C or less. Thus, the second temperature can be bounded by any two of the foregoing endpoints. For example, the second temperature can be about 180 °C to about 230 °C, about 160 °C to about 190 °C, or about 210 °C to about 240 °C. In a preferred embodiment, the second temperature is about 150 °C to about 250 °C, more preferably about 180 °C to about 230 °C, and most preferably about 200 °C.

[0042] In some embodiments of the invention, the pH of the slurry, the first pressurized slurry, the fluid-injected slurry, and/or the second pressurized slurry can be adjusted via the addition of exogenous acid. As used herein, an "exogenous acid" is an acid that is purposefully added to a specified slurry and does not include acid that is naturally released from the biomass during processing. The pH of the specified slurry or slurries can be adjusted to any suitable pH. For example, the pH can be adjusted to about 5 or less, e.g., about 4.5 or less, about 4 or less, about 3.5 or less, about 3 or less, about 2.5 or less, about 2 or less, about 1.5 or less, or about 1 or less. Alternatively, or in addition, the pH can be adjusted to about 0.5 or more, e.g., about 1 or more, about 1.5 or more, about 2 or more, about 2.5 or more, about 3 or more, about 3.5 or more, about 4 or more, or about 4.5 or more. Thus, the adjusted pH can be bounded by any two of the foregoing endpoints. For example, the adjusted pH can be about 0.5 to about 3, about 2.5 to about 3.5, or about 1 to about 3.5. In a preferred embodiment, the pH is about 3 or less. In another preferred embodiment, the methods of the invention are substantially free of exogenous acid. In some embodiments of the invention, an exogenous

acid is not employed.

[0043] Any suitable compound can be used for pH adjustment. In some embodiments where at least one exogenous acid is employed, the exogenous acid comprises, consists of, or consists essentially of an organic acid, an inorganic acid, or combinations thereof. In some embodiments, the exogenous acid comprises, consists of, or consists essentially of sulfuric acid, sulfonic acid, phosphoric acid, phosphonic acid, nitric acid, nitrous acid, hydrochloric acid, hydrofluoric acid, hydrobromic acid, hydroiodic acid, aliphatic carboxylic acids (such as acetic acid and formic acid), aromatic carboxylic acids (such as benzoic acid and salicylic acid), dicarboxylic acids (such as oxalic acid, phthalic acid, sebacic acid, and adipic acid), aliphatic fatty acids (such as oleic acid, palmitic acid, and stearic acid), aromatic fatty acids (such as phenylstearic acid), amino acids, carbonic acid (e.g., formed *in situ* by the addition of carbon dioxide), sulfurous acid (e.g., formed *in situ* by the addition of sulfur dioxide), or combinations thereof.

[0044] In some embodiments of the invention, the liquid carrier comprises a liquid selected from the group consisting of water, C₁-C₅ alcohols, water-miscible organic solvents, and combinations thereof. In some embodiments of the invention, the liquid carrier consists of water. In some embodiments of the invention, the liquid carrier comprises one or more water-immiscible organic solvents (e.g., toluene, hexane, nitromethane, and the like).

[0045] In some embodiments of the invention, the solid comprises a material selected from the group consisting of biomass, fractionated biomass, municipal solid waste, a polysaccharide, an oligosaccharide, and combinations thereof.

[0046] In some embodiments of the invention, the method is a continuous process. In some embodiments of the invention, the method is not a batch process.

[0047] In some embodiments of the invention, the method is performed in a tubular apparatus.

[0048] In some embodiments of the invention, the slurry or the first pressurized slurry is continuously flowing during the injecting step, especially where the method is performed in a tubular apparatus and especially where the fluid is injected into a flowing stream of slurry (any version) (rather than into a tank of slurry, even if the tank is continuously stirred). In some embodiments, the inventive method is a once-through process (as opposed to a process employing a recirculating loop or a closed loop).

[0049] In some embodiments of the invention, the method further comprises contacting the second pressurized slurry with a supercritical or near-critical fluid. In some embodiments, the supercritical or near-critical fluid comprises, consists of, or consists essentially of water.

[0050] The present invention is further defined in the following Examples, in which all parts and percentages are by weight, unless otherwise stated. It should be understood that these examples, while indicating preferred

embodiments of the invention, are given by way of illustration only and are not to be construed as limiting in any manner. From the above discussion and these examples, one skilled in the art can ascertain the essential characteristics of this invention.

EXAMPLES

[0051] With reference to **FIGURE 1**, a slurry comprising lignocellulosic biomass in water is stored in storage tank **1**. The slurry is then gravity fed into a low pressure pump **2**, which pressurizes the slurry to form a first pressurized slurry. Alternatively, the slurry can be fed to the low pressure pump **2** by a screw feeder, a mechanical pressurizing device, conveyor, or alternative mechanical device (not shown). In an alternative embodiment, low pressure pump **2** may be eliminated and replaced with a screw feeder, a mechanical pressurizing device, conveyor, or alternative mechanical device (not shown), which pressurizes the slurry to form a first pressurized slurry.

[0052] Saturated vapor **3**, such as saturated steam in the case of water as the injection fluid (or superheated vapor, such as superheated steam in the case of water as the injection fluid), is injected into the slurry line by one or more fluid injectors **4**, thereby forming a fluid-injected slurry. The temperature of the slurry increases as the steam (in the case of water as the injection fluid) condenses to liquid water and releases its latent heat. Fluid typically is injected at a pressure that is slightly higher than the pressure of the slurry. Because temperature and pressure are interrelated, especially in the case of saturated vapor, the temperature of the fluid prior to injection typically is dictated by the required pressure necessary to ensure that the fluid has a pressure slightly higher than the slurry, such that the fluid is capable of being injected into the slurry. If the pressure of the fluid is excessively high, such that by consequence the temperature is also excessively high, some of the organic material in the slurry (e.g., monomeric sugars, polymers, etc.) may degrade when contacted with the fluid having an excessively high temperature.

[0053] The fluid-injected slurry is then pumped to high pressure by high pressure pump **5**. The high temperature and high pressure slurry (i.e., second pressurized slurry) may then be subjected to further processing **6**, such as supercritical or near-critical treatment. During supercritical or near-critical treatment, the second pressurized slurry is contacted with a supercritical or near-critical fluid (e.g., water), which breaks down the organic components of biomass (e.g., polysaccharides) into simpler compounds (e.g., oligosaccharides and monosaccharides).

[0054] The injection fluid may be a liquid or a vapor, or a combination thereof. Although hot liquid may be injected to heat the slurry, it is advantageous to use a vapor, because the vapor releases latent heat upon condensation, which has a much higher heating value than the specific heat of a liquid. As a result of the higher heating value of a condensing vapor, the use of vapor as the

injection fluid also reduces the quantity of liquid that is effectively added to the slurry upon vapor condensation, as compared to the amount of hot fluid that would be required to achieve the same slurry temperature, thereby avoiding unnecessary dilution of the slurry.

[0055] Once the slurry is heated, it is easier to pump to high pressure because the viscosity decreases inversely with temperature, enabling pumping of a slurry with a higher solids content. This process makes the invention more economical and lowers the power required to pump, which also results in beneficial energy savings. This method is superior to prior art methods for pumping high viscosity slurries to high pressure, including those methods that employ heat exchangers, which are capital intensive and have fouling problems. In addition, the direct heating by fluid injection is more efficient than indirect heating through the use of heat exchangers, and also is not associated with the pressure drop issues that plague methods employing heat exchangers.

[0056] While the preferred forms of the invention have been disclosed, it will be apparent to those skilled in the art that various changes and modifications may be made that will achieve some of the advantages of the invention. Therefore, the scope of the invention is to be determined solely by the claims to be appended.

[0057] When ranges are used herein for physical properties, such as temperature ranges and pressure ranges, or chemical properties, such as chemical formulae, all combinations, and subcombinations of ranges specific embodiments therein are intended to be included.

Claims

1. A method, comprising:

providing a slurry at a first temperature and a first pressure, wherein said slurry comprises a liquid carrier and a solid, **characterised by** the steps of

increasing said first pressure to a second pressure of 0.34 MPa (50 psia) to 8.62 MPa (1250 psia), thereby forming a first pressurized slurry; injecting a fluid into said first pressurized slurry, thereby forming a fluid-injected slurry, wherein said fluid-injected slurry has a second temperature greater than said first temperature, and said second temperature is 100 °C to 300 °C; and

increasing said second pressure to a third pressure greater than 8.62 MPa (1250 psia), thereby forming a second pressurized slurry.

2. The method of claim 1, wherein said fluid is selected from the group consisting of vapor, saturated vapor, superheated vapor, and any combination thereof.

3. The method of claim 1,
wherein said fluid is selected from the group consisting of steam, saturated steam, superheated steam, and any combination thereof. 5
4. The method of claim 1, further comprising:
adding to at least one of said slurry, said first pressurized slurry, said fluid-injected slurry, and said second pressurized slurry a component selected from the group consisting of helium, nitrogen, argon, oxygen, carbon dioxide, carbon monoxide, sulfur dioxide, hydrogen chloride, and hydrogen. 10
5. The method of claim 1,
wherein at least one of said slurry and said first pressurized slurry has a first viscosity of at least 5,000 cP. 15
6. The method of claim 5,
wherein said fluid-injected slurry has a second viscosity that is no more than 80% of said first viscosity. 20
7. The method of claim 1,
wherein said third pressure is 13.8 MPa (2000 psia) to 41.4 MPa (6000 psia). 25
8. The method of claim 1,
wherein, prior to said injecting, said fluid has a fourth pressure and a fourth temperature, and wherein said fourth pressure is a saturation vapor pressure of said fluid at said fourth temperature. 30
9. The method of claim 1,
wherein said fluid-injected slurry is under a pressure sufficient to keep said fluid-injected slurry in a liquid state. 35
10. The method of claim 1,
wherein said solid comprises a material selected from the group consisting of biomass, fractionated biomass, municipal solid waste, a polysaccharide, an oligosaccharide, and any combination thereof. 40
11. The method of claim 1,
wherein said method is a continuous process. 45
12. The method of claim 1,
wherein said slurry or said first pressurized slurry is continuously flowing during said injecting.
13. The method of claim 1, further comprising:
contacting said second pressurized slurry with a supercritical or near-critical fluid comprising water. 50
14. The method of claim 1, wherein:
said slurry has a first temperature of 1 °C to 50 °C and a first pressure of 0.10 MPa (14 psia) to 0.34 MPa (50 psia); 55

said slurry has a viscosity of at least 5,000 cP; and
;
said third pressure is 17.9 MPa (2600 psia) to 41.4 MPa (6000 psia).

15. The method of claim 14,

wherein said liquid carrier comprises water; and said solid comprises a material selected from the group consisting of biomass, fractionated biomass, municipal solid waste, a polysaccharide, an oligosaccharide, and any combination thereof.

Patentansprüche

1. Verfahren, das Folgendes umfasst:

Bereitstellen einer Aufschlammung bei einer ersten Temperatur und einem ersten Druck, wobei die Aufschlammung eine flüssige Träger-substanz und einen Feststoff umfasst, **gekennzeichnet durch** die Schritte des Erhöhens des ersten Drucks auf einen zweiten Druck von 0,34 MPa (50 psia) auf 8,62 MPa (1250 psia), wobei dadurch eine erste unter Druck stehende Aufschlammung ausgebildet wird;
Injizieren eines Fluids in die erste unter Druck stehende Aufschlammung, wobei dadurch eine mit Fluid injizierte Aufschlammung ausgebildet wird, wobei die mit Fluid injizierte Aufschlammung eine zweite Temperatur aufweist, die über der ersten Temperatur liegt, und die zweite Temperatur 100 °C bis 300 °C beträgt; und Erhöhens des zweiten Drucks auf einen dritten Druck, der über 8,62 MPa (1250 psia) liegt, wobei dadurch eine zweite unter Druck stehende Aufschlammung ausgebildet wird.

2. Verfahren nach Anspruch 1,
wobei das Fluid aus der Gruppe ausgewählt ist, die aus Dampf, gesättigtem Dampf, überhitztem Dampf und einer beliebigen Kombination davon besteht.
3. Verfahren nach Anspruch 1,
wobei das Fluid aus der Gruppe ausgewählt ist, die aus Dunst, gesättigtem Dunst, überhitztem Dunst und einer beliebigen Kombination davon besteht.
4. Verfahren nach Anspruch 1, das ferner Folgendes umfasst:
Hinzufügen einer Komponente, die aus der Gruppe ausgewählt ist, die aus Helium, Stickstoff, Argon, Sauerstoff, Kohlendioxid, Kohlenmonoxid, Schwefeldioxid, Chlorwasserstoff und Wasserstoff besteht,

zu der Aufschlammung, der ersten unter Druck stehenden Aufschlammung, der mit Fluid injizierten Aufschlammung und/oder der zweiten unter Druck stehenden Aufschlammung.

5. Verfahren nach Anspruch 1, wobei die Aufschlammung und/oder die erste unter Druck stehende Aufschlammung eine erste Viskosität von wenigstens 5.000 cP aufweist. 5
6. Verfahren nach Anspruch 5, wobei die mit Fluid injizierte Aufschlammung eine zweite Viskosität, die nicht mehr als 80 % der ersten Viskosität beträgt, aufweist. 10
7. Verfahren nach Anspruch 1, wobei der dritte Druck 13,8 MPa (2000 psia) bis 41,4 MPa (6000 psia) beträgt. 15
8. Verfahren nach Anspruch 1, wobei das Fluid, vor dem Injizieren, einen vierten Druck und eine vierte Temperatur aufweist, und wobei der vierte Druck ein Sättigungsdampfdruck des Fluids bei der vierten Temperatur ist. 20
9. Verfahren nach Anspruch 1, wobei die mit Fluid injizierte Aufschlammung unter einem Druck steht, der ausreicht, um die mit Fluid injizierte Aufschlammung in einem flüssigen Zustand zu halten. 25
10. Verfahren nach Anspruch 1, wobei der Feststoff ein Material umfasst, das aus der Gruppe ausgewählt ist, die aus Biomasse, fraktionierter Biomasse, festen Siedlungsabfällen, einem Polysaccharid, einem Oligosaccharid und einer beliebigen Kombination davon besteht. 30
11. Verfahren nach Anspruch 1, wobei das Verfahren ein fortlaufender Vorgang ist. 35
12. Verfahren nach Anspruch 1, wobei die Aufschlammung oder die erste unter Druck stehende Aufschlammung während des Injizierens fortlaufend fließt. 40
13. Verfahren nach Anspruch 1, das ferner Folgendes umfasst:
Inberührungbringen der zweiten unter Druck stehenden Aufschlammung mit einem überkritischen oder nahezu kritischem Fluid, das Wasser umfasst. 45
14. Verfahren nach Anspruch 1, wobei:
die Aufschlammung eine erste Temperatur von 1 °C bis 50 °C und einen ersten Druck von 0,10 MPa (14 psia) bis 0,34 MPa (50 psia) aufweist; 50
die Aufschlammung eine Viskosität von wenigstens 5.000 cP aufweist; und
der dritte Druck 17,9 MPa (2600 psia) bis 41,4 MPa (6000 psia) beträgt. 55

tens 5.000 cP aufweist; und
der dritte Druck 17,9 MPa (2600 psia) bis 41,4 MPa (6000 psia) beträgt.

5 15. Verfahren nach Anspruch 14,

wobei die flüssige Trägersubstanz Wasser umfasst; und
der Feststoff ein Material umfasst, das aus der Gruppe ausgewählt ist, die aus Biomasse, fraktionierter Biomasse, festen Siedlungsabfällen, einem Polysaccharid, einem Oligosaccharid und einer beliebigen Kombination davon besteht.

Revendications

1. Procédé comprenant :

la fourniture d'une suspension à une première température et à une première pression, ladite suspension comprenant un support liquide et un solide, **caractérisé par** les étapes consistant à augmenter ladite première pression à une deuxième pression de 0,34 MPa (50 psia) à 8,62 MPa (1 250 psia), formant ainsi une première suspension sous pression ;
injecter un fluide dans ladite première suspension sous pression, formant ainsi une suspension injectée de fluide, ladite suspension injectée de fluide ayant une seconde température supérieure à ladite première température, et ladite seconde température étant comprise entre 100 °C et 300 °C ; et
augmenter ladite deuxième pression à une troisième pression supérieure à 8,62 MPa (1 250 psia), formant ainsi une seconde suspension sous pression.

2. Procédé selon la revendication 1, dans lequel ledit fluide est choisi dans le groupe constitué par la vapeur, la vapeur saturée, la vapeur surchauffée et toute combinaison de celles-ci.

3. Procédé selon la revendication 1, dans lequel ledit fluide est choisi dans le groupe constitué par la vapeur, la vapeur saturée, la vapeur surchauffée et toute combinaison de celles-ci.

4. Procédé selon la revendication 1, comprenant en outre :
l'ajout, à ladite suspension et/ou à ladite première suspension sous pression et/ou à ladite suspension injectée de fluide et/ou à ladite seconde suspension sous pression, d'un composant choisi dans le groupe constitué par l'hélium, l'azote, l'argon, l'oxygène, le dioxyde de carbone, le monoxyde de carbone, le

dioxyde de soufre, le chlorure d'hydrogène et l'hydrogène.

17,9 MPa (2 600 psia) et 41,4 MPa (6 000 psia).

- 5.** Procédé selon la revendication 1, dans lequel ladite suspension et/ou ladite première suspension sous pression présente une première viscosité d'au moins 5 000 cP. 5
- 6.** Procédé selon la revendication 5, dans lequel ladite suspension injectée de fluide présente une seconde viscosité qui n'est pas supérieure à 80 % de ladite première viscosité. 10
- 7.** Procédé selon la revendication 1, dans lequel ladite troisième pression est comprise entre 13,8 MPa (2 000 psia) et 41,4 MPa (6 000 psia). 15
- 8.** Procédé selon la revendication 1, dans lequel, avant ladite injection, ledit fluide a une quatrième pression et une quatrième température, et dans lequel ladite quatrième pression est une pression de vapeur de saturation dudit fluide à ladite quatrième température. 20
- 9.** Procédé selon la revendication 1, dans lequel ladite suspension injectée de fluide est sous une pression suffisante pour maintenir ladite suspension injectée de fluide à l'état liquide. 25
- 10.** Procédé selon la revendication 1, dans lequel ledit solide comprend un matériau choisi dans le groupe constitué par la biomasse, la biomasse fractionnée, les déchets solides municipaux, un polysaccharide, un oligosaccharide et toute combinaison de ceux-ci. 30 35
- 11.** Procédé selon la revendication 1, dans lequel ledit procédé est un procédé en continu.
- 12.** Procédé selon la revendication 1, dans lequel ladite suspension ou ladite première suspension sous pression s'écoule en continu pendant ladite injection. 40
- 13.** Procédé selon la revendication 1, comprenant en outre : la mise en contact de ladite seconde suspension sous pression avec un fluide supercritique ou quasi critique comprenant de l'eau. 45 50
- 14.** Procédé selon la revendication 1, dans lequel : ladite suspension a une première température de 1 °C à 50 °C et une première pression de 0,10 MPa (14 psia) à 0,34 MPa (50 psia) ; ladite suspension présente une viscosité d'au moins 5 000 cP ; et ladite troisième pression est comprise entre 55
- 15.** Procédé selon la revendication 14, dans lequel ledit support liquide comprend de l'eau ; et ledit solide comprend un matériau choisi dans le groupe constitué par la biomasse, la biomasse fractionnée, les déchets solides municipaux, un polysaccharide, un oligosaccharide et toute combinaison de ceux-ci.

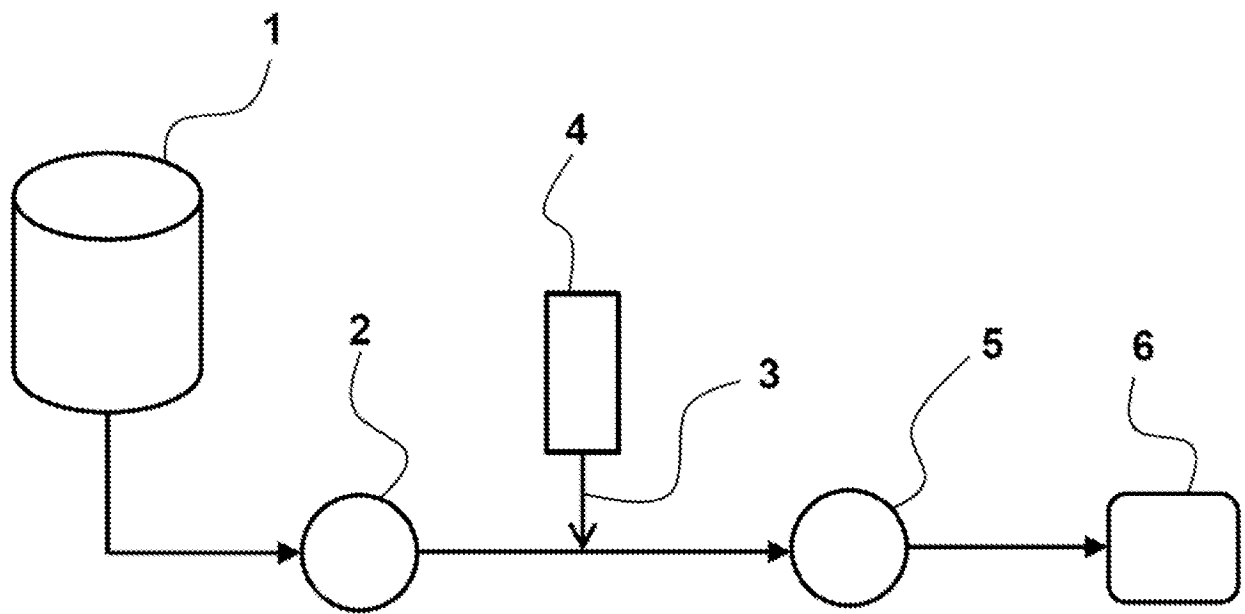


FIGURE 1

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2011119753 A2 [0002]