

(19)



(11)

EP 3 025 846 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
01.06.2016 Bulletin 2016/22

(51) Int Cl.:
B29C 53/58 ^(2006.01) **F16C 3/02** ^(2006.01)
F16L 47/16 ^(2006.01)

(21) Application number: **14275248.4**

(22) Date of filing: **28.11.2014**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME

(72) Inventors:
• **Pollitt, William**
Banbury, Oxfordshire OX16 4XD (GB)
• **Chase, Ian**
Banbury, Oxfordshire OX16 4XD (GB)

(71) Applicant: **Crompton Technology Group Limited**
Solihul, West Midlands B90 4SS (GB)

(74) Representative: **Gardiner, Stephen Robin**
Dehns
St Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)

(54) **Composite tension/compression strut**

(57) A composite filament-wound shaft with an end fitting mounted on an interface region on at least one end of said shaft, wherein in said interface region filaments of the filament-wound shaft are angled with respect to the shaft axis such that they follow a path with a radial component and have been cut so as to expose the ends of said filaments in said interface region; and wherein

said end fitting comprises a helical thread engaging with said interface region. The helical threaded engagement provides excellent load transmission of axial forces and is therefore well suited to tension and compression elements. The joint provides a low cost and low weight interface.

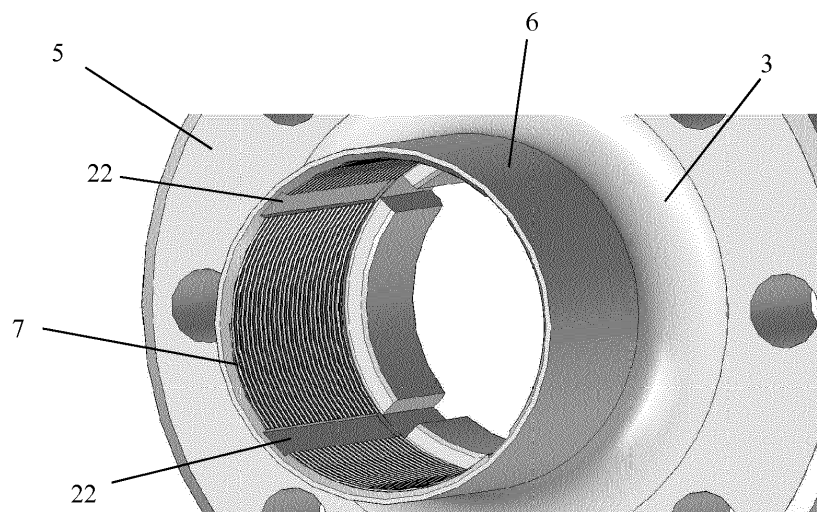


Fig. 5

EP 3 025 846 A1

Description

Technical Field

[0001] This disclosure relates to transmission shaft joints for joining end fittings to composite transmission shafts, in particular tension/compression transmission shafts or struts.

Background

[0002] Filament wound structures such as composite transmission shafts are typically formed by winding filaments such as carbon fibres around a mandrel in a helical fashion so as to build up a tube shaped shaft. The angle of the helical winding influences the properties of the shaft. For example, windings approaching 45 degrees have higher torsional properties and those higher than 45 degrees have greater properties in the hoop direction. About 45 degrees is generally optimal for torque transmission.

[0003] Creating regions that sustain bearing loads required for a tension/compression strut would be problematic with a purely composite solution, so it is desirable to be able to attach metallic ends to a shaft. Forces are then transmitted through such end fittings which are typically mechanically attached to the ends of the shaft.

[0004] It is desirable that the joint between the shaft and the end fittings be structurally efficient so as to minimise weight while ensuring good force transmission and good joint robustness.

[0005] One problem with attaching end fittings onto composite filament-wound shafts is ensuring that the load transfer between the end fittings and the shaft is distributed amongst all filament layers. The thickness of the shaft is typically built up from a large number of layers of helically wound filaments. Attaching an end fitting to the shaft by a simple mechanical press fit over the shaft would result in the end fitting interfacing only with the outermost plies. The load transfer between plies would then be reliant on the interlaminar shear strength of the laminate to distribute the load to adjacent plies, leading to a weaker component.

[0006] US 2012/0060636 A1 describes a clamping-type joint in which the composite fibres are trapped between a nut located inside the tube of composite and an external collar that surrounds the tube of composite. A threaded end fitting component can be used to move the nut and the collar closer together, thus clamping the shaft fibres therebetween.

[0007] US 2006/0258469 A1 describes a method of forming a composite shaft such that an internally splined end fitting can be axially press fit over the shaft with good torsional load transfer properties. US 2008/0012329 A1 describes a particularly advantageous spline profile for this joint.

Summary

[0008] According to this disclosure, there is provided a composite filament-wound shaft with an end fitting mounted on an interface region on at least one end of said shaft, wherein in said interface region filaments of the filament-wound shaft are angled with respect to the shaft axis such that they follow a path with a radial component and have been cut so as to expose the ends of said filaments in said interface region; and wherein said end fitting comprises a helical thread engaging with said interface region.

[0009] The end fitting is typically metallic (although it could be formed from any suitable material) and typically has a cylindrical attachment portion on which the thread is provided and a flanged portion to which external components are attached so that the shaft may act as an actuator rod or other force transmission component. It will be appreciated that the joint described here may be used in a wide range of applications, wherever tension/compression elements, etc. may be used. Some example applications include aerospace applications such as piston rods, struts, control actuators, etc.

[0010] Mounting the end fitting to the composite shaft via a helical thread makes the joint more suitable for transmitting axial forces than a joint that is engaged via axial splines onto the interface region. This helical attachment thus forms a tension/compression joint that is more suitable for shafts that transmit tension and/or compression forces.

[0011] The angling of the filaments in the interface region followed by cutting or grinding to expose the filament ends ensures that all, or most layers of the helical plies of fibres that form the shaft are engaged with the end fitting, thus ensuring excellent load sharing of forces between the end fitting and the shaft. Distributing the applied forces across more fibres, in particular across more fibre plies of the shaft greatly increases the strength of the joint. During the mounting process, the helical thread is driven into the composite shaft, between the fibre ends, compressing the fibres and thus forming a very strong attachment. As more of the thread engages with the interface region the strength of the joint increases. The thread cuts into and removes material from the composite shaft. To maximise the efficiency of force transfer in the axial direction (i.e. for tension/compression), it is desirable to make the thread is perpendicular as possible to the shaft axis. However, this has the effect of increasing the amount of cutting required to fully screw the end fitting onto the shaft.

[0012] The joint is structurally efficient in terms of its strength to weight ratio. The fitting can be formed as a single piece, and can use less material (e.g. less metal) and less composite in the joint region compared with other joining techniques. This also reduces cost and is simple to manufacture and assemble.

[0013] The end fitting may further comprise one or more grooves across the helical thread that break the

helical thread into a plurality of part-helices. In some preferred examples, the grooves may be axial grooves or they may be helical grooves. The grooves have the advantage of reducing the torque required to affix the end fitting. The grooves allow debris that is cut from the interface region by the threads to be accommodated within the grooves, thus either finding a path out of the joint completely, or at least not further obstructing or resisting the mounting process. Any number of such grooves may be used providing sufficient threaded engagement remains to keep the joint parts securely fixed together and to ensure effective load transfer across the joint. In some examples four axial grooves across the helical threads are provided, e.g. every 90 degrees around the shaft.

[0014] A multi-start thread may be used on the end fitting, i.e. one with multiple adjacent helices interleaved with one another. However, in some preferred examples the thread is a single-start thread. The multi-start thread may have advantages in reducing the number of turns required to mount the end fitting onto the shaft, but it also requires a reduction in the angle between the threads and the shaft axis (i.e. the threads must be less perpendicular to the shaft axis) which, as discussed before diverges from the ideal, perpendicular arrangement.

[0015] The thread preferably has a profile that comprises a cutting tooth portion arranged to cut into the interface region and a substantially flat land portion that frictionally engages with the interface region. As the thread forms a helix, an axial section through the thread will exhibit alternating teeth and lands.

[0016] The thread profile may further comprise at least one channel portion adjacent to the cutting tooth portion to accommodate debris produced during a mounting process. The channel portion may be provided between the tooth portion and the flat land portion. Where axial grooves are also formed across the thread, these channels will feed into the grooves, thus providing a route for debris to escape or collect during the mounting process.

[0017] The interface region of the shaft may comprise a ramp of hoop-wound fibres that increases in thickness in the axial direction of the shaft towards the end of the shaft, and helical-wound fibres wound over the ramp. The hoop-wound fibres can easily be wound so as to accurately build up the profile of the ramp at the desired gradient, forming a conical wedge shape with its thickest part at the edge of the shaft. During forming of the shaft, the hoop section may be formed on a mandrel first. The rest of the shaft is then formed using helical wound fibres as normal, but in the region of the ramp part, the fibres are redirected radially outwardly so as to splay outwards towards the end of the shaft. After the shaft has been built up to a desired thickness, the end (above the hoop-wound ramp) will be thicker than the middle of the shaft. This thicker section is then ground down to a similar diameter to the rest of the shaft. As the fibres in this region are not parallel to the shaft, the grinding (or more generally any material removal process) step exposes the ends of fibres from lots of different plies of the composite shaft.

When the end fitting is attached to overlap this interface region, the end fitting becomes engaged with all of these plies and thus shares its load transmission between all of those plies rather than concentrating load on a smaller number of surface plies. Preferably the helical-wound fibres over the ramp have been cut or ground parallel to the axis of the shaft to expose the fibre ends and form the interface region.

[0018] According to another aspect of this disclosure, there is provided a method of mounting an end fitting onto a composite filament-wound shaft, the end fitting comprising a helical thread; the shaft comprising an interface region in which filaments of the filament-wound shaft are angled with respect to the shaft axis such that they follow a path with a radial component and have been cut so as to expose the ends of said filaments in said interface region; the method comprising screwing said end fitting onto said shaft.

[0019] All of the preferred features of the end fitting and shaft that have been described above naturally also apply to this aspect of the disclosure.

[0020] According to another aspect, this disclosure provides an end fitting for mounting onto a composite filament-wound shaft, said end fitting comprising an internal thread arranged to cut helically into an interface region on the end of said filament-wound shaft during mounting.

Brief description of drawings

[0021] One or more non-limiting examples will now be described, by way of example only, and with reference to the accompanying figures in which:

- Fig. 1 illustrates an end fitting joined to a composite shaft;
- Fig. 2 shows the interface of the joint in more detail;
- Fig. 3 illustrates a shaft construction;
- Fig. 4 illustrates an interface in the process of being joined; and
- Fig. 5 shows an end fitting with axial grooves across the internal thread.

[0022] Composites can be made very structurally efficient (i.e. a high strength to weight ratio), however this efficiency is usually reduced in interfacing with metallic elements which may be required, e.g. for connection to other devices or equipment. A structurally efficient tension-compression joint has applications in struts, control linkages and rods.

[0023] Fig. 1 shows a tension-compression joint 1 comprising a composite shaft 2 with a metal end-fitting 3 mounted thereon. The end-fitting 3 may be connected to other equipment via bolts 4 through flange 5. End-fitting 3 also has a cylindrical attachment part 6 which is internally threaded with a helical thread and with an internal diameter closely matched to the outer diameter of the shaft 2. It will be appreciated that "closely matched" may

mean exactly the same size, very slightly larger (to allow movement) or very slightly smaller (to create compression upon fitting). The exact choice of internal and external diameters will depend upon the materials used, the intended use of the shaft and the forces expected to be transmitted therethrough.

[0024] The detailed view of Fig. 2 shows that the thread profile is made up of teeth 7 and flat lands 8. The end-fitting 3 shown in Fig. 2 is a single-start thread so the multiple teeth 7 shown in Fig. 2 are in fact all part of the same helical thread. Similarly, all of the flat lands 8 are part of the same helical thread.

[0025] Fig. 3 illustrates the construction of the shaft 2. Fig. 3 is somewhat schematic in nature as it shows the plies 10a-e much larger than in a real example. Also, the plies 10 in Fig. 3 do not illustrate that the individual filaments are helically wound, which would almost certainly be the case in real implementations.

[0026] The shaft 2 illustrated in Fig. 3 is made up of 5 plies 10 (individually labelled 10a-10e). At the end of the shaft 2, a conical ramp 11 has been formed from hoop-wound fibres with the ramp's thickness building up towards the end of the shaft 2 so that it is thickest at the end. The helical wound plies 10 are then wound on top of the ramp 11. As can be seen in Fig. 3, as the plies 10 pass over the top of the hoop wound ramp 11, they splay radially outwardly (i.e. the hoop 11 causes them to follow a path with a radial component rather than purely axial and circumferential components). The joint interface region 12 has been formed by grinding down the thicker portion of helical plies 10 over the ramp 11 so as to conform the thickness with the rest of the shaft (although conformity of thickness is not essential). This grinding process has led to exposure of the ends of the individual plies 10a-10e such that all of those plies 10a-10e interface with the threads 7 of end-fitting 3. As the threads of end-fitting 3 interface with all of the plies 10a-10e, forces are transmitted between the end-fitting 3 and the shaft 2 via all of the plies 10a-10e rather than only through surface plies 10a and possibly 10b (which would be the case in the absence of the ramp 11).

[0027] The threaded engagement of the shaft 2 and end-fitting 3 means that the threads provide excellent force transmission in the axial direction so that the joint is particularly suited to tension and compression force transmission. This means that the joint reacts the shear loading at the interface most effectively in the axial rather than the circumferential direction. The joint will still have an adequate transmission in the circumferential direction (e.g. for incidental torsional loads), but is more ideally suited to axial loads. Due to the thread, the joint will resist torsional loads in one sense (the tightening sense of the thread) more than the opposite sense (the loosening sense of the thread). The joint is also structurally efficient in that it achieves an excellent bond between the shaft 2 and end-fitting 3 with a relatively small quantity of metal, thus reducing weight and cost. The joint is also mechanically simple to manufacture and join in that it can be

made as a single component.

[0028] Assembly of the joint is carried out by way of turning the end fitting 3 relative to the shaft 2 whilst allowing the end fitting 3 to move axially relative to the shaft 2. This may be improved further by forcing the end fitting 3 to move axially at the pitch of the thread, i.e. driving the end fitting 3 to move at an axial rate of one thread pitch per full rotation so that its driven axial movement exactly matches the rate that would be induced by the thread.

[0029] Fig. 4 shows an end fitting 3 part way through mounting onto shaft 2. Arrows 20 indicate an axial driving force applied to the end fitting 3 so as to induce movement at a rate matching the natural movement rate of the thread, i.e. driving the end fitting at an axial rate of one thread pitch per full rotation around the shaft axis.

[0030] Fig. 5 shows an end fitting 3. The threads 7 are interrupted by axial grooves 22 that provide passages for material cuttings to be held or even to pass along the grooves 22 and out of the joint. Any number of axial grooves 22 may be provided, although four are illustrated in Fig. 5.

Claims

1. A composite filament-wound shaft with an end fitting mounted on an interface region on at least one end of said shaft, wherein in said interface region filaments of the filament-wound shaft are angled with respect to the shaft axis such that they follow a path with a radial component and have been cut so as to expose the ends of said filaments in said interface region; and wherein said end fitting comprises a helical thread engaging with said interface region.
2. A shaft as claimed in claim 1, wherein said end fitting further comprises grooves across the helical thread that break the helical thread into a plurality of part-helices.
3. A shaft as claimed in claim 2, wherein said grooves are axial grooves or helical grooves.
4. A shaft as claimed in claim 2 or 3, comprising four axial grooves across the helical threads.
5. A shaft as claimed in any preceding claim, wherein the thread is a single-start thread.
6. A shaft as claimed in any preceding claim, wherein said thread has a profile that comprises a cutting tooth portion arranged to cut into said interface region and a substantially flat land portion that frictionally engages with said interface region.
7. A shaft as claimed in claim 6, wherein said profile

further comprises at least one channel portion adjacent to said cutting tooth portion to accommodate debris produced during a mounting process.

8. A shaft as claimed in any preceding claim, wherein the interface region of the shaft comprises a ramp of hoop-wound fibres that increases in thickness in the axial direction of the shaft towards the end of the shaft, and helical-wound fibres wound over said ramp. 5 10
9. A shaft as claimed in claim 8, wherein said helical-wound fibres over said ramp have been cut or ground parallel to the axis of the shaft to expose the fibre ends and form said interface region. 15
10. A method of mounting an end fitting onto a composite filament-wound shaft, the end fitting comprising a helical thread; the shaft comprising an interface region in which filaments of the filament-wound shaft are angled with respect to the shaft axis such that they follow a path with a radial component and have been cut so as to expose the ends of said filaments in said interface region; 20 25 the method comprising screwing said end fitting onto said shaft.
11. A method as claimed in claim 10, wherein the end fitting is driven axially at a rate equal to one thread pitch per rotation. 30

35

40

45

50

55

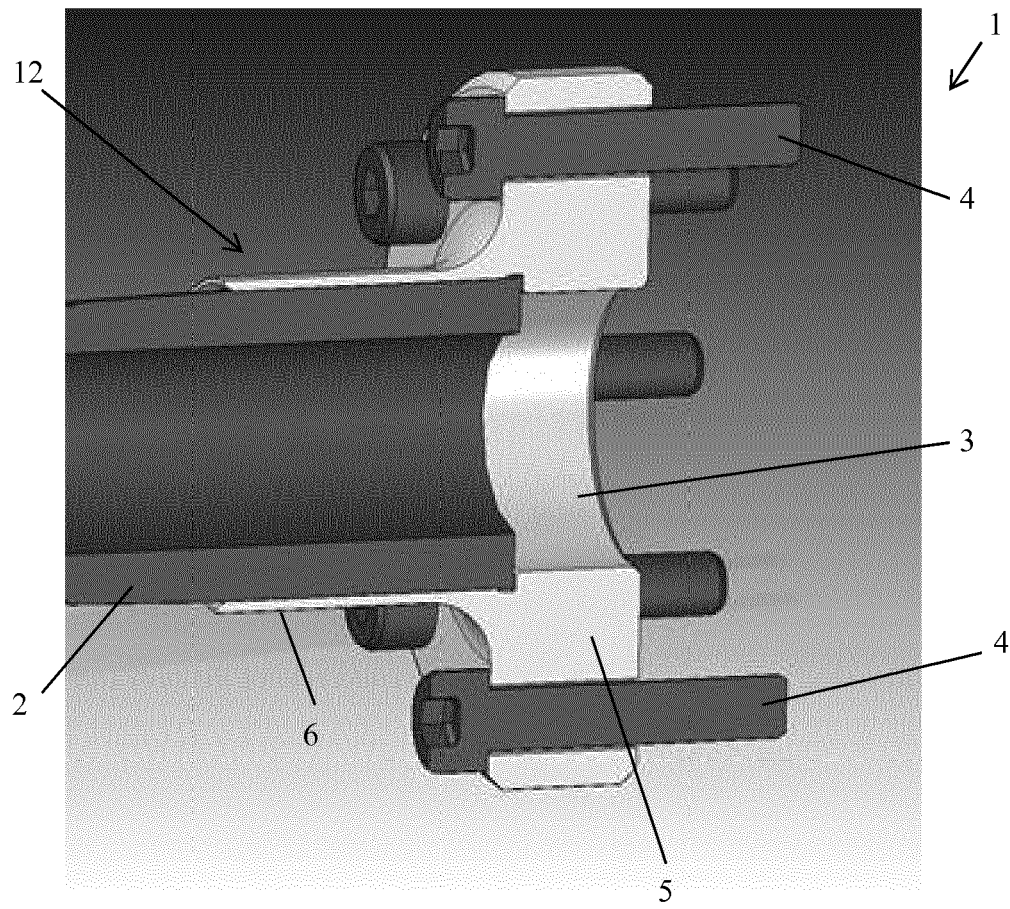


Fig. 1

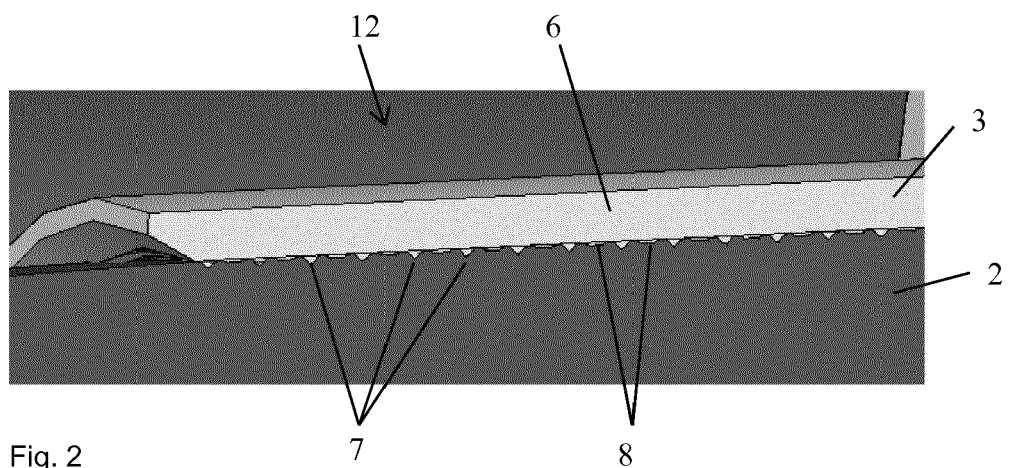


Fig. 2

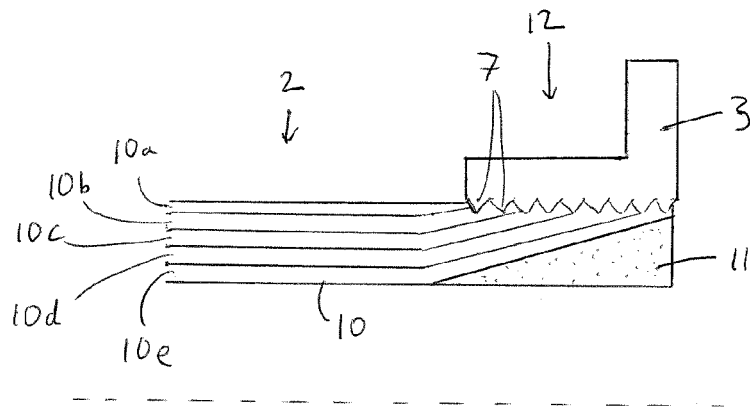


Fig. 3

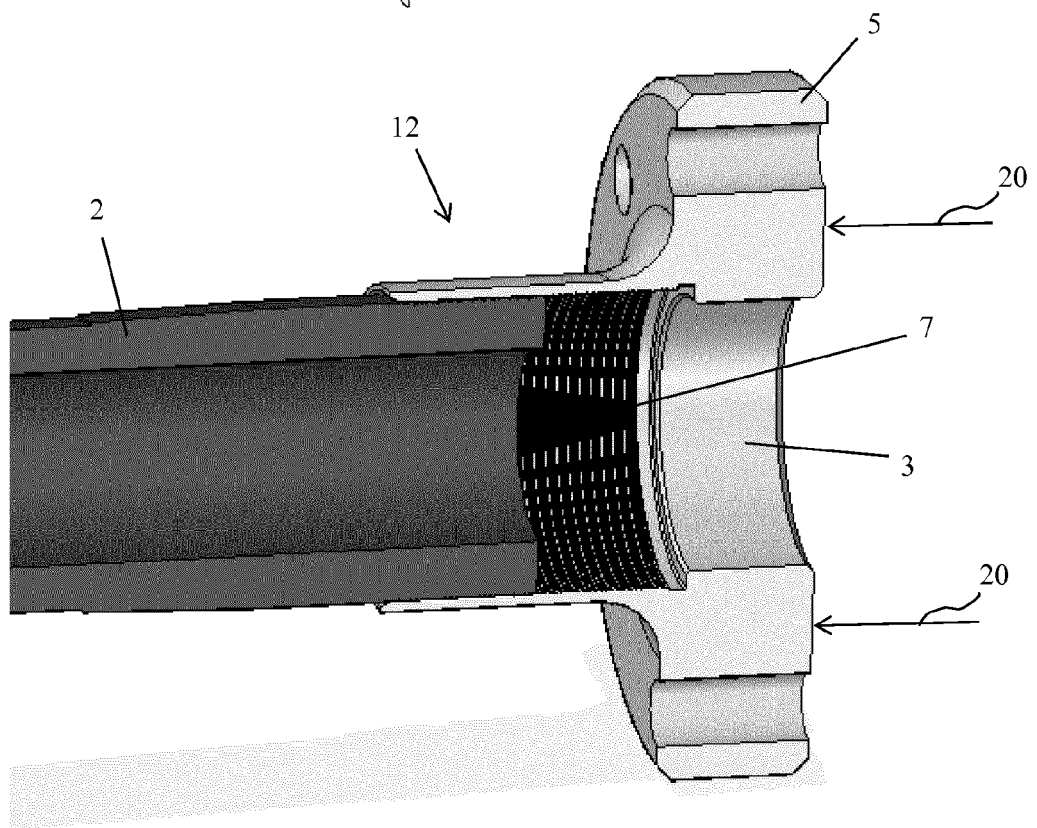


Fig. 4

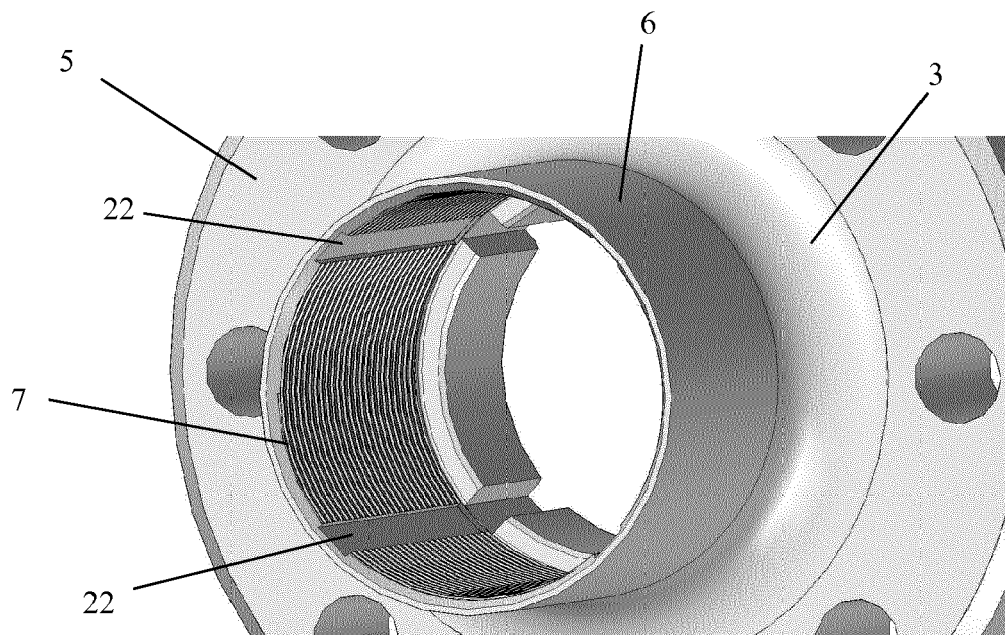


Fig. 5



EUROPEAN SEARCH REPORT

Application Number
EP 14 27 5248

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A,D	US 2012/060636 A1 (DEWHIRST MICHAEL JAMES [GB]) 15 March 2012 (2012-03-15) * the whole document *	1-11	INV. B29C53/58 F16C3/02 F16L47/16
A,D	US 2006/258469 A1 (DEWHIRST MICHAEL J [GB] ET AL DEWHIRST MICHAEL JAMES [GB] ET AL) 16 November 2006 (2006-11-16) * the whole document *	1-11	
			TECHNICAL FIELDS SEARCHED (IPC)
			B29C F16C F16L
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 29 April 2015	Examiner Schneider, Dominik
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 27 5248

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-04-2015

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012060636 A1	15-03-2012	EP 2229540 A1	22-09-2010
		GB 2454958 A	27-05-2009
		US 2012060636 A1	15-03-2012
		WO 2009066070 A1	28-05-2009

US 2006258469 A1	16-11-2006	DE 102006012934 A1	14-12-2006
		GB 2424464 A	27-09-2006
		US 2006258469 A1	16-11-2006

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20120060636 A1 [0006]
- US 20060258469 A1 [0007]
- US 20080012329 A1 [0007]