



(11)

EP 3 029 373 A1

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
08.06.2016 Bulletin 2016/23

(51) Int Cl.:
F23J 13/04 (2006.01)

(21) Application number: **15195086.2**

(22) Date of filing: **18.11.2015**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(72) Inventors:
• **Lüttgens, Kay-Bernd**
45145 Essen (DE)
• **Fischer, Christian**
42899 Remscheid (DE)
• **Lehminger, Stefan**
51067 Köln (DE)
• **Han, Xianshan**
214011 Wuxi City (CN)

(30) Priority: **02.12.2014 CN 201410773021**

(71) Applicant: **Vaillant (Wuxi) Heating Equipment Co., Ltd.**
Wuxi, Jiangsu 214028 (CN)

(74) Representative: **Hocker, Thomas**
Vaillant GmbH
Berghauser Strasse 40
42859 Remscheid (DE)

(54) **FLUE PIPE ASSEMBLY**

(57) The present invention discloses a flue pipe assembly for a gas appliance including at least a first pipe section and a second pipe section, and a first electrical conductor and a second electrical conductor attached to the first and the second pipe sections respectively. Wherein, the flue pipe assembly further includes a pipe connection mechanism, and the pipe connection mechanism is disposed between the first and the second pipe sections to establish a mechanical connection therebetween, and in the mean time to establish an electrical connection between the first and the second electrical conductors. In this way, reliable mechanical and electrical connections can be established between pipe sections by the pipe connection mechanism.

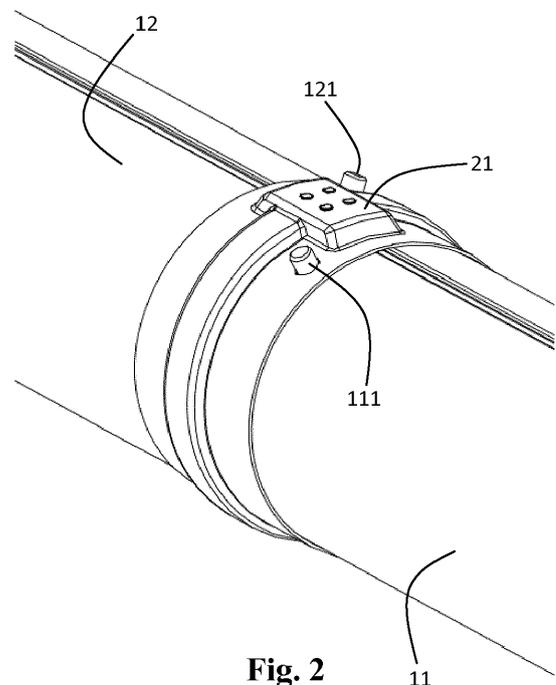


Fig. 2

EP 3 029 373 A1

DescriptionFIELD OF THE INVENTION

[0001] The present invention relates to fields of domestic gas appliances, and particularly relates to flue pipes for domestic gas appliances.

BACKGROUND OF THE INVENTION

[0002] Domestic gas heating appliances generally include gas water heaters, gas boilers, gas stoves and so on. A domestic gas appliance typically has a flue hood and a number of flue pipes connected with the flue hood for collecting combustion products (containing carbon monoxide and nitrogen oxides) of the gas appliance and exhausting them outside. The flue pipes generally include a number of pipe sections connected in series, and these pipe sections are produced in accordance with appropriate safety standards by recognized suppliers and properly assembled in users' home according to corresponding specifications. However, in consideration of cost, dealers may adopt non-standard pipes or hire workers without professional training to assemble the pipes, which may result in instability of the pipe connection and cause risks of gas leakage.

[0003] Chinese published patent application CN103615806A discloses flue pipes with electrical conductors. When the pipe sections are connected in series, the electrical conductors of each pipe section are connected with each other and further electrically connected to a controller of a gas water heater. In this way, when there exists a mechanical connection problem of the pipe sections, the electrical connection of the conductors will be broken accordingly. Thus, the controller of the appliance will take certain security measures, such as stop running of the appliance.

[0004] The Chinese patent application discloses the conception that the electrical conductors can be used to provide a prompt feedback once a connection problem exists between the pipe sections. Nevertheless, the above solution does not provide reliable mechanical and electrical connection means between the pipe sections.

SUMMARY OF THE INVENTION

[0005] It is an object of present invention to provide a flue pipe assembly, wherein the mechanical and electrical connections of pipe sections of the flue pipe assembly are stable and reliable, and the flue pipe assembly can provide a prompt feedback even if there exists a disconnection of the pipe sections.

[0006] According to one aspect of the present invention there is provided a flue pipe assembly for a gas appliance comprising at least a first pipe section and a second pipe section, and a first electrical conductor and a second electrical conductor attached to the first and the second pipe sections respectively. Wherein, the flue pipe assembly

bly further comprises a pipe connection mechanism, and said pipe connection mechanism is disposed between the first and the second pipe sections to establish a mechanical connection therebetween, and in the mean time to establish an electrical connection between the first and the second electrical conductors. In this way, reliable mechanical and electrical connections can be established between pipe sections by the pipe connection mechanism.

[0007] Preferably, the pipe connection mechanism comprises a fixed connection device for mechanically connecting adjacent end portions of the first and the second pipe sections.

[0008] Preferably, the fixed connection device comprises a connecting ring covering the adjacent end portions of the first and the second pipe sections.

[0009] Preferably, the pipe connection mechanism further comprises electrical terminals disposed on the connecting ring to electrically connect the first and the second electrical conductors.

[0010] Preferably, each of the first and the second pipe sections is provided with a conductor base with conductive pads electrically connected to the first or the second electrical conductor; each of the electrical terminals has two ends contacting corresponding conductive pads of the first and the second pipe sections.

[0011] Preferably, the connecting ring comprises a first portion and a second portion, and the first and the second portions are separate and fixedly connected to the first and the second pipe sections respectively; the electrical terminals comprise a female terminal attached to the first portion and electrically connected to the first electrical conductor of the first pipe section, and a male terminal attached to the second portion and electrically connected to the second electrical conductor of the second pipe section.

[0012] Preferably, each of the first and said second electrical conductors comprises two electrical wires; and the electrical terminals are insulatively disposed on the connecting ring.

[0013] Alternatively, the fixed connection device comprises at least two latching members, and each latching member latches the adjacent end portions of the first and the second pipe sections.

[0014] Preferably, each of the first and said second electrical conductors comprises only one electrical wire, and said two latching members are formed differentially.

[0015] Preferably, a sealing member is disposed between the first and the second pipe sections.

[0016] In a further embodiment, the flue pipe assembly comprises a third pipe section adapted for extending through a wall, a third electrical conductor attached to the third pipe section, a switch electrically connected to the third electrical conductor, and a wall mounting mechanism associated with the third pipe section for mounting the third pipe section to the wall; wherein said switch is turned on at the time when said wall mounting mechanism is mounted to the wall.

[0017] Preferably, the wall mounting mechanism com-

prises a mounting flange and a retaining device; wherein the mounting flange defines a through hole therein for being extended through by the third pipe section, and the retaining device engages with the mounting flange to attach it to the wall.

[0018] Preferably, the switch is disposed on the mounting flange at a side facing the wall.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

Fig. 1 is a schematic view showing a flue pipe assembly in accordance with a first embodiment of present invention connected with a gas water heater;

Fig. 2 is a perspective view showing two adjacent pipe sections of the flue pipe assembly as shown in Fig. 1 are connected via a first pipe connection mechanism;

Fig. 3 is similar to Fig. 2, wherein a connecting ring of the first pipe connection mechanism is removed;

Fig. 4 is a perspective view showing two separate adjacent pipe sections as shown in Fig. 3;

Fig. 5 is a perspective view showing the connecting ring of the pipe connection mechanism;

Fig. 6 is a perspective view showing an end pipe section is fixedly mounted to a wall via a first wall mounting mechanism;

Fig. 7 is a perspective view showing the end pipe section together with the first wall mounting mechanism as shown in Fig. 6 from another aspect;

Fig. 8 is a perspective view showing a flue pipe assembly in accordance with a second embodiment of present invention, wherein two adjacent pipe sections of the flue pipe assembly are connected via a second pipe connection mechanism;

Fig. 9 is a perspective view showing two separate adjacent pipe sections as shown in Fig. 8;

Fig. 10 is a sectional view of the two connected pipe sections as shown in Fig. 8;

Fig. 11 is a schematic view showing a flue pipe assembly in accordance with a third embodiment of present invention, wherein two adjacent pipe sections of the flue pipe assembly are connected via a third pipe connection mechanism;

Fig. 12 is a schematic view of the pipe section as shown in Fig. 11 from another aspect;

Fig. 13 is a schematic sectional view showing a flue pipe assembly in accordance with a fourth embodiment of present invention, wherein an end pipe section is fixedly mounted to a wall via a second wall mounting mechanism;

Fig. 14 is an explosive view of the end pipe section and the second wall mounting mechanism as shown in Fig. 13;

Fig. 15 is a schematic sectional view showing a flue pipe assembly in accordance with a fifth embodiment of present invention, wherein an end pipe section is fixedly mounted to a wall via a third wall mounting mechanism;

Fig. 16A-16C are schematic views showing the process of installing the end pipe section as shown in Fig. 15 to the wall via the third wall mounting mechanism.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0020] Reference will now be made to the drawing figures to describe the preferred embodiments of the present invention in detail. However, the embodiments can not be used to restrict the present invention. Changes such as structure, method and function obviously made to those of ordinary skill in the art are also protected by the present invention.

[0021] Gas appliances could be fired with combustible gas, such as natural gas, city gas, liquefied petroleum gas, methane, etc., thereby supplying thermal energy for domestic usages. Such as gas water heaters for supplying hot water, gas boilers for supplying hot water and room heating, and gas stoves for cooking. A gas water heater will be exemplified hereinafter for illustrating the flue pipe assembly of present invention.

[0022] Refer to Fig. 1, a gas water heater 80 can be connected with a flue pipe assembly composed of a number of pipe sections to exhaust combustion products, or can be connected with an elbow pipe to exhaust combustion products, which depends on the position for installing the gas water heater in a room and layout of the room. The gas water heater may include a housing, a gas burner, a heat exchanger, a flue hood, and an air supply fan. Heat generated by the gas burner passes through the heat exchanger and is absorbed by cold water flowing through the heat exchanger. The combustion products are driven by the fan and collected by the flue hood, and further discharged outside via the flue pipe assembly which is connected with the flue hood. As the configurations of gas water heaters are well known in the art, a detailed explanation is omitted for sake of brevity.

[0023] Refer to Fig. 1 through Fig. 7, the pipe section can be a straight pipe, such as the pipe sections labeled in 11, 12, 13, can also be an elbow pipe, like the pipe section labeled in 14. Moreover, the pipe section can be an intermediate pipe, such as the pipe sections labeled in 11, 12, 14, can also be an end pipe extending through a wall 90, like the pipe section labeled in 13. Each intermediate pipe section has the same structure, and it has two opposite end portions with complementary configuration, in this way, two adjacent pipe sections can be connected fluently. Each intermediate pipe section 11, 12, 14 has a longitudinally extending slot defined in an outer wall thereof, and an electrical conductor 41 is received in the slot. In this embodiment, the electrical conductor is a cable including two electrical wires 411, 412, and a conductor base 511 is embedded in the outer wall at each end portion of the intermediate pipe section 11, 12, 14. The two electrical wires 411, 412 extend into the conductor base 511 and are respectively electrically connected with two conductive pads 5111, 5112 disposed on an upper surface of each conductor base.

[0024] Fig. 2 through Fig. 5 show a first pipe section 11 and a second pipe section 12 which are positioned adjacent to each other and mechanically and electrically connected via a first pipe connection mechanism. The adjacent end portions of the first and the second pipe sections 11, 12 are provided with guiding post 112 and guiding groove 122 respectively, so that the two adjacent pipe sections can be connected fluently. In this embodiment, the end portion of the second pipe section 12 encircles the end portion of the first pipe section 11. The end portion of the second pipe section 12 circumferentially defines a receiving groove in an inner wall thereof, and a sealing member 101 is received in this receiving groove. In this way, the first and the second pipe sections 11, 12 are sealed at the connection therebetween. In this embodiment, the sealing member 101 is a sealing ring made of rubber material. It would be apparent to those skilled in the art that, in other embodiments, the guiding post and the guiding groove can change positions to each other, and the sealing member can also be disposed on the outer wall of the end portion of the first pipe section 11. In this embodiment, the first and the second pipe section 11, 12 are formed with positioning posts 111, 121 respectively on the outer wall of end portions thereof.

[0025] The pipe connection mechanism includes a fixed connection device for realization of a reliable mechanical connection between the first and the second pipe sections 11, 12. As shown in Fig. 5, the fixed connection device includes a connecting ring 21. This connecting ring 21 has a terminal receiving chamber 211, positioning holes 212, and mounting holes 213. The pipe connection mechanism further includes electrical terminals 512 fixed on the connecting ring 21 for establishing an electrical connection between a first electrical conductor of the first pipe section 11 and a second electrical conductor of the second pipe section 12. In this embodiment, the electrical terminals include two terminals (only

one is shown in Fig. 5) both received in the terminal receiving chamber 211. Each electrical terminal 512 has a terminal body and an elastic contacting arm 5121. The terminal body is fixed in the terminal receiving chamber 211 with an insulative layer formed between the electrical terminal 512 and an inner wall of the terminal receiving chamber 211 to avoid an electrical conduction between the electrical terminals 512 and the connecting ring 21.

[0026] In assembling, the connecting ring 21 covers the adjacent end portions of the first and the second pipe sections 11, 12, and the connecting ring 21 is fixed to the first and the second pipe sections 11, 12 via the engagement of the positioning posts 111, 121 and the positioning holes 212. Fastening members (not shown), such as bolts can extend through the mounting holes to fasten the connecting ring 21 to the pipe sections and forming a solid connection between the first and the second pipe sections 11, 12. In the meantime, the two elastic contacting arms 5121 of the electrical terminals 512 contact against the conductive pads 5111, 5112 of the conductor bases of the first and the second pipe sections 11, 12 respectively, thereby realizing the electrical connection of the first and the second electrical conductors. The mechanical connection between adjacent pipe sections becomes stable and reliable by introducing the pipe connection mechanism, which can reduce the case of disconnection of pipe sections. Even if a disconnection of pipe sections happens or the installing of the flue pipe assembly does not meet the requirements, as a result, the electrical conductors connected in series are broken, then a controller of the gas water heater can sense it and take actions accordingly, such as stop running of the gas water heater to avoid leakage of flue gas.

[0027] Refer to Figs. 6 and 7, a third pipe section, namely an end pipe section 13 extends through a wall and secures to the wall via a wall mounting mechanism. The end pipe section 13 has one end located inside the room and mechanically, electrically connected with an adjacent intermediate pipe section 12 via the pipe connection mechanism as described above. The wall mounting mechanism includes a mounting flange 31 with a central through hole for being passed through by the end pipe section 13. The through hole has a size substantially same as that of a cross section of the end pipe section 13. In this way, in case there is a reverse wind outside, the flue gas discharged outside would not return inner of the room via the gap between the end pipe section and the wall. The mounting flange 31 defines a circular groove at a surface thereof facing the wall for receiving a sealing element 311. In this embodiment, the sealing element is a sealing ring made of rubber material. When the mounting flange 31 is mounted onto the wall, the sealing element 31 forms a sealing between the wall and the flange to avoid the flue gas discharged outside return into the room. The mounting flange 31 defines mounting holes 313, and fastening members, such as bolts extend through the mounting holes 313 to fasten the mounting flange 31 onto the wall.

[0028] As shown in Fig. 7, a switch 61 is disposed at the surface of the mounting flange 31 facing to the wall, and the switch 61 is connected with a third electrical conductor of the end pipe section 13 in series. The switch 41 can be a pressing switch, a reed switch, or other contact switch, can also be a proximity switch, a photoelectric switch, or other non-contact switches. At the time when the mounting flange 31 is fixed to the wall 90, the switch 61 is turned on, and at the same time, an electric current is generated and passes through the parallel wires 411, 412 of the electrical conductor 41 in reverse directions. The end pipe section can be secured to the wall via the wall mounting mechanism, which can reduce the case of disconnection of pipe sections. Even if a disconnection of pipe sections happens or the installing of the flue pipe assembly does not meet the requirement, as a result, the switch is opened, then the controller of the gas water heater can sense it and take actions accordingly, such as stop running of the gas water heater to avoid leakage of flue gas.

[0029] Fig. 8 through Fig. 10 shows a flue pipe assembly in accordance with a second embodiment of present invention. The main difference with respect to the first embodiment is that, the connecting ring includes a first portion 221 and a second portion 222. The first and the second portions 221, 222 are separate and fixed to adjacent end portions of the first and the second pipe sections 11, 12 respectively via bolts. The first and the second portions 221, 222 are respectively provided with terminal bases 521, 522. The electrical terminals include a female terminal (not shown) retained in the terminal base 521 and electrically connected to the first electrical conductor, and a male terminal 5221 retained in the terminal base 522 and electrically connected to the second electrical conductor. When the first pipe section 11 is connected with the second pipe section 12, the male terminal 5221 electrically contacts the female terminal, and the first portion 221 and the second portion 222 are fastened together via bolts. In addition, a dust-proof cover 223 covers the terminal bases 521, 522 after assembling. Similarly, a sealing member 102 is provided between the first and the second pipe section 11, 12 to ensure a sealing connection therebetween.

[0030] Figs. 11 and 12 show a third embodiment of the flue pipe assembly. In present embodiment, the electrical conductor 41 includes only one electrical wire, and the pipe sections are made of metallic material to perform as the other electrical wire as disclosed in aforementioned embodiments. The fixed connection device includes at least two latching members 231, 232, and these two latching members are both disposed at one end portion of a pipe section. When the first pipe section 11 is connected to the second pipe section 12, the two latching members 231, 232 each latches adjacent end portions of the first and the second pipe sections 11, 12, thereby achieving a reliable mechanical connection between the pipe sections. In this embodiment, the latching members 231, 232 also act as terminals to establish an electrical

connection between the electrical conductors of the pipe sections. One latching member 231 is located adjacent to the electrical conductor 43, and it has a different design with respect to the other latching member 232. For example, the latching members have different structures, different size, or different colors. In this way, when connecting two pipe sections, the electrical conductors of the two pipe sections can be connected without mistakes. Similarly, a sealing member 103 is provided between the first and the second pipe section 11, 12 to ensure a sealing connection therebetween.

[0031] Figs. 13 and 14 show a fourth embodiment of the flue pipe assembly. In this embodiment, the wall mounting mechanism includes a mounting flange 321 and a retaining device. The retaining device includes a restricting member 322 encircling the end pipe section 13, an additional flange 323 having a central hole for being passed through by the end pipe section 13, and a circular wedge-shaped piece 324. When the wall mounting mechanism is attached to the wall 90, the mounting flange 321 and the additional mounting flange 323 are located at opposite sides of the wall 90. The mounting flange 321 has one side opposite to the wall 90 abuts against the restricting member 322, and the additional mounting flange 323 has one side opposite to the wall 90 is abut against by the wedge-shaped piece 324. By this means, the end pipe section 13 can be secured to the wall 90 reliably. Similar to the first embodiment, a switch 62 and a sealing member 325 are disposed between the mounting flange 321 and the wall 90.

[0032] Fig. 15 and Figs. 16A-16C show a fifth embodiment of the flue pipe assembly. In this embodiment, the wall mounting mechanism includes a mounting flange 331 and a retaining device. The retaining device includes two restricting devices 332 and a circular wedge-shaped piece 333. Each restricting device 332 includes a first arm 3321 and a second arm 3322 forming an angle therebetween, and a torsion springs 3323 engaged with the first and the second arms 3321, 3322. The first and the second arms 3321, 3322 is able to together rotate on a pivot which is encircled by the torsion spring 3323. Besides, the first arm 3321 is shorter than the second arm 3322. In this embodiment, the switch 63 is provided on the end pipe section 13 and engageable with the first arm 3321.

[0033] Refer to Fig. 16A, under the action of the torsion spring 3323, the first arm 3321 and the second arm 3322 each has a distal end lift up above the end pipe section 13 in a natural state. Refer to Fig. 16B, when the end pipe section 13 extends through the wall 90, the second arm 3322 is pressed by the wall and return to its natural state after lost of interference with the wall. As shown in Fig. 16C, the mounting flange 331 and the wedge-shaped piece 333 are disposed at one side of the wall 90 opposite to the other side where the restricting device 332 positions. Refer back to Fig. 15, when the wall mounting mechanism is mounted to the wall, the mounting flange 331 is abut against by the wedge-shaped piece 333 at

its one side, and the mounting flange 331 abuts against the wall 90 at its the other side. At the opposite side of the wall 90, the second arm 3322 is forced to abut against the wall, and the second arm 3321 pressed the switch to activate it on. Similarly, a sealing member 334 is disposed

[0034] It would be apparent to those skilled in the art that, the heat exchanger can be set with more sections of fins corresponding to more combustion stages of a burner. In addition, the heat exchanger can also be used in a gas boiler or other gas water heating appliance.

[0035] It is to be understood, however, that even though numerous, characteristics and advantages of the present invention have been set forth in the foregoing description, together with details of the structure and function of the invention, the disclosed is illustrative only, and changes may be made in detail, especially in matters of number, shape, size, and arrangement of parts within the principles of the invention to the full extent indicated by the broadest general meaning of the terms in which the appended claims are expressed.

Claims

1. A flue pipe assembly for a gas appliance comprising at least a first pipe section and a second pipe section, and a first electrical conductor and a second electrical conductor attached to the first and the second pipe sections respectively; **characterized in that**, the flue pipe assembly further comprises a pipe connection mechanism, and said pipe connection mechanism is disposed between the first and the second pipe sections to establish a mechanical connection therebetween, and in the mean time to establish an electrical connection between the first and the second electrical conductors.
2. A flue pipe assembly according to claim 1, **characterized in that** said pipe connection mechanism comprises a fixed connection device for mechanically connecting adjacent end portions of the first and the second pipe sections.
3. A flue pipe assembly according to claim 2, **characterized in that** said fixed connection device comprises a connecting ring covering the adjacent end portions of the first and the second pipe sections.
4. A flue pipe assembly according to claim 3, **characterized in that** said pipe connection mechanism further comprises electrical terminals disposed on the connecting ring to electrically connect the first and the second electrical conductors.
5. A flue pipe assembly according to claim 4, **characterized in that** each of the first and the second pipe sections is provided with a conductor base with con-

ductive pads electrically connected to the first or the second electrical conductor; each of said electrical terminals has two ends contacting corresponding conductive pads of the first and the second pipe sections.

6. A flue pipe assembly according to claim 4, **characterized in that** said connecting ring comprises a first portion and a second portion, and the first and the second portions are separate and fixedly connected to the first and the second pipe sections respectively; said electrical terminals comprise a female terminal attached to said first portion and electrically connected to the first electrical conductor of the first pipe section, and a male terminal attached to said second portion and electrically connected to the second electrical conductor of the second pipe section.
7. A flue pipe assembly according to claim 4, **characterized in that** each of said first and said second electrical conductors comprises two electrical wires; and said electrical terminals are insulatively disposed on the connecting ring.
8. A flue pipe assembly according to claim 2, **characterized in that** said fixed connection device comprises at least two latching members, and each latching member latches the adjacent end portions of the first and the second pipe sections.
9. A flue pipe assembly according to claim 8, **characterized in that** each of said first and said second electrical conductors comprises only one electrical wire, and said two latching members are formed differentially.
10. A flue pipe assembly according to claim 1, **characterized in that** a sealing member is disposed between the first and the second pipe sections.
11. A flue pipe assembly according to claim 1, **characterized in that** the flue pipe assembly further comprises a third pipe section adapted for extending through a wall, a third electrical conductor attached to the third pipe section, a switch electrically connected to the third electrical conductor, and a wall mounting mechanism associated with the third pipe section for mounting the third pipe section to the wall; wherein said switch is turned on at the time when said wall mounting mechanism is mounted to the wall.
12. A flue pipe assembly according to claim 11, **characterized in that** said wall mounting mechanism comprises a mounting flange and a retaining device; wherein said mounting flange defines a through hole therein for being extended through by the third pipe section, and said retaining device engages with the

mounting flange to attach it to the wall.

13. A flue pipe assembly according to claim 11, **characterized in that** said switch is disposed on the mounting flange at a side facing the wall.

5

10

15

20

25

30

35

40

45

50

55

7

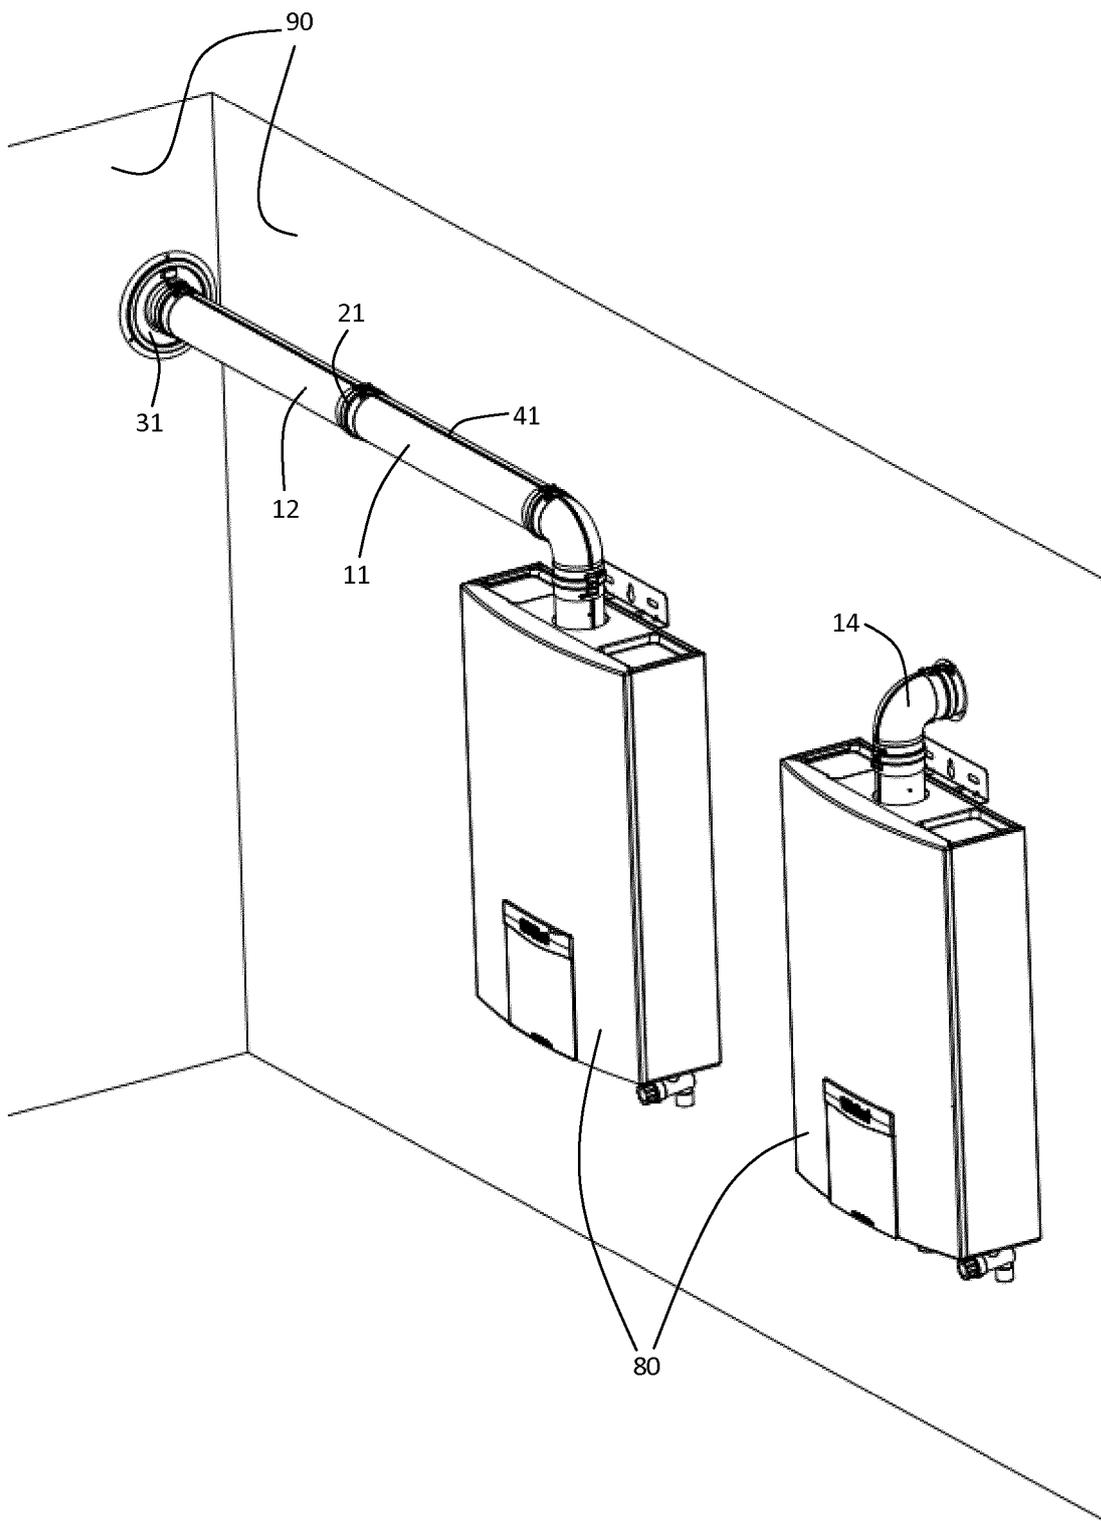


Fig. 1

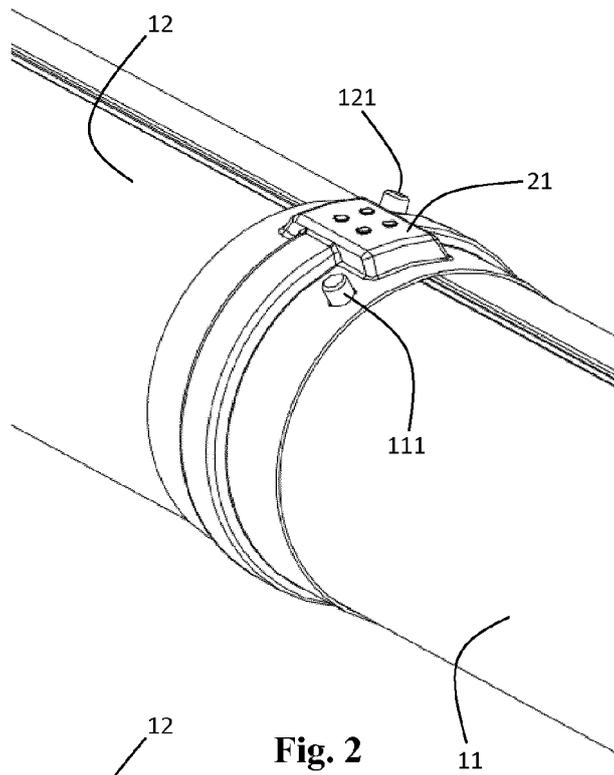


Fig. 2

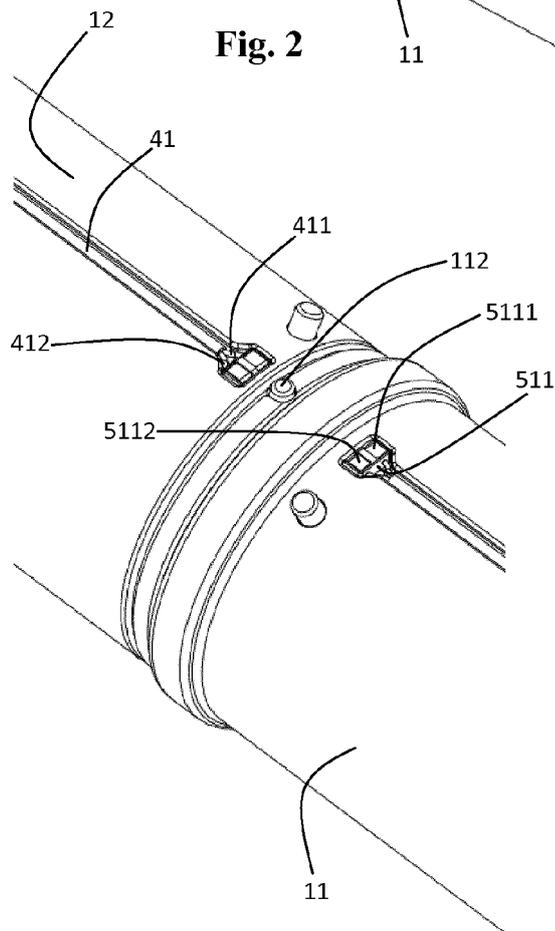


Fig. 3

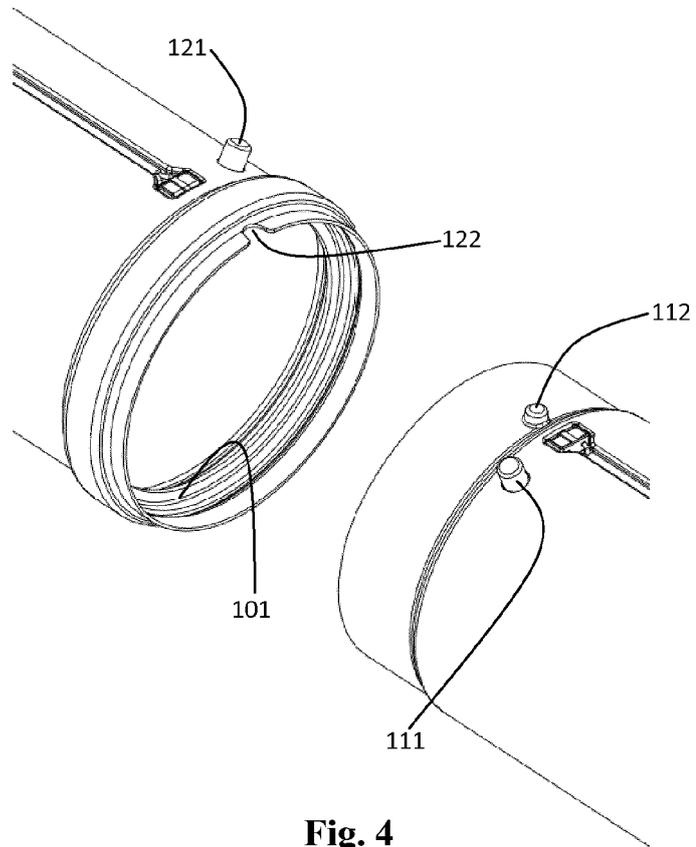


Fig. 4

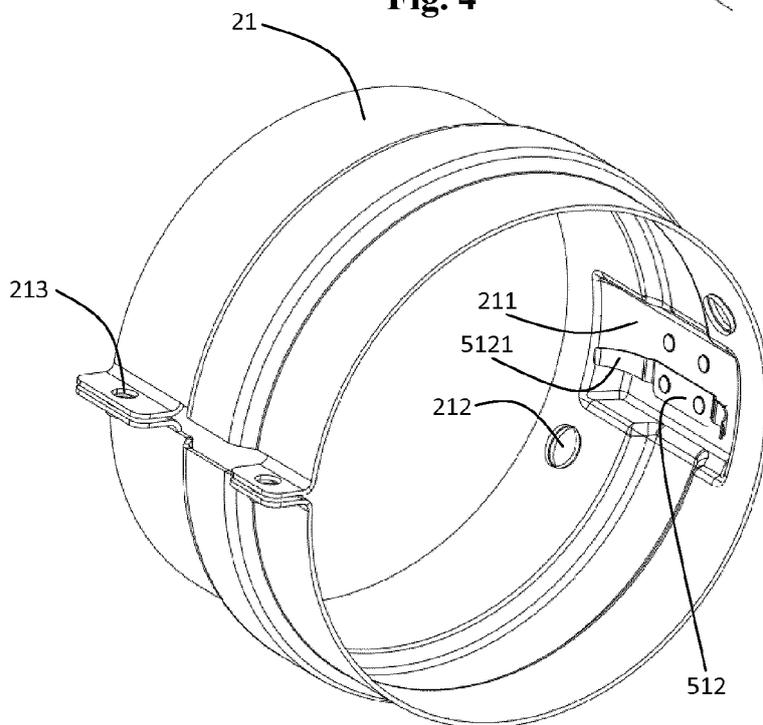


Fig. 5

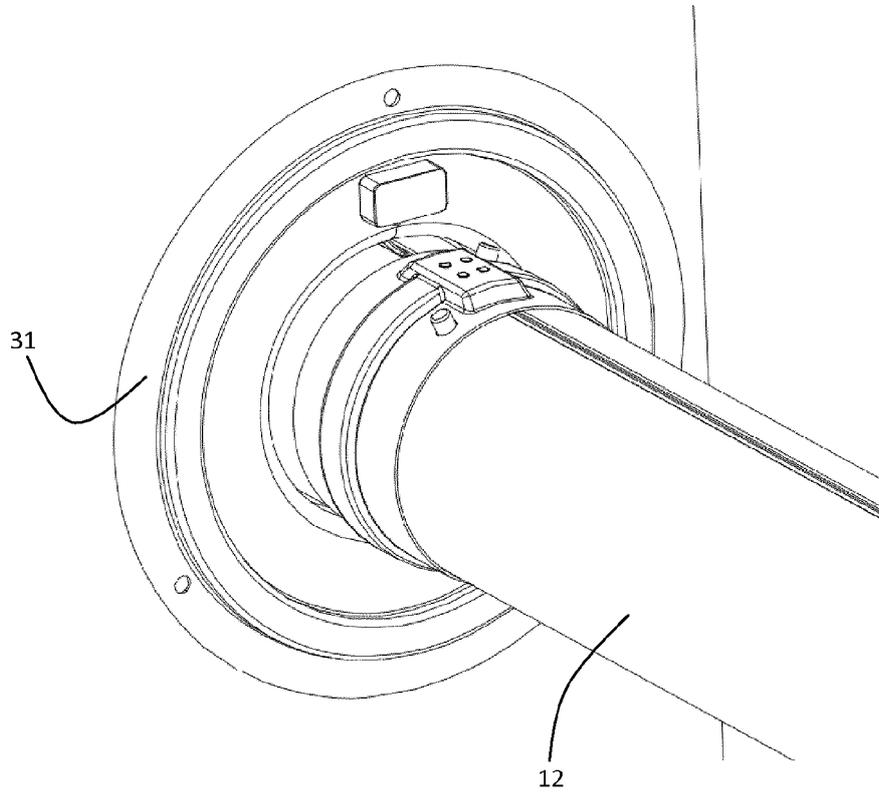


Fig. 6

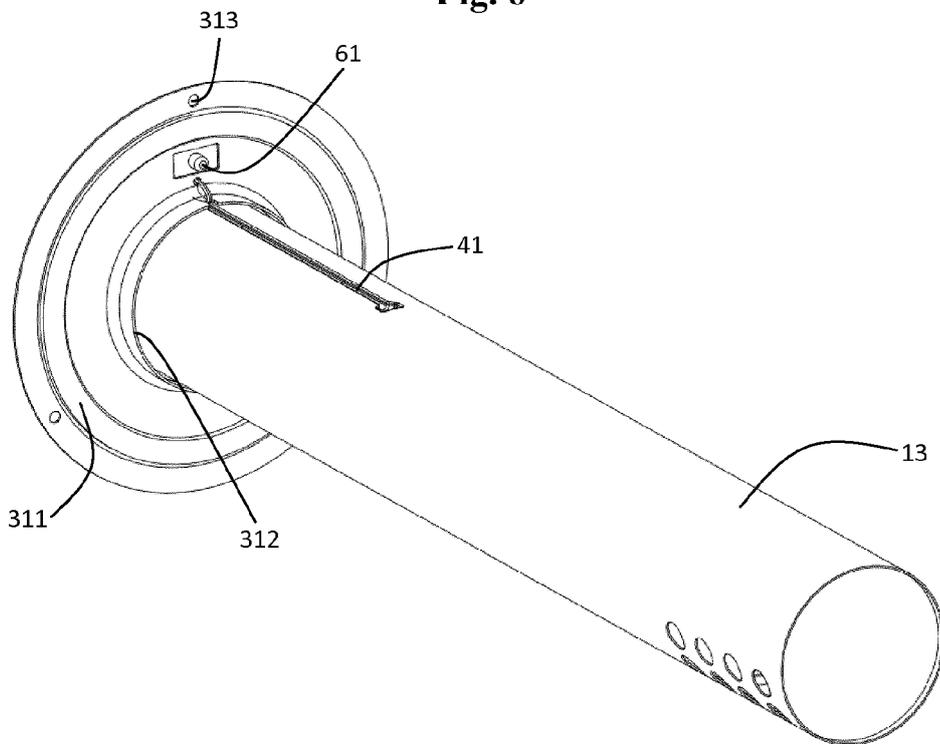


Fig. 7

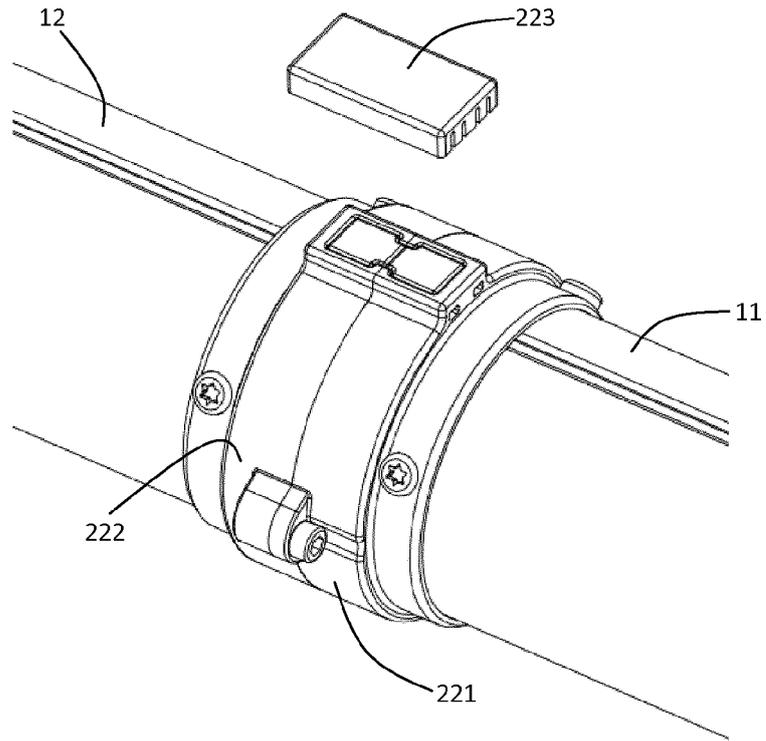


Fig. 8

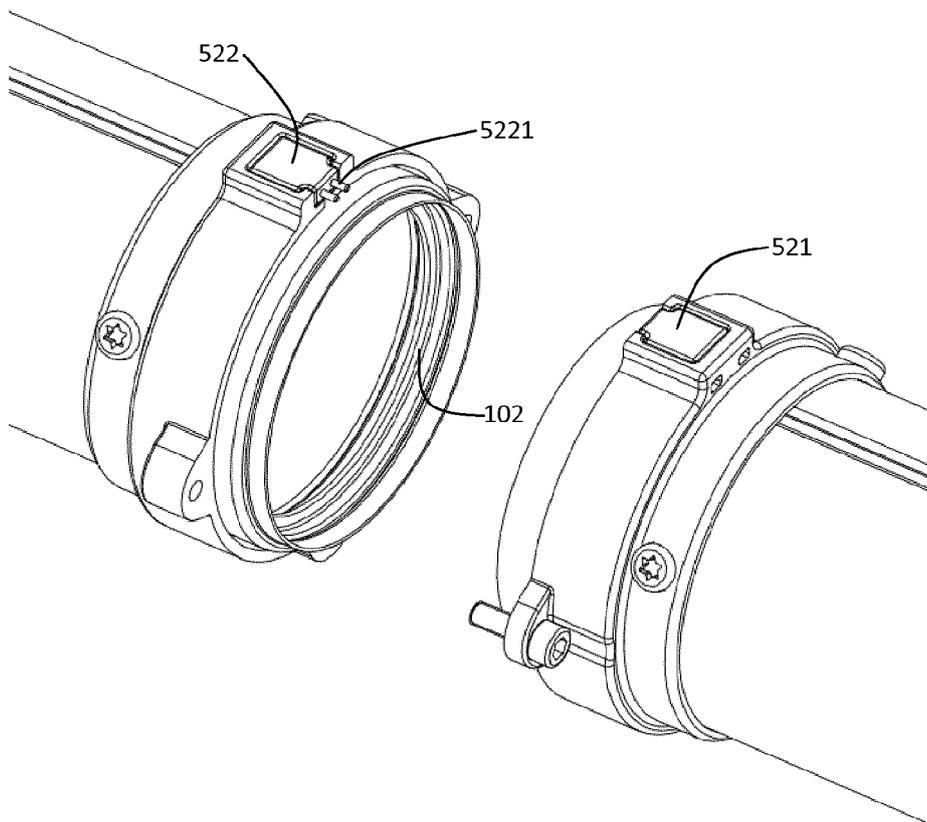


Fig. 9

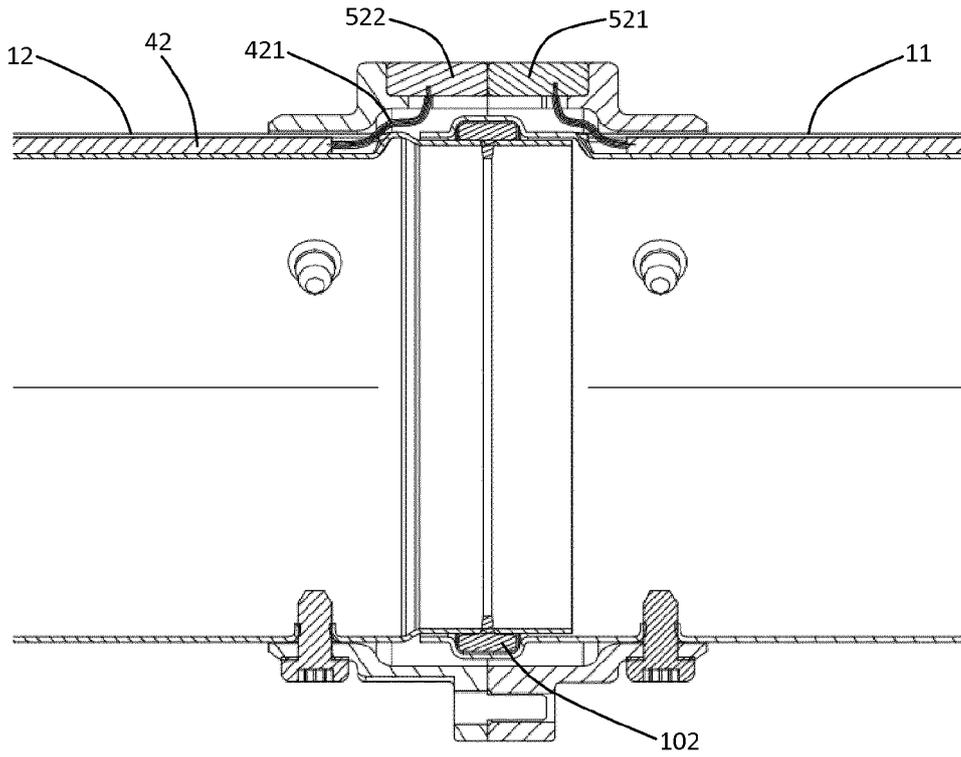


Fig. 10

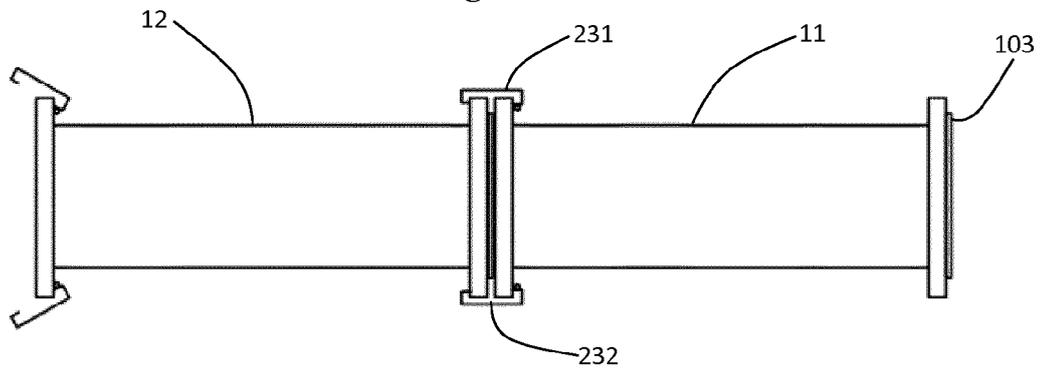


Fig. 11

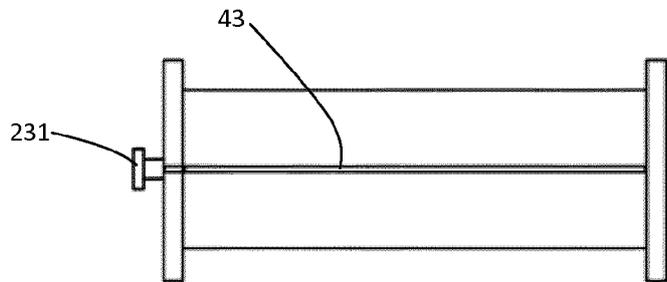


Fig. 12

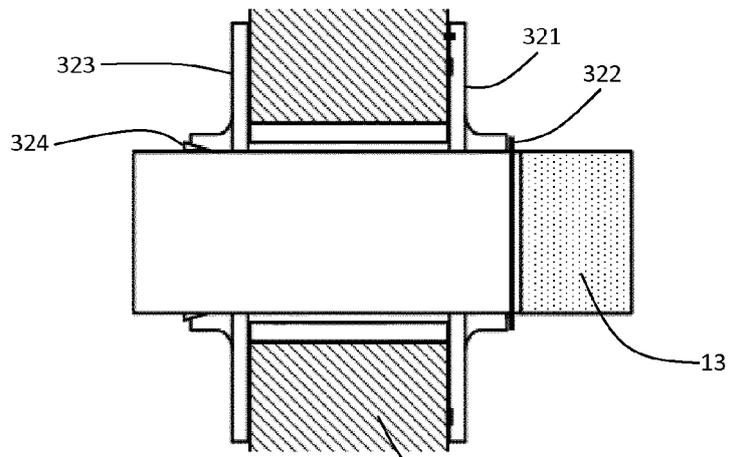


Fig. 13

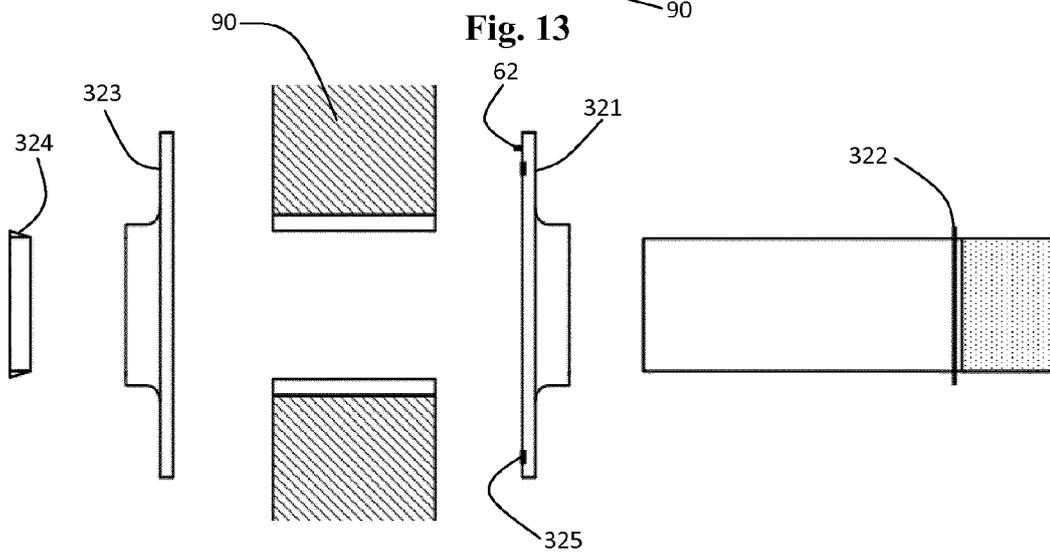


Fig. 14

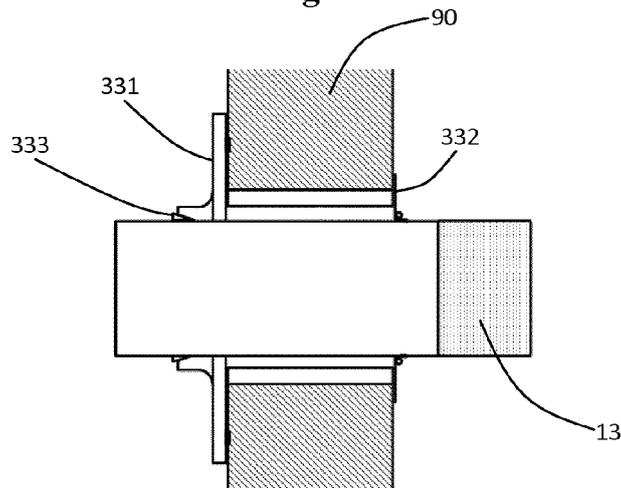


Fig. 15

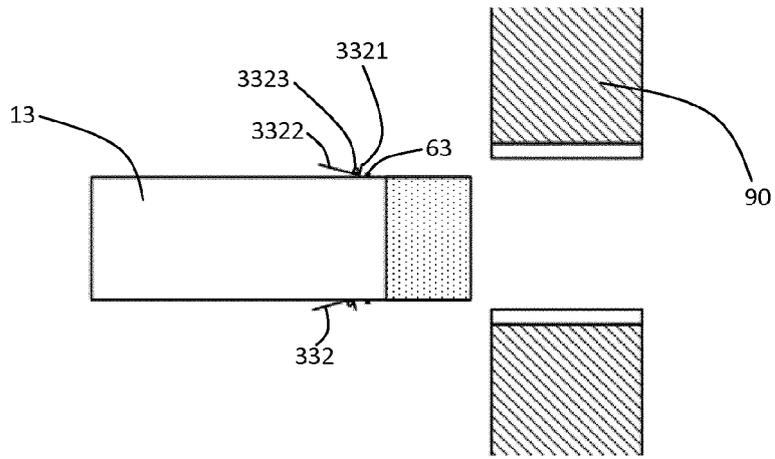


Fig. 16A

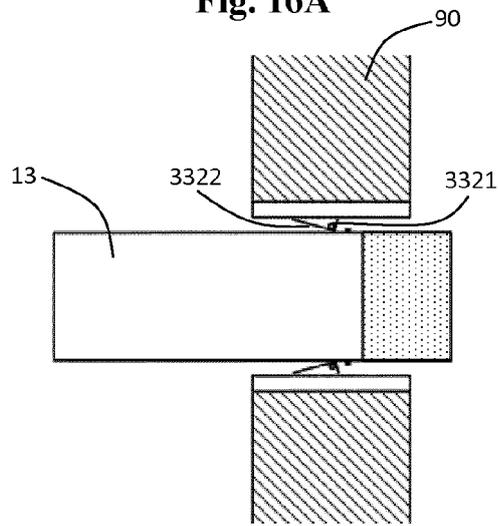


Fig. 16B

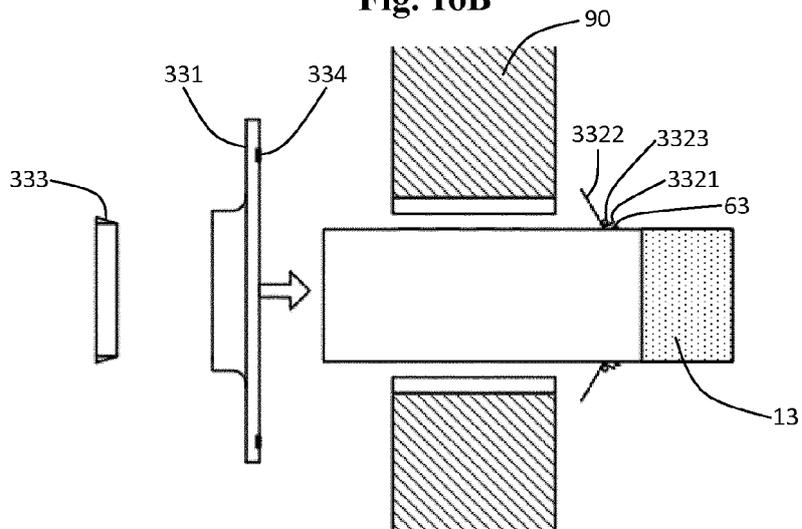


Fig. 16C



EUROPEAN SEARCH REPORT

Application Number
EP 15 19 5086

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	CN 103 411 315 A (VAILLANT BEIJING HEATING EQUIPMENT CO LTD) 27 November 2013 (2013-11-27)	1-3,8-12	INV. F23J13/04
A	* paragraph [0037] - paragraph [0062]; figures 6-8 *	4,13	
X	JP 2000 035217 A (RINNAI KK) 2 February 2000 (2000-02-02)	1-3,8-10	
A	* paragraph [0014] - paragraph [0029]; figures 1-4 *	4,11	
X	JP 2011 149597 A (RINNAI KK) 4 August 2011 (2011-08-04)	1-3,8-10	
A	* paragraph [0017]; figure 1 *	4,11	

			TECHNICAL FIELDS SEARCHED (IPC)
			F23J
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
Munich		24 March 2016	Theis, Gilbert
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone		T : theory or principle underlying the invention	
Y : particularly relevant if combined with another document of the same category		E : earlier patent document, but published on, or after the filing date	
A : technological background		D : document cited in the application	
O : non-written disclosure		L : document cited for other reasons	
P : intermediate document		& : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P/4C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 15 19 5086

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-03-2016

10

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
CN 103411315	A	27-11-2013	NONE	

JP 2000035217	A	02-02-2000	NONE	

JP 2011149597	A	04-08-2011	JP 5380316 B2	08-01-2014
			JP 2011149597 A	04-08-2011

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 103615806 A [0003]