



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
22.06.2016 Bulletin 2016/25

(51) Int Cl.:
B65B 11/10 (2006.01) **B65B 9/02** (2006.01)
B65B 41/18 (2006.01) **B65B 59/02** (2006.01)
B65B 35/20 (2006.01) **B65B 51/14** (2006.01)
B65B 53/02 (2006.01)

(21) Application number: **14199505.0**

(22) Date of filing: **19.12.2014**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventor: **Cerf, Alain**
Pinellas Park, FL 33782 (US)

(74) Representative: **Szabo, Zsolt**
Danubia
Patent & Law Office LLC
Bajcsy-Zsilinszky út 16
1051 Budapest (HU)


(71) Applicant: **Cerf, Alain**
Pinellas Park, FL 33782 (US)

(54) **Film wrapping using a single roll**

(57) This invention is to register printed film (16) on product (12) while wrapping the printed film from a single roll (10). This is achieved by using a sensor (9) that can read a mark on the film (16) in order to insure that a predetermined length of film (16) is pulled off the roll (10) and the printed portion of the film (16) is in registration with the product (12). The marks on the film (16) establish the amount of film (16) needed to wrap the product (12).

A sensor (9) such as a photo sensor reads the mark and determines whether the proper length of the film (16) has been pulled off the roll (10). When the amount of film (16) pulled of the roll (10) does not coincided with sensor (9) reading, the distance between where the product (12) stops and the sealing bar (8) is varied. This allows the length of the film (16) to be adjusted until the sensor (9) readings and the length of the film (16) coincides.

FIGURE 2

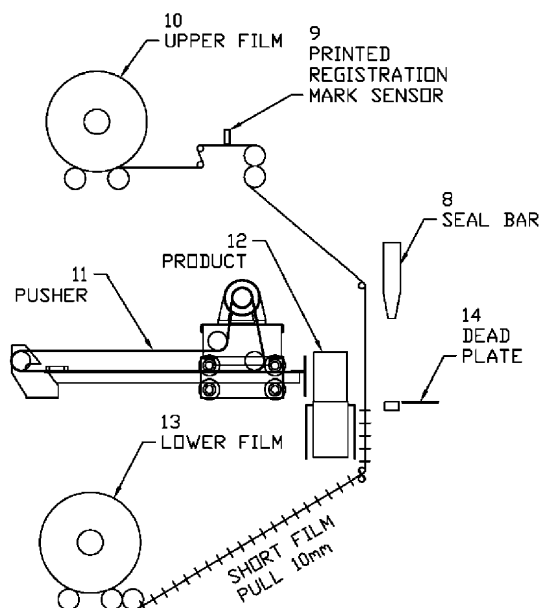

Description

Field of the invention

[0001] This invention relates to wrapping a product with heat shrinkable film by pushing the product into a curtain of film while wrapping the article from a single roll and achieving print registration.

Background of the Invention

[0002] The prior art shows in figure 1 an upper roll 4 having an upper film 5 bonded to a lower film 6 on lower roll 7 to create a film curtain. The upper film is usually a short piece of film. A portion of the bonded film rests on a bucket 2 attached to conveyor 3. A product 1 is placed on the film resting on the bucket 2. The bucket 3 is pushed into a curtain of film. The upper film does not move. The lower film is pulled over product to wrap the product with the movement of the bucket conveyor.

[0003] After the film covers the product a seal bar seals the film at the back of the article. The seal bar simultaneously cuts the film and seals the film together on both sides of the cut. This creates a new curtain and seals the film wrap around the article. After sealing, the upper roll is pulled a few millimeters to allow an unsealed sealed surface for cutting and sealing the next product on the bucket conveyor. The films used in the prior art did not require print registration.

Summary of the invention

[0004] The objective of this invention is to register the printed film using the film on a single roll on the product. This is achieved by using a sensor that can read a mark on the film in order to insure that a predetermined length of film is pulled off a roll and the printed portion of the film is in registration with the product. The marks on the film establish the amount of film needed to wrap the product. A sensor such as a photo sensor reads the mark and determines whether the proper length of the film has been pulled off the roll. When the amount of film pulled of the roll does not coincided with sensor reading, the distance between where the product stops and the sealing bar is varied. This allows the length of the film to be adjusted until the sensor readings and the length of the film coincides. When the length of the film and sensor readings coincides the print will be properly registered with the product position of the product. If the sensor reads the mark too soon the product will stop closer to the sealing bar. If the sensor reading is late, the product is stopped further away from the sealing bar. After wrapping, the product is sent though a conventional heat shrinkable tunnel that heat shrinks the film.

[0005] An objective of the invention is using a pusher plate to push the product from one dead plate through the curtain of film to another dead plate. Another objective of this invention is to use a conveyor to push the product

through the curtain of film onto a transfer belt

Brief description of the drawings

[0006]

Figure 1 shows wrapping with a single roll without print registration.

Figures 2 and 3 shows print registration using a pusher plate

Figure 4 shows pushing a product into a film curtain using a conveyor.

Detailed description of the invention

[0007] Figures 2 and 3 show an upper roll film 10. The lower roll film is usually has a short waste heat shrinkable film that is sealed to the upper roll film. A pusher 11 pushes the product 12 resting on dead plate 13 through the curtain onto a dead plate 14. The lower film is held in a substantially fixed position while the upper film wraps the product. Substantially fixed would allow a small amount of the film to move when the product is pushed. The preferred mode is to keep the film from moving. The sealing bar 8 seals and cuts the film so that a new curtain is created for the next product. Afterward the lower film roller pulls the film from the upper roll a few millimeters to allow for an unsealed sealed surface for cutting and sealing the next product on the dead plate. The lower film can be held stationary using pinch rollers. The position of upper roll film and the lower roll film can be interchanged.

[0008] To insure that the stroke of the pusher unwinds a predetermined length of film that coincides with the registration marks on the film, the length of the stroke is controlled by a sensor reading registration marks on the film. This is done by entering the length and width of the product in a computer. This will allow the computer to establish a minimum stroke which is smaller than the stroke needed from the pitch of the registration marks. When the machine is running a photo sensor reads the registration marks. If the registration mark is not read before the end of the stroke, the stroke of the pusher will be gradually increased until the registration mark coincides with the stroke of the pusher. If the registered mark is read before the end of the stroke, the stroke will be gradually decreased until the registration mark coincided with the stroke of the pusher. The stroke adjusts the position of the product with respect to the sealing bar thereby changing the length of the film used for wrapping. Tension of the film can be controlled by increasing the amount of film pulled by the lower waste film roller.

[0009] Figure 4 shows product 12 on a conveyor being pushed on to conveyor 15 through a curtain of film 16 onto transfer belt. Lower film roll 17 is held in a stationary position while upper film roll allows the film to wrap the product. The film from the lower film roll is held under a tension by a dancing bar. As the product moves onto the

transfer conveyor the dancing bar moves to allow more slack so that the film from the lower roll moves under the product. After sealing, the dancing bar moves to its original position. During the wrapping the length of film from the lower roll does not have to change during wrapping [0010] The photo sensor 9 reads a mark on the film that locates the position of the print registration. The sensing of the mark determines the where the product stops on the transfer belt before the sealing bar seals and cuts the curtain of film. If the sensor reading is too soon the product on the transfer belt will stop closer to the sealing bar. If the sensor reading is late, the product will stop further away from the sealing bar.

Claims

1. An apparatus for wrapping a product with a heat shrinkable film from a single roll and for maintaining print registration comprising:

a first roll having heat shrinkable film,
 a second roll having a film,
 means for pushing the product into a curtain of film while wrapping the article by unwinding the film from the first film, while holding the film on the second roll in a substantially stationary position while wrapping the product from the film from the first roll,
 means for achieving print registration by adjusting the distance between the sealing bar and where the product stops before sealing and cutting the film,
 means for simultaneously cutting the film and sealing the film together on both sides of the cut thereby creating a film curtain,
 means for pulling the film from the first roller after cutting and sealing the film, and
 means for sensing a registration mark on the film.

2. An apparatus according to claim 1 wherein the means for achieving print registration includes a pusher having a variable stroke that pushes the product resting on a dead plate through a film curtain onto another dead plate wherein the stroke of the pusher can vary the distance between the product and the seal bar before sealing.
3. An apparatus according to claim 1 wherein the means for pushing the product from a conveyor through a film curtain includes a conveyor that pushes the product through the film curtain onto a transfer conveyor.
4. An apparatus according to claim 3 wherein the means for achieving print registration includes means for varying the distance between the product

on the transfer conveyor and the seal bar before sealing.

5. An apparatus according to claim 5 wherein the film from the second roll has a dancing bar that allows the film from the second roll to move under the product to reduce the tension during the transfer of the product from the conveyor to the transfer conveyor.
6. An apparatus according to claim 1 wherein the sensor means is a photo sensor.
7. A process for wrapping a product with a heat shrinkable film from a single roll comprising:

providing a first roll having heat shrinkable film, providing a second roll having a film, pushing the product into a curtain of film while wrapping the article by unwinding the film from the first film while holding the second roll of film in a substantially stationary position while wrapping the product from the film from the first roll, adjusting the distance between the sealing bar and where the product stops before sealing and cutting the film to achieving print registration, simultaneously cutting the film and sealing the film together on both sides of the cut thereby creating a film curtain, pulling the film from the first roller after cutting and sealing the film, and sensing registration marks on the film.

8. A process according to claim 1 wherein the adjustment of the distance between the sealing bar and where the products stops before sealing and cutting the film includes pushing the product resting on a dead plate with a pusher having a variable stroke through a film curtain onto another dead plate wherein the stroke of the pusher establishes the distance between the product and the seal bar before sealing.
9. A process according to claim 7 wherein the product is pushed by a conveyor through a film curtain onto a transfer conveyor.
10. A process according to claim 7 including the steps of by entering the length and width of the product in a computer to establish a minimum stroke which is smaller than the stroke needed from the pitch of the registration marks.
11. Apparatus for wrapping a product with a heat shrinkable film from a single roll comprising:

a first roll having heat shrinkable film,
 a second roll having a film,
 means for pushing the product into a curtain of film while wrapping the article by unwinding the

film from the first film while holding the film on the second roll in a substantially stationary position while wrapping the product from the film from the first roll,

means for achieving print registration by using 5

a pusher with a variable stroke that pushes the product resting on a dead plate through a film curtain onto another dead plate where the stroke of the pusher establishes the distance between the product and the seal bar before sealing, 10

means for achieving print registration by adjusting the distance between the sealing bar and where the product stops before sealing and cutting the film,

means for simultaneously cutting the film and 15

sealing the film together on both sides of the cut thereby creating a film curtain,

means for pulling the film from the first roller after cutting and sealing the film, and

means for sensing a registration mark on the 20 film.

25

30

35

40

45

50

55

FIGURE 1

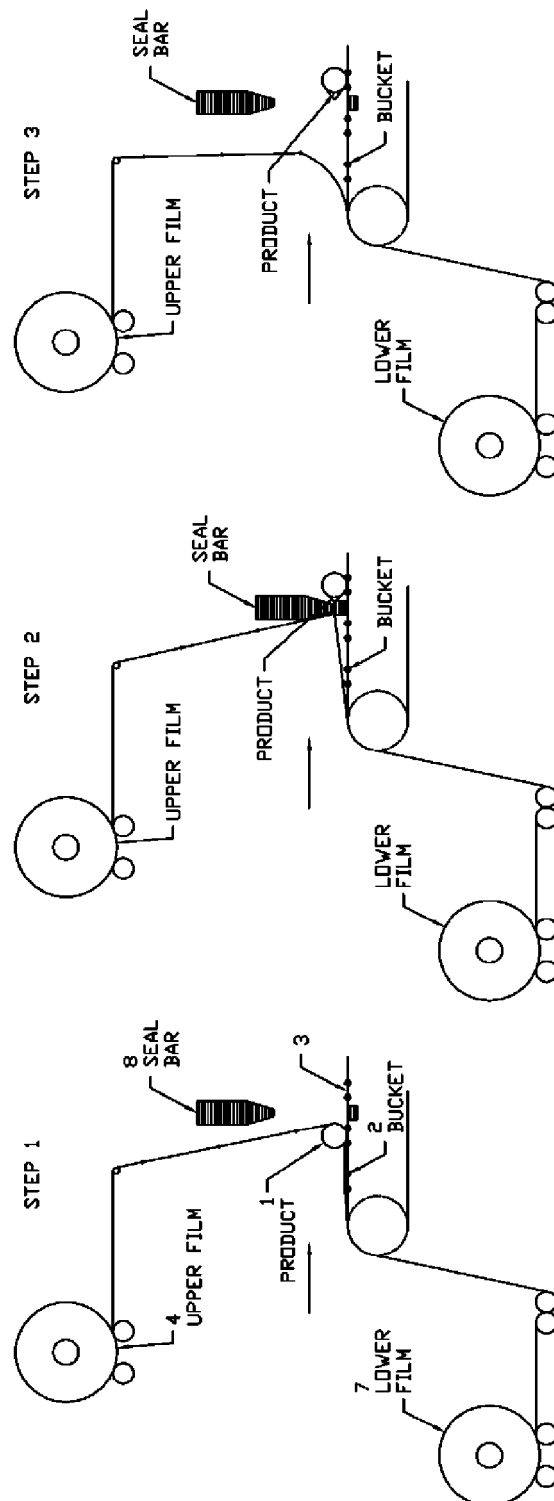


FIGURE 3

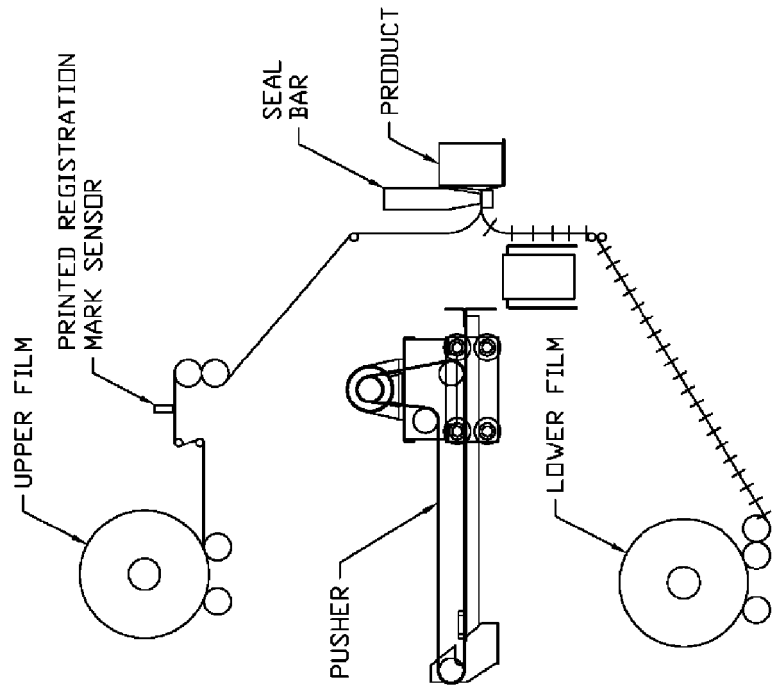


FIGURE 2


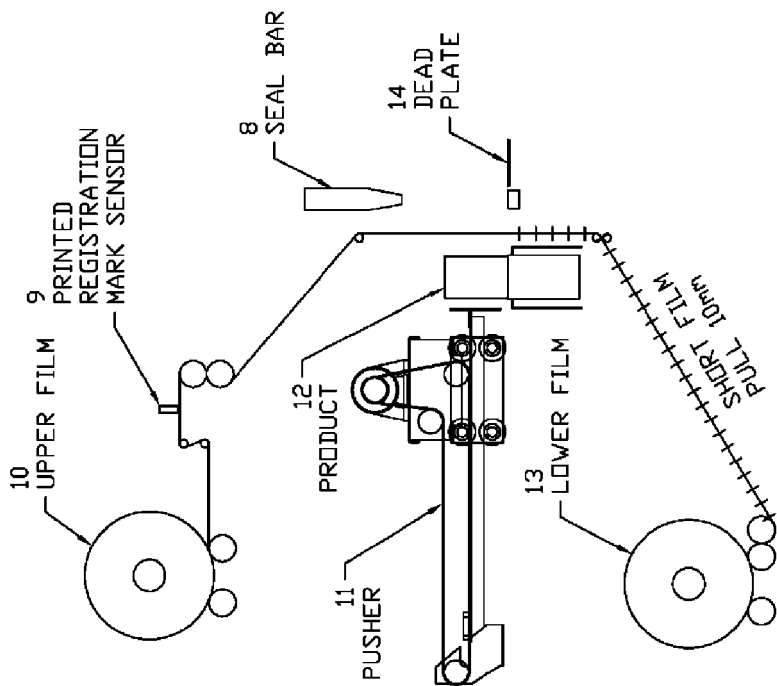


FIGURE 4



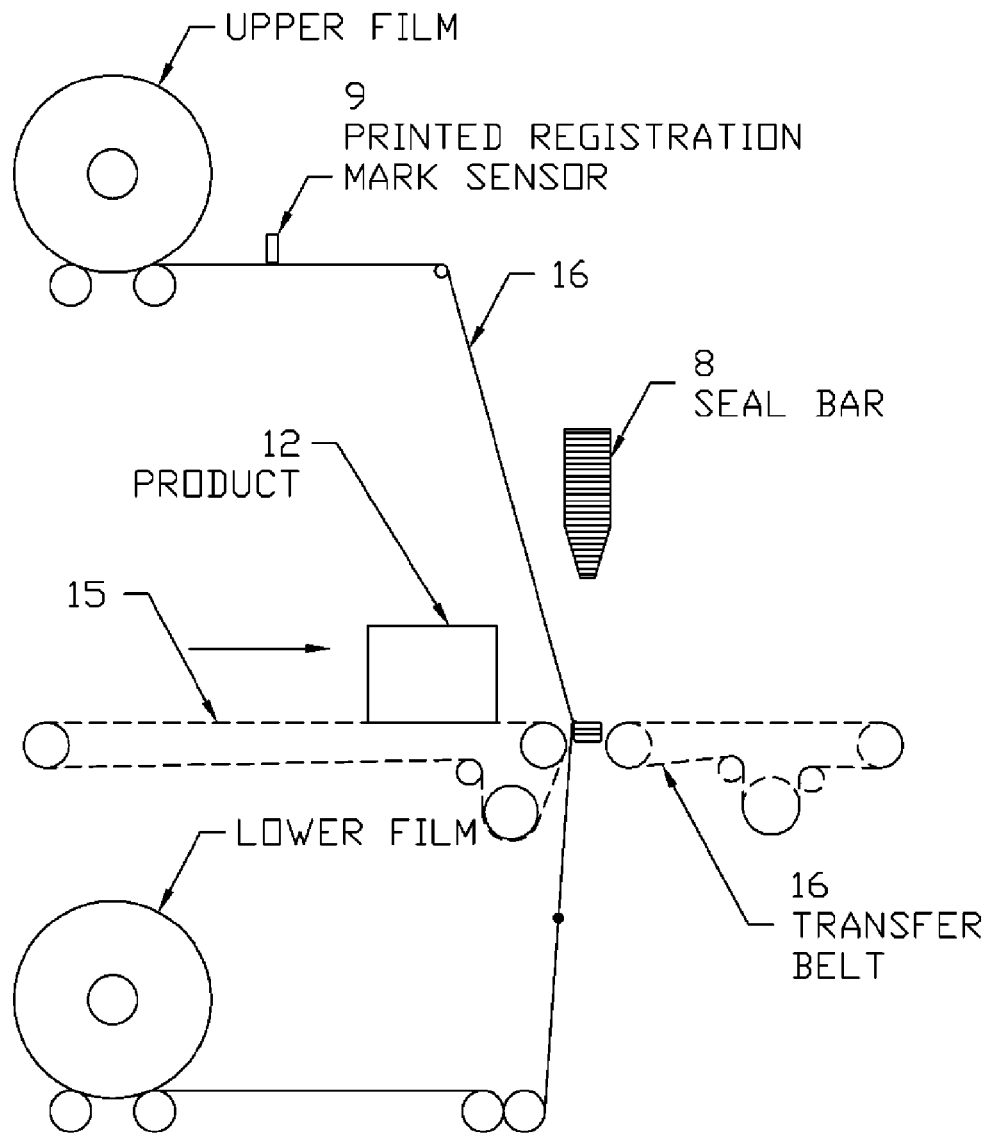

EUROPEAN SEARCH REPORT

 Application Number
 EP 14 19 9505

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 0 160 347 A2 (TETRA PAK INT [SE]) 6 November 1985 (1985-11-06)	1,3-7,9,11	INV. B65B11/10
Y	* the whole document *	2,8,10	B65B9/02
Y	EP 0 630 811 A1 (TETRA LAVAL HOLDINGS & FINANCE [CH]) 28 December 1994 (1994-12-28)	2,8,10	B65B41/18
A	* abstract; figures 1,3 *	1,3-7,9,11	B65B59/02
Y	US 3 564 810 A (FALETTI FRED J ET AL) 23 February 1971 (1971-02-23)	2,8,10	ADD. B65B35/20
A	* figure 1 *	1,3-7,9,11	B65B51/14
Y	GB 1 508 126 A (BRITISH VISQUEEN LTD) 19 April 1978 (1978-04-19)	2,8,10	B65B53/02
A	* figure 1 *	1,3-7,9,11	
A	EP 0 976 656 A1 (TETRA LAVAL HOLDINGS & FINANCE [CH]) 2 February 2000 (2000-02-02) * the whole document *	1-11	TECHNICAL FIELDS SEARCHED (IPC)
A	US 4 167 841 A (CAMP JOHANNES P) 18 September 1979 (1979-09-18) * the whole document *	1-11	B65B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 26 February 2015	Examiner Cardoso, Victor
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 19 9505

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-02-2015

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0160347 A2	06-11-1985	AU 4196285 A	07-11-1985
		EP 0160347 A2	06-11-1985
		JP S60240604 A	29-11-1985
		SE 454680 B	24-05-1988
		SU 1531847 A3	23-12-1989
		US 4662148 A	05-05-1987
EP 0630811 A1	28-12-1994	AT 171128 T	15-10-1998
		AU 677828 B2	08-05-1997
		AU 6308394 A	24-11-1994
		BR 9401987 A	13-12-1994
		CA 2123032 A1	18-11-1994
		DE 69413314 D1	22-10-1998
		DE 69413314 T2	25-02-1999
		EP 0630811 A1	28-12-1994
		ES 2122079 T3	16-12-1998
		JP H072205 A	06-01-1995
		JP 3593142 B2	24-11-2004
		RU 2118276 C1	27-08-1998
		TW 244347 B	01-04-1995
		US 5766280 A	16-06-1998
US 3564810 A	23-02-1971	NONE	
GB 1508126 A	19-04-1978	AU 8008875 A	28-10-1976
		BE 828634 A4	30-10-1975
		FR 2269461 A2	28-11-1975
		GB 1508126 A	19-04-1978
		IE 42745 B1	08-10-1980
		LU 72378 A1	19-08-1976
		ZA 7502163 A	31-03-1976
EP 0976656 A1	02-02-2000	AT 225281 T	15-10-2002
		AU 754947 B2	28-11-2002
		AU 4117699 A	24-02-2000
		CA 2279024 A1	29-01-2000
		DE 69903232 D1	07-11-2002
		DE 69903232 T2	11-09-2003
		EP 0976656 A1	02-02-2000
		ES 2184373 T3	01-04-2003
		JP 4512218 B2	28-07-2010
		JP 2000053106 A	22-02-2000
		RU 2233775 C2	10-08-2004
		US 6662533 B1	16-12-2003
US 4167841 A	18-09-1979	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 19 9505

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-02-2015

10	Patent document cited in search report	Publication date	Patent family member(s)	Publication date
15				
20				
25				
30				
35				
40				
45				
50				
55				

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82