

(19)



(11)

**EP 3 048 197 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**18.04.2018 Bulletin 2018/16**

(51) Int Cl.:  
**D04H 1/425** <sup>(2012.01)</sup> **D04H 18/04** <sup>(2012.01)</sup>

(21) Application number: **15152391.7**

(22) Date of filing: **23.01.2015**

(54) **Non-woven gauze product and method and system for manufacturing the same**

Vliesverbandmullprodukt und Verfahren und System zur Herstellung davon

Produit de gaze non tissé et procédé et système servant à le fabriquer

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

- **Wang, Huan**  
**518109 Shenzhen (CN)**
- **Lu, Zaoxia**  
**518109 Shenzhen (CN)**

(43) Date of publication of application:  
**27.07.2016 Bulletin 2016/30**

(74) Representative: **Hamer, Christopher K. et al**  
**Mathys & Squire LLP**  
**The Shard**  
**32 London Bridge Street**  
**London SE1 9SG (GB)**

(73) Proprietor: **Winner Medical Co., Ltd.**  
**Longhua District**  
**Shenzhen**  
**Guangdong 518109 (CN)**

(56) References cited:  
**EP-A1- 1 688 522 CN-B- 102 277 692**  
**US-A- 5 098 764**

(72) Inventors:

- **Li, Jianquan**  
**518109 Shenzhen (CN)**

**EP 3 048 197 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description****Technical Field**

**[0001]** This invention relates to the field of gauze manufacturing, particularly to a non-woven gauze product and a method and system for manufacturing the same.

**Prior Art**

**[0002]** Gauze is a kind of woven fabric having thin and lightweight warp and weft. Due to its advantages of softness, comfort, excellent breathability, no stimulation to skin, good moisture absorption, strong stretching resistance and no fall-off of fluff, gauze is widely used in medical field. The traditional utilization of gauze covers medical gauze, sticky pad, bandage and breathing mask.

**[0003]** Conventional manufacturing method of gauze is constructed with warp and weft, and gone through a procedure including cotton opening and cleaning, carding, cotton-sliver forming, roving forming, spun yarn forming, spooling, warping, slashing, weaving, ect.. Such procedure has disadvantages of long production process, complex production, high labor cost, high energy consumption, poor production environment, thread ends at the edge, and the like. Once a thread end is dropped in and even left over in human body in a surgery, it will cause worse of patient's condition. The requirement thus exists to look for a new manufacturing method of gauze.

**[0004]** The non-woven fabric made by current spunlace process has a dense or loose structure. Such fabric having dense structure has shortcomings of hard hand-feel, poor drapability and slow speed of imbibition; while fabric having loose structure has shortcomings of having more hairiness on surface, easy pilling, fall-off of fluff, drop-out of fiber and poor strength. Both of these types of spunlace non-woven cloth are not a substitute for the current woven gauze in terms of appearance, texture or performance, especially for applying in medical field due to their shortcomings of slow speed of imbibition, easy pilling or fall-off of fluff.

**[0005]** CN 102277692 discloses a gauze manufacturing method using spunlace drum equipment which includes a spunlace forming drum comprising a second drum sleeve which is coated on the surface of the drum and comprises a second drum sleeve cylinder and a spunlace support net.

**[0006]** EP 1688522 discloses a method for producing spunlace non-woven cloth which includes the steps of clearing cotton, carding, spreading the web, water jetting, bleaching, drying and rolling the finished products.

**[0007]** US 5098764 discloses non-woven fabrics comprising yarn-like fiber groups of parallel and tightly compacted fiber segments, which groups include fiber segments circumferentially wrapped around at least a portion of the fiber groups.

**Summary of the Invention**

**[0008]** According to a first aspect of this invention, a system for manufacturing non-woven gauze product comprising:

a picker for opening, cleaning and blending raw cotton;

a carding machine provided downstream of the picker for further opening and cleaning the raw cotton and carding for fiber-web forming;

a lapping platform provided downstream of the carding machine for spreading the fiber-web in an overlapped manner upon a set specification;

a sensing line transporter for transporting a sensing line to the lapping platform and to a place between upper and lower fiber-webs delivered by one or more carding machine; the lapping platform being provided with a press roller for pressing the sensing line delivered by the sensing line transporter to the place between the upper and lower fiber-webs when spreading the fiber-web in an overlapped manner;

a spunlace device provided downstream of the lapping platform for water jetting the overlapped fiber-web; the spunlace device comprising a first spunlace machine and a second spunlace machine; the first spunlace machine including a first rotatable barrel and a first spunlace support net surrounding the first barrel; the second spunlace machine including a second rotatable barrel and a second spunlace support net surrounding the second barrel, the second spunlace support net having a shaping layer, the shaping layer being provided thereon with pointed projections disposed in a matrix arrangement and a through hole, each pointed projection having a tapered top and a bottom of rectangular cross-section, the bottom size of each pointed projection being larger than the bottom distance between two adjacent pointed projections; and

an aftertreatment device provided downstream of the spunlace device for post-processing the product obtained after water jetting process to receive product of non-woven gauze.

**[0009]** According to a second aspect of this invention, a method for manufacturing non-woven gauze product by utilizing the above-mentioned system, comprising:

a picking step for opening, cleaning and blending raw cotton;

a carding step for further opening and cleaning the raw cotton and carding for fiber-web forming;

a lapping step for spreading the fiber-web in an overlapped manner upon a set specification, wherein the lapping step further comprises:

embedding the sensing line into a place between two layers of fiber-web;

a spunlace step for water jetting the overlapped fiber-web introduced into the spunlace device, wherein the spunlace step specifically comprises: prewetting the fiber-web with low-pressure water flow when introducing the fiber-web into the input of the spunlace device; water jetting the prewetted fiber-web with the spunlace device to cause the fiber on the shaping layer of the second spunlace machine to be shifted and entangled under the impact of spunlace to form a rectangular hole on the water-jetted fiber-web; performing water jetting on the fiber-web from the back side thereof by the first spunlace machine, and performing water jetting on the fiber-web from the front side thereof by the second spunlace machine; and an aftertreatment step for post-processing the product obtained after water jetting process to receive product of non-woven gauze.

**[0010]** According to a third aspect of this invention, a non-woven gauze product manufactured by utilizing the above-mentioned system, comprising spunlace non-woven cloth having rectangular holes in an array layout formed by the impact of spunlace, the rectangular holes in an array layout being presented in a flat structure having warp and weft, and the dimension of each rectangular hole being larger than the line width of warp and weft, the non-woven gauze product further comprising a sensing line embedded among the fibers of the spunlace non-woven cloth, and the upper and lower surfaces thereof being covered by entangled fibers.

**[0011]** With the non-woven gauze product and the manufacturing method and system thereof provided herein, the spunlace device includes a second spunlace machine having a shaping layer on the surface, the shaping layer is provided thereon with pointed projections disposed in a matrix arrangement, each pointed projection has a tapered top and a bottom of rectangular cross-section, the bottom size of each pointed projection is larger than the bottom distance between two adjacent pointed projections. A non-woven cloth having rectangular holes in an array layout is formed by water jetting the fiber-web at the second spunlace machine. The rectangular holes in an array layout are presented in a flat structure having warp and weft, and the dimension of each rectangular hole is larger than the line width of warp and weft. The structure and features of such non-woven cloth are similar to those of gauze, so the non-woven cloth can be a substitute for the current gauze. With this invention, a gauze-like non-woven cloth is achieved by utilizing the disclosed manufacturing process of spunlace non-woven cloth herein, and the corresponding manufacturing method has advantages of short production period and low cost, which reduces the cost of such non-woven gauze product.

## Brief Description of the Drawings

### [0012]

- 5 Fig. 1 is a schematic structure chart of the system for manufacturing non-woven gauze product according to an embodiment of the disclosure;
- 10 Fig. 2 is a schematic structure drawing of the spunlace device according to an embodiment of the disclosure;
- 15 Fig. 3 is a schematic structure drawing of the first spunlace machine in the spunlace device according to an embodiment of the disclosure;
- 20 Fig. 4 is a schematic structure drawing of the first spunlace machine in the spunlace device according to an embodiment of the disclosure;
- 25 Fig. 5 is a schematic structure drawing of the second spunlace machine in the spunlace device according to an embodiment of the disclosure;
- 30 Fig. 6 is a schematic structure drawing of the second spunlace machine in the spunlace device according to an embodiment of the disclosure;
- 35 Fig. 7 is a schematic structure drawing of the second spunlace support net of the second spunlace machine in the spunlace device according to an embodiment of the disclosure;
- 40 Fig. 8 is a schematic structure drawing of pointed projections on the shaping layer in the second spunlace machine of the spunlace device according to an embodiment of the disclosure;
- 45 Fig. 9 is a schematic structure drawing of pointed projections on the shaping layer in the second spunlace machine of the spunlace device according to an embodiment of the disclosure;
- 50 Fig. 10 is a schematic side view from outside of the second spunlace machine in the spunlace device according to an embodiment of the disclosure;
- 55 Fig. 11 is a schematic side view from inside of the second spunlace machine in the spunlace device according to an embodiment of the disclosure;
- Fig. 12 is a schematic side view from inside of the second spunlace machine in the spunlace device according to another embodiment of the disclosure;
- Fig. 13 is a schematic flow chart of the method for manufacturing non-woven gauze product according to an embodiment of the disclosure;
- Fig. 14 is a schematic structure drawing of the non-woven gauze product according to an embodiment of the disclosure;
- Fig. 15 is a schematic structure drawing of local structure of the system for manufacturing non-woven gauze product according to an embodiment of this invention;
- Fig. 16 is a schematic structure drawing of the non-woven gauze product according to another embodiment of this invention;
- Fig. 17 is a schematic structure drawing of the chip-binding wire according to another embodiment of this

invention.

## DETAILED DESCRIPTION OF THE EMBODIMENTS

**[0013]** The core idea of the present invention is to manufacture gauze by the manufacturing process of spunlace non-woven cloth which has features of short production period, low cost and advanced automation. Since the non-woven gauze manufactured by the manufacturing process disclosed herein has advantages of current gauze, such manufacturing process can be a substitute for current woven gauze process to produce gauze product, which greatly reduces the cost of gauze product.

**[0014]** The current spunlace process, due to the limitation of the structure of spunlace device, can only produce spunlace non-woven cloth having holes in irregular arrangement, which fails to achieve the advantages of gauze.

**[0015]** In an embodiment of the present invention, there is an improvement in the spunlace device, and a spunlace non-woven cloth having advantages of gauze can be produced by rotary drum water jetting.

**[0016]** This invention is further described below in detail with reference to specific embodiments and accompanying drawings.

### Embodiment I of the disclosure

**[0017]** Referring to Fig. 1, a system for manufacturing non-woven gauze product provided in this embodiment comprises a picker 601, a weight separator 602, a cotton collector 603, a cotton opener 604, a cotton blender 605, a cotton cleaner 606, a carding machine 607, a lapping platform 608, a spunlace device 609 and an aftertreatment device 610.

**[0018]** The cotton picker 601 is used for capturing raw cotton fiber and sending the captured raw cotton fiber to downstream equipment for processing. The picker can be a reciprocating picker and can be applied to various grades of raw cotton and/or cotton-type chemical fiber.

**[0019]** The weight separator 602 is provided downstream of the picker for separating and removing the weight mixed in the raw cotton fiber sent by the picker. In other embodiments, the system for manufacturing non-woven gauze product may further comprise an iron absorption device and a metal-spark-heavy matter diverter, both disposed between the picker and the weight separator. The iron absorption device is located downstream of the picker for checking and removing metal mixed in the raw cotton fiber. The iron absorption device can adopt a bridge-type manner to absorb iron and the like. The metal-spark-heavy matter diverter is located downstream of the iron absorption device for checking and removing metal and heavy matter and preventing a fire.

**[0020]** The cotton collector 603 is located downstream of the weight separator for collecting the raw cotton fiber processed by the weight separator and outputting the collected raw cotton fiber.

**[0021]** The cotton opener 604 is located downstream of the cotton collector for opening and cleaning the raw cotton fiber outputted by the cotton collector. In this embodiment, the cotton opener is a single-stage axial cotton opener.

**[0022]** The cotton blender 605 is located downstream of the cotton opener for blending and loosening the opened raw cotton fiber. In this embodiment, the cotton blender is a multi-bin cotton blender.

**[0023]** The cotton cleaner 606 is located downstream of the cotton blender for fine loosening and cleaning the initially loosened and blended raw cotton fiber.

**[0024]** The carding machine 607 is located downstream of the cotton cleaner for carding the fine loosened and cleaned raw cotton fiber, removing impurities and/or short flocks, and carding for fiber-web forming. In other embodiments, the system for manufacturing non-woven gauze product may further comprise a foreign fiber sorting machine, a dust removing machine, an iron absorption device and a pneumatic hopper cotton feeder, all disposed between the cotton cleaner and the carding machine. The foreign fiber sorting machine is located downstream of the cotton cleaner for removing the foreign fiber mixed in the raw cotton fiber. The dust removing machine is located downstream of the foreign fiber sorting machine for removing tiny impurities mixed in the raw cotton fiber. The iron absorption device is located downstream of the dust removing machine for checking and removing metal mixed in the raw cotton fiber. In an example, the iron absorption device adopts a bridge-type manner to absorb iron and the like. The pneumatic hopper cotton feeder is located downstream of the iron absorption device for evenly feeding the raw cotton fiber into the carding machine.

**[0025]** The lapping platform 608 is located downstream of the carding machine for spreading the fiber-web in an overlapped manner upon a set specification.

**[0026]** It should be noted that, in the lapping platform, the number of layers for spreading the fiber-web in an overlapped manner is determined upon actual demand. Typically, the fiber-web is outputted by utilizing multiple parallel carding machines and spread in an overlapped manner in the lapping platform. Fig. 1 illustrates two carding machines. The number of the carding machine is selected upon the width and weight of fiber. In some embodiments, if there is only one carding machine, the lapping platform only acts as a transport platform without spreading the fiber-web in an overlapped manner. In this embodiment, the lapping platform 608 can adopt a paralleled manner or a staggered manner to spread the fiber-web.

**[0027]** The spunlace device 609 is located downstream of the lapping platform for water jetting the overlapped fiber-web.

**[0028]** Referring to Fig. 2, in this embodiment, the spunlace device comprises a first spunlace machine 30 and a second spunlace machine 40.

**[0029]** The first spunlace machine 30 includes a first

rotatable barrel and a first spunlace support net 312 surrounding the first barrel; the second spunlace machine 40 includes a second rotatable barrel and a second spunlace support net 412 surrounding the second barrel.

**[0030]** Spunlace heads 10 are arranged along the circumferences of the first and second spunlace machines. Prewetted spunlace heads are disposed at the introduction port of a rotary drum device. The rotary drum is rotated continuously to drive the fiber-web 20 move along the direction B. The first spunlace machine 30 is a rotary drum with function of being entangled by spunlace, and the second spunlace machine 40 is a rotary drum with function of being shaped by spunlace. The fiber-web 20 is passed firstly through the first spunlace machine 30 to be water jetted from back side of the fiber-web, then passed through the second spunlace machine 40 to be water jetted from front side of the fiber-web. To produce a spunlace non-woven having gauze-like structure, the first spunlace machine 30 and the second spunlace machine 40 of the rotary drum device for spunlace non-woven have different rotary drum sleeves, and a rectangular hole is formed during water jetting the fiber-web 20 from the back side.

**[0031]** Referring to Fig. 3 and Fig. 4, the first barrel of the first spunlace machine 30 comprises a first rotary drum sleeve 31, a sealing element 32 and an inner container 33. The first rotary drum sleeve 31 is surrounded the surface of the rotary drum for supporting the fiber-web 100 to be water jetted. One end of the inner container 33 of the rotary drum is connected to a gas-water separator (not shown in the figures). Each spunlace head 10 is respectively provided with a suction port 34 of a suction groove. The suction port 34 is communicated with a support frame 35. The suction port 34 and the support frame 35 form a negative pressure suction system or part of the negative pressure system, which is used for drawing water from the fiber-web 100 and the first rotary drum sleeve 31. The sealing element 32 is mounted between the inner container 33 and the first rotary drum sleeve 31 and used for sealing and holding the first rotary drum sleeve 31. The first rotary drum sleeve 31 comprises a first rotary drum sleeve barrel 311. The first spunlace support net 312 is disposed outside the first rotary drum sleeve barrel 311. The first spunlace support net 312 is used for supporting the fiber-web for water jetting. The first rotary drum sleeve barrel 311 can be a steel plate having drilled holes or a honeycomb net rolled into a cylinder. The first spunlace support net 312 can be a stainless steel wire net or a nickel wire net. The first spunlace support net 312 can also be a double-layer net, for example an overlapped double-layer net with a stainless steel wire net and a nickel wire net. When the rotary drum works, the inner container 33 is kept to be immovable, while the first rotary drum sleeve 31 is revolved. The spunlace heads 10 inject water flow to the surface of the first spunlace support net 312 along the arrow direction as shown in Fig. 4.

**[0032]** Referring to Figs. 5-9, the second barrel of the

second spunlace machine 40 (i.e. rotary drum with function of being shaped by spunlace) comprises a second rotary drum sleeve 41, a sealing element 42 and an inner container 43. A suction port 44 for collecting water flow is provided inside the second rotary drum sleeve 41. The suction port 44 is communicated with a support frame 45. The second rotary drum sleeve 41 comprises a second rotary drum sleeve barrel 411. The second spunlace support net 412 is disposed outside the second rotary drum sleeve barrel 411.

**[0033]** The second rotary drum sleeve barrel 411 is a punching hole mesh rolled into a cylinder, for example the barrel is made of a sheet of stainless steel on which holes are punched. The second rotary drum sleeve barrel 411 clings to the inner surface of the second spunlace support net 412 to support the second spunlace support net 412, so that the second spunlace support net 412 can withstand pressure during spunlace negative pressure suction to better pump water away, thus better entangling fiber on the second spunlace support net 412.

**[0034]** Referring to Figs. 7-9, the second spunlace support net 412 comprises a shaping layer 413 provided with thereon with pointed projections 414 disposed in a matrix arrangement and a through hole, each pointed projection 414 has a tapered top and a bottom of rectangular cross-section, the bottom size ( $d_1$ ) of each pointed projection 414 is larger than the bottom distance ( $d_2$ ) between two adjacent pointed projections. The bottom size of each pointed projection 414 refers to the long and wide of the rectangular cross-section at the bottom of the pointed projection 414. The bottom distance between two adjacent pointed projections refers to the vertical interval between an edge of the pointed projection 414 and an edge of adjacent pointed projection close thereto. As shown in Fig. 8 and Fig. 9, the distance  $d_1$  is larger than the distance  $d_2$ .

**[0035]** The shaping layer 413, functioned as forming rectangular holes required by spunlace non-woven, is located at the surface layer of the second spunlace support net 412. Referring to Fig. 8 and Fig. 9, the pointed projection 414 comprises a cuboid portion 4141 at its lower end and a tip portion 4142 at its upper end. Fig. 8 and Fig. 9 show two different shapes of the tip portion 4142; however, in other embodiments, the shape can also be properly changed according to actual requirement. The tip portion 4142 forms the tapered top of the pointed projection, which makes it easier to form rectangular holes on the fiber-web during water jetting.

**[0036]** In this embodiment, the bottom distance between two adjacent pointed projections is 0.1~1mm, the density of the pointed projections on the shaping layer 414 is not less than 50 per square inch, for example, choosing 75 per square inch to manufacture gauze product having sparser structure.

**[0037]** Referring to Fig. 10 and Fig. 11, Fig. 10 shows a side view from outside of the second rotary drum sleeve 41, and Fig. 11 shows a side view from inside of the second rotary drum sleeve 41.

**[0038]** Each pointed projection 414 on the shaping layer 413 is provided around with through holes 415 for pumping wastewater after water jetting. The suction port 44 is communicated with the through holes 415. The through holes are not marked in Fig. 7.

**[0039]** The shaping layer 413 is made from polyester polymer or metal material, such as polycarbonate material. The pointed projections 414 on the shaping layer 413 can be made by casting process.

**[0040]** Fig. 12 shows a side view from inside of the second rotary drum sleeve 41 according to another embodiment. The spunlace support net 412 may further comprise a rebounding layer 416 clung to the inner surface of the shaping layer 413. The rebounding layer 416 is a metal wire net, for example a stainless steel wire net. The rebounding layer 416 is used to prevent fiber from entering into the suction port 44 with water flow of spunlace. Moreover, the water flow jetted across fiber is slightly rebounded by the rebounding layer 416, which makes the fiber entangled better with the shaping layer 413. The second spunlace support net 412, the rebounding layer 416 and the second rotary drum sleeve barrel 411 are successively combined without misplacement. The dimension of an opening of the rebounding layer 416 is larger than that of the through hole 415, which makes a better effect on rebounding the water flow. The thickness of the second rotary drum sleeve barrel 411 is larger than that of the second spunlace support net 412 and the rebounding layer 416, which plays a good role in supporting function.

**[0041]** In this embodiment, the pointed projections 414 each having a tapered top, provided on the shaping layer 413 of the second spunlace machine 40, form rectangular holes arranged regularly in a matrix manner on the fiber-web during water jetting. The cotton fiber entangled between adjacent rectangular holes forms a crisscrossed structure of warp and weft. Since there is no overlap between warp and weft, the shaping layer 413 is flat except the projections and through holes. Therefore, a flat structure of warp and weft is presented on the spunlace non-woven, and the long and wide of each rectangular hole is respectively larger than the width of warp and weft, which enhances the softness and hydroscopicity of the spunlace non-woven, thus such newly spunlace non-woven achieves a gauze-like effect.

**[0042]** The aftertreatment device 610 is located downstream of the spunlace device for post-processing the product obtained after water jetting process to receive non-woven gauze product. The aftertreatment device can comprise a degreasing and bleaching device, a dryer, a coiler, a cutter and the like.

**[0043]** Referring to Fig. 13, a method for manufacturing non-woven gauze product by utilizing the above-mentioned system provided correspondingly in this embodiment comprises:

Step 701, picking cotton, that is, capturing raw cotton fiber and sending the captured raw cotton fiber to

downstream equipment for processing. The raw cotton fiber is typically an all-cotton material.

Step 702: weight separating, that is, separating and removing the weight mixed in the raw cotton fiber sent by the picker.

Step 703: cotton collecting, that is, collecting the raw cotton fiber.

Step 704: cotton opening, that is, opening and cleaning the collected raw cotton fiber.

Step 705: cotton blending, that is, blending and loosening the opened raw cotton fiber.

Step 706: cotton cleaning, that is, fine loosening and cleaning the initially loosened and blended raw cotton fiber.

Step 707: carding, that is, carding the fine loosened and cleaned raw cotton fiber, removing impurities and/or short flocks, and carding for fiber-web forming.

Step 708: lapping, that is, spreading the fiber-web in an overlapped manner upon a set specification. It should be noted that, in the lapping step, the number of layers for spreading the fiber-web in an overlapped manner is determined upon actual demand. Typically, the fiber-web is outputted by utilizing multiple parallel carding machines and spread in an overlapped manner in the lapping platform. In some embodiments, if there is only one carding machine, the lapping platform only acts as a transport platform without spreading the fiber-web in an overlapped manner in the lapping step. In this embodiment, at the lapping step, a paralleled manner or a staggered manner to spread the fiber-web can be adopted.

Step 709: water jetting, that is, water jetting the overlapped fiber-web in the spunlace device in the above-mentioned Embodiment I. This step specifically comprises: prewetted the fiber-web with low-pressure water flow when introducing the fiber-web into the input of the spunlace device; water jetting the prewetted fiber-web with the spunlace device to cause the fiber on the shaping layer of the second spunlace machine to be shifted and entangled under the impact of spunlace to form rectangular holes on the water-jetted fiber-web; performing water jetting on the fiber-web from the back side thereof by the first spunlace machine, and performing water jetting on the fiber-web from the front side thereof by the second spunlace machine. In this embodiment, water jetting along vertical direction is adopted with a spunlace pressure of 40~500bar.

Step 710: post-processing, that is, post-processing the product obtained after water jetting process to receive non-woven gauze product. Such aftertreatment step may comprise steps of degreasing and bleaching, softening and finishing, drying, coiling, cutting, etc..

**[0044]** Referring to Fig. 14, a non-woven gauze product manufactured by the above-mentioned method pro-

vided correspondingly in this embodiment comprises spunlace non-woven cloth. The spunlace non-woven cloth has rectangular holes in an array layout formed by the impact of spunlace. The rectangular holes in an array layout are presented in a flat structure having warp and weft. The dimension of each rectangular hole is larger than the line width of warp and weft. The dimension of the rectangular hole refers to the long and wide of the rectangular hole. To achieve a better gauze-like effect, the line width of warp and weft of the non-woven gauze is 0.1~1mm. The warp/weft density refers to the number of warp/weft per inch. The density of the rectangular holes refers to the number of the rectangular holes per square inch. The density of the rectangular holes is not less than 50 holes per square inch, for example, 75 holes per square inch. Specifically, the warp/weft density of the non-woven gauze product may be chosen as 19\*15 per inch or 30\*20 per inch. Generally, the holes on a sheet of gauze are holes of relatively rigid rectangle. As for the non-woven gauze provided in this embodiment, the rectangular holes thereof are rigidly rectangular holes. Therefore the non-woven gauze has gauze-like effect as well as gauze-like structure and features. The non-woven gauze product can be used as a medical dressing formed by superimposing multiple layers of spunlace non-woven cloth.

#### Embodiment II of the invention

**[0045]** Referring to Fig. 15, the system for manufacturing non-woven gauze product in accordance with the invention is provided in this embodiment. The difference between this embodiment of the invention and Embodiment I of the disclosure is that, the system of the invention further comprises a sensing line transporter 807 for transporting a sensing line 804 to the lapping platform 608 and to a place between upper and lower fiber-webs delivered by one or more carding machine. The lapping platform 608 is provided with a press roller 801 for pressing the sensing line 804 delivered by the sensing line transporter to the place between the upper fiber-web 805 and lower fiber-web 806 when spreading the fiber-web in an overlapped manner. The sensing line transporter 807 can be an unwinding device.

**[0046]** A double doffer carding machine is generally adopted, which can output two layers of fiber-web. In some embodiments, if only one carding machine is adopted in the system for manufacturing non-woven gauze product, the two layers of fiber-web outputted by the carding machine are served as an upper fiber-web and a lower fiber-web delivered to the lapping platform. If there are two or more carding machines adopted in the system for manufacturing non-woven gauze, the two layers of fiber-web outputted by each carding machine are firstly combined together as one layer of fiber-web, then the combined fiber-web from one or more carding machines is served as the lower fiber-web delivered to the lapping platform, and the combined fiber-web from the

rest carding machines is served as the upper fiber-web delivered to the lapping platform. In this embodiment, there are two carding machines shown in Fig. 1, wherein the two layers of fiber-web outputted by one carding machine are combined together as one layer which is served as the lower fiber-web delivered to the lapping platform, and the two layers of fiber-web outputted by the other carding machine are combined together as one layer which is served as the upper fiber-web delivered to the lapping platform.

**[0047]** Due to the need to ensure the sensing line straightly embedded between two layers of fiber-web, only the paralleled manner to spread the fiber-web can be adopted in the lapping platform 608 in this embodiment.

**[0048]** Once the sensing line is shifted under the impact of water flow during spunlace process, the sensing line will be bent and not straight on non-woven cloth, which will affect subsequent cutting process. In order to make the embedded sensing line to be kept stable between the two layers of fiber-web without shifting to prevent the sensing line from shifting under the impact of water flow during spunlace process, the system for manufacturing non-woven gauze product further comprises a coater 802 for coating adhesive on the sensing line prior to embedding the sensing line into the place between the upper and lower fiber-webs. The sensing line will closely stick to the fiber-web after coated by the coater and pressed by the press roller. Hence, during spunlace process, when fiber is entangled and shifted under the impact of water flow, the fiber stuck to the sensing line is moved to one side integrally due to the constraint of the sensing line, such that the sensing line is still remained to be a straight line, which will not affect the appearance of the non-woven cloth as well as subsequent cutting process. To coat adhesive on the sensing line, a spraying or paint method can be adopted. Moreover, when coating adhesive on the sensing line, it can be performed in a manner of coating upon an preset interval, so as to protect the softness of non-woven cloth from the effect of adhesive.

**[0049]** When the sensing line between the upper and lower layers of fiber-web is pressed with the press roller, the sensing line may be moved relative to the two layers of fiber-web due to vibration of mechanical equipment, which may affect the straightness of the pressed sensing line. To ensure the embedded sensing line more straight, a metal ring 803 is provided ahead of the coater in the system for manufacturing non-woven gauze product. The sensing line is threaded through the metal ring 803. When the sensing line between the upper and lower layers of fiber-web is pressed with the press roller, the movement of the sensing line is restrained due to the fixation on the sensing line by the metal ring 803, thus ensuring the straightness of the sensing line. There can be one metal ring, or a series of multiple metal rings arranged in a cascaded manner. The metal ring can be secured to one end of a fixed link, and the other end of the fixed link

is secured to the lapping platform. The end of the fixed link secured on the lapping platform can be provided with a rotatable structure. The position of the metal ring can be adjusted by adjusting the fixed link, thus adjusting the track of the chip-binding wire (which will be described hereinafter).

**[0050]** After embedding the sensing line at the lapping platform, the combined fiber-web is immediately delivered to the spunlace device. To ensure the sensing line be presented as a straight line on the shaped spunlace cloth, the first spunlace head is disposed as closest as possible to the press roller.

**[0051]** With the system for manufacturing non-woven gauze product provided in this embodiment, a sensing line can be embedded into gauze having rectangular holes. There can be one embedded sensing line, or more embedded sensing lines arranged parallelly upon a preset interval. When embedding a plurality of sensing lines, a plurality of sensing line transporters are needed correspondingly to deliver a plurality of sensing lines parallelly upon a preset interval to the place between upper fiber-web and lower fiber-web.

**[0052]** A method for manufacturing non-woven gauze product by utilizing the above-mentioned system is provided correspondingly in this embodiment. The difference between the method of this embodiment of the invention and Embodiment I of the disclosure is that the step 708 (i.e. lapping step) further comprises a step of embedding a sensing line between two layers of fiber-web.

**[0053]** In order to make the embedded sensing line stable between the two layers of fiber-web without shifting, the lapping step further comprises a step of coating adhesive on the sensing line prior to embedding the sensing line into the place between the upper and lower fiber-webs. The sensing line will closely stick to the fiber-web after being coated by the coater and pressed by the press roller. To coat adhesive on the sensing line, a spraying or paint method can be adopted.

**[0054]** With the method for manufacturing non-woven gauze product provided in accordance with the invention, a sensing line can be embedded into gauze having rectangular holes. There can be one embedded sensing line, or more embedded sensing lines arranged parallelly upon a preset interval. Due to the need to ensure the sensing line be straightly embedded between two layers of fiber-web, only the paralleled manner to spread the fiber-web can be adopted in the lapping step in this embodiment.

**[0055]** Referring to Fig. 16, a non-woven gauze product manufactured by the method of this embodiment is provided correspondingly in this embodiment. The difference between the product of this embodiment of the invention and Embodiment I of the disclosure is that a sensing line 901 is embedded between two layers of the spunlace non-woven cloth. The sensing line 901 is embedded between the fiber of the spunlace non-woven cloth, and the upper and lower surfaces thereof are covered by en-

tangled fibers. There can be one or more embedded sensing lines. As shown in Fig. 16, the label 902 represents non-woven layer.

**[0056]** The sensing line can be a X-Ray detectable thread or a chip-binding wire bound with a chip capable of transmitting radio signals (e.g. radio-frequency signals).

**[0057]** The X-ray detectable thread can be fiber coated with X-ray absorption material (e.g. barium sulfate).

**[0058]** In this embodiment, the sensing line is a chip-binding wire. Referring to Fig. 17, the chip-binding wire comprises a metal wire 903, a chip 904, a non-woven layer 905 and a fixing thread 906.

**[0059]** One or more chips 904 arranged upon a preset interval are fixed on the metal wire 903. The non-woven layer 905 is wrapped around the outside of the metal wire 903 and the chip 904. The fixing thread 906 is wound around the outside of the non-woven layer 905.

**[0060]** To protect the non-woven gauze product from the effect of the thickness of the chip-binding wire, the metal wire 903 is tiny, for example adopting a copper wire. Furthermore, the metal wire is a continuous copper wire or a plurality of end-to-end binding copper wire sections. In the case that the metal wire is a plurality of end-to-end binding copper wire sections, each section is provided with at least a chip, and that when only one chip, the chip can be disposed at the midpoint of the copper wire section. The chip 904 can emit radio signals. Each chip has a correspondingly independent serial number which can be detected by a receiver used for receiving radio wave. The distance between two chips can be set according to actual requirement, for instance 29cm. The chip is cohered to the metal wire by conducting resin, and the metal wire can act as an antenna, thereby increasing the detection distance of the chip.

**[0061]** To guarantee the fixing thread 906 to be more securely wrapped around the outside of the non-woven layer 905, the fixing thread 906 is combined therein with at least one thread of spandex. The fixing thread 906 can be formed of multiple yarns, and the spandex thread is combined inside the multiple yarns. The elasticity of the spandex thread is higher than that of normal yarn, thus improving the elasticity of the fixing thread and making the wrapped thread more solid.

**[0062]** It is noted that, during the manufacturing process of the non-woven gauze, after embedding the chip-binding wire, when cutting the spunlace non-woven gauze into small pieces, it is usually to ensure that each piece of gauze has only one chip-binding wire and only one chip.

**[0063]** The non-woven gauze product provided in this embodiment of the invention can be a medical dressing formed by superimposing multiple layers of spunlace non-woven cloth. If the medical dressing is dropped in human body during surgery, it can easily be checked out because of the embedded sensing line, so as to avoid the occurrence of medical malpractice.

**[0064]** The above are further detailed descriptions



about this invention in combination with specific embodiments, but it cannot be concluded that specific implementation of this invention is merely limited to such descriptions. Persons of ordinary skill in the art also can make simple deductions or replacements without departing from the concept of this invention, which should be regarded as falling within the protection scope of this invention.

## Claims

1. A system for manufacturing non-woven gauze product, comprising:

a picker (601) for opening, cleaning and blending raw cotton;

a carding machine (607) provided downstream of the picker (601) for further opening and cleaning the raw cotton and carding for fiber-web (20, 100) forming;

a lapping platform (608) provided downstream of the carding machine (607) for spreading the fiber-web (20, 100) in an overlapped manner upon a set specification;

a sensing line transporter (807) for transporting a sensing line (804, 901) to the lapping platform (608) and to a place between upper and lower fiber-webs (805, 806) delivered by one or more carding machine (607); the lapping platform (608) being provided with a press roller (801) for pressing the sensing line (804, 901) delivered by the sensing line transporter (807) to the place between the upper and lower fiber-webs (805, 806) when spreading the fiber-web (20, 100) in an overlapped manner;

a spunlace device (609) provided downstream of the lapping platform (608) for water jetting the overlapped fiber-web (20, 100); the spunlace device (609) comprising a first spunlace machine (30) and a second spunlace machine (40); the first spunlace machine (30) including a first rotatable barrel and a first spunlace support net (312) surrounding the first barrel; the second spunlace machine (40) including a second rotatable barrel and a second spunlace support net (412) surrounding the second barrel, the second spunlace support net (412) having a shaping layer (413), the shaping layer (413) being provided thereon with pointed projections (414) disposed in a matrix arrangement and a through hole (415), each pointed projection (414) having a tapered top and a bottom of rectangular cross-section, the bottom size of each pointed projection (414) being larger than the bottom distance between two adjacent pointed projections (414); and

an aftertreatment device (610) provided down-

stream of the spunlace device (609) for post-processing the product obtained after water jetting process to receive non-woven gauze product.

2. The system according to claim 1, wherein the bottom distance between two adjacent pointed projections (414) is 0.1~1mm, the density of the pointed projections (414) on the shaping layer (413) is not less than 50 per square inch.

3. The system according to claim 1, further comprising a coater (802) for coating adhesive on the sensing line (804, 901) prior to embedding the sensing line (804, 901) into the place between the upper and lower fiber-webs (805, 806).

4. The system according to claim 3, further comprising a metal ring (803) provided ahead of the coater (802) for fixing the sensing line (804, 901).

5. A method for manufacturing non-woven gauze product by utilizing the system according to any one of claims 1-4, comprising:

a picking step (701) for opening, cleaning and blending raw cotton;

a carding step (707) for further opening and cleaning the raw cotton and carding for fiber-web (20, 100) forming;

a lapping step (708) for spreading the fiber-web (20, 100) in an overlapped manner upon a set specification, wherein the lapping step (708) further comprises: embedding the sensing line (804, 901) into a place between two layers of fiber-web (805, 806);

a spunlace step (709) for water jetting the overlapped fiber-web (20, 100) introduced into the spunlace device (609), wherein the spunlace step (709) specifically comprises: prewetting the fiber-web (20, 100) with low-pressure water flow when introducing the fiber-web (20, 100) into the input of the spunlace device (609); water jetting the prewetted fiber-web (20, 100) with the spunlace device (609) to cause the fiber on the shaping layer (413) of the second spunlace machine (40) to be shifted and entangled under the impact of spunlace to form a rectangular hole on the water-jetted fiber-web (20, 100); performing water jetting on the fiber-web (20, 100) from the back side thereof by the first spunlace machine (30), and performing water jetting on the fiber-web (20, 100) from the front side thereof by the second spunlace machine (40); and

an aftertreatment step (710) for post-processing the product obtained after water jetting process to receive product of non-woven gauze.

6. The method according to claim 5, wherein in the lapping step (708), prior to embedding the sensing line (804, 901) into a place between two layers of fiberweb (805, 806), further comprises: coating adhesive on the sensing line (804, 901). 5
7. A non-woven gauze product manufactured by utilizing the system according to any one of claims 1-4, comprising spunlace non-woven cloth having rectangular holes in an array layout formed by the impact of spunlace, the rectangular holes in an array layout being presented in a flat structure having warp and weft, and the dimension of each rectangular hole being larger than the line width of warp and weft; the non-woven gauze product further comprising a sensing line (804, 901) embedded among the fibers of the spunlace non-woven cloth, and the upper and lower surfaces thereof being covered by entangled fibers. 10
8. The non-woven gauze product according to claim 7, wherein the line width of warp and weft of the non-woven gauze product is 0.1~1mm, and the density of the rectangular holes is not less than 50 per square inch. 15
9. The non-woven gauze product according to claim 7, wherein the sensing line (804, 901) is an X-Ray detectable thread or a chip-binding wire bound with a chip capable of transmitting radio signals. 20
10. The non-woven gauze product according to claim 9, wherein the chip-binding wire comprises: 25
  - a metal wire (903); 30
  - one or more chips (904) arranged upon a preset interval and fixed on the metal wire (903);
  - a non-woven layer (905) wrapped around the metal wire (903) and the chip (904); and
  - a fixing thread (906) wound around the non-woven layer (905). 35
11. The non-woven gauze product according to claim 10, wherein the metal wire (903) is a continuous copper wire or a plurality of end-to-end binding copper wire sections, and/or the fixing thread (906) is combined therein with at least one thread of spandex. 40
12. The non-woven gauze product according to any one of claims 7-11, wherein the non-woven gauze product is a medical dressing formed by superimposing multiple layers of spunlace non-woven cloth. 45

#### Patentansprüche

1. System zur Herstellung von Vliesverbandmullprodukt, das Folgendes umfasst: 50

einen Picker (601) zum Öffnen, Reinigen und Mischen von Rohbaumwolle;  
 eine unterhalb des Pickers (601) vorgesehene Kardiermaschine (607) zum weiteren Öffnen und Reinigen der Rohbaumwolle und zum Kardieren zur Bildung von Faservlies (20, 100);  
 eine unterhalb der Kardiermaschine (607) vorgesehene Lappplattform (608) zum Ausbreiten des Faservlieses (20, 100) auf eine überlappte Weise nach einer vorgegebenen Spezifikation;  
 einen Erfassungslinientransporter (807) zum Transportieren einer Erfassungslinie (804, 901) zur Lappplattform (608) und zu einem Ort zwischen dem oberen und dem unteren Faservlies (805, 806), geliefert von einer oder mehreren Kardiermaschinen (607); wobei die Lappplattform (608) mit einer Presswalze (801) zum Pressen der Erfassungslinie (804, 901) versehen ist, geliefert vom Erfassungslinientransporter (807) zu dem Ort zwischen dem oberen und unteren Faservlies (805, 806) beim Ausbreiten des Faservlieses (20, 100) auf eine überlappte Weise;  
 eine unterhalb der Lappplattform (608) vorgesehene Spunlace-Vorrichtung (609) zum Richten von Wasserstrahlen auf das überlappte Faservlies (20, 100); wobei die Spunlace-Vorrichtung (609) eine erste Spunlace-Maschine (30) und eine zweite Spunlace-Maschine (40) umfasst; wobei die erste Spunlace-Maschine (30) eine erste drehbare Trommel und ein die erste Trommel umgebendes erstes Spunlace-Tragnetz (312) beinhaltet; wobei die zweite Spunlace-Maschine (40) eine zweite drehbare Trommel und ein die drehbare Trommel umgebendes zweites Spunlace-Tragnetz (412) beinhaltet, wobei das zweite Spunlace-Tragnetz (412) eine Formungslage (413) aufweist, wobei auf der Formungslage (413) in einer Matrixanordnung angeordnete spitze Vorsprünge (414) und ein Durchgangsloch (415) vorgesehen sind, wobei jeder spitze Vorsprung (414) eine konische Oberseite und eine Unterseite mit rechteckigem Querschnitt hat, wobei die Unterseitengröße jedes spitzen Vorsprungs (414) größer ist als die Unterseitendistanz zwischen zwei benachbarten spitzen Vorsprüngen (414); und  
 eine unterhalb der Spunlace-Vorrichtung (609) vorgesehene Nachbehandlungsvorrichtung (610) zum Nachverarbeiten des nach dem Wasserstrahlprozess erhaltenen Produkts zum Erhalten eines Vliesverbandmullprodukts.

2. System nach Anspruch 1, wobei die Unterseitendistanz zwischen zwei benachbarten spitzen Projektionen (414) 0,1 - 1 mm beträgt, die Dichte der spitzen Projektionen (414) auf der Formungslage (413) mindestens 50 pro Quadratzoll beträgt. 55

3. System nach Anspruch 1, das ferner einen Beschichter (802) zum Auftragen von Klebstoff auf die Erfassungslinie (804, 901) vor dem Einbetten der Erfassungslinie (804, 901) in dem Ort zwischen dem oberen und unteren Faservlies (805, 806) umfasst.
4. System nach Anspruch 3, das ferner einen Metallring (803) umfasst, der vor dem Beschichter (802) zum Fixieren der Erfassungslinie (804, 901) vorgesehen ist.
5. Verfahren zur Herstellung eines Vliesverbandmullprodukts mit Hilfe des Systems nach einem der Ansprüche 1-4, das Folgendes beinhaltet:
  - einen Pickschritt (701) zum Öffnen, Reinigen und Mischen von Rohbaumwolle;
  - einen Kardierschritt (707) zum weiteren Öffnen und Reinigen der Rohbaumwolle und zum Kardieren zum Bilden von Faservlies (20, 100);
  - einen Läppschritt (708) zum Ausbreiten des Faservlieses (20, 100) auf eine überlappte Weise nach einer vorgegebenen Spezifikation, wobei der Läppschritt (708) ferner Folgendes beinhaltet: Einbetten der Erfassungslinie (804, 901) in einen Ort zwischen zwei Lagen Faservlies (805, 806);
  - einen Spunlace-Schritt (709) zum Richten von Wasserstrahlen auf das in die Spunlace-Vorrichtung (609) eingeleitete überlappte Faservlies (20, 100), wobei der Spunlace-Schritt (709) speziell Folgendes beinhaltet: Vorbenetzen des Faservlieses (20, 100) mit einem Niederdruckwasserstrom beim Einleiten des Faservlieses (20, 100) in den Eingang der Spunlace-Vorrichtung (609); Richten von Wasserstrahlen auf das vorbenetzte Faservlies (20, 100) mit der Spunlace-Vorrichtung (609), um zu bewirken, dass die Faser auf der Formungslage (413) der zweiten Spunlace-Maschine (40) unter dem Einfluss von Spunlace verschoben und verschränkt wird, um ein rechteckiges Loch auf dem wasserbestrahlten Faservlies (20, 100) zu bilden; Richten von Wasserstrahlen auf das Faservlies (20, 100) von dessen Rückseite durch die erste Spunlace-Maschine (30) und Richten von Wasserstrahlen auf das Faservlies (20, 100) von seiner Frontseite durch die zweite Spunlace-Maschine (40); und
  - einen Nachbehandlungsschritt (710) zum Nachverarbeiten des nach dem Wasserstrahlprozess erhaltenen Produkts zum Erhalten eines Vliesverbandmullprodukts.
6. Verfahren nach Anspruch 5, das im Läppschritt (708), vor dem Einbetten der Erfassungslinie (804, 901) in einen Ort zwischen zwei Lagen Faservlies (805, 806), ferner Folgendes beinhaltet: Auftragen

von Klebstoff auf die Erfassungslinie (804, 901).

7. Vliesverbandmullprodukt, hergestellt mit Hilfe des Systems nach einem der Ansprüche 1-4, umfassend Spunlace-Faservliestuch mit rechteckigen Löchern in einem durch Spunlace-Einfluss von gebildeten Anordnungslayout, wobei die rechteckigen Löcher in einem Anordnungslayout in einer flachen Struktur mit Kette und Schuss präsentiert wird und die Abmessung jedes rechteckigen Lochs größer ist als die Linienbreite von Kette und Schuss; wobei das Vliesverbandmullprodukt ferner eine Erfassungslinie (804, 901) umfasst, eingebettet unter den Fasern des Spunlace-Vliestuchs, wobei die Ober- und Unterseiten davon durch verschränkte Fasern bedeckt sind.
8. Vliesverbandmullprodukt nach Anspruch 7, wobei die Linienbreite von Kette und Schuss des Vliesverbandmullprodukts 0,1 - 1 mm beträgt und die Dichte der rechteckigen Löcher mindestens 50 pro Quadrat Zoll ist.
9. Vliesverbandmullprodukt nach Anspruch 7, wobei die Erfassungslinie (804, 901) ein mit Röntgenstrahlung erfassbarer Faden oder ein Chipbindungsdraht ist, gebunden mit einem Chip, der Funksignale ausgeben kann.
10. Vliesverbandmullprodukt nach Anspruch 9, wobei der Chipbindungsdraht Folgendes umfasst:
  - einen Metalldraht (903);
  - einen oder mehrere Chips (904), die in voreingestellten Intervallen angeordnet und auf dem Metalldraht (903) fixiert sind;
  - eine Faservlieslage (905), die um den Metalldraht (903) und den Chip (904) gewickelt ist; und
  - einen Fixierfaden (906), der um die Faservlieslage (905) herum gewickelt ist.
11. Vliesverbandmullprodukt nach Anspruch 10, wobei der Metalldraht (903) ein fortlaufender Kupferdraht oder mehrere Ende-an-Ende-Bindungskupferdrahtabschnitte ist und/oder der Fixierfaden (906) darin mit wenigstens einem Spandex-Fader kombiniert ist.
12. Vliesverbandmullprodukt nach einem der Ansprüche 7-11, wobei das Vliesverbandmullprodukt ein medizinischer Verband ist, gebildet durch Übereinanderlegen mehrerer Lagen Spunlace-Vliestuch.

## Revendications

1. Système de fabrication d'un produit de gaze non tissée, comprenant :

un batteur (601) permettant d'ouvrir, nettoyer et mélanger le coton brut ;

une machine de cardage (607) située en aval du batteur (601) et permettant d'ouvrir et nettoyer davantage le coton brut, et d'effectuer un cardage pour la formation d'une nappe de fibres (20, 100) ;

une plateforme nappeuse (608) située en aval de la machine de cardage (607) pour étaler la nappe de fibres (20, 100) avec superposition sur spécification définie ;

un transporteur de ligne de détection (807) permettant de transporter une ligne de détection (804, 901) vers la plateforme nappeuse (608) et vers un emplacement situé entre des nappes de fibres supérieure et inférieure (805, 806) apportées par une ou plusieurs machines de cardage (607) ; la plateforme nappeuse (608) étant munie d'un rouleau presseur (801) permettant de presser la ligne de détection (804, 901) apportée par le transporteur de ligne de détection (807) vers l'emplacement situé entre les nappes de fibres supérieure et inférieure (805, 806) lors de l'étalement de la nappe de fibres (20, 100) avec superposition ;

un dispositif d'hydroliage (609) situé en aval de la plateforme nappeuse (608) et permettant d'enchevêtrer par jet d'eau la nappe de fibres (20, 100) ; le dispositif d'hydroliage (609) comprenant une première machine d'hydroliage (30) et une seconde machine d'hydroliage (40) ; la première machine d'hydroliage (30) comprenant un premier cylindre rotatif et un premier filet de support d'hydroliage (312) entourant le premier cylindre ; la seconde machine d'hydroliage (40) comprenant un second cylindre rotatif et un second filet de support d'hydroliage (412) entourant le second cylindre, le second filet de support d'hydroliage (412) ayant une couche de mise en forme (413), la couche de mise en forme (413) étant munie de protubérances pointues (414) disposées dans un agencement de matrice, et d'un orifice débouchant (415), chaque protubérance pointue (414) ayant une partie supérieure conique et une partie inférieure de section transversale rectangulaire, la taille de la partie inférieure de chaque protubérance pointue (414) étant plus grande que la distance inférieure entre deux protubérances pointues adjacentes (414) ; et

un dispositif de traitement subséquent (610) situé en aval du dispositif d'hydroliage (609) et permettant de traiter de manière subséquente le produit obtenu après le processus d'enchevêtrement par jet d'eau afin de recevoir un produit de gaze non tissée.

## 2. Système selon la revendication 1, dans lequel la dis-

tance inférieure entre deux protubérances pointues adjacentes (414) est de 0,1 à 1 mm, et la densité des protubérances pointues (414) sur la couche de mise en forme (413) n'est pas inférieure à 50 par pouce carré.

3. Système selon la revendication 1, comprenant en outre une enduiseuse (802) permettant d'enduire la ligne de détection (804, 901) avec un adhésif avant d'intégrer la ligne de détection (804, 901) à l'emplacement situé entre les nappes de fibres supérieure et inférieure (805, 806).

4. Système selon la revendication 3, comprenant en outre un anneau métallique (803) situé devant l'enduseuse (802) pour fixer la ligne de détection (804, 901).

5. Procédé de fabrication d'un produit de gaze non tissée au moyen du système selon l'une quelconque des revendications 1 à 4, le procédé comprenant :

une étape de battage (701) permettant d'ouvrir, nettoyer et mélanger le coton brut ;

une étape de cardage (707) permettant d'ouvrir et nettoyer davantage le coton brut, et d'effectuer un cardage pour la formation d'une nappe de fibres (20, 100) ;

une étape de nappage (708) permettant d'étaler la nappe de fibres (20, 100) avec superposition sur spécification définie, l'étape de nappage (708) consistant en outre à : intégrer la ligne de détection (804, 901) à un emplacement situé entre deux couches de nappe de fibres (805, 806) ; une étape d'hydroliage (709) permettant d'enchevêtrer par jet d'eau la nappe de fibres superposées (20, 100) introduite dans le dispositif d'hydroliage (609), l'étape d'hydroliage (709) consistant spécifiquement à :

préhumidifier la nappe de fibres (20, 100) avec un flux d'eau à basse pression lors de l'introduction de la nappe de fibres (20, 100) dans l'entrée du dispositif

d'hydroliage (609) ; enchevêtrer par jet d'eau au moyen du dispositif d'hydroliage (609) la nappe de fibres préhumidifiée (20, 100) afin de provoquer le décalage de la fibre sur la couche de mise en forme (413) de la seconde machine d'hydroliage (40), et son emmêlement sous l'impact de l'hydroliage afin de former un orifice rectangulaire sur la nappe de fibres enchevêtrée par jet d'eau (20, 100) ;

réaliser au moyen de la première machine d'hydroliage (30) un enchevêtrement par jet d'eau sur la nappe de fibres (20, 100) depuis son côté arrière, et réaliser au moyen de la


seconde machine d'hydroliage (40) un enchevêtrement par jet d'eau sur la nappe de fibres (20, 100) depuis son côté avant ; et

une étape de traitement subséquent (710) permettant de traiter de manière subséquente le produit obtenu après le processus d'enchevêtrement par jet d'eau afin de recevoir un produit de gaze non tissée.

6. Procédé selon la revendication 5, dans lequel l'étape de nappage (708), avant l'intégration de la ligne de détection (804, 901) à un emplacement situé entre deux couches de nappe de fibres (805, 806), consiste en outre à : enduire la ligne de détection (804, 901) avec un adhésif. 10
7. Produit de gaze non tissée fabriqué au moyen du système selon l'une quelconque des revendications 1 à 4, comprenant un tissu non tissé hydrolié ayant des orifices rectangulaires dans une disposition matricielle formée par l'impact de l'hydroliage, les orifices rectangulaires dans une disposition matricielle étant présentés dans une structure plane ayant une chaîne et une trame, et la dimension de chaque orifice rectangulaire étant supérieure à la largeur linéaire de la chaîne et de la trame ; le produit de gaze non tissée comprenant en outre une ligne de détection (804, 901) intégrée parmi les fibres du tissu non tissé hydrolié, et ses surfaces supérieure et inférieure étant couvertes par des fibres emmêlées. 20 25 30
8. Produit de gaze non tissée selon la revendication 7, dans lequel la largeur linéaire de la chaîne et de la trame du produit de gaze non tissée est de 0,1 à 1 mm, et la densité des orifices rectangulaires n'est pas inférieure à 50 par pouce carré. 35
9. Produit de gaze non tissée selon la revendication 7, dans lequel la ligne de détection (804, 901) est un fil détectable par rayons X ou un fil de liaison à une puce lié à une puce capable de transmettre des signaux radio. 40
10. Produit de gaze non tissée selon la revendication 9, dans lequel le fil de liaison à une puce comprend : 45
- un fil métallique (903) ;
  - une ou plusieurs puces (904) disposées à un intervalle prédéfini et fixées sur le fil métallique (903) ; 50
  - une couche non tissée (905) enroulée autour du fil métallique (903) et de la puce (904) ; et
  - un fil de fixation (906) enroulé autour de la couche non tissée (905). 55
11. Produit de gaze non tissée selon la revendication 10, dans lequel le fil métallique (903) est un fil de

cuiivre continu ou une pluralité de sections de fil de cuiivre se liant bout à bout, et/ou le fil de fixation (906) y est combiné avec au moins un fil d'élasthanne.

- 5 12. Produit de gaze non tissée selon l'une quelconque des revendications 7 à 11, le produit de gaze non tissée étant un pansement médical formé en superposant plusieurs couches de tissu non tissé hydrolié.

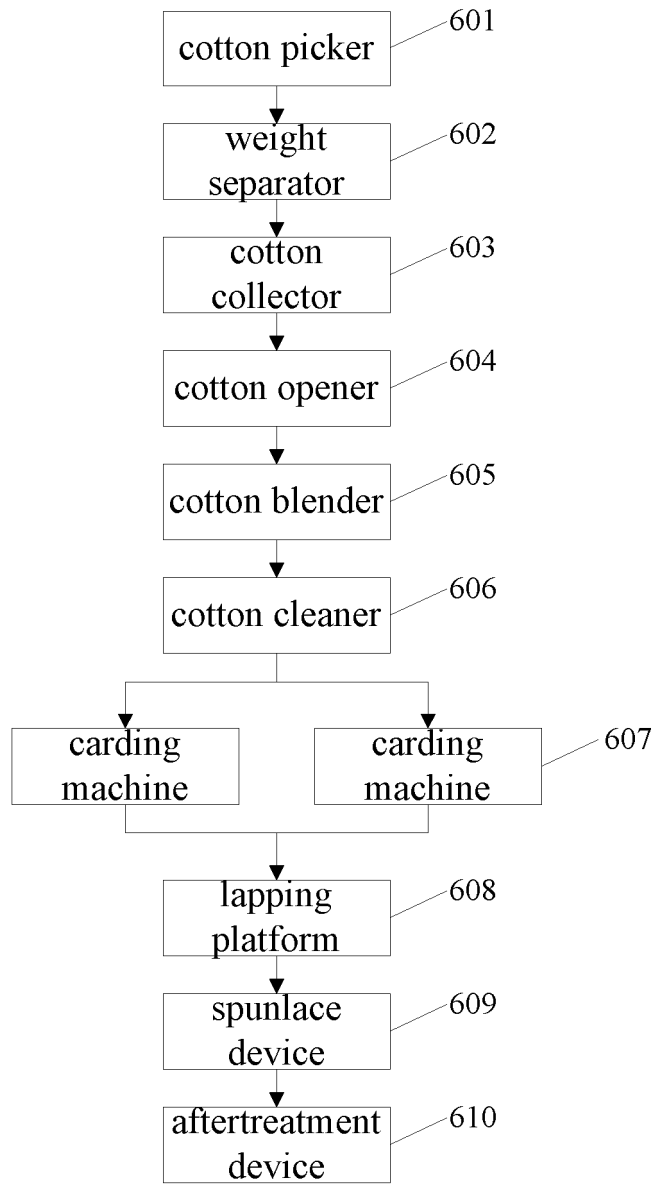

**Fig. 1**

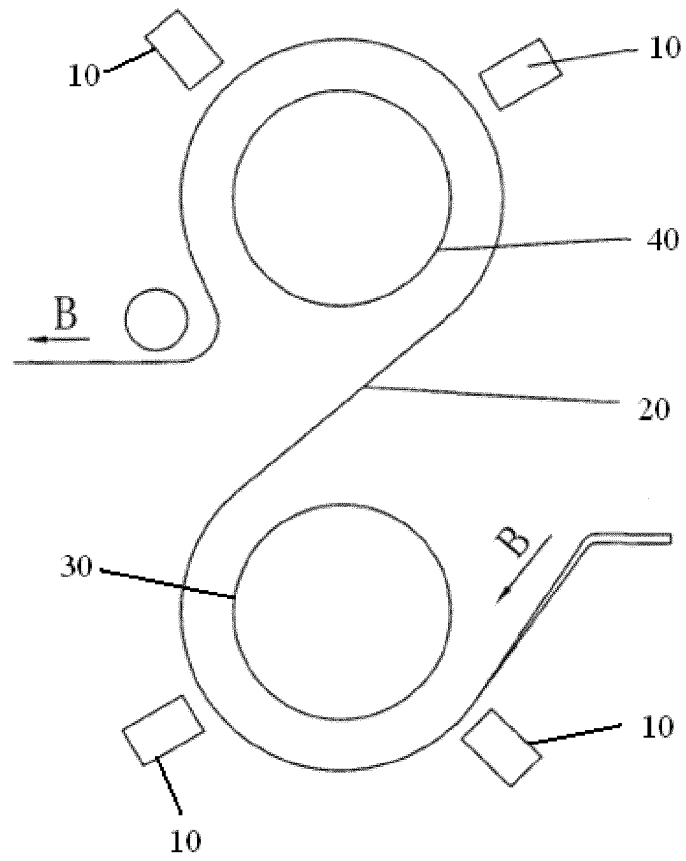


Fig. 2

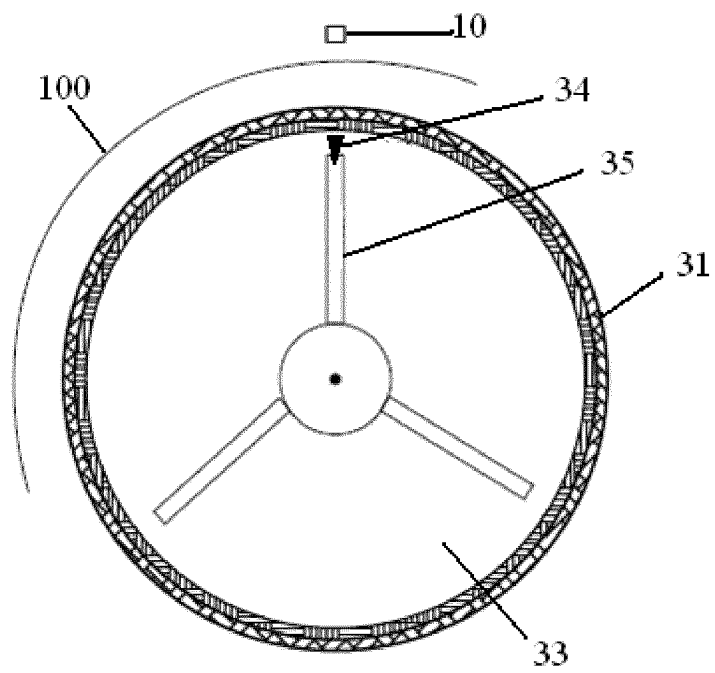


Fig. 3

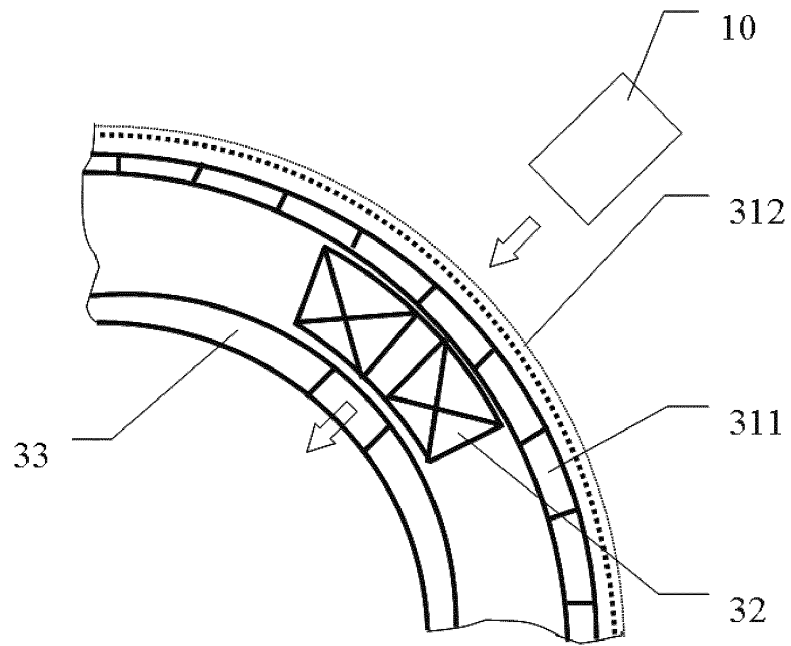


Fig. 4

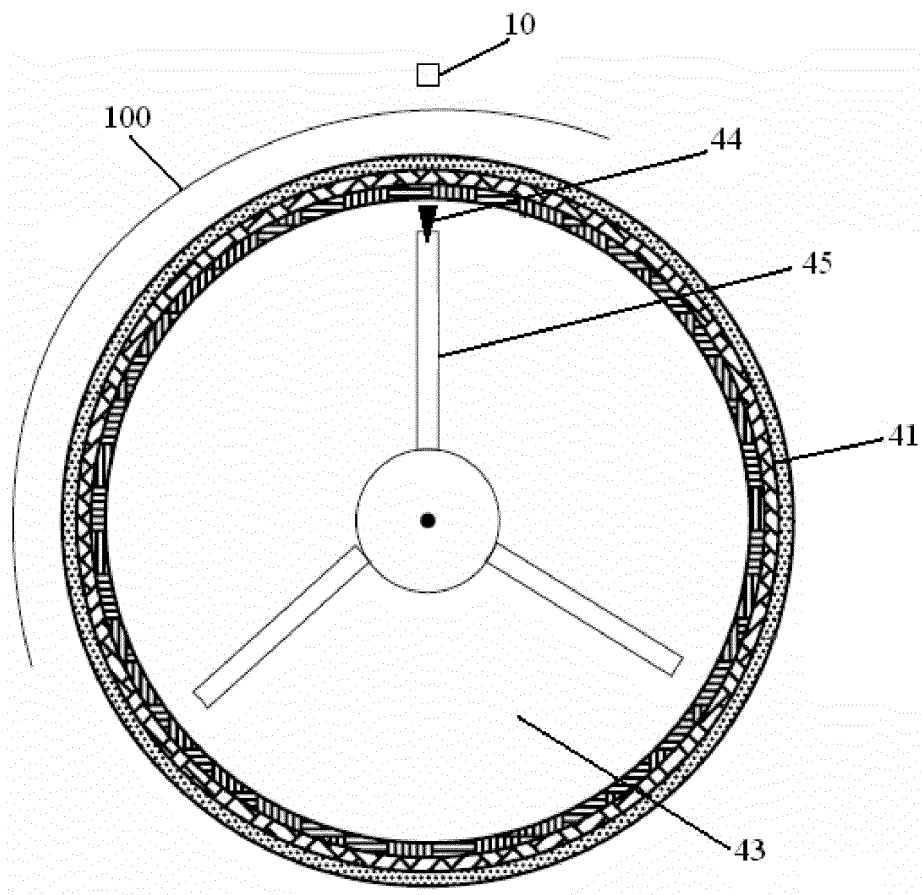


Fig. 5



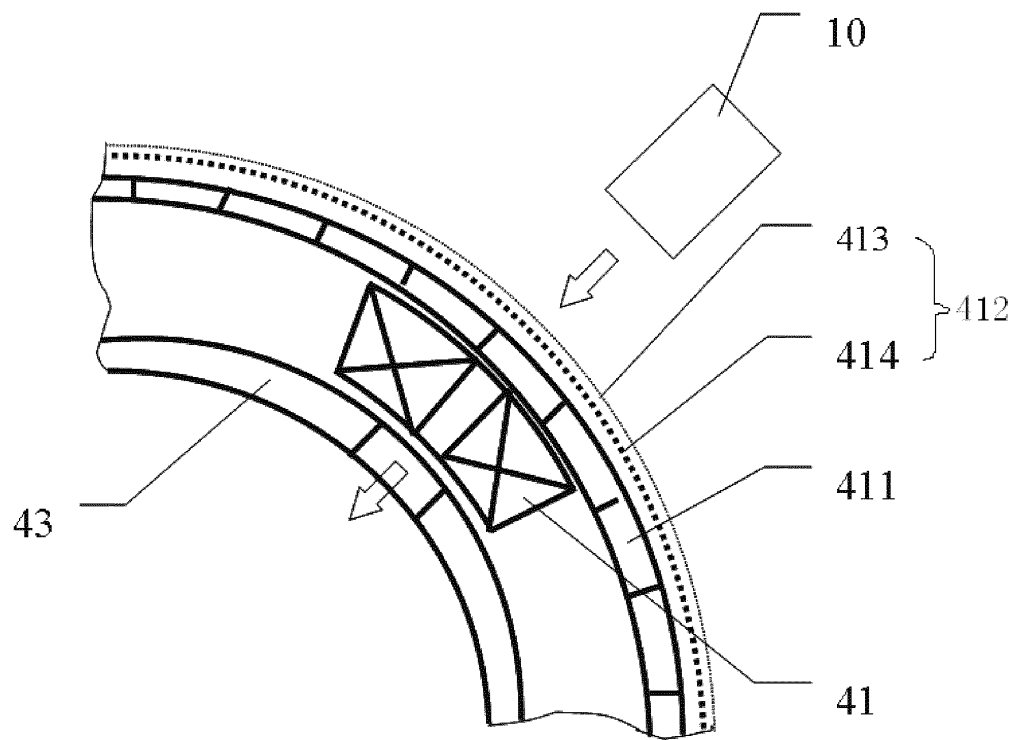


Fig. 6

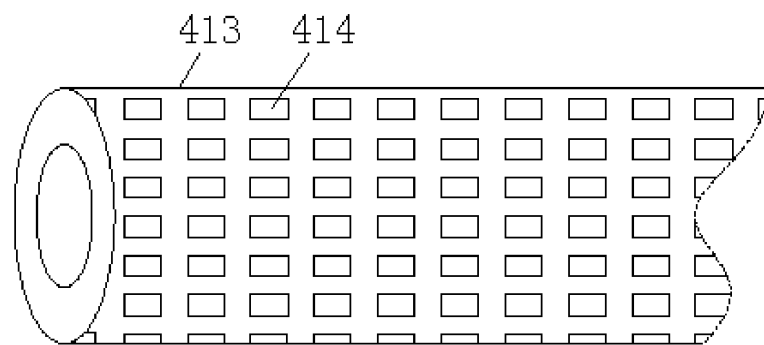


Fig. 7

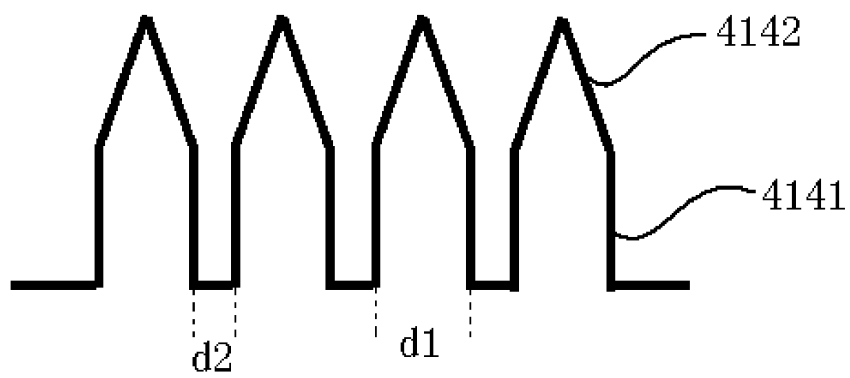


Fig. 8

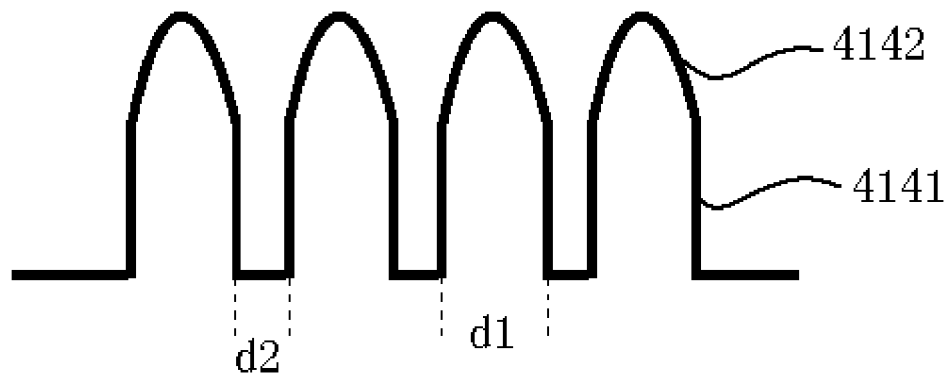


Fig. 9



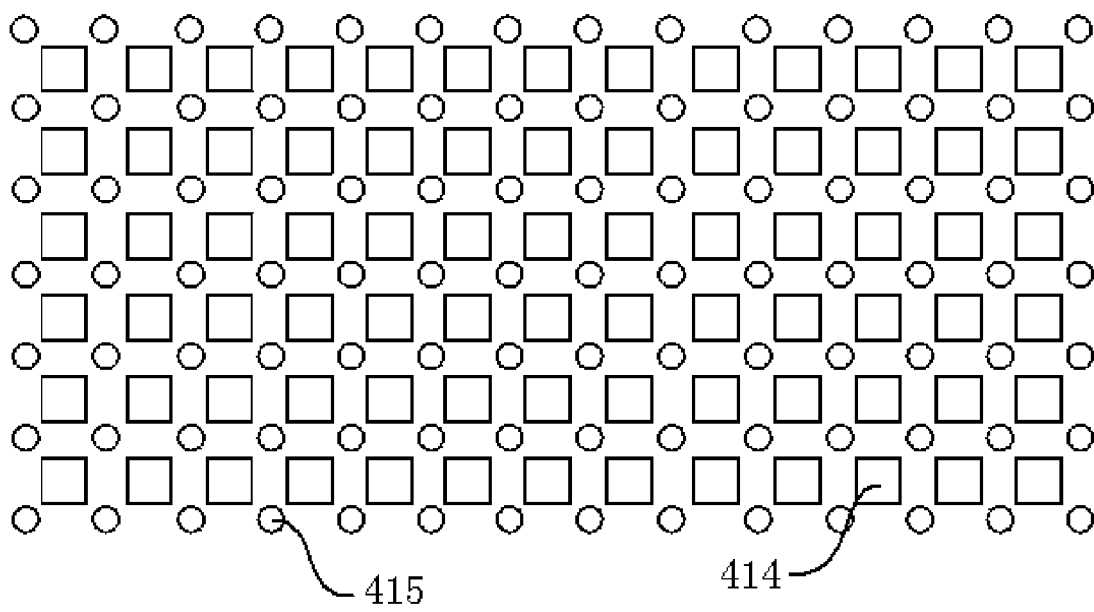



Fig. 10

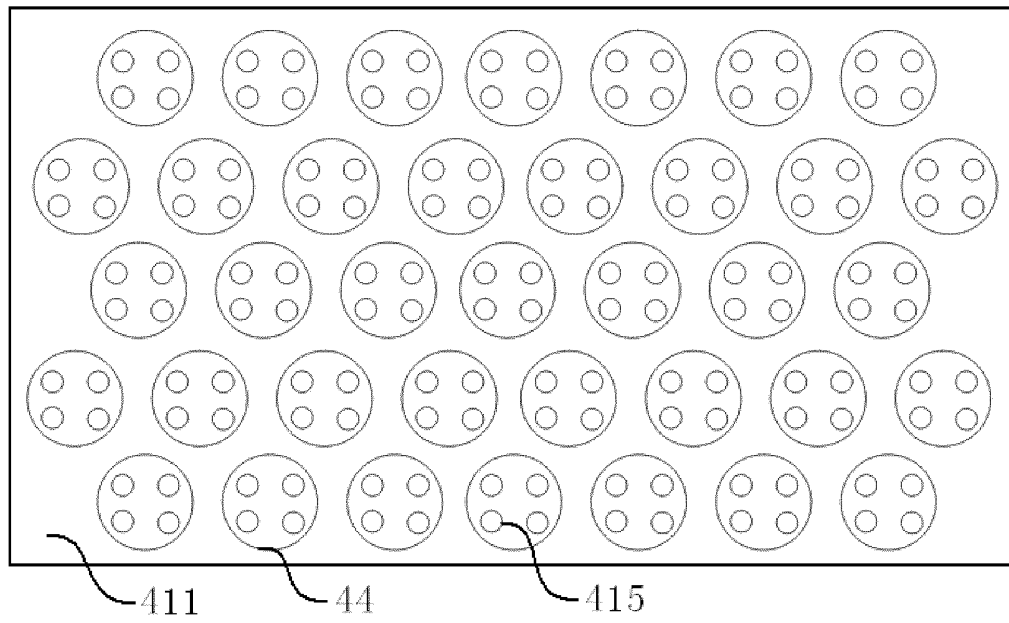


**Fig. 11**

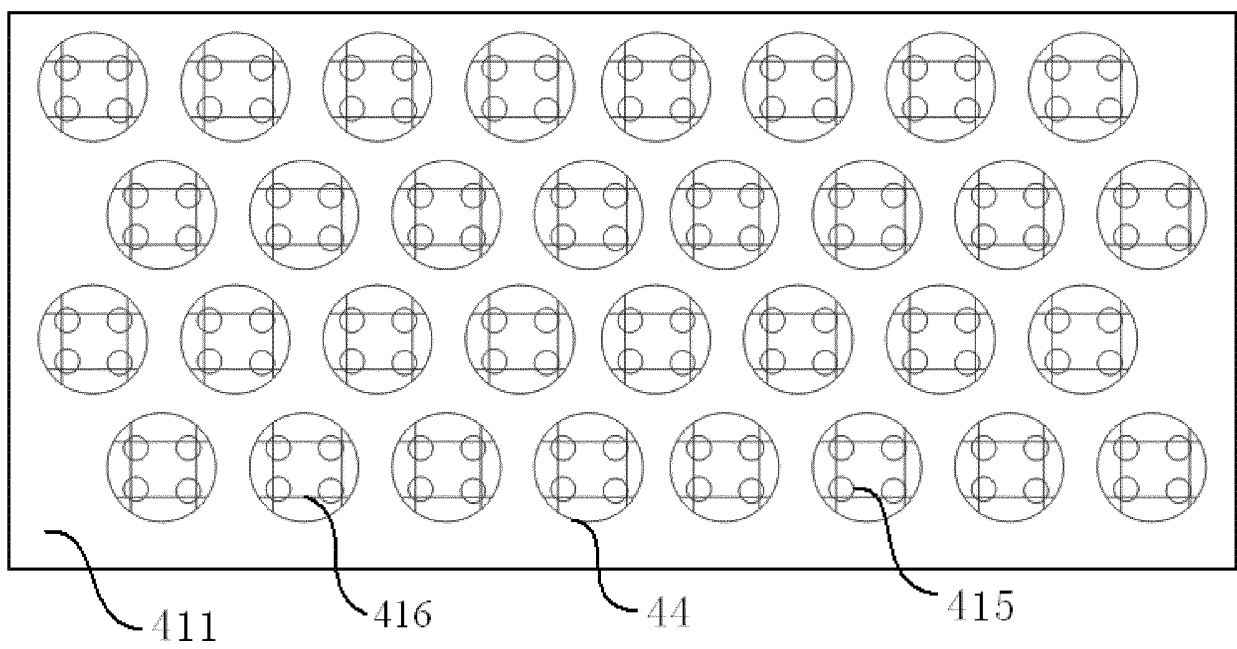

**Fig. 12**

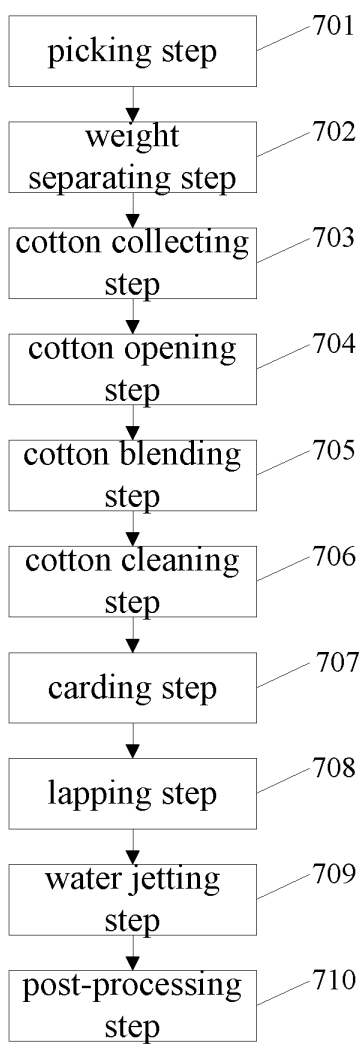

**Fig. 13**

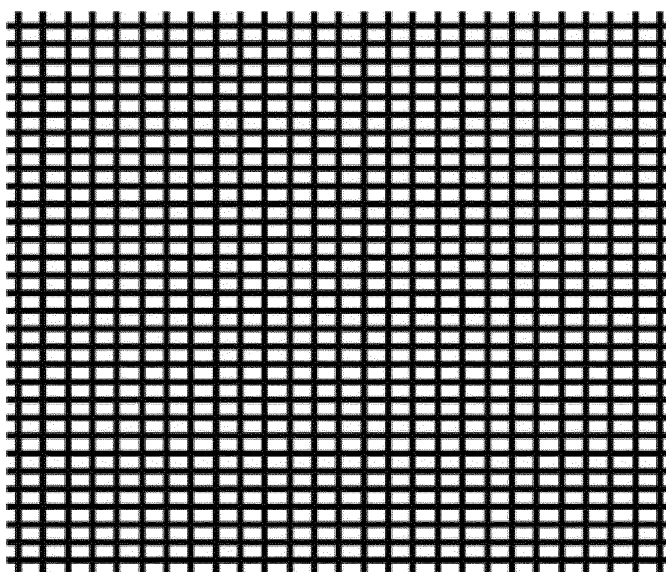

**Fig. 14**

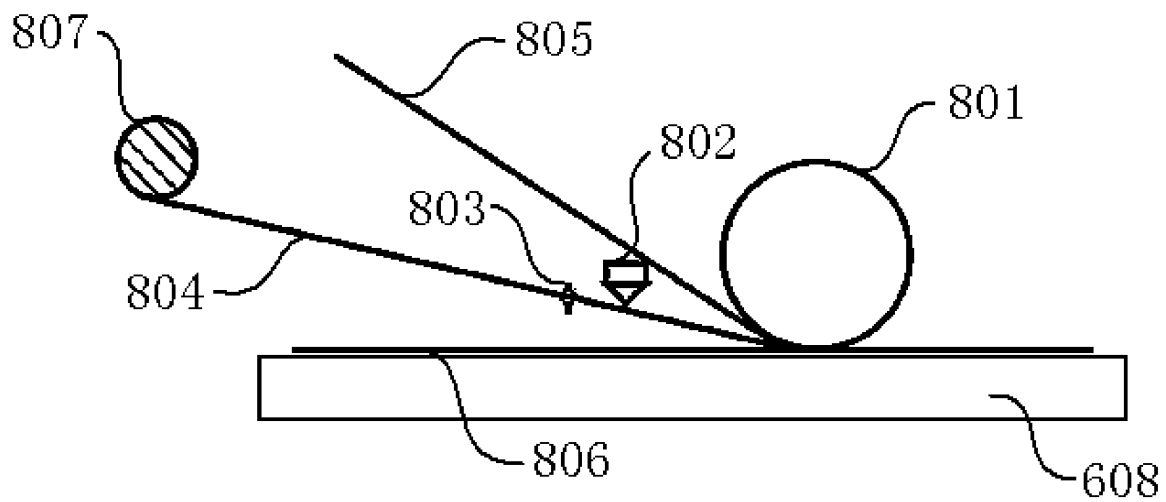


Fig. 15



Fig. 16

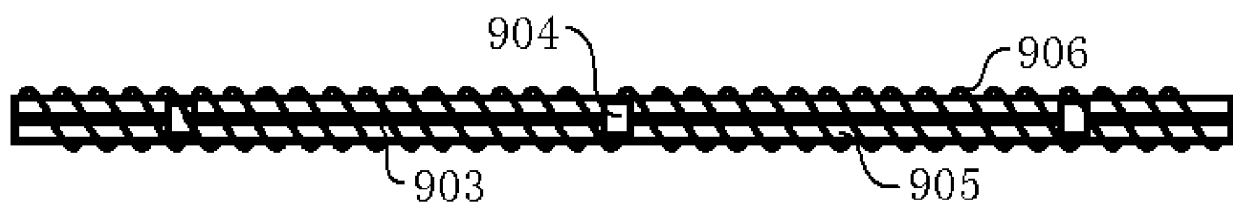


Fig. 17

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- CN 102277692 [0005]
- EP 1688522 A [0006]
- US 5098764 A [0007]