



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
27.07.2016 Bulletin 2016/30

(51) Int Cl.:
E05B 3/00 (2006.01) E05B 15/16 (2006.01)

(21) Application number: **16152317.0**

(22) Date of filing: **21.01.2016**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Heywood Williams Components Limited**
Elland, Yorkshire HX5 9HT (GB)

(72) Inventor: **PEARSON, Paul Robert**
Daventry, Northamptonshire NN11 5RB (GB)

(74) Representative: **Appleyard Lees IP LLP**
15 Clare Road
Halifax HX1 2HY (GB)

(30) Priority: **23.01.2015 GB 201501155**

(54) **HANDLES**

(57) A handle, for example a door or window handle, is provided comprising a handle portion 10, a base portion 11, and spindle 12. The handle portion 10 is rotatable with respect to the base portion 11 but is held in position

against the base portion 11 by trapping the base portion 11 between a projecting part and the spindle 12 and the handle portion 10.

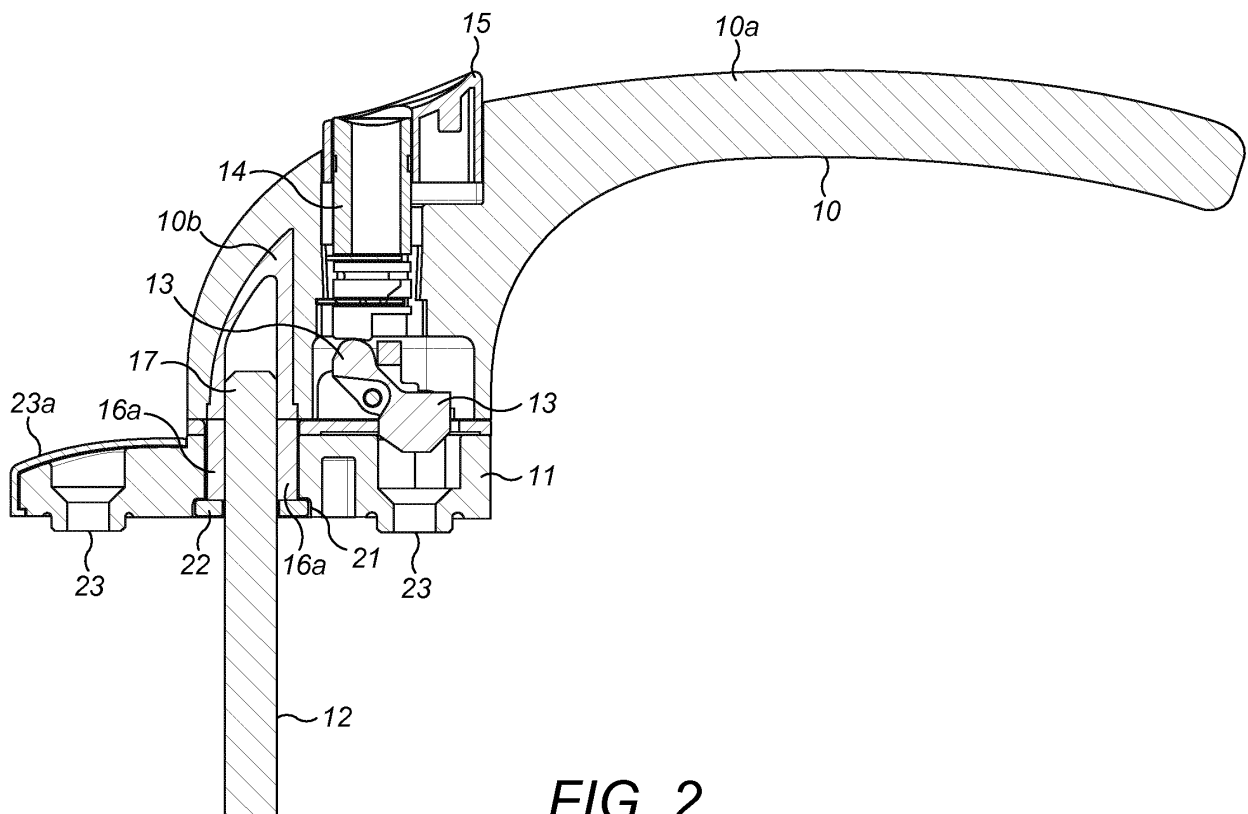


FIG. 2

Description

[0001] The invention relates to handles, for example to handles for windows and doors.

[0002] Such handles commonly comprise a handle portion rotatable on a base portion. In use, the base portion is attached to a window or door and the handle portion is provided with a spindle which passes through the base portion and into an operating mechanism so that rotation of the handle with respect to the base portion operates the mechanism and opens or closes the window or door.

[0003] One typical form of handle is manufactured by forming the handle with a projecting boss that is passed through a hole in the base portion and is then deformed by a spin-riveting procedure to secure the handle portion and base portion together while still permitting rotation of the handle portion with respect to the base portion. The spindle is then inserted into the boss in a subsequent step

[0004] Another type of handle uses a handle body that is made of plastics material with a metal spindle, a neck section of which can pass through an opening in a base portion. A body section of the spindle is too wide to pass through the opening in the base portion. The neck section of the spindle protruding through the opening in the body is secured in a socket of the handle by a friction fit. Disadvantages arise with this arrangement, because the engagement of the spindle in the plastic socket can degrade over time due to heavy use. The handle can then work loose from the spindle and cause the handle to malfunction.

[0005] According to the present invention there is provided an apparatus and method as set forth in the appended claims. Other features of the invention will be apparent from the dependent claims, and the description which follows.

[0006] According to an aspect of the invention there is provided a handle comprising a handle portion, a base portion and a spindle, the handle portion being rotatable with respect to the base portion but being held in position against the base portion by trapping the base portion between a projecting part of the spindle and the handle portion, wherein the spindle is engaged with the handle portion in an interference fit, wherein the handle portion comprises a body section made of plastics material and an inset section made of a different material, and wherein the spindle engages with the inset section of the handle portion.

[0007] The body section may be an overmoulded body section, preferably engaged with the inset section by means of an overmoulding process. The body section may be an injection moulded body section. The body section may be injection moulded around the inset section.

[0008] The inset section may be made of metal, preferably zinc, preferably die cast zinc. The inset section

may be aluminium, which may be die cast aluminium. The inset section may be magnesium, which may be die cast magnesium. The inset section may be steel.

[0009] The handle portion preferably comprises mainly plastics material.

[0010] A preferred material for the handle portion, in particular the body section, is acrylonitrile butadiene styrene (ABS). An alternative material for the body section may be polyamide (PA). An alternative material for the body section may be polyoxymethylene (POM).

[0011] The ABS may be electroplated.

[0012] The spindle is preferably of metal.

[0013] A preferred material for the spindle is mild steel.

[0014] The base portion may be provided with a cover cap, for example to conceal one or more fixing holes.

[0015] The cover cap may also be of ABS and may be electroplated.

The inset section may have a projecting boss that projects out of the body section. The inset section preferably incorporates a spindle-receiving opening. The spindle-receiving opening may be located in the boss. The spindle-receiving opening may extend along a longitudinal axis of the inset section. The spindle-receiving opening may have a longitudinal axis parallel to a longitudinal axis of the boss. The longitudinal axis of the spindle-receiving opening may be coaxial with the longitudinal axis of the boss.

[0016] The base portion may include a handle portion receiving opening, which opening may be adapted to receive the boss of the inset section.

[0017] The inset section may include a contact portion, which may be adjacent to the boss. The contact portion of the inset section may be located within the body section of the of the handle portion. The contact portion may include at least one lateral projection, which may assist in engagement of the contact portion with the body section of the handle portion.

[0018] The spindle-receiving opening in the inset section may extend from the boss to the contact portion. The spindle-receiving opening may taper in the contact portion, preferably tapering to a narrowest part in a direction extending away from the boss.

[0019] The spindle may have at least one flattened section extending along at least a part of a length of the spindle. The at least one flattened section may co-operate with a corresponding flattened section of the spindle-receiving opening to reduce the risk of the handle portion rotating with respect of the spindle portion.

[0020] According to another aspect of the invention there is provided a handle comprising a handle portion and a base portion, the handle portion being rotatable with respect to the base portion but being held in position against the base portion by trapping the base portion between a projecting part of a spindle and the handle portion, wherein the handle portion is adapted to receive a spindle in an interference fit, wherein the handle portion comprises a body section

made of plastics material and an inset section made of a different material, and wherein the inset section of the handle portion is adapted to engage with said spindle.

[0021] The invention extends to a kit of parts comprising a handle of the preceding aspect and a spindle.

[0022] According to another aspect of the invention there is provided a method of manufacturing a handle comprising a handle portion, a base portion and a spindle, the handle portion being rotatable with respect to the base portion but being held in position against the base portion by trapping the base portion between a projecting part of the spindle and the handle portion, wherein the handle portion comprises a body section made of plastics material and an inset section made of a different material, the method comprising moulding the body section over the inset section and passing the spindle through an opening in the base portion and engaging the spindle in an opening of the inset section of the handle portion in an interference fit.

[0023] By way of example, a specific embodiment of the invention will now be described, with reference to the accompanying drawings, in which:

Figure 1 is an exploded side view of an embodiment of a handle according to the invention;

Figure 2 is a cross-sectional side view of the handle;

Figure 3 is an exploded perspective view of the handle;

[0024] The principle components of the handle shown in the Figures 1 to 3 are a handle portion 10, a base portion 11 and a spindle 12. In use the handle portion 10 has to be rotatably mounted on the base portion 11 with the spindle 12 projecting from the handle portion 10, through the base portion 11, and into a window or door such that rotation of the handle portion 10, with respect to the base portion 11, causes rotation of the spindle 12 within the window or door, thus operating a mechanism of the window or door.

[0025] This embodiment of the invention is principally concerned with the way in which the components 10, 11 and 12 are assembled and fastened together.

[0026] The handle does however include a latch assembly 13, a locking barrel 14 and a cover cap 15.

[0027] When the handle is in use, the locking barrel 14 can be operated to lock the handle portion 10 in position with respect to the base portion 11, thus locking the window or door.

[0028] The components 11, 13 and 15 may be moulded from plastics material. Spindle 12 and locking barrel 14 are made of metal.

[0029] The handle 10 is made of two components: a body section 10a and a spindle retainer 10b. The body section 10a is made of plastics material, such as ABS that is overmoulded onto the spindle retainer 10b. The

plastics material may also be polyamide (PA) or polyoxymethylene (POM). The process of overmoulding is technically difficult to achieve, because the body section 10a must be injection moulded in the presence of the spindle retainer 10b.

[0030] The spindle retainer 10b has a projecting circular cross-section boss 16a which projects from the body section 10a. In addition the spindle retainer 10b has projections 16b that are used to ensure good retention of the spindle retainer 10b in the body section 10a. The boss 16a projects from the body section 10a and through holes in the latch assembly 13 and the base portion 11. The location of the boss 16a within the hole in the base portion 11 guides the handle portion for rotation with respect to the base portion 11.

[0031] The spindle retainer 10b is hollow with a bore sized to receive the spindle 12 in the boss 16 in an interference fit.

[0032] The metal spindle 12 is manufactured from a length of square cross-section metal which is turned down to provide a cylindrical portion 17 that is sized to engage in the bore of the spindle retainer 10b by an interference fit. The cylindrical portion 17 retains four flat side sections corresponding to the flat sides of the square cross-section of the spindle 12. The orientation of the flats on the cylindrical portion 17 must match the orientation of the correspondingly shaped bore of the spindle retainer 10b. In addition the orientation of the square cross section of the metal spindle 12 must match the orientation of a corresponding square opening of the window or door mechanism to which the handle is fitted. The turning down of the portion 17 provides a square cross-section shoulder 19.

[0033] The handle is provided with a washer 22 which has an inner diameter slightly larger than the portion 17 of the spindle 12 such that the washer can slide over the portion 17 of the spindle 12 until the washer comes to rest against the square cross-section shoulder 19.

[0034] The washer 22 has an outer diameter which is too large for the washer to pass right through the hole 20 in the base portion 11 but can fit within the larger diameter portion of the hole provided by the shoulder 21.

[0035] The main components are very simply secured together by passing the spindle 12 through the washer 22, through the base portion 20, through the hole in the latch sub-assembly 13, and into the boss 16a. The size of the portion 17 is selected to be an interference fit within the boss 16a.

[0036] To facilitate the forcing of the portion 17 into the socket in the boss 16a, the portion 17 may be provided with a slight taper angle, for example from 0.5° to 0.75°.

[0037] In other words, the portion 17 of the spindle 12 is forced into the boss 16a and cannot subsequently be withdrawn therefrom. The portion 17 is securely gripped within the boss 16a and it is the grip provided by this interference fit which retains the components together, while still permitting the handle portion 10 to rotate with respect to the base portion 11, unless it is locked in po-

sition by operation of the locking barrel 14.

[0038] The way in which the locking barrel 14 and latch sub-assembly 13 fit within the handle 10 is shown in the cross-sectional view of Figure 2 but will not be described in detail, since these components are conventional.

[0039] The base portion 11 has holes 23 therein for mounting the base portion on a window or door. In use, one of the fixing holes 23 is concealed by the handle 10, as shown in Figure 2, and to make the assembly aesthetic, the other hole 23 is covered by clipping on a cover cap 23a.

[0040] The body section 10a of handle portion 10 and base portion 11 may be made of any suitable plastics material, polycarbonate (PC) or ABS being preferred, alternatively PA or POM can be used. ABS has the advantage that it can be electroplated.

[0041] The base portion 11 may be made of similar material, or may be a zinc die casting.

[0042] The spindle 12 is preferably made from mild steel.

[0043] The cover caps 15 and 23a may also be of PC or ABS.

[0044] The latch assembly 13 may be of ABS or PA or POM.

[0045] The locking barrel 14 may be of any suitable metal.

The advantageous combination of a handle body section made of plastics material and an inset section thereof made of metal allows for a lower manufacturing cost to be obtained with the cheaper plastics material body section, whilst also allowing the longevity of a metal/metal interface between the spindle and inset section. Thus the high wear area of the handle is made of metal and the body section is made of plastics material. The advantageous use of an overmoulded handle body section on the inset section allows the benefits to be fully realised.

[0046] Attention is directed to all papers and documents which are filed concurrently with or previous to this specification in connection with this application and which are open to public inspection with this specification, and the contents of all such papers and documents are incorporated herein by reference.

[0047] All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive.

[0048] Each feature disclosed in this specification (including any accompanying claims, abstract and drawings) may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

[0049] The invention is not restricted to the details of the foregoing embodiment(s). The invention extends to any novel one, or any novel combination, of the features

disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

Claims

1. A handle comprises a handle portion, a base portion and a spindle, the handle portion being rotatable with respect to the base portion but being held in position against the base portion by trapping the base portion between a projecting part of the spindle and the handle portion, wherein the spindle is engaged with the handle portion in an interference fit, wherein the handle portion comprises a body section made of plastics material and an inset section made of a different material, wherein the spindle engages with the inset section of the handle portion, and in which the body section is an overmoulded body section.
2. The handle of claim 1, in which the body section is an injection moulded body section.
3. The handle of any preceding claim, in which the inset section is formed of metal.
4. The handle of any preceding claim, in which the handle portion comprises mainly plastics material.
5. The handle of claim 4, in which the body section is formed from plastics material.
6. The handle of any preceding claim, in which the inset section has a projecting boss that projects out of the body section.
7. The handle of any preceding claim, in which the inset section incorporates a spindle-receiving opening.
8. The handle of claim 7, in which the spindle-receiving opening extends along a longitudinal axis of the inset section.
9. The handle of claim 7 or claim 8, in which the spindle-receiving opening has a longitudinal axis parallel to a longitudinal axis of the boss.
10. The handle of any preceding claim, in which the base portion includes a handle portion receiving opening adapted to receive the boss of the inset section.
11. The handle of any preceding claim, in which the spindle-receiving opening in the inset section extends from the boss to a contact portion of the inset section.

12. The handle of claim 11, in which the spindle-receiving opening tapers in the contact portion.
13. A handle comprises a handle portion and a base portion, the handle portion being rotatable with respect to the base portion but being held in position against the base portion by trapping the base portion between a projecting part of a spindle and the handle portion, wherein the handle portion is adapted to receive a spindle in an interference fit, wherein the handle portion comprises a body section made of plastics material and an inset section made of a different material, wherein the inset section of the handle portion is adapted to engage with said spindle, and in which the body section is an overmoulded body section.
14. A kit of parts comprises a handle according to claim 13 and a spindle.
15. A method of manufacturing a handle comprising a handle portion, a base portion and a spindle, the handle portion being rotatable with respect to the base portion but being held in position against the base portion by trapping the base portion between a projecting part of the spindle and the handle portion, wherein the handle portion comprises a body section made of plastics material and an inset section made of a different material, the method comprising moulding the body section over the inset section and passing the spindle through an opening in the base portion and engaging the spindle in an opening of the inset section of the handle portion in an interference fit.

40

45

50

55

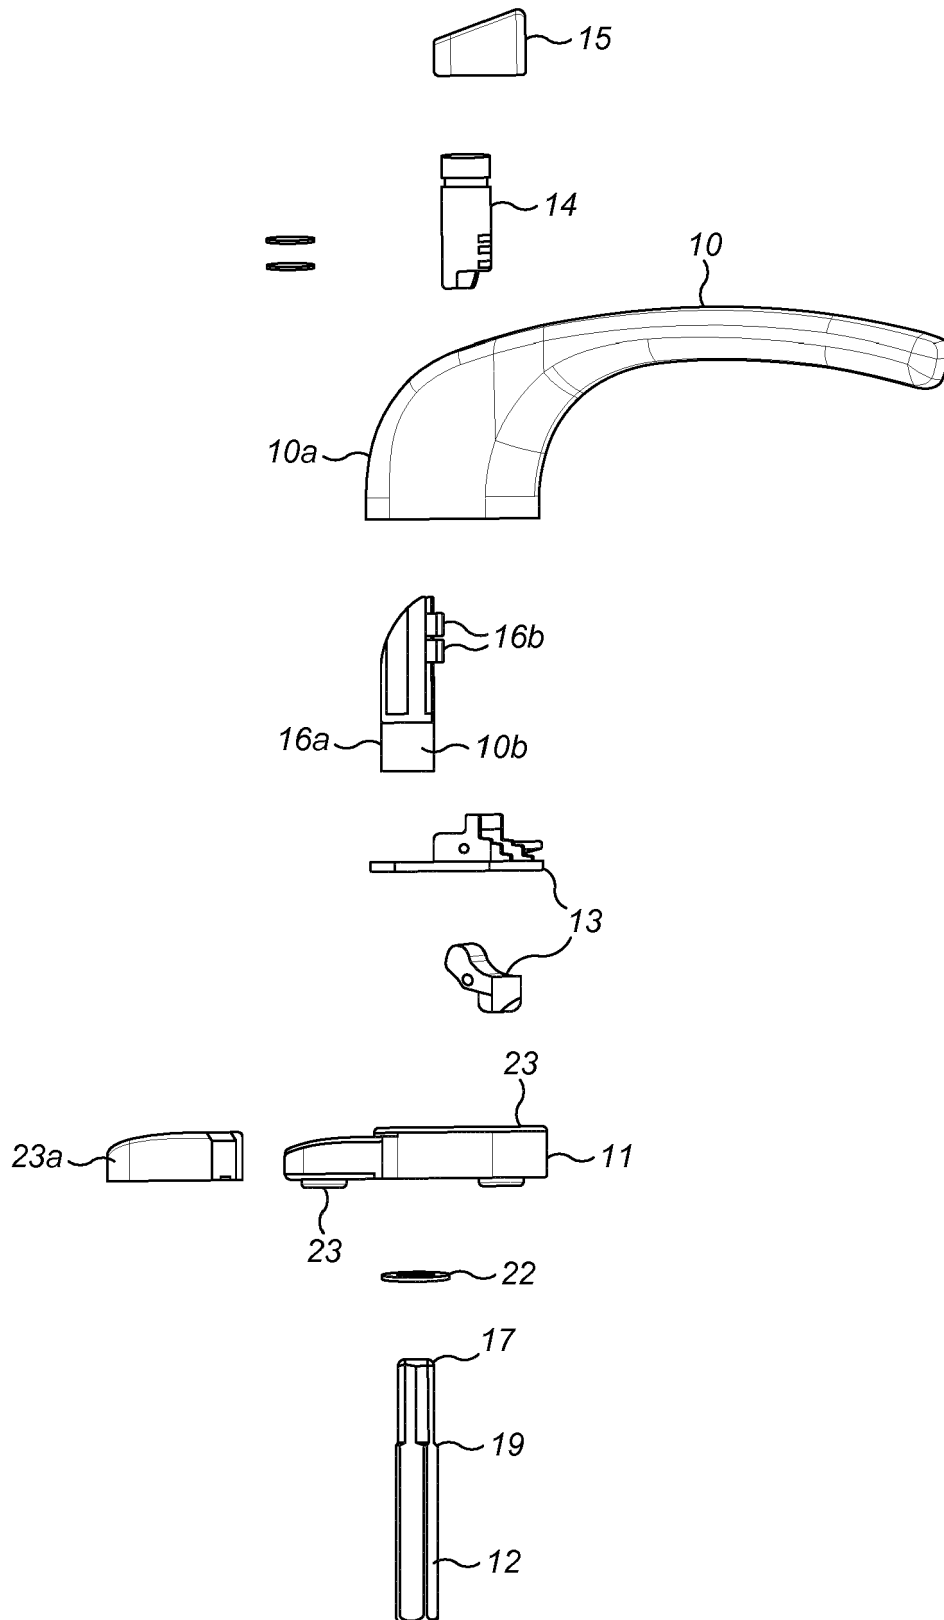


FIG. 1

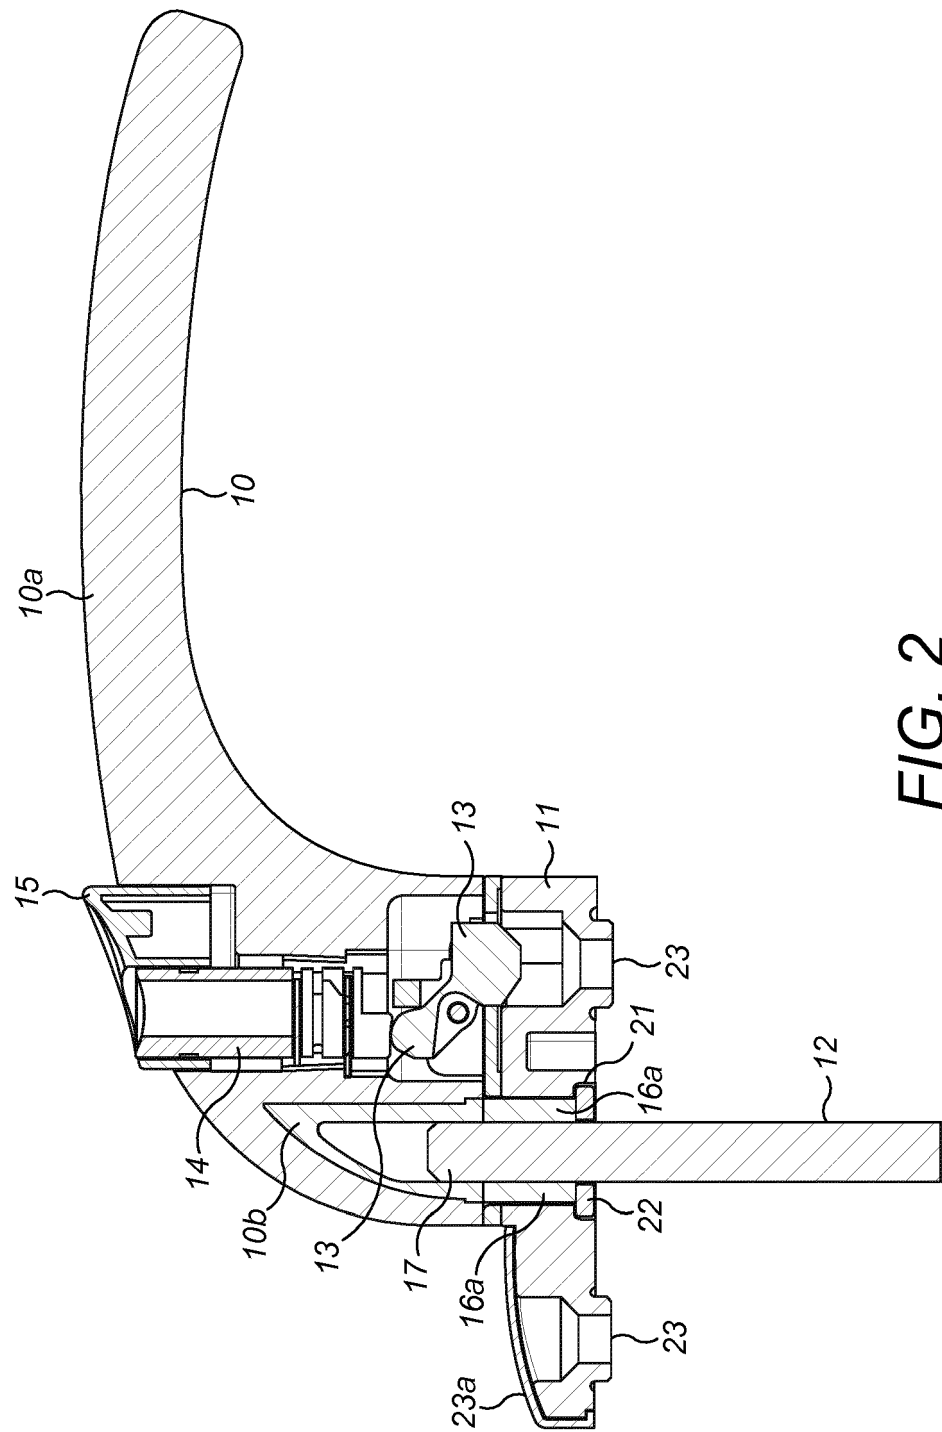


FIG. 2

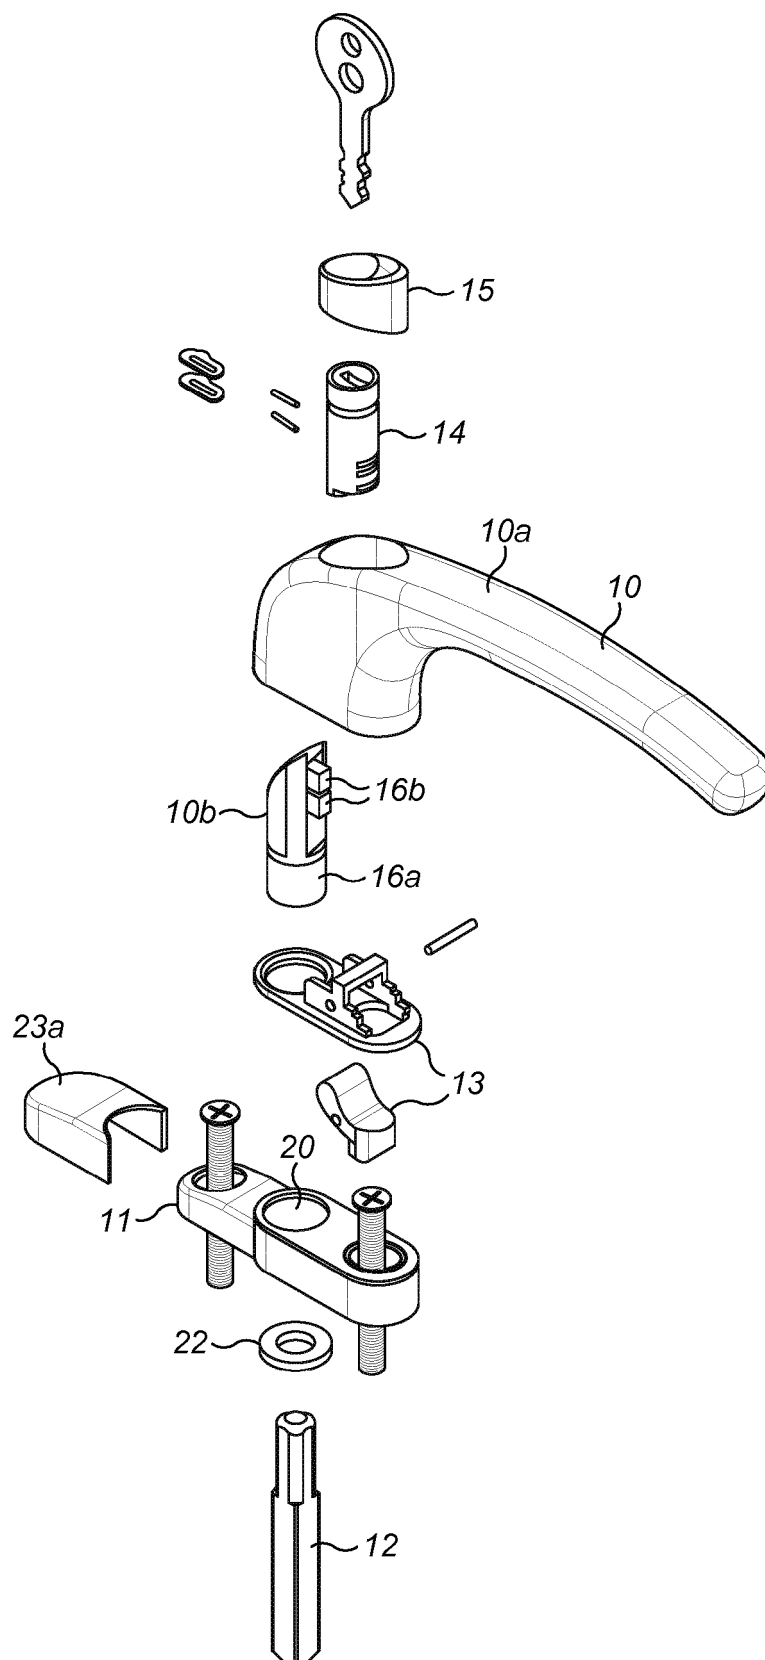


FIG. 3



EUROPEAN SEARCH REPORT

Application Number
EP 16 15 2317

5

10

15

20

25

30

35

40

45

50

55

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (IPC) |
| Y | DE 20 2007 008827 U1 (BEHLE WILFRIED [DE]) 6 September 2007 (2007-09-06) | 13,14 | INV. E05B3/00 E05B15/16 |
| A | * paragraph [0004] - paragraph [0007]; figures 1-3 * * paragraph [0029] - paragraph [0034] * | 1-12,15 | |
| Y | US 4 607 973 A (WILKE RUDOLF [DE]) 26 August 1986 (1986-08-26) | 13,14 | |
| A | * column 1, line 64 - column 2, line 41; figures 1-3 * * column 3, line 32 - column 4, line 33 * | 1-12,15 | |
| A | EP 2 476 823 A2 (HOPPE AG [IT]) 18 July 2012 (2012-07-18) * paragraphs [0005], [0006]; figures 1-7 * * paragraph [0023] - paragraph [0025] * | 1-14 | TECHNICAL FIELDS SEARCHED (IPC) E05B |
| A | EP 2 520 744 A2 (HEYWOOD WILLIAMS COMPONENTS LTD [GB]) 7 November 2012 (2012-11-07) * paragraphs [0004] - [0007]; figures 1-7 * * paragraphs [0024] - [0029] * | 1-14 | |
| The present search report has been drawn up for all claims | | | |
| Place of search The Hague | | Date of completion of the search 15 June 2016 | Examiner Koster, Michael |
| CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document | | T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document | |

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 15 2317

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-06-2016

10

15

20

25

30

35

40

45

50

55

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| DE 202007008827 U1 | 06-09-2007 | DE 102008020986 A1 | 24-12-2008 |
| | | DE 202007008827 U1 | 06-09-2007 |
| US 4607973 A | 26-08-1986 | DE 3105217 A1 | 09-09-1982 |
| | | US 4607973 A | 26-08-1986 |
| EP 2476823 A2 | 18-07-2012 | DE 102011008758 A1 | 19-07-2012 |
| | | EP 2476823 A2 | 18-07-2012 |
| EP 2520744 A2 | 07-11-2012 | CN 102777071 A | 14-11-2012 |
| | | EP 2520744 A2 | 07-11-2012 |

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82