



(11) **EP 3 048 406 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
13.03.2024 Bulletin 2024/11

(21) Application number: **14846663.4**

(22) Date of filing: **16.09.2014**

(51) International Patent Classification (IPC):
B21D 53/08 ^(2006.01) **B23P 15/26** ^(2006.01)
F25B 39/00 ^(2006.01) **F28F 1/32** ^(2006.01)
F28D 1/053 ^(2006.01)

(52) Cooperative Patent Classification (CPC):
F25B 39/00; B21D 53/085; B23P 15/26; F28F 1/32;
F28D 1/05366; F28F 2215/12

(86) International application number:
PCT/JP2014/074450

(87) International publication number:
WO 2015/041216 (26.03.2015 Gazette 2015/12)

(54) **HEAT EXCHANGER, AIR CONDITIONER USING SAID HEAT EXCHANGER, AND
MANUFACTURING METHODS OF SAID HEAT EXCHANGER**

WÄRMETAUSCHER, KLIMAAANLAGE MIT DEM BESAGTEN WÄRMETAUSCHER UND
HERSTELLUNGSVERFAHREN FÜR DEN BESAGTEN WÄRMETAUSCHER

ÉCHANGEUR DE CHALEUR, CLIMATISEUR UTILISANT LEDIT ÉCHANGEUR DE CHALEUR, ET
MÉTHODES DE FABRICATION DUDIT ÉCHANGEUR DE CHALEUR

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **20.09.2013 PCT/JP2013/075522**

(43) Date of publication of application:
27.07.2016 Bulletin 2016/30

(73) Proprietor: **Mitsubishi Electric Corporation**
Tokyo 100-8310 (JP)

(72) Inventors:
• **NAKAJIMA, Takashi**
Tokyo 100-8310 (JP)
• **KATO, Takashi**
Tokyo 100-8310 (JP)
• **SUZUKI, Wataru**
Tokyo 100-8310 (JP)

• **IKEDA, Ryoichi**
Tokyo 100-8310 (JP)

(74) Representative: **Pfenning, Meinig & Partner mbB**
Patent- und Rechtsanwälte
Theresienhöhe 11a
80339 München (DE)

(56) References cited:
EP-A1- 0 633 435 WO-A1-2012/098912
JP-A- 2002 139 282 JP-A- 2004 353 954
JP-A- 2010 156 525 JP-A- 2012 030 284
JP-A- 2012 183 554 JP-A- 2012 184 907
JP-A- 2012 184 920 JP-A- 2013 007 540
JP-A- 2013 019 596 JP-U- 3 014 703
US-A1- 2004 149 424 US-A1- 2008 271 879
US-A1- 2008 271 879 US-A1- 2009 145 587

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to a heat exchanger of a finned tube type employing flat tubes, an air-conditioning apparatus using the same and methods of manufacturing the same.

Background Art

[0002] Conventionally, in a heat exchanger for car air-conditioning system, since weight reduction is very important, a heat exchanger using aluminum flat multiport pipes as heat transfer tubes is employed. Many of them employ a system called corrugate and are configured by setting fins made of aluminum thin plate material successively undulating between the flat tubes. Moreover, partially, there also exists a structure called finned tube type, in which fins are inserted across plural flat tubes.

[0003] On the other hand, in a heat exchanger used for air-conditioning machine for home use or building use, a finned tube structure employing copper cylindrical pipes as the heat transfer tubes, in which many fins are provided to cross plural heat transfer tubes, was mainstream; however, in recent years, similar to the car air-conditioning machine, the heat exchangers of the finned tube type using the aluminum flat tubes as the heat transfer tubes are employed in some cases (for example, refer to Patent Literature 1).

[0004] JP 2013-007540 A is directed to a heat exchanger according to the preamble of claim 1 and an air conditioner with the heat exchanger. This document also refers to methods of manufacturing a heat exchanger according to the preambles of claims 6 and 7.

[0005] The problem to be solved is to enable suppressing the warp itself produced by the push-opening of opening sides of notches by flat heat transfer tubes. This problem is solved by a heat exchanger that includes: flat heat transfer tubes through which a working fluid passes therein; and fins on which notches are juxtaposed like a comb teeth in a longitudinal direction, wherein the fins are laminated plurally with gaps, and the flat transfer tubes are impacted in the notches. Furthermore, the depths of the notches at both end sides are deeper than those of central parts of the fins in the longitudinal direction.

Citation List

Patent Literature

[0006] Patent Literature 1: Japanese Unexamined Patent Application Publication No. 2012-154497

Summary of Invention

Technical Problem

[0007] However, in a heat exchanger using conventional aluminum flat tubes having a structure including opening ports for inserting the flat tubes into the fins, there was a problem that, when a force was applied to the fin from a direction to insert the flat tubes, a portion of the fin protruding from an end portion of the flat tube was likely to be deformed as compared to other portions, and the fin was bent or crushed in manufacturing or assembling.

[0008] The present invention has been made to solve the problem as described above, and has as an object to acquire a heat exchanger of the finned tube type, in which a fin is not deformed even if a force is applied from a side of the fin where opening ports for inserting flat tubes exist, an air-conditioning apparatus using the same and a method of manufacturing the same.

Solution to Problem

[0009] A heat exchanger of the present invention includes plural heat transfer tubes and plural fins each having two opposing sides and plural opening ports on one side, of the two sides, for inserting and fastening the plural heat transfer tubes, and the heat exchanger is formed such that the plural heat transfer tubes and the plural fins cross each other, wherein three plural heat transfer tubes, of the plural heat transfer tubes, at both end portions and a center portion are fastened to the opening ports in a state protruding from the one sides of the plural fins toward the outside of the plural fins and having spatial portions, which become gaps, with deepest portions of the opening ports opposing the one side of the fin.

[0010] Furthermore, the present invention is directed to an air-conditioning apparatus including the heat exchanger of the present invention.

[0011] Moreover, the present invention is directed to a method of manufacturing a heat exchanger that includes plural heat transfer tubes and plural fins each having two opposing sides and plural opening ports on one side, of the two sides, for inserting and fastening the plural heat transfer tubes, the heat exchanger being formed such that the plural heat transfer tubes and the plural fins cross each other, characterized in that the method comprises: placing the plural heat transfer tubes in parallel on a heat transfer tube positioning member in a flat-plate shape; fitting the opening ports of the plural fins over the plural heat transfer tubes placed on the heat transfer tube positioning member; positioning the one sides of the plural fins to be separated from positions in the heat transfer tube positioning member where the plural heat transfer tubes are placed; and brazing the plural heat transfer tubes and the plural fins, wherein the plural heat transfer tubes are fastened to the opening ports in a state protruding from the one sides of the plural fins toward the

outside of the plural fins.

[0012] Further, the present invention is directed to a method of manufacturing a heat exchanger that includes plural heat transfer tubes and plural fins each having two opposing sides and plural opening ports on one side, of the two sides, for inserting and fastening the plural heat transfer tubes, the heat exchanger being formed such that the plural heat transfer tubes and the plural fins cross each other, characterized in that the method comprises: arranging the plural fins in parallel on a flat tube insertion jig; fitting the plural heat transfer tubes into the opening ports of the plural fins; placing part of the plural heat transfer tubes on protruding portions of the flat tube insertion jig to create a difference in height from the heat transfer tubes other than the part of the heat transfer tubes; and brazing the plural heat transfer tubes and the plural fins, wherein at least two of the plural heat transfer tubes are fastened to the opening ports in a state protruding from the one sides of the plural fins toward the outside of the plural fins, and having spatial portions, which become gaps, with deepest portions of the opening ports opposing the one side of the fin.

Advantageous Effects of Invention

[0013] With the heat exchanger of the present invention, even though a force is applied from a side where the opening ports of the fin are provided, end portions of the flat tubes protruding from the opening ports of the fin receives the force, and thereby, it is possible to suppress deformation of the fin.

Brief Description of Drawings

[0014]

[Fig. 1] Fig. 1 is a perspective view showing a heat exchanger in Embodiment 1.

[Fig. 2] Fig. 2 is a cross-sectional view showing the heat exchanger in Embodiment 1.

[Fig. 3] Fig. 3 is a plan view showing a fin of the heat exchanger in Embodiment 1.

[Fig. 4a] Fig. 4a is a diagram showing a method of manufacturing a heat exchanger in Embodiment 1.

[Fig. 4b] Fig. 4b is a diagram showing flat tubes aligned on a flat tube positioning member in the method of manufacturing a heat exchanger in Embodiment 1.

[Fig. 5] Fig. 5 is a cross-sectional view showing a heat exchanger in Embodiment 2.

[Fig. 6a] Fig. 6a is a diagram showing fins aligned on a flat tube insertion jig in a method of manufacturing a heat exchanger in Embodiment 2.

[Fig. 6b] Fig. 6b is a diagram showing flat tubes aligned on the flat tube insertion jig in the method of manufacturing a heat exchanger in Embodiment 2.

[Fig. 7] Fig. 7 is a cross-sectional view showing a heat exchanger in Embodiment 3.

[Fig. 8] Fig. 8 is a plan view showing a fin of a heat exchanger in Embodiment 4.

[Fig. 9] Fig. 9 is a plan view of a hoop material, which is a material of the fin in Embodiment 4.

Description of Embodiments

[0015] Hereinafter, embodiments of the present invention will be described based on the drawings. Note that the present invention is not limited by the embodiments described as follows, but rather by the appended claims.

Embodiment 1

[0016] Fig. 1 is a perspective view showing a heat exchanger in Embodiment 1 of the present invention.

[0017] Fig. 2 is a cross-sectional view showing the heat exchanger in Embodiment 1 of the present invention.

[0018] Fig. 3 is a plan view showing a fin of the heat exchanger in Embodiment 1 of the present invention.

[0019] The heat exchanger 1 of Embodiment 1 is a heat exchanger of a finned tube type, in which, as shown in Fig. 1, plural flat tubes 4 are arranged in parallel and plural fins 2 are attached in a direction orthogonal to pipe axes of the flat tubes 4. A fluid, such as refrigerant, flows inside the flat tubes 4, and by forming the cross section of the flat tube into a flat shape, it is possible to increase an amount of the fluid, such as the refrigerant, without increasing ventilating resistance, and accordingly, sufficient performance as a heat exchanger is available even in a case of being downsized.

[0020] The flat tube 4 is, for example, a multiport flat tube including plural refrigerant flow channels inside thereof. A cross section of the flat tube 4 is formed by arc-shaped portions 4a and 4c at both end portions and a pair of long side portions 4b connecting the arc-shaped portions 4a and 4c. In other words, a flat shape including a major axis in the direction of long side portions 4b and a minor axis formed by the arc-shaped portions 4a and 4c is provided. A material of the flat tube 4 is desirable to be made of metal that is excellent in heat transfer and less likely to be corroded, for example, it may be considered to be made of aluminum or copper.

[0021] The fin 2 is, as shown in Fig. 3, substantially rectangular in a planar shape thereof, and on one side 3a, plural opening ports 6, into which the flat tubes 4 are inserted to be attached, are arranged in a row like the teeth of a comb.

[0022] The opening port 6 has a shape of a long and narrow cutout having a major axis from one side 3a toward the other side 3b of the fin 2. As a fin material for forming the fin 2, in general, an aluminum thin plate having a thickness of the order of from 0.1 mm to 0.7 mm wound around a reel like a hoop, or a fin material formed into a sheet shape is used. The fin 2 is formed one by one by sequentially separating many fins 2, which have been formed into a predetermined shape by use of a progressive press device, from the hoop-like or sheet-

like fin material. Note that the fins 2 may be formed one by one by a device other than the progressive press device.

[0023] The dimension of the width of the opening port 6 is substantially the same as the length of the minor axis side in the cross section of the flat tube 4, which is the length such that, when the flat tube 4 is inserted into the opening port 6, fitted without any space therebetween.

[0024] Moreover, in a deepest portion 6a in a depth direction of the opening port 6, an arc portion having substantially the same shape as the arc-shaped portion 4a at the end portion of the flat tube 4 is formed, and the arc portion and the arc-shaped portion 4a are configured to contact each other when the flat tube 4 is inserted into the deepest portion 6a of the opening port 6. Then, the dimensions of the plural opening ports 6 in the depth direction (the lengths from the one side 3a to the deepest portion 6a of the fin 2) are the same lengths as one another.

[0025] Here, in the heat exchanger of Embodiment 1, as shown in Fig. 2, in a state where the arc-shaped portion 4a at one end portion of the flat tube 4 contacts the deepest portion 6a in the opening port 6 of the fin 2, the arc-shaped portion 4c at the other end portion of the flat tube 4 is in a state protruding from the one side 3a in the opening port 6 of the fin 2. In other words, the depth dimension of the opening port 6 is set shorter than the length of the major axis side in the cross section of the flat tube 4.

[0026] Then, a flat tube end portion tangential line 8 connecting the tip ends of the arc-shaped portions 4c of the plural flat tubes 4 is linear and parallel to the one side 3a of the fin 2.

[0027] Note that, in the above, description has been given of positional relationship with the flat tubes 4 by extracting only one fin 2; however, as shown in Fig. 1, since the plural fins 2 are attached to the flat tubes 4, the positional relationship between all the fins 2 and flat tubes 4 is the same as the shape in Fig. 2. Moreover, an example in which all of the flat tubes 4 are in a state protruding from the one side 3a in the opening ports 6 of the fin 2 has been shown; however, there may be a state in which part of the flat tubes (for example, two or more) are protruding from the one side 3a of the fin 2.

[0028] Next, a method of manufacturing a heat exchanger of Embodiment 1 will be described.

[0029] Fig. 4a is a diagram showing the method of manufacturing a heat exchanger in Embodiment 1.

[0030] Moreover, Fig. 4b is a diagram showing flat tubes aligned on a flat tube positioning member 10 in the method of manufacturing a heat exchanger in Embodiment 1.

[0031] As shown in Fig. 4a, as a manufacturing method of assembling the fins 2 and the flat tubes 4, the plural flat tubes 4 are fastened onto a flat tube positioning member 10 in advance, and moved in the axial direction at a constant speed. Moreover, a method in which the fins 2 are held by fin holding units 12 of a fin insertion device

9 one by one and moved to be inserted and fastened into the flat tubes 4 arranged on the flat tube positioning member 10 is generally adopted (for example, refer to Japanese Unexamined Patent Application Publication No. 2012-30284).

[0032] Each of the plural fin holding units 12 is arranged on the circumference of a drum 20, and circulates with rotation of the drum 20. Then, each of the fin holding units 12 receives and holds a single fin 2, and applies the fin 2 being held to an outer circumferential surface of the flat tube 4.

[0033] Holding of the fin 2 by the fin holding unit 12 is carried out by, for example, the so-called vacuum absorption for absorbing the fin 2 by use of air suction. The fin insertion device 9 is coupled to a cam follower (not shown).

[0034] In consideration of heat transfer, fastening between the flat tube 4 and the fin 2 can be carried out by brazing, soldering, welding, adhesive or the like.

[0035] As the method of manufacturing a heat exchanger of Embodiment 1, as shown in Fig. 4b, the flat tube positioning member 10, on which fin contact members 11 protrude, is applied to the fin insertion device 9, to thereby assemble the fins 2 and the flat tubes 4.

[0036] In a case where such a fin insertion device 9 is used, the one side 3a of the fin 2 where the opening ports 6 exist contacts the fin contact members 11 in insertion operation, and thereby fastening is carried out in a state where the arc-shaped portions 4c at the end portions of the flat tubes 4 protrude from the opening port 6.

[0037] In other words, by arranging the upper end portion of the fin contact member 11 above the lower ends of the flat tubes 4 that contact the flat tube positioning member 10 (the tip ends of the arc-shaped portions 4c), the end portions of the flat tubes 4 come to be positioned outside the one side 3a of the fin 2 where the opening ports 6 exist. With this state, the fins 2 and the flat tubes 4 are brazed.

[0038] Then, the heat exchanger of Embodiment 1 is able to prevent deformation of the fin 2 even though a force is applied from the one side 3a of the fin 2 where the opening ports 6 are provided, because the end portions of the flat tubes 4 protruding from the opening ports 6 of the fin 2 receive the force. Moreover, by configuring the air-conditioning apparatus by use of the heat exchanger 1 that is less likely to be deformed, there occurs no increase in air resistance or no degradation in heat exchanging efficiency of the heat exchanger part caused by the deformed fin 2, and thereby an air-conditioning apparatus with excellent cooling and heating performance becomes available.

Embodiment 2

[0039] In Embodiment 1, the flat tubes 4 are made to be uniformly protruded from the opening ports 6 of the fin 2, and the flat tube end portion tangential line 8 connecting the tip ends of the arc-shaped portions 4c of the

plural flat tubes 4 is linear and parallel to the one side 3a of the fin 2; however, the heat exchanger 1 of Embodiment 2 includes a shape in which only the flat tubes 4 at both end portions on the one side 3a of the fin 2 are protruded from the opening ports 6.

[0040] Fig. 5 is a cross-sectional view showing the heat exchanger in Embodiment 2.

[0041] In the heat exchanger 1 of Embodiment 2, the shape of the fin 2 is assumed to have a bow in which the one side 3a becomes an inner side.

[0042] At this time, there is provided a configuration in which, of the flat tubes 4, the flat tubes 4 at the both end portions protrude outside the one side 3a of the fin 2 so that a tangential line 14 of the flat tubes 4 at the both end portions is positioned outside a subtense 15 connecting both ends of the one side 3a of the fin 2 with respect to the heat exchanger.

[0043] The heat exchanger of Embodiment 2 assumes a case in which the bow is generated in the fin 2. When the heat exchanger of the finned tube type depicted in Fig. 1 is manufactured, in general, the fins 2 and the flat tubes 4 are assembled first, and thereafter, brazing junction thereof is carried out. Depending on the manufacturing method, such as assembling operation or brazing of the fins 2 and the flat tubes 4, a bow is generated in the fin 2 in some cases.

[0044] There is provided the configuration of the heat exchanger for protecting the one side 3a of the fin 2 from an external force, in the same manner as Embodiment 1, even though the bow has a shape in which the one side 3a of the fin 2 becomes the inner side.

[0045] A method of manufacturing such a heat exchanger will be described. Fig. 6a is a diagram showing the fins 2 aligned on a flat tube insertion jig 16 in the method of manufacturing a heat exchanger in Embodiment 2. Fig. 6b is a diagram showing the flat tubes 4 aligned on the flat tube insertion jig 16 in the method of manufacturing a heat exchanger in Embodiment 2.

[0046] First, as shown in Fig. 6a, the fins 2 are aligned on the flat tube insertion jig 16 in a flat-plate shape. Thereafter, as shown in Fig. 6b, the flat tubes 4 are inserted into the opening ports 6 of the fin 2. At this time, there are projections 17 at both end portions of the flat tube insertion jig 16, and the amount of insertion of the flat tubes 4 at the both ends into the opening ports 6 of the fin 2 becomes small as compared to other flat tubes 4; accordingly, the flat tubes 4 at the both ends are fastened in a shape having spatial portions, which become gaps, with the deepest portions 6a of the opening ports 6. With this state, the fins 2 and the flat tubes 4 are brazed. Note that, since the bow is generated in the heat exchanger after the fins 2 and the flat tubes 4 are assembled, the bow is not generated during the assembling operation.

[0047] In such a heat exchanger, even though the fin 2 of the heat exchanger 1 is bowed toward the one side 3a, the flat tubes 4 at both ends protrude from the one side 3a of the fin 2, to thereby receive an external force from the direction of the one side 3a, and therefore, it is

possible to prevent deformation of the fin 2. Moreover, by configuring the air-conditioning apparatus by use of the heat exchanger 1 that is less likely to be deformed, there occurs no increase in air resistance or no degradation in heat exchanging efficiency of the heat exchanger part caused by the deformed fin 2, and thereby an air-conditioning apparatus with excellent cooling and heating performance becomes available.

[0048] Note that an example in which only the two flat tubes 4 at the both ends of the fin 2 protrude from the one side 3a of the fin 2 has been shown; however, even if other flat tubes 4 further protrude outward from the one side 3a, similar effects can be obtained. Moreover, depending on the protruding amount of the flat tubes 4, there may be a configuration in which, not necessarily the flat tubes 4 at both end portions, but some flat tubes 4 positioned inside thereof protrude.

Embodiment 3

[0049] In Embodiment 1, the flat tubes 4 are made to be uniformly protruded from the opening ports 6 of the fin 2, and the flat tube end portion tangential line 8 connecting the tip ends of the arc-shaped portions 4c of the plural flat tubes 4 is linear and parallel to the one side 3a of the fin 2; however, the heat exchanger 1 of Embodiment 3, includes a shape in which three flat tubes 4 at both end portions and a center portion on the one side 3a of the fin 2 are protruded from the opening ports 6.

[0050] Fig. 7 is a cross-sectional view showing the heat exchanger in Embodiment 3.

[0051] The heat exchanger 1 of Embodiment 3 assumes a shape of the fin 2 having a bow in which the one side 3a becomes an outer side.

[0052] At this time, there is provided a configuration in which, of the flat tubes 4, the flat tubes 4 at both end portions and a center portion protrude outside the one side 3a of the fin 2 so that a tangential line 19 of the flat tubes 4 at the both end portions and the center portion is positioned outside a curved line drawn by the one side 3a of the fin 2.

[0053] The heat exchanger of Embodiment 3 assumes, similar to Embodiment 2, a case in which the bow is generated in the fin 2. However, it is assumed that the bow is in the direction opposite to Embodiment 2.

[0054] There is provided a configuration of the heat exchanger for protecting the one side 3a of the fin 2 from an external force, in the same manner as Embodiment 1, even though the bow has a shape in which the one side 3a of the fin 2 becomes the outer side.

[0055] A method of manufacturing such a heat exchanger will be described. Similar to Embodiment 2, first, as shown in Fig. 6a, the fins 2 are aligned on the flat tube insertion jig 16 in a flat-plate shape. Thereafter, as shown in Fig. 6b, the flat tubes 4 are inserted into the opening ports 6 of the fin 2. At this time, by providing projections 17 at both end portions and a center portion of the flat tube insertion jig 16, the amount of insertion of the flat

tubes 4 at the both end portions and the center portion into the opening ports 6 of the fin 2 becomes small as compared to other flat tubes 4; accordingly, the flat tubes 4 at the both end portions and the center portion are fastened in a shape having spatial portions, which become gaps, with the deepest portions 6a of the opening ports 6. With this state, the fins 2 and the flat tubes 4 are brazed.

[0056] In such a heat exchanger, even though the fin 2 of the heat exchanger 1 is bowed with the one side 3a being the outer side, the flat tubes 4 at the both ends and the center protrude from the one side 3a of the fin 2, to thereby receive an external force from the direction of the one side 3a, and therefore, it is possible to prevent deformation of the fin 2. Moreover, by configuring the air-conditioning apparatus by use of the heat exchanger 1 that is less likely to be deformed, there occurs no increase in air resistance or no degradation in heat exchanging efficiency of the heat exchanger part caused by the deformed fin 2, and thereby an air-conditioning apparatus with excellent cooling and heating performance becomes available.

[0057] Note that an example in which only the three flat tubes 4 at the both end portions and the center portion of the fin 2 protrude from the one side 3a of the fin 2 has been shown; however, further, even if other flat tubes 4 protrude outward from the one side 3a, similar effects can be obtained. Moreover, depending on the protruding amount of the flat tubes 4, there may be a configuration in which, not necessarily the flat tubes 4 at the both end portions and the center portion, but some other flat tubes 4 protrude.

Embodiment 4

[0058] In Embodiment 4, with respect to the shape of the fin 2 depicted in Fig. 3 related to Embodiment 1, recessed portions 6b are provided to the other side 3b. In other words, the embodiment is different in the shape of fin 2 from the heat exchanger 1 of Embodiments 1 to 3.

[0059] Fig. 8 is a plan view showing a fin of a heat exchanger in Embodiment 4.

[0060] In Fig. 8, the opening ports 6 and the recessed portions 6b are provided on the one side 3a and the other side 3b, respectively, at the same positions opposing in a lengthwise direction on the page. Moreover, the width of the recessed portion 6b in the lengthwise direction on the page and the width of the opening port 6 in the lengthwise direction on the page are formed equally.

[0061] Next, a manufacturing method for manufacturing the heat exchanger 1 of Embodiment 4 will be described.

[0062] The fin 2 of the heat exchanger 1 is manufactured by processing a hoop material 30, which is the sheet-like fin material wound around a reel.

[0063] Fig. 9 is a plan view of the hoop material, which is the fin material in Embodiment 4.

[0064] In Fig. 9, a direction of the hoop material 30

passing through a press device is indicated by a hoop material forwarding direction 31.

[0065] In Embodiment 4, first, long holes 32 are formed in the hoop material 30, and various kinds of projections or cutouts for improving performance of the fin 2 are formed by use of a press device including metal molds. Next, the hoop material 30 is cut to a predetermined width at a fin cut-off line 33, which is a position passing the long holes 32, to form the fin 2.

[0066] Here, positions of the fin cut-off line 33 with respect to the positions of the long holes 32 can be easily changed by adjusting the press device including the metal molds. Accordingly, it is also possible to easily change the depth of the opening port 6 and the recessed portion 6b of the fin 2 molded by use of such a hoop material 30.

[0067] With regard to the method of assembling the fins 2 and the flat tubes 4, any of the method shown in Embodiment 1, in which the fins 2 are held one by one by the fin holding units 12 of the fin insertion device 9 and moved, to be inserted into the flat tubes 4 arranged on the flat tube positioning member 10 and fastened, and the method, as shown in Embodiment 2 or 3, in which the fins 2 are positioned and aligned by a jig or the like in advance, and the flat tubes 4 are inserted into the opening ports 6 of the aligned fins 2 and assembled, may be employed. Then, the fins 2 and the flat tubes 4 are finally joined by brazing or the like.

[0068] For making the effect of preventing deformation of the fin 2 remarkable, it is effective to allow the flat tubes 4 to have large protruding dimension; however, if the insertion depth of the flat tube 4 into the opening port 6 becomes extremely shallow, the heat transfer performance of the flat tube 4 and the fin 2 is degraded.

[0069] In the method of manufacturing the heat exchanger 1 of Embodiment 4, it becomes possible to conveniently carry out fine adjustment of the protruding dimension of the flat tube 4 by adjusting the position of the fin cut-off line 33 with respect to the positions of the long holes 32.

[0070] Accordingly, it becomes possible to arrange the flat tubes 4 at most effective positions with respect to conflicting function effects of the prevention effect for deformation of the fin 2 and the heat transfer performance.

Reference Signs List

[0071]

1 heat exchanger 2 fin 3a one side 3b the other side
4 flat tube 4a arc-shaped portion 4b long side portion
4c arc-shaped portion 6 opening port 6a deepest portion 6b recessed portion
8 flat tube end portion tangential line 9 fin insertion device 10 flat tube positioning member 11 fin contact member 12 fin holding unit 14 tangential line 15 sub-tense 16 flat tube insertion jig 17 projection
19 tangential line 20 drum 30 hoop material 31 hoop material forwarding direction 32 long hole 33 fin cut-

off line

Claims

1. A heat exchanger (1) including plural heat transfer tubes (4) and plural fins (2) each having two opposing sides and plural opening ports (6) on one side (3a), of the two sides, for inserting and fastening the plural heat transfer tubes (4),

the heat exchanger (1) being formed such that the plural heat transfer tubes (4) and the plural fins (2) cross each other,

characterized in that three plural heat transfer tubes, of the plural heat transfer tubes (4), at both end portions and a center portion are fastened to the opening ports (6) in a state protruding from the one sides (3a) of the plural fins (2) toward the outside of the plural fins (2) and having spatial portions, which become gaps, with deepest portions (6a) of the opening ports (6) opposing the one side (3a) of the fin (2).

2. The heat exchanger (1) of claim 1, wherein the heat transfer tube (4) is a flat tube (4).

3. The heat exchanger (1) of any of claims 1 to 2, wherein depth dimensions in the plural opening ports (6) from the one side (3a) of the fin (2) are all in a same dimension.

4. The heat exchanger (1) of any of claims 1 to 3, wherein, on an other side (3b), of the two sides of the fin (2), recessed portions (6b) are formed on positions opposing the opening ports (6).

5. An air-conditioning apparatus including the heat exchanger (1) of any of claims 1 to 4.

6. A method of manufacturing a heat exchanger (1) that includes plural heat transfer tubes (4) and plural fins (2) each having two opposing sides and plural opening ports (6) on one side (3a), of the two sides, for inserting and fastening the plural heat transfer tubes (4), the heat exchanger (1) being formed such that the plural heat transfer tubes (4) and the plural fins (2) cross each other,

characterized in that

the method comprises:

placing the plural heat transfer tubes (4) in parallel on a heat transfer tube positioning member (10) in a flat-plate shape;

fitting the opening ports (6) of the plural fins (2) over the plural heat transfer tubes (4) placed on the heat transfer tube positioning member (10); positioning the one sides (3a) of the plural fins

(2) to be separated from positions in the heat transfer tube positioning member (10) where the plural heat transfer tubes (4) are placed; and brazing the plural heat transfer tubes (4) and the plural fins (2),

wherein the plural heat transfer tubes (4) are fastened to the opening ports (6) in a state protruding from the one sides (3a) of the plural fins (2) toward the outside of the plural fins (2).

7. A method of manufacturing a heat exchanger (1) that includes plural heat transfer tubes (4) and plural fins (2) each having two opposing sides and plural opening ports (6) on one side (3a), of the two sides, for inserting and fastening the plural heat transfer tubes (4), the heat exchanger (1) being formed such that the plural heat transfer tubes (4) and the plural fins (2) cross each other,

characterized in that

the method comprises:

arranging the plural fins (2) in parallel on a flat tube insertion jig (16);

fitting the plural heat transfer tubes (4) into the opening ports (6) of the plural fins (2);

placing part of the plural heat transfer tubes (4) on protruding portions of the flat tube insertion jig (16) to create a difference in height from the heat transfer tubes (4) other than the part of the heat transfer tubes (4); and

brazing the plural heat transfer tubes (4) and the plural fins (2),

wherein at least two of the plural heat transfer tubes (4) are fastened to the opening ports (6) in a state protruding from the one sides (3a) of the plural fins (2) toward the outside of the plural fins (2), and having spatial portions, which become gaps, with deepest portions (6a) of the opening ports (6) opposing the one side (3a) of the fin (2).

8. The method of manufacturing a heat exchanger (1) of claim 6 or 7, further comprising:

forming long holes (32) in a sheet-like hoop material (30) in manufacturing the plural fins (2); and

cutting the hoop material (30) at a position passing through the long holes (32).

Patentansprüche

1. Wärmetauscher (1), umfassend mehrere Wärmeübertragungsleitungen (4) und mehrere Rippen (2), die jeweils zwei gegenüberliegende Seiten und mehrere Öffnungsports (6) auf einer Seite (3a) der zwei Seiten zum Einsetzen und Befestigen der mehreren

Wärmeübertragungsleitungen (4) aufweisen,

wobei der Wärmetauscher (1) so ausgebildet ist, dass sich die mehreren Wärmeübertragungsleitungen (4) und die mehreren Rippen (2) miteinander kreuzen,

dadurch gekennzeichnet, dass drei Wärmeübertragungsleitungen der mehreren Wärmeübertragungsleitungen (4) an beiden Endabschnitten und einem Zentrumsabschnitt an den Öffnungsports (6) in einem Zustand befestigt sind, in dem diese von den einen Seiten (3a) der mehreren Rippen (2) in Richtung der Außenseite der mehreren Rippen (2) vorstehen und räumliche Abschnitte aufweisen, die zu Lücken werden, wobei tiefste Abschnitte (6a) der Öffnungsports (6) der einen Seite (3a) der Rippe (2) gegenüberliegen.

2. Wärmetauscher (1) nach Anspruch 1, wobei die Wärmeübertragungsleitung (4) eine Flachleitung (4) ist.
3. Wärmetauscher (1) nach einem der Ansprüche 1 bis 2, wobei die Tiefenabmessungen in den mehreren Öffnungsports (6) von der einen Seite (3a) der Rippe (2) aus alle die gleiche Abmessung aufweisen.
4. Wärmetauscher (1) nach einem der Ansprüche 1 bis 3, wobei auf einer anderen Seite (3b) der zwei Seiten der Rippe (2) vertiefte Abschnitte (6b) an Positionen gegenüberliegend zu den Öffnungsports (6) ausgebildet sind.
5. Klimaanlage, umfassend den Wärmetauscher (1) nach einem der Ansprüche 1 bis 4.
6. Verfahren zur Herstellung eines Wärmetauschers (1), der mehrere Wärmeübertragungsleitungen (4) und mehrere Rippen (2) aufweist, die jeweils zwei gegenüberliegende Seiten und mehrere Öffnungsports (6) auf einer Seite (3a) der zwei Seiten zum Einsetzen und Befestigen der mehreren Wärmeübertragungsleitungen (4) aufweisen, wobei der Wärmetauscher (1) so ausgebildet ist, dass sich die mehreren Wärmeübertragungsleitungen (4) und die mehreren Rippen (2) miteinander kreuzen, **dadurch gekennzeichnet, dass** das Verfahren umfasst:

Anordnen der mehreren Wärmeübertragungsleitungen (4) parallel zueinander auf einem Wärmeübertragungsleitung-Positionierungselement (10) in Form einer flachen Platte; Einpassen der Öffnungsports (6) der mehreren Rippen (2) über die mehreren Wärmeübertragungsleitungen (4), die auf dem Wärmeübertragungsleitung-Positionierungselement (10) an-

geordnet sind;

Positionieren der einen Seiten (3a) der mehreren Rippen (2), um von Positionen in dem Wärmeübertragungsleitung-Positionierungselement (10), wo die mehreren Wärmeübertragungsleitungen (4) angeordnet sind, separiert zu sein; und

Verlöten der mehreren Wärmeübertragungsleitungen (4) und der mehreren Rippen (2), wobei die mehreren Wärmeübertragungsleitungen (4) an den Öffnungsports (6) in einem Zustand befestigt werden, in dem sie von den einen Seiten (3a) der mehreren Rippen (2) in Richtung der Außenseite der mehreren Rippen (2) vorstehen.

7. Verfahren zur Herstellung eines Wärmetauschers (1), der mehrere Wärmeübertragungsleitungen (4) und mehrere Rippen (2) aufweist, die jeweils zwei gegenüberliegende Seiten und mehrere Öffnungsports (6) auf einer Seite (3a) der zwei Seiten zum Einsetzen und Befestigen der mehreren Wärmeübertragungsleitungen (4) aufweisen, wobei der Wärmetauscher (1) so ausgebildet ist, dass sich die mehreren Wärmeübertragungsleitungen (4) und die mehreren Rippen (2) miteinander kreuzen, **dadurch gekennzeichnet, dass** das Verfahren umfasst:

Anordnen der mehreren Rippen (2) parallel auf einer Flachleitung-Einsetzvorrichtung (16);

Einpassen der mehreren Wärmeübertragungsleitungen (4) in die Öffnungsports (6) der mehreren Rippen (2);

Anordnen eines Teils der mehreren Wärmeübertragungsleitungen (4) auf vorstehenden Abschnitten der Flachleitung-Einsetzvorrichtung (16), um einen Höhenunterschied zu den Wärmeübertragungsleitungen (4) zu realisieren, die nicht zu dem Teil der Wärmeübertragungsleitungen (4) gehören; und

Verlöten der mehreren Wärmeübertragungsleitungen (4) und der mehreren Rippen (2), wobei mindestens zwei der mehreren Wärmeübertragungsleitungen (4) an den Öffnungsports (6) in einem Zustand befestigt werden, in dem sie von den einen Seiten (3a) der mehreren Rippen (2) in Richtung der Außenseite der mehreren Rippen (2) vorstehen und räumliche Abschnitte aufweisen, die zu Lücken werden, wobei die tiefsten Abschnitte (6a) der Öffnungsports (6) der einen Seite (3a) der Rippe (2) gegenüberliegen.

8. Verfahren zur Herstellung eines Wärmetauschers (1) nach Anspruch 6 oder 7, ferner umfassend:

Ausbilden von Langlöchern (32) in einem blat-

tähnlichen Bandmaterial (30) bei der Herstellung der mehreren Rippen (2); und
Schneiden des Bandmaterials (30) an einer Position, die durch die Langlöcher (32) verläuft.

Revendications

1. Echangeur de chaleur (1) comportant plusieurs tubes de transfert de chaleur (4) et plusieurs ailettes (2) ayant chacune deux côtés opposés et plusieurs orifices d'ouverture (6) sur un côté (3a), des deux côtés, pour insérer et fixer les plusieurs tubes de transfert de chaleur (4),

l'échangeur de chaleur (1) étant formé de telle sorte que les plusieurs tubes de transfert de chaleur (4) et les plusieurs ailettes (2) se croisent, **caractérisé en ce que** parmi les plusieurs tubes de transfert de chaleur (4), au niveau des deux portions d'extrémité et d'une portion centrale sont fixés aux orifices d'ouverture (6) dans un état faisant saillie des uns côtés (3a) des plusieurs ailettes (2) vers l'extérieur des plusieurs ailettes (2) et ayant des portions spatiales, qui deviennent des espaces, avec des portions les plus profondes (6a) des orifices d'ouverture (6) opposées au un côté (3a) de l'ailette (2).

2. Echangeur de chaleur (1) selon la revendication 1, dans lequel le tube de transfert de chaleur (4) est un tube plat (4).
3. Echangeur de chaleur (1) selon l'une quelconque des revendications 1 à 2, dans lequel les dimensions de profondeur dans les plusieurs orifices d'ouverture (6) à partir du un côté (3a) de l'ailette (2) sont toutes d'une même dimension.
4. Echangeur de chaleur (1) selon l'une quelconque des revendications 1 à 3, dans lequel, sur un autre côté (3b), des deux côtés de l'ailette (2), des portions en retrait (6b) sont formées sur des positions opposées aux orifices d'ouverture (6).
5. Appareil de climatisation comportant l'échangeur de chaleur (1) selon l'une quelconque des revendications 1 à 4.
6. Procédé de fabrication d'un échangeur de chaleur (1), qui comporte plusieurs tubes de transfert de chaleur (4) et plusieurs ailettes (2) ayant chacune deux côtés opposés et plusieurs orifices d'ouverture (6) sur un côté (3a) des deux côtés, pour insérer et fixer les plusieurs tubes de transfert de chaleur (4), l'échangeur de chaleur (1) étant formé de telle sorte que les plusieurs tubes de transfert de chaleur (4)

et les plusieurs ailettes (2) se croisent,

caractérisé en ce que

le procédé comprend :

le placement des plusieurs tubes de transfert de chaleur (4) en parallèle sur un élément de positionnement de tube de transfert de chaleur (10) en forme de plaque plate ;
le montage des orifices d'ouverture (6) des plusieurs ailettes (2) sur les plusieurs tubes de transfert de chaleur (4) placés sur l'élément de positionnement de tube de transfert de chaleur (10) ;
le positionnement des uns côtés (3a) des plusieurs ailettes (2) de manière à les séparer des positions dans l'élément de positionnement de tube de transfert de chaleur (10) où sont placés les plusieurs tubes de transfert de chaleur (4) ; et
le brasage des plusieurs tubes de transfert de chaleur (4) et des plusieurs ailettes (2), dans lequel les plusieurs tubes de transfert de chaleur (4) sont fixés aux orifices d'ouverture (6) dans un état faisant saillie des uns côtés (3a) des plusieurs ailettes (2) vers l'extérieur des plusieurs ailettes (2).

7. Procédé de fabrication d'un échangeur de chaleur (1), qui comporte plusieurs tubes de transfert de chaleur (4) et plusieurs ailettes (2) ayant chacune deux côtés opposés et plusieurs orifices d'ouverture (6) sur un côté (3a) des deux côtés, pour insérer et fixer les plusieurs tubes de transfert de chaleur (4), l'échangeur de chaleur (1) étant formé de telle sorte que les plusieurs tubes de transfert de chaleur (4) et les plusieurs ailettes (2) se croisent, **caractérisé en ce que** le procédé comprend :

la disposition des plusieurs ailettes (2) en parallèle sur un gabarit d'insertion de tube plat (16) ;
le montage des plusieurs tubes de transfert de chaleur (4) dans les orifices d'ouverture (6) des plusieurs ailettes (2) ;
le placement d'une partie des plusieurs tubes de transfert de chaleur (4) sur les portions saillantes du gabarit d'insertion de tube plat (16) pour créer une différence de hauteur par rapport aux tubes de transfert de chaleur (4) autres que la partie des tubes de transfert de chaleur (4) ; et
le brasage des plusieurs tubes de transfert de chaleur (4) et des plusieurs ailettes (2), dans lequel au moins deux des plusieurs tubes de transfert de chaleur (4) sont fixés aux orifices d'ouverture (6) dans un état faisant saillie des uns côtés (3a) des plusieurs ailettes (2) vers l'extérieur des plusieurs ailettes (2), et présentant des portions spatiales, qui deviennent des espaces, avec des portions les plus profondes (6a)

des orifices d'ouverture (6) opposées au un côté (3a) de l'aillette (2).

8. Procédé de fabrication d'un échangeur de chaleur (1) selon la revendication 6 ou 7, comprenant en outre : 5

la formation de longs trous (32) dans un matériau de cerceau du type feuille (30) lors de la fabrication des plusieurs ailettes (2) ; et 10
le découpage du matériau de cerceau (30) au niveau d'une position passant par les trous longs (32).

15

20

25

30

35

40

45

50

55

FIG. 1

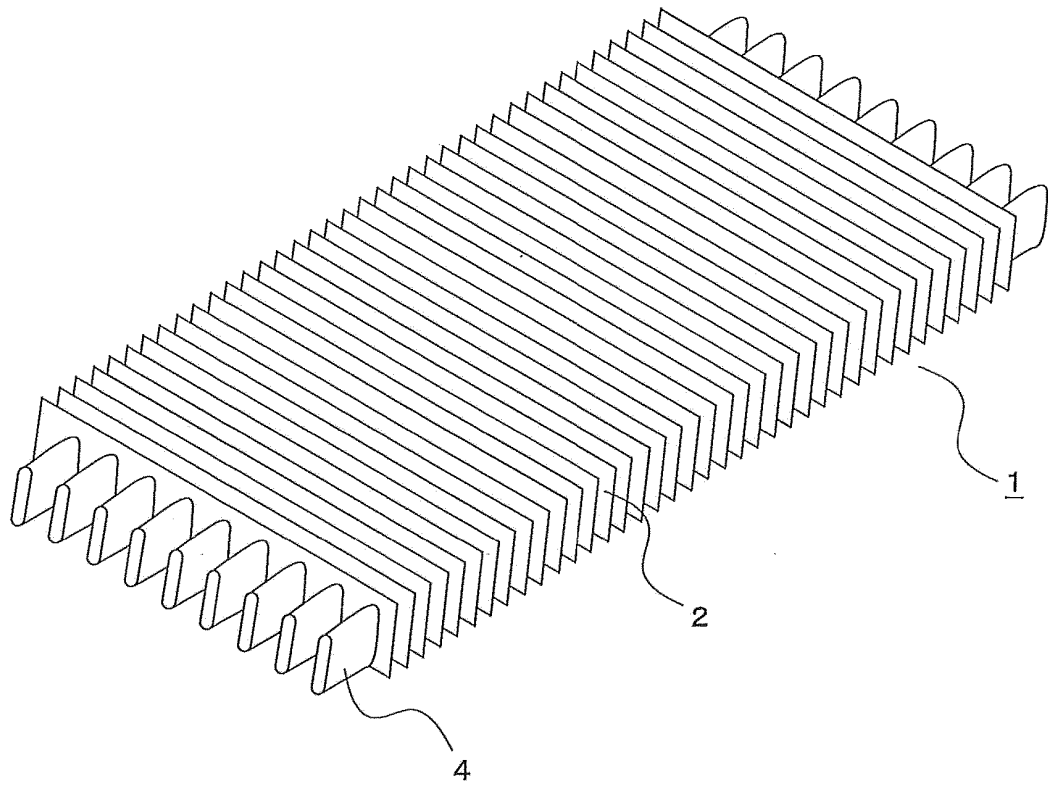


FIG. 2

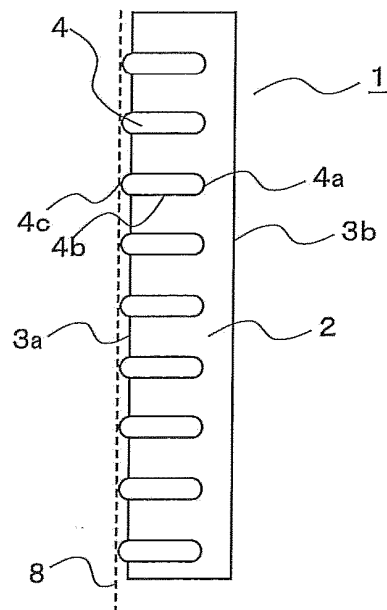


FIG. 3

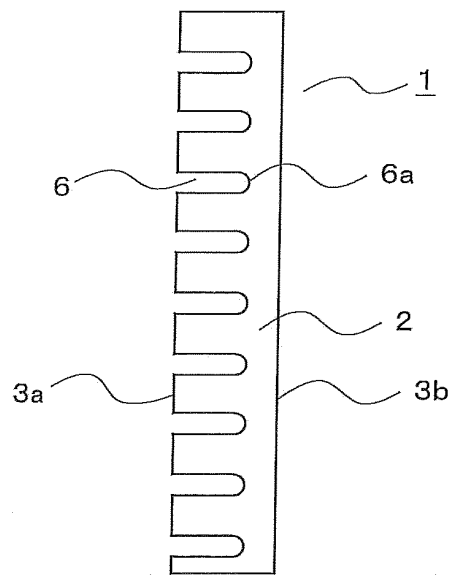


FIG. 4a

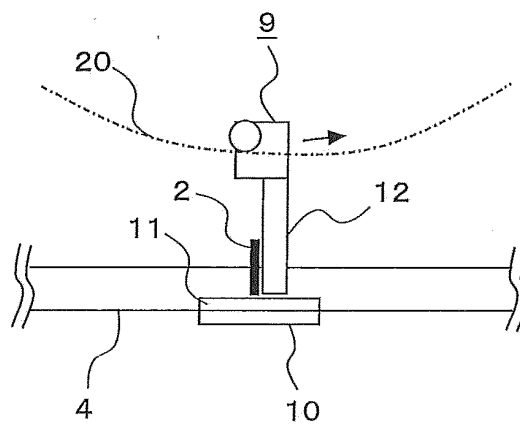


FIG. 4b

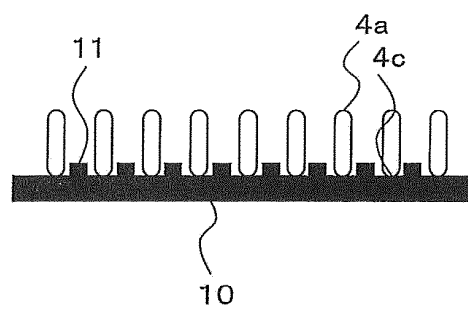


FIG. 5

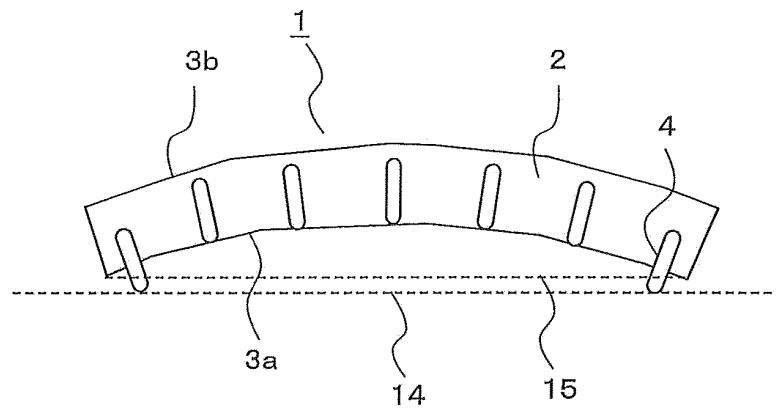


FIG. 6a

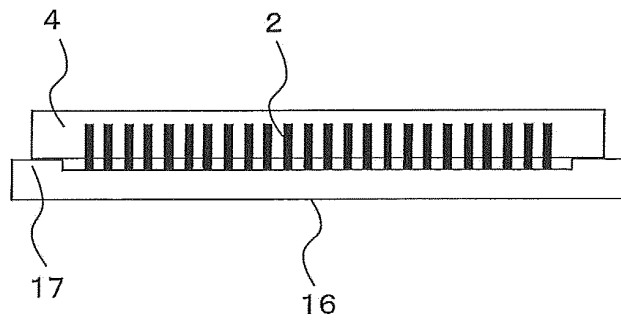


FIG. 6b

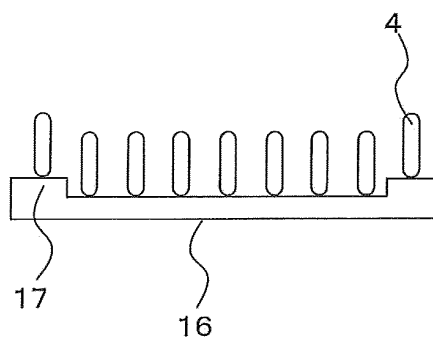


FIG. 7

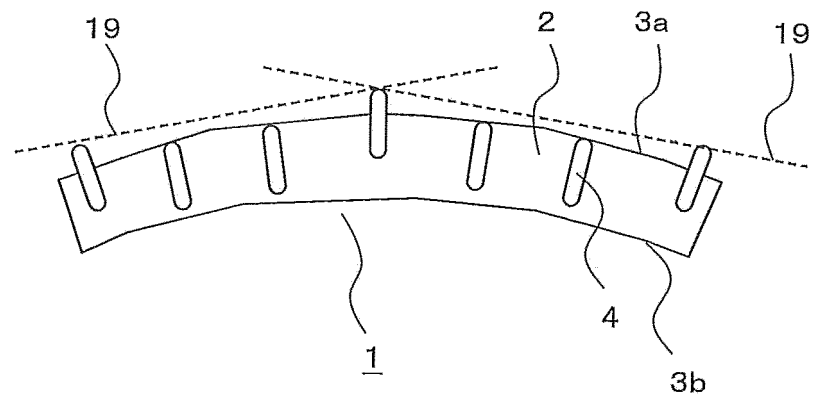


FIG. 8


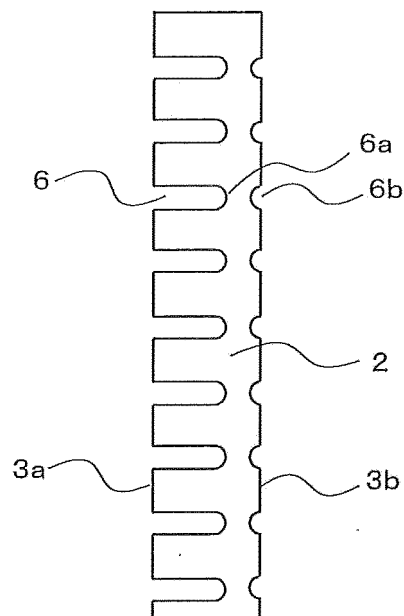


FIG. 9

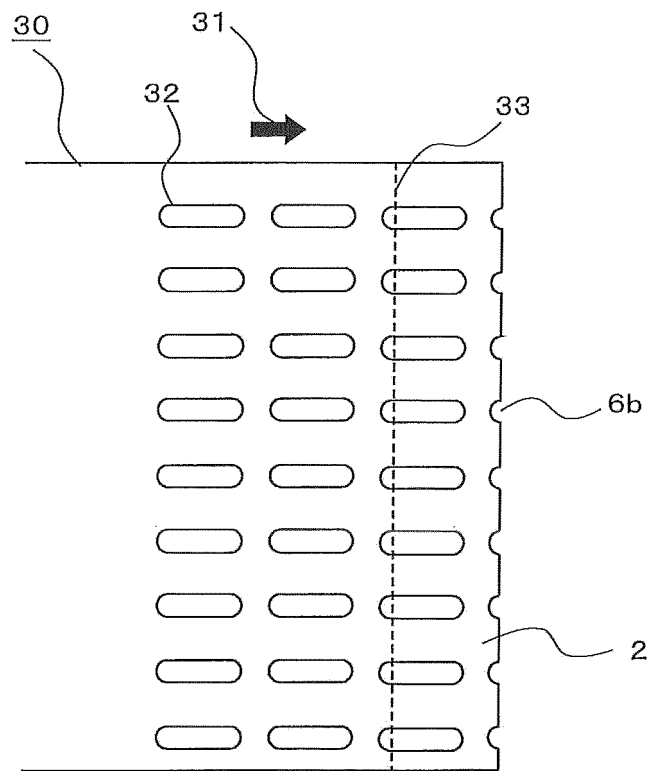

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2013007540 A [0004]
- JP 2012154497 A [0006]
- JP 2012030284 A [0031]