



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
10.08.2016 Bulletin 2016/32

(51) Int Cl.:
F28F 9/18 ^(2006.01) **B23K 1/00** ^(2006.01)
F28D 1/053 ^(2006.01)

(21) Application number: **14844568.7**

(86) International application number:
PCT/JP2014/073998

(22) Date of filing: **10.09.2014**

(87) International publication number:
WO 2015/037641 (19.03.2015 Gazette 2015/11)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

- **OKAZAKI, Takashi**
Tokyo 100-8310 (JP)
- **ISHIBASHI, Akira**
Tokyo 100-8310 (JP)
- **HIGASHIUE, Shinya**
Tokyo 100-8310 (JP)

(30) Priority: **12.09.2013 PCT/JP2013/074639**

(74) Representative: **Moore, Graeme Patrick**
Mewburn Ellis LLP
City Tower
40 Basinghall Street
London EC2V 5DE (GB)


(71) Applicant: **Mitsubishi Electric Corporation**
Chiyoda-ku
Tokyo 100-8310 (JP)

(72) Inventors:
• **NISHIYAMA, Takumi**
Tokyo 100-8310 (JP)

(54) **LAMINATED HEADER, HEAT EXCHANGER, AND HEAT PUMP DEVICE**

(57) In a stacking type header 10, in a state in which flat tubes 20 are inserted into openings 12A in a bare member 12 and in which ends 20A of the flat tubes 20 are in contact with stoppers 12B, spaces 30 are formed at positions surrounded by the flat tubes 20, a clad member 11, and the bare member 12. The spaces 30 each include a first space 30a formed in a vicinity of a contact boundary surface between the flat tube 20 and the clad member 11, a second space 30b smaller than, at least, the first space 30a and formed in a vicinity of a contact boundary surface between the bare member 12 and the clad member 11, and a third space 30c smaller than, at least, the first space 30a and formed in a vicinity of a contact boundary surface between the bare member 12 and the flat tube 20.

FIG. 5

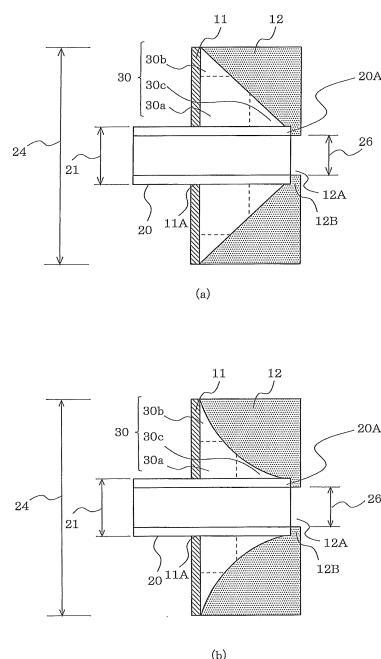

Description

Technical Field

[0001] The present invention relates to stacking type headers, heat exchangers, and heat pump devices.

Background Art

[0002] A stacking type header having a header tank, in which a plate serving as a bare member and a plate serving as a clad member are stacked and brazed together, has been known (see, for example, Patent Literature 1). In the stacking type header disclosed in Patent Literature 1, projections (positioning portions 32) are provided in communication holes (communication holes 31) provided in the bare member (intermediate plate 14) in a header tank (a header tank 2) to project inward from the side surfaces of the communication holes. By reducing the sectional area of the communication holes from the contact boundary surface between the bare member and the clad member (inner plate 13) toward the ends of flat tubes (heat exchange tubes 8) by the provision of the projections, positioning of the ends of the flat tubes is achieved, and entrance of the brazing material into the tubes is prevented.

[0003] Furthermore, there is a known stacking type header having a header tank, in which a tank portion formed of a bare member and a plate portion formed of a clad member are stacked (for example, see Patent Literature 2). In the stacking type header disclosed in Patent Literature 2, a pair of inclined portions (tube-positioning portion 29) are formed in the tank portion 25 to narrow in the width direction from the contact boundary surface between the tank portion 25 formed of the bare member and the plate portion 27 formed of the clad member toward an end of a flat tube (tube 2). By bringing the end of the flat tube into contact with the inclined portions, positioning of the end of the flat tube is achieved.

Citation List

Patent Literature

[0004]

Patent Literature 1: Japanese Unexamined Patent Application Publication No. 2008-249241 (pages 5 to 8 and Figs. 2 to 7)

Patent Literature 2: Japanese Unexamined Patent Application Publication No. 2006-17442 (pages 5, 6, and Fig. 2)

Summary of Invention

Technical Problem

[0005] In the stacking type header disclosed in Patent

Literature 1, because the sectional area of the communication holes decreases from the contact boundary surface between the bare member and the clad member toward the flat tubes, there has been a problem in that molten brazing material flows below the flat tubes, and it is difficult to form fillets on upper parts of the flat tubes.

[0006] In the stacking type header disclosed in Patent Literature 2, because a shape that is tapered only in the width direction from the contact boundary surface between the bare member and the clad member toward the end of the flat tube is employed, there has been a problem in that fillets cannot be formed over the entire area in the circumferential direction of the flat tubes, leading to low joining strength. In addition, there is a problem in that the amount of brazing material filled is small.

[0007] Furthermore, in the stacking type header disclosed in Patent Literature 2, because the end of the flat tube and the inclined portions are in contact with each other at points, there has been a problem in that fillets cannot be formed at the contact boundary surfaces between the flat tube and the tank portion.

[0008] The present invention has been made in view of the above-described problems, and an object thereof is to provide a stacking type header having stacked heat-medium flow paths, in which the joining strength between the plates and the flat tubes has been improved by forming fillets at intended joint portions.

[0009] Another object of the present invention is to obtain a heat exchanger having such a stacking type header.

[0010] Another object of the present invention is to obtain a heat pump device having such a heat exchanger.

Solution to Problem

[0011] A stacking type header of the present invention includes a clad member coated with brazing material and provided on a side from which a flat tube is inserted; and a bare member stacked on the clad member and having an opening into which the flat tube is inserted, the opening being provided with a stopper, with which an end of the flat tube inserted into the opening is brought into contact. In a state in which the flat tube is inserted into the opening in the bare member and in which the end of the flat tube is in contact with the stopper, spaces are formed at positions surrounded by the flat tube, the clad member, and the bare member. The spaces each include a first space formed in a vicinity of a contact boundary surface between the flat tube and the clad member, a second space smaller than the first space and formed in a vicinity of a contact boundary surface between the bare member and the clad member to be continuous with the first space, and a third space smaller than the first space and formed in a vicinity of a contact boundary surface between the bare member and the flat tube to be continuous with the first space.

Advantageous Effects of Invention

[0012] In the stacking type header of the present invention, because the spaces formed at positions surrounded by the flat tubes, the bare member, and the clad member each include the first space formed in the vicinity of the contact boundary surface between the flat tube and the clad member, the second space smaller than, at least, the first space and formed in the vicinity of the contact boundary surface between the bare member and the clad member, and the third space smaller than, at least, the first space and formed in the vicinity of the contact boundary surface between the bare member and the flat tube, the spaces can be configured to increase in size from the contact boundary surfaces between the bare member and the clad member toward the flat tube. Thus, it is possible to form fillets at the intended joint portions, increasing the joining strength of the flat tubes, the clad member, and the bare member.

Brief Description of Drawings

[0013]

[Fig. 1] Fig. 1 shows the configuration of a heat exchanger to which a stacking type header according to Embodiment 1 of the present invention is applied.

[Fig. 2] Fig. 2 is a partially exploded schematic perspective view showing the stacking type header according to Embodiment 1 of the present invention.

[Fig. 3] Fig. 3 is a schematic sectional view showing the sectional configuration of a flat tube to be joined to the stacking type header according to Embodiment 1 of the present invention.

[Fig. 4] Fig. 4 is a schematic diagram for explaining the relationship between the flat tube and the bare member in the stacking type header according to Embodiment 1 of the present invention.

[Fig. 5] Fig. 5 includes enlarged schematic configuration diagrams showing the flat tube, the clad member, and the bare member of the stacking type header according to Embodiment 1 of the present invention in a connected state.

[Fig. 6] Fig. 6 is a partially exploded enlarged schematic perspective view showing the stacking type header according to Embodiment 1 of the present invention.

[Fig. 7] Fig. 7 includes schematic sectional configuration diagrams taken along line A-A in Fig. 6, showing states before and after the flat tubes are inserted into the stacking type header.

[Fig. 8] Fig. 8 includes schematic diagrams showing an example method for joining a conventional stacking type header and flat tubes.

[Fig. 9] Fig. 9 includes schematic diagrams showing an example method for joining a stacking type header according to Embodiment 1 of the present invention and the flat tubes.

[Fig. 10] Fig. 10 includes enlarged schematic configuration diagrams showing a flat tube, a clad member, and a bare member of a stacking type header according to Embodiment 2 of the present invention in a connected state.

[Fig. 11] Fig. 11 is a schematic circuit diagram showing the configuration of a heat pump device according to Embodiment 3 of the present invention. Description of Embodiments

[0014] Embodiments of the present invention will be described below based on the drawings.

[0015] Although a case where a stacking type header according to the embodiments of the present invention is applied to a heat exchanger into which refrigerant flows will be described below, the stacking type header according to the embodiments of the present invention may be applied to other apparatuses into which other fluids flow. The configuration, operation, and other related information described below are merely examples, and the present invention is not limited to such configuration, operation and other information. In the drawings, the same or similar components are denoted by the same reference signs or are not denoted by reference signs. Furthermore, detailed structures are illustrated in simplified forms or are not illustrated. In addition, overlapping or similar explanations will be given in simplified forms or omitted.

Embodiment 1

[0016] First, a heat exchanger 1 to which a stacking type header 10 according to Embodiment 1 of the present invention is applied will be described.

<Configuration of Heat Exchanger 1>

[0017] The configuration of the heat exchanger 1 will be described below.

[0018] Fig. 1 shows the configuration of the heat exchanger 1 to which the stacking type header 10 is applied. Note that, in Fig. 1, the flow direction of refrigerant is indicated with arrows filled in black.

[0019] As shown in Fig. 1, the heat exchanger 1 includes the stacking type header 10, a header 3, a plurality of flat tubes 20, and a plurality of fins 5. The header 3 may be either a stacking type header similar to the stacking type header 10 or a header of another type.

[0020] Heat-medium flow paths 10a are formed inside the stacking type header 10. A refrigerant pipe (not shown) is connected to the inflow side of the heat-medium flow paths 10a. The plurality of flat tubes 20 are connected to the outflow side of the heat-medium flow paths 10a. Merging flow paths 3a are formed inside the header 3. The plurality of flat tubes 20 are connected to the inflow side of the merging flow paths 3a. A refrigerant pipe (not shown) is connected to the outflow side of the merging flow paths 3a.

[0021] The flat tubes 20 have a plurality of flow paths formed therein. The flat tubes 20 are made of, for example, aluminum. The flat tubes 20 are joined to the plurality of fins 5. The fins 5 are made of, for example, aluminum. The flat tubes 20 and the fins 5 are preferably joined together by brazing. Although Fig. 1 shows a configuration in which eight flat tubes 20 are provided, the present invention is not limited to such a configuration.

<Flow of Refrigerant in Heat Exchanger 1>

[0022] The flow of refrigerant in the heat exchanger 1 will be described below.

[0023] The refrigerant flowing through the refrigerant pipe flows in the stacking type header 10, is divided into the heat-medium flow paths 10a, and flows out into the plurality of flat tubes 20. In the plurality of flat tubes 20, the refrigerant exchanges heat with, for example, air supplied by a fan. Note that the refrigerant flowing through the plurality of flat tubes 20 flows into the merging flow paths 3a in the header 3, is merged, and flows out into the refrigerant pipe. Note that the refrigerant may be flowed in the opposite direction.

<Configuration of Stacking Type Header 10>

[0024] Next, the configuration of the stacking type header 10 will be described.

[0025] Fig. 2 is a partially exploded schematic perspective view showing the stacking type header 10. Fig. 3 is a schematic sectional view showing the sectional configuration of the flat tube 20 to be joined to the stacking type header 10.

[0026] As shown in Fig. 2, the stacking type header 10 includes a clad member 11 and a bare member 12. As described below, the bare member 12 is provided with openings 12A, into which the flat tubes 20 are inserted, and stoppers 12B, with which the ends 20A of the flat tubes 20 come into contact. The ends 20A of the flat tubes 20 inserted into the openings 12A in the bare member 12 are configured to be butted against the stoppers 12B. The number of the clad members 11 is at least one, and the clad member 11 is provided at a side of the bare member 12 from which the flat tubes 20 are inserted. The ends 20A of the flat tubes 20 mean the ends of the flat tubes 20 at the bare member 12 side and include the ends and the outer circumferential surfaces of the ends.

[0027] Although Fig. 2 shows, as an example, the stacking type header 10 in which one clad member 11 and one bare member 12 are stacked, the present invention is not limited thereto. For example, besides the structure of the stacking type header 10 shown in Fig. 2, a plurality of bare members and clad members, provided only with openings, may be stacked, and the bare member 12 as shown in Fig. 2 may be provided at a desired position for positioning.

[0028] The bare member 12 is made of, for example, aluminum. The bare member 12 is not coated with braz-

ing material. The openings 12A are through-holes extending between the front and rear surfaces of the bare member 12. When the bare member 12 and the clad member 11 are stacked, the openings 12A function as parts of the heat-medium flow paths 10a.

[0029] The clad member 11 is made of, for example, aluminum and is thinner than the bare member 12. The clad member 11 is coated with brazing material over, at least, the front and rear surfaces. The clad member 11 is provided with openings 11A. The openings 11A are through-holes extending between the front and rear surfaces of the clad member 11. When the bare member 12 and the clad member 11 are stacked, the openings 11A function as parts of the heat-medium flow paths 10a.

[0030] Refrigerant pipes (not shown) are connected to the bare member 12. For example, a mouthpiece or another related component may be provided on the surface of the bare member 12 from which the refrigerant flows in so that the refrigerant pipes are connected to the bare member 12 via the mouthpiece or the other related component. Alternatively, the inner circumferential surfaces of the openings 12A in the bare member 12 may be shaped to fit onto the outer circumferential surfaces of the refrigerant pipes so that the refrigerant pipes can be directly connected to the openings 12A without using a mouthpiece or another related component.

[0031] As shown in Fig. 3, the flat tubes 20 each have a tube height 21 (hereinbelow, referred to as "H21"), a tube width 22 (hereinbelow, referred to as "L22"), and a tube thickness 23 (hereinbelow, referred to as "t23"). The flat tube 20 is provided with at least one partition 20B inside the tube and, thus, has a multi-hole structure.

[0032] Fig. 4 is a schematic diagram for explaining the relationship between the flat tube 20 and the bare member 12 in the stacking type header 10. Fig. 5 includes enlarged schematic configuration diagrams showing the flat tube 20, the clad member 11, and the bare member 12 of the stacking type header 10 in a connected state. The stacking type header 10 will be described in more detail based on Figs. 4 and 5. Fig. 5 shows two configuration examples of a space 30.

[0033] As shown in Figs. 4 and 5, the bare member 12 is provided with the openings 12A, into which the flat tubes 20 are inserted, and the stoppers 12B.

[0034] The openings 12A are formed to have a hole height 24 (hereinbelow, referred to as "H24") and a hole width 25 (hereinbelow, referred to as "L25") at the side from which the flat tubes 20 are inserted.

[0035] Furthermore, the openings 12A are formed to have a hole height 26 (hereinbelow, referred to as "H26") and a hole width 27 (hereinbelow, referred to as "L27") at the stopper side, which is opposite from the side from which the flat tubes 20 are inserted.

[0036] That is, the openings 12A are formed to be reduced in diameter from the insertion side toward the stopper side, as $L25 > L22 > L27$, and $H24 > H21 > H26$. In this way, the insertion positions of the flat tubes 20 are determined inside the bare member 12. The spaces 30

may have either a chamfered shape, as shown in Fig. 5 (a), in which wall surfaces are flat, or a rounded shape, as shown in Fig. 5 (b), in which the wall surfaces are curved (i.e., curved to protrude toward the central axes of the openings 12A).

[0037] Furthermore, the stoppers 12B are formed on the stopper-side circumferences of the openings 12A by making portions of the bare member 12 protrude toward the central axes of the openings 12A. By forming the stoppers 12B, as shown in Figs. 5 (a) and 5 (b), the ends 20A of the flat tubes 20 make surface contact with the inner parts of the bare member 12, and the positions of the flat tubes 20 are determined.

[0038] When the flat tubes 20 are joined to the stacking type header 10, the spaces 30 are formed inside the bare member 12, at positions surrounded by the flat tubes 20, the clad member 11, and the bare member 12. These spaces 30 communicate with the openings 12A (the side from which the flat tubes 20 are inserted and the stopper side, which is opposite from the side from which the flat tubes 20 are inserted). The spaces 30 each include a first space 30a, a second space 30b, and a third space 30c.

[0039] The first space 30a is formed in the vicinity of the contact boundary surface between the flat tube 20 and the clad member 11 and functions as a buffer space.

[0040] The second space 30b is formed in the vicinity of the contact boundary surface between the bare member 12 and the clad member 11 and is smaller than, at least, the first space 30a. The second space 30b is formed to increase in size from the contact boundary surface between the bare member 12 and the clad member 11 toward the flat tube 20.

[0041] The third space 30c is formed in the vicinity of the contact boundary surface between the bare member 12 and the flat tube 20 and is smaller than, at least, the first space 30a. The third space 30c is formed to increase in size from the contact boundary surface between the bare member 12 and the flat tube 20 toward the bare member 12.

[0042] The lengths of boundary surfaces among the first space 30a, the second space 30b, and the third space 30c may be appropriately changed depending on the type and material of the brazing material.

[0043] Fig. 6 is a partially exploded enlarged schematic perspective view showing the stacking type header 10. Fig. 7 includes schematic sectional configuration diagrams taken along line A-A in Fig. 6, showing states before and after the flat tubes 20 are inserted into the stacking type header 10. Insertion of the flat tubes 20 into the stacking type header 10 will be described based on Figs. 6 and 7. Note that Fig. 7 (a) shows the state before the flat tubes 20 are inserted into the stacking type header 10, and Fig. 7 (b) shows the state after the flat tubes 20 are inserted into the stacking type header 10.

[0044] When the flat tubes 20 are joined to the stacking type header 10, the flat tubes 20 are inserted into the openings 11A in the clad member 11 and the openings

12A in the bare member 12, and the positions of the ends 20A of the flat tubes 20 are determined by the stoppers 12B provided in the bare member 12. When the flat tubes 20 are inserted, the spaces 30 are formed by the flat tubes 20, the clad member 11, and the bare member 12. Then, the flat tubes 20 are brazed to the stacking type header 10.

[0045] During brazing, the brazing material applied to the clad member 11 flows in narrower spaces, namely, the second spaces 30b and the third spaces 30c, due to the capillary action, forming fillets 31 over the entire area in the circumferential direction of the spaces 30. Although not shown, the fillets 31 are also formed in the vicinity of the contact boundary surfaces between the flat tubes 20 and the clad member 11 in the first spaces 30a, by allowing the brazing material to flow therein.

[0046] The wall-surface hole size of the openings 12A in the bare member 12 at the stopper side, at which the insertion positions of the flat tubes 20 are determined, are set to satisfy the relationships $H21 \geq H26 \geq (H21 - 2 \times t23)$ and $L22 \geq L27 \geq (L22 - 2 \times t23)$. Thus, the ends 20A of the flat tubes 20 do not project from the wall surface of the bare member 12.

[0047] Furthermore, the wall-surface hole size of the openings 12A in the bare member 12, at the side from which the flat tubes 20 are inserted, are set to satisfy the relationships $H21 \leq H24$ and $L22 \leq L25$. Thus, the openings 12A in the bare member 12 may be formed in a rounded shape or a chamfered shape from the insertion side to the stopper side (see Figs. 5 (a) and 5 (b)). In other words, the inner wall surfaces of the openings 12A in the bare member 12 may be formed in a rounded shape or a chamfered shape from the insertion side to the stopper side.

[0048] As a result, in the second spaces 30b and the third spaces 30c, it is possible to reduce (shorten) the thicknesses (the distances between the individual members) of the portions where the capillary action occurs and to increase the lengths of the portions where the capillary action occurs. In other words, in the second spaces 30b and the third spaces 30c, by adjusting the distances and lengths of the members defining these spaces, the capillary action is made more likely to occur.

[0049] Hence, by forming the spaces 30 to increase in size from the third spaces 30c toward the first spaces 30a, a shape that allows the fillets 31 to be more easily formed at the intended joining portions can be obtained.

<Method for Joining Stacking Type Header 10 and Flat Tubes 20>

[0050] An example method for joining the stacking type header 10 and the flat tubes 20 will be described below, together with the behavior of the brazing material. First, an example method for joining the conventional stacking type header and the flat tubes will be described.

[0051] Fig. 8 includes schematic diagrams showing an example method for joining a conventional stacking type

header 49 and flat tubes 40. Fig. 8 shows an example in which the sectional area of the openings, formed from a contact boundary surface between a clad member 41 and a bare member 42 toward ends of the flat tubes 40, is not reduced. Fig. 8 also shows the behavior of brazing material 45. In Fig. 8, the gravity direction is shown by a solid arrow. In Fig. 8 (a), intended joint portions, where fillets are intended to be formed, are shown by dashed line circles.

[0052] The flat tubes 40 are inserted into openings 41 A in the clad member 41 and openings 42A in the bare member 42. In this state, the flat tubes 40, the clad member 41, and the bare member 42 are heated (Fig. 8 (a)). As a result, the brazing material 45 coating the clad member 41 reaches or exceeds the melting point temperature, melting and flowing into spaces 46 (Fig. 8 (b)).

[0053] The brazing material 45 tends to flow to lower parts of the spaces 46 due to the influence of the gravity, and, before the fillets are formed on upper parts of the flat tubes 40, a large amount of brazing material 45 accumulates below the flat tubes 40 (Fig. 8 (c)). As a result, a large amount of brazing material 45 accumulates only in the spaces 46 below the flat tubes 40, and a large amount of brazing material 45 does not accumulate in the spaces 46 above the flat tubes 40 (Fig. 8 (d)). In other words, it is impossible to guide an appropriate amount of brazing material 45 to all the intended joint portions, where the fillets are intended to be formed.

[0054] When heating of the flat tubes 40, the clad member 41, and the bare member 42 is completed and the brazing material 45 is cooled, the flat tubes 40, the clad member 41, and the bare member 42 are joined together. However, in the stacking type header 49, an appropriate amount of brazing material 45 is not distributed to all the intended joint portions, where the fillets are intended to be formed. Thus, the bonding strength of the flat tubes 40, the clad member 41, and the bare member 42 is low.

[0055] Next, an example method for joining the stacking type header 10 and the flat tubes 20 will be described.

[0056] Fig. 9 includes schematic diagrams showing an example method for joining the stacking type header 10 and the flat tubes 20. Fig. 9 shows an example in which the sectional area of the openings 12A, formed from the contact boundary surface between the clad member 11 and the bare member 12 toward the end of the flat tubes 40, is reduced, as described above. Fig. 9 also shows the behavior of the brazing material. In Fig. 9, the gravity direction is shown by a solid arrow. In Fig. 9 (a), intended joint portions, where fillets are intended to be formed, are shown by dashed line circles.

[0057] The flat tubes 20 are inserted into the openings 11 A in the clad member 11 and the openings 12A in the bare member 12. In this state, the flat tubes 20, the clad member 11, and the bare member 12 are heated (Fig. 9 (a)). As a result, the brazing material 15 coating the clad member 11 reaches or exceeds the melting point temperature, melting and flowing into the spaces 30.

[0058] When the flat tubes 20, the clad member 11,

and the bare member 12 are heated, fluid is preferably supplied from the inside of the flat tubes 20 toward the ends 20A of the flat tubes 20. The temperature of the fluid is preferably higher than the melting point of the brazing material 15, and, in such a case, inhibiting of melting of the brazing material 15 is controlled. Furthermore, a preferred fluid is air, and, in such a case, general-purpose equipment can be used, and thus, the process can be simplified.

[0059] The molten brazing material 15 gathers at the contact boundary surfaces between the clad member 11 and the bare member 12 in the second spaces 30b due to the influence of the capillary action (Fig. 9 (b)).

[0060] When the amount of the brazing material 15 flowing in increases, and the influence of the gravity becomes larger than the influence of the capillary action, the brazing material 15 gathers at the inner parts of the spaces 30 along the wall surfaces of the spaces 30. The brazing material 15 flowing in the third spaces 30c along the wall surfaces inside the spaces 30 gathers at the contact boundary surfaces between the bare member 12 and the flat tubes 20 inside the third spaces 30c due to the capillary action, similarly to the second spaces 30b (Fig. 9 (c)).

[0061] If the brazing material 15 further flows in after the fillets 31 are formed at the intended joint portions, the brazing material 15 flows into the first spaces 30a, gathers in the vicinity of the contact boundary surfaces between the clad member 11 and the flat tubes 20, preventing the brazing material 15 from flowing in from the ends 20A of the flat tubes 20 (Fig. 9 (d)).

<Flow of Refrigerant in Stacking Type Header 10>

[0062] Next, the operation of the stacking type header 10 will be described based on an example.

[0063] The stacking type header 10 includes the heat-medium flow paths 10a, through which heat medium flows, formed by stacking the clad member 11 and the bare member 12 in multiple layers. Thus, the heat medium flowing in the stacking type header 10 is divided into the plurality of heat-medium flow paths 10a by the effect of the stacking type header 10 and flows into or out to each of the flat tubes 20.

<Advantage of Stacking Type Header 10>

[0064] An advantage of the stacking type header 10 will be described.

[0065] The stacking type header 10 is configured so that the spaces 30 defined by the flat tubes 20, the clad member 11, and the bare member 12 increase in size from the contact boundary surfaces between the clad member 11 and the bare member 12 toward the flat tubes 20. With this configuration, in the stacking type header 10, it is possible to allow the brazing material 15 to preferentially flow into the intended joint portions. By allowing the brazing material 15 to preferentially flow into the in-

tended joint portions, the fillets 31 can be easily formed at the intended joint portions.

[0066] In addition, by allowing the brazing material 15 to preferentially flow into the intended joint portions, the joining strength can be increased compared with the conventional headers for the same amount of the brazing material 15 used. Furthermore, because the fillets 31 are formed by allowing the brazing material 15 to preferentially flow into the intended joint portions, the amount of the brazing material 15 used can be reduced.

[0067] By setting the size of the holes in the bare member 12 at the stopper side to satisfy the relationships $H21 \geq H26 \geq (H21 - 2 \times t23)$ and $L22 \geq L27 \geq (L22 - 2 \times t23)$ and by setting the size of the holes at the insertion side to satisfy the relationships $H21 \leq H24$ and $L22 \leq L25$, it is possible to form the fillets 31 at all the intended joint portions located in the circumferential direction of the flat tubes 20. By forming the fillets 31 over the entire area in the circumferential direction of the flat tubes 20, the joining strength can be increased.

[0068] By bringing the ends 20A of the flat tubes 20 and the stoppers 12B of the bare member 12 into surface contact, the brazing material 15 can be prevented from flowing into the flat tubes 20.

[0069] In addition, by setting the size of the holes in the bare member 12 at the stopper side to satisfy the relationships $H21 \geq H26 \geq (H21 - 2 \times t23)$ and $L22 \geq L27 \geq (L22 - 2 \times t23)$, and by bringing the ends 20A of the flat tubes 20 and the stoppers 12B of the bare member 12 into surface contact, not only flowing in of the brazing material 15 can be prevented, but also the resistance occurring when the heat medium flows in or out can be reduced. Moreover, the ends 20A of the flat tubes 20 can be easily positioned.

[0070] By determining the insertion positions of the flat tubes 20 with the stoppers 12B, the heat exchanger 1 can be manufactured without providing an excessive insertion allowance. Thus, the proportion of the heat exchanging part in a heat exchanger can be increased compared with a heat exchanger of the same size. In addition, by eliminating the need to provide an excessive insertion allowance, the size of the heat exchanger can be reduced when an equivalent heat exchange capacity is to be obtained.

[0071] By reducing the thicknesses and increasing the lengths of the first spaces 30a, located close to the contact boundary surfaces between the clad member 11 and the bare member 12, and the second spaces 30b, located close to the contact boundary surfaces between the flat tubes 20 and the bare member 12, the influence of the capillary action can be increased. Thus, the areas in the first spaces 30a and the second spaces 30b where the fillets 31 are formed can be increased. By increasing these areas in the first spaces 30a and the second spaces 30b where the fillets 31 are formed, the joining strength at the contact boundary surfaces can be increased.

Embodiment 2

[0072] Fig. 10 includes enlarged schematic configuration diagrams showing the flat tube 20, the clad member 11, and the bare member 12 of a stacking type header 10A according to Embodiment 2 of the present invention in a connected state. The stacking type header 10A will be described based on Fig. 10. Fig. 10 shows two configuration examples of the spaces 30. In Embodiment 2, the difference from Embodiment 1 will be mainly described, and the components the same as or similar to those in Embodiment 1 will be denoted by the same reference signs, and the descriptions thereof will be omitted or given in a simplified form.

[0073] Although the stacking type header 10A has basically the same configuration as the stacking type header 10 according to Embodiment 1, it differs from the stacking type header 10 according to Embodiment 1 in that the shape of the openings 12A in the bare member 12 into which the flat tubes 20 are inserted, at portions from the insertion side to the stoppers, namely, the configuration of the spaces 30, is step-shaped.

[0074] As has been described in Embodiment 1, the openings 12A are formed to be reduced in diameter, as $L25 > L22 > L27$, and $H24 > H21 > H26$, from the insertion side to the stopper side. With this configuration, the insertion positions of the flat tubes 20 are determined in the bare member 12. As shown in Fig. 10, the spaces 30 are shaped so that the first spaces 30a and the second spaces 30b can ensure certain capacities.

[0075] For example, as shown in Fig. 10 (a), a multiple-step shape in which, while the first spaces 30a and the second spaces 30b are reserved, the wall surfaces of the spaces 30 connecting the first spaces 30a and the second spaces 30b are formed in the shape of steps may be employed.

[0076] Alternatively, as shown in Fig. 10 (b), a step shape in which, while the first spaces 30a and the second spaces 30b are reserved, the wall surfaces of the spaces 30 connecting the first spaces 30a and the second spaces 30b are formed in a flat surface may be employed. Note that the wall surfaces of the spaces 30 connecting the first spaces 30a and the second spaces 30b do not need to be exactly flat, but may be partially curved. In addition, the wall surfaces of the spaces 30 connecting the first spaces 30a and the second spaces 30b may be formed as curved surfaces.

<Advantage of Stacking Type Header 10A>

[0077] Advantages of the stacking type header 10A will be described. The stacking type header 10A provides the following advantages, in addition to the same advantages as those provided by the stacking type header 10 according to Embodiment 1.

[0078] By making the portions from the openings to the stoppers in the openings 12A in the bare member 12, into which the flat tubes 20 are inserted, have a step

shape, manufacturing is relatively easy, compared with a case where chamfering is performed or curved surfaces are formed.

[0079] Furthermore, in the stacking type header 10A, the thicknesses and lengths of the first spaces 30a and the second spaces 30b can be easily set to desired values. Hence, manufacturing of the stacking type headers 10A is easy, and thus, the manufacturing costs can be reduced. Furthermore, by making it easy to set the thicknesses and lengths of the first spaces 30a and the second spaces 30b to desired values, the stacking type headers 10A can be more uniformly manufactured during manufacturing. By making it possible to manufacture stacking type headers 10A having a uniform quality, the reliability of the commercial products can be increased.

[0080] Furthermore, in manufacturing of the stacking type header 10A using a mold made by cutting and casting, by making the spaces 30 have a simple step shape, mold manufacturing can be easily performed. Hence, manufacturing of the stacking type headers 10A is easy, and thus, the manufacturing costs can be reduced.

Embodiment 3

[0081] Fig. 11 is a schematic circuit diagram showing the configuration of a heat pump device 51 according to Embodiment 3 of the present invention. The heat pump device 51 will be described based on Fig. 11. This heat pump device 51 has a heat exchanger to which the stacking type header according to Embodiment 1 or 2 is applied and is used as, for example, a refrigerator, a freezer, a vending machine, an air-conditioning apparatus, a freezing apparatus, or a hot-water dispenser. In Embodiment 3, a case where the stacking type header 10 according to Embodiment 1 is used will be described as an example.

<Use Mode of Heat Exchanger>

[0082] A case where the heat pump device 51 is an air-conditioning apparatus that is configured to be able to switch between a cooling operation and a heating operation will be described below. In Fig. 11, the flow direction of the refrigerant during the cooling operation is indicated by a solid arrow, and the flow direction of the refrigerant during the heating operation is indicated by a dashed-line arrow.

[0083] As shown in Fig. 11, the heat pump device 51 includes a compressor 52, a four-way valve 53, a heat-source-side heat exchanger 54, an expansion device 55, a load-side heat exchanger 56, a heat-source-side fan 57, a load-side fan 58, and a controller 59. The compressor 52, the four-way valve 53, the heat-source-side heat exchanger 54, the expansion device 55, and the load-side heat exchanger 56 are connected by a refrigerant pipe, forming a refrigerant circuit.

[0084] For example, the compressor 52, the four-way valve 53, the expansion device 55, the heat-source-side

fan 57, the load-side fan 58, various sensors, and other related components are connected to the controller 59. When the controller 59 switches the flow path of the four-way valve 53, the cooling operation and the heating operation are switched. The heat-source-side heat exchanger 54 serves as a condenser during the cooling operation and serves as an evaporator during the heating operation. The load-side heat exchanger 56 serves as an evaporator during the cooling operation and serves as a condenser during the heating operation.

[0085] The flow of the refrigerant during the cooling operation will be described.

[0086] The high-pressure, high-temperature gaseous refrigerant discharged from the compressor 52 flows into the heat-source-side heat exchanger 54 via the four-way valve 53, is condensed by heat exchange with the outdoor air supplied by the heat-source-side fan 57, is transformed into high-pressure liquid refrigerant, and then flows out of the heat-source-side heat exchanger 54. The high-pressure liquid refrigerant flowing out of the heat-source-side heat exchanger 54 flows into the expansion device 55 and is transformed into low-pressure two-phase gas-liquid refrigerant. The low-pressure two-phase gas-liquid state refrigerant flowing out of the expansion device 55 flows into the load-side heat exchanger 56, is evaporated by heat exchange with the indoor air supplied by the load-side fan 58, is transformed into low-pressure gaseous refrigerant, and then flows out of the load-side heat exchanger 56. The low-pressure gaseous refrigerant flowing out of the load-side heat exchanger 56 is sucked into the compressor 52 via the four-way valve 53.

[0087] The flow of the refrigerant during the heating operation will be described.

[0088] The high-pressure, high-temperature gaseous refrigerant discharged from the compressor 52 flows into the load-side heat exchanger 56 via the four-way valve 53, is condensed by heat exchange with the indoor air supplied by the load-side fan 58, is transformed into high-pressure liquid refrigerant, and then flows out of the load-side heat exchanger 56. The high-pressure liquid refrigerant flowing out of the load-side heat exchanger 56 flows into the expansion device 55, and is transformed into low-pressure two-phase gas-liquid refrigerant. The low-pressure two-phase gas-liquid refrigerant flowing out of the expansion device 55 flows into the heat-source-side heat exchanger 54, is evaporated by heat exchange with the outdoor air supplied by the heat-source-side fan 57, is transformed into low-pressure gaseous refrigerant, and then flows out of the heat-source-side heat exchanger 54. The low-pressure gaseous refrigerant flowing out of the heat-source-side heat exchanger 54 is sucked into the compressor 52 via the four-way valve 53.

[0089] The heat exchanger 1 to which the stacking type header 10 according to Embodiment 1 is applied is used as, at least, one of the heat-source-side the heat exchanger 54 and the load-side heat exchanger 56. When the heat exchanger 1 serves as the evaporator, the heat

exchanger 1 is connected so that the refrigerant flows in from the stacking type header 10 and the refrigerant flows out of the header 3. In other words, when the heat exchanger 1 serves as the evaporator, the two-phase gas-liquid refrigerant flows into the stacking type header 10 from the refrigerant pipe, and the gaseous refrigerant flows into the header 3 from the flat tubes 20. When the heat exchanger 1 serves as the condenser, the gaseous refrigerant flows into the header 3 from the refrigerant pipe, and the liquid refrigerant flows into the stacking type header 10 from the flat tubes 20.

[0090] Because the stacking type header 10 divides the refrigerant by a plurality of branch flow paths, even when two-phase gas-liquid refrigerant flows therein, it is possible to equalize the flow rate and quality of the refrigerant flowing in the plurality of flat tubes 20. In other words, the stacking type header 10 is suitable for the heat pump device 51.

<Effect of Heat Exchanger 1>

[0091] In the stacking type header 10, the bare member 12 has a larger thickness than the clad member 11, and the flat tubes 20 are joined in such a state that their ends 20a are positioned by the stoppers 12B. Hence, the molten brazing material does not flow into the flat tubes 20, eliminating an increase in the pressure loss of the refrigerant.

[0092] Furthermore, in the stacking type header 10, by determining the insertion positions of the flat tubes 20 with the stoppers 12B, the heat exchanger 1 can be manufactured without providing an excessive insertion allowance, and thus, the proportion of the heat exchanging part in the heat exchanger can be increased compared with a heat exchanger of the same size. In addition, by eliminating the need to provide an excessive insertion allowance, the size of the heat exchanger can be reduced when an equivalent heat exchange capability is to be obtained.

[0093] Although Embodiments 1 to 3 have been described above, the present invention is not limited by the descriptions of these embodiments. For example, it is possible to combine the embodiments entirely or partially, or to combine modifications thereof.

Reference Signs List

[0094] 1 heat exchanger, 3 header, 3a merging flow path, 5 fin, 10 stacking type header, 10A stacking type header, 10a heat-medium flow path, 11 clad member, 11 A opening, 12 bare member, 12A opening, 12B stopper, 15 brazing material, 20 flat tube, 20A end, 20B partition, 20a end, 21 tube height, 22 tube width, 23 tube thickness, 24 hole height, 25 hole width, 26 hole height, 27 hole width, 30 space, 30a first space, 30b second space, 30c third space, 31 fillet, 40 flat tube, 41 clad member, 41 A opening, 42 bare member, 42A opening, 45 brazing material, 46 space, 49 stacking type header, 51 heat pump

device, 52 compressor, 53 four-way valve, 54 heat-source-side heat exchanger, 55 expansion device, 56 load-side heat exchanger, 57 heat-source-side fan, 58 load-side fan, 59 controller

Claims

1. A stacking type header comprising:

a clad member coated with brazing material and provided on a side from which a flat tube is inserted; and

a bare member stacked on the clad member and having an opening into which the flat tube is inserted, the opening being provided with a stopper, with which an end of the flat tube inserted into the opening is brought into contact, in a state in which the flat tube is inserted into the opening in the bare member and in which the end of the flat tube is in contact with the stopper, spaces being formed at positions surrounded by the flat tube, the clad member, and the bare member,

the spaces each including a first space formed in a vicinity of a contact boundary surface between the flat tube and the clad member, a second space smaller than the first space and formed in a vicinity of a contact boundary surface between the bare member and the clad member to be continuous with the first space, and a third space smaller than the first space and formed in a vicinity of a contact boundary surface between the bare member and the flat tube to be continuous with the first space.

2. The stacking type header of claim 1, wherein the second space is formed to increase in size from the contact boundary surface between the bare member and the clad member toward the flat tube.

3. The stacking type header of claim 1 or 2, wherein the third space is formed to increase in size from the contact boundary surface between the bare member and the flat tube toward the bare member.

4. The stacking type header of any one of claims 1 to 3, wherein the opening is formed to extend from a front surface to a rear surface of the bare member, wherein a hole size of the opening at a side of the stopper is set to satisfy relationships in which a tube height of the flat tube \geq a hole height of the opening at the side of the stopper \geq (the tube height of the flat tube - 2 x a tube thickness of the flat tube), and a tube width of the flat tube \geq a hole width of the opening at the side of the stopper \geq (the tube width

of the flat tube - 2 x the tube thickness of the flat tube).

5. The stacking type header of claim 4,
wherein a hole size at the side from which the flat
tube is inserted is set to satisfy relationships in which 5
the tube height of the flat tube \leq a hole height of the
opening at the side from which the flat tube is insert-
ed, and
the tube width of the flat tube \leq a hole width of the 10
opening at the side from which the flat tube is insert-
ed.
6. The stacking type header of any one of claims 1 to 5,
wherein an occurrence of capillary action is control- 15
led by adjusting a distance between and a length of
members defining each of the second space and the
third space.
7. The stacking type header of claim 6,
wherein an inner wall surface of the opening in the 20
bare member, extending from the side from which
the flat tube is inserted to a side of the stopper, is
formed in a rounded shape, a chamfered shape, or
a step shape. 25
8. A heat exchanger comprising:
the stacking type header of any one of claims 1
to 7; and
the flat tube. 30
9. A heat pump device comprising the heat exchanger
of claim 8. 35

40

45

50

55

FIG. 1

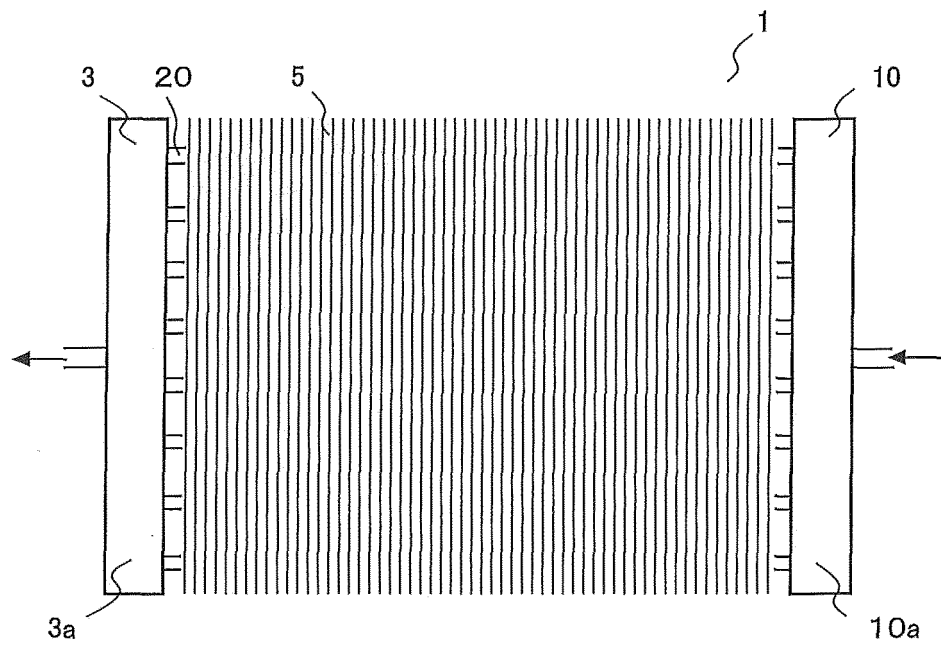


FIG. 2

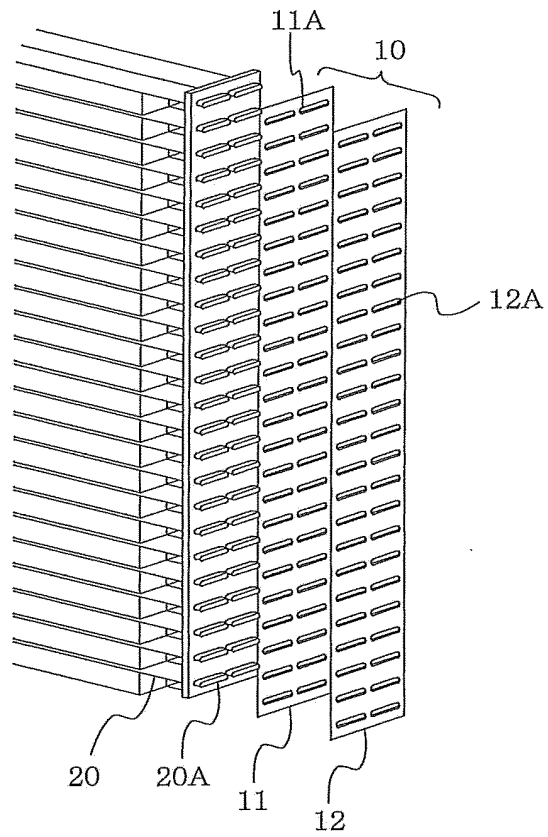


FIG. 3

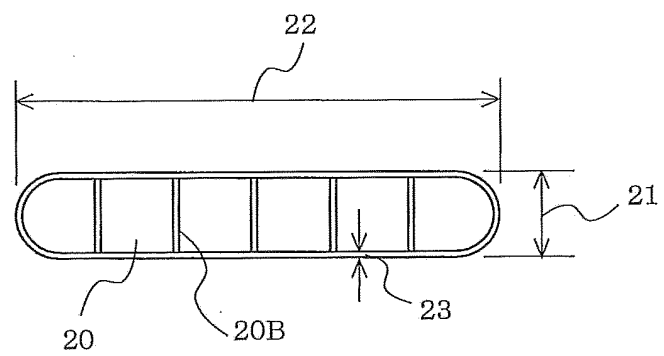


FIG. 4



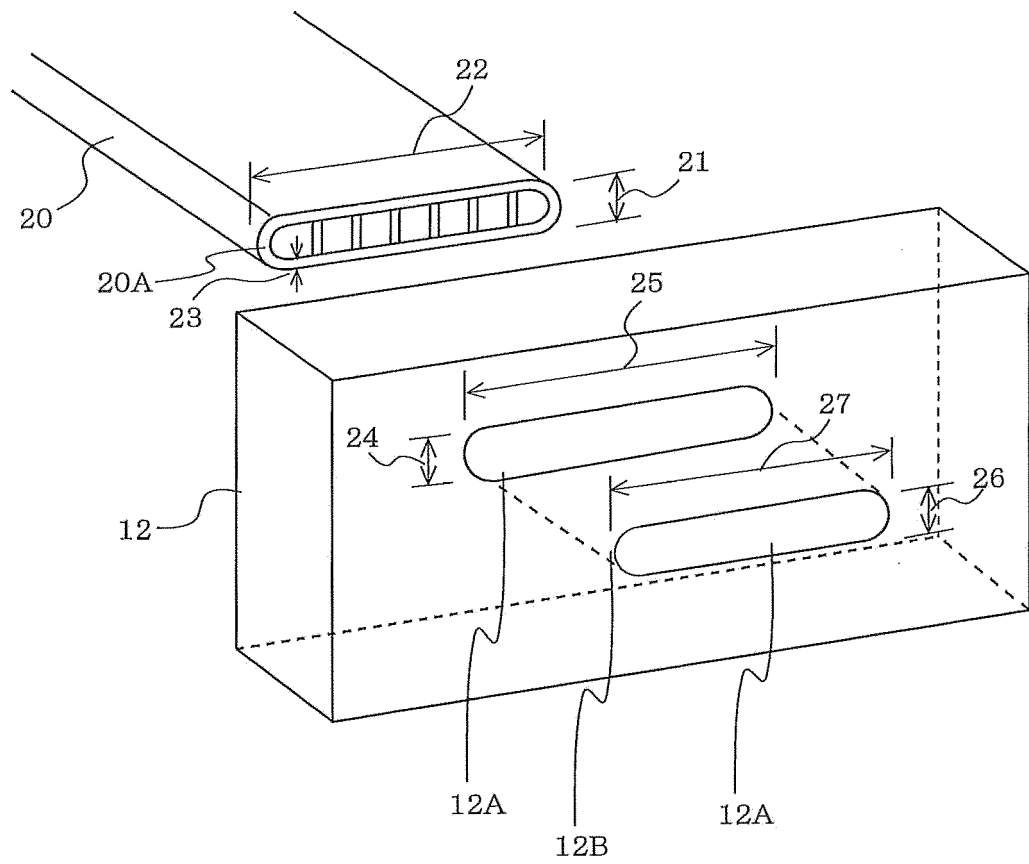


FIG. 5

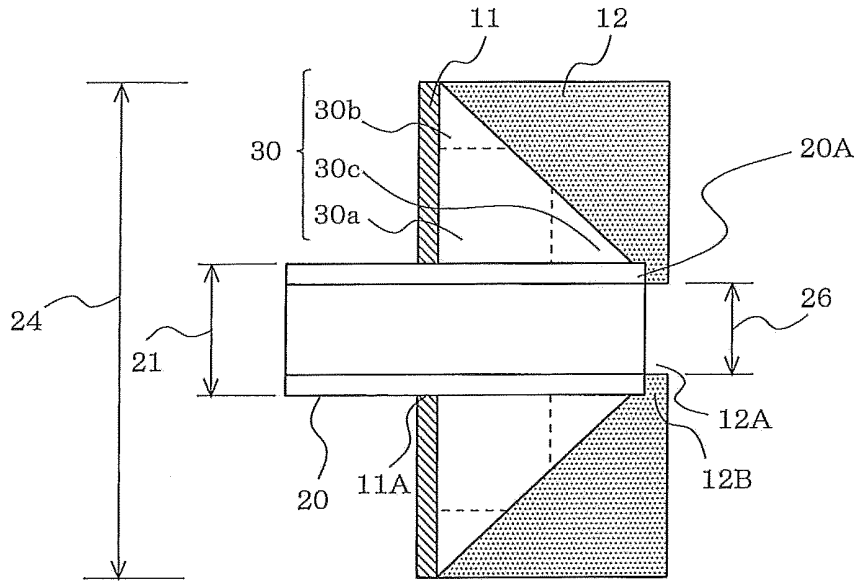

(a)

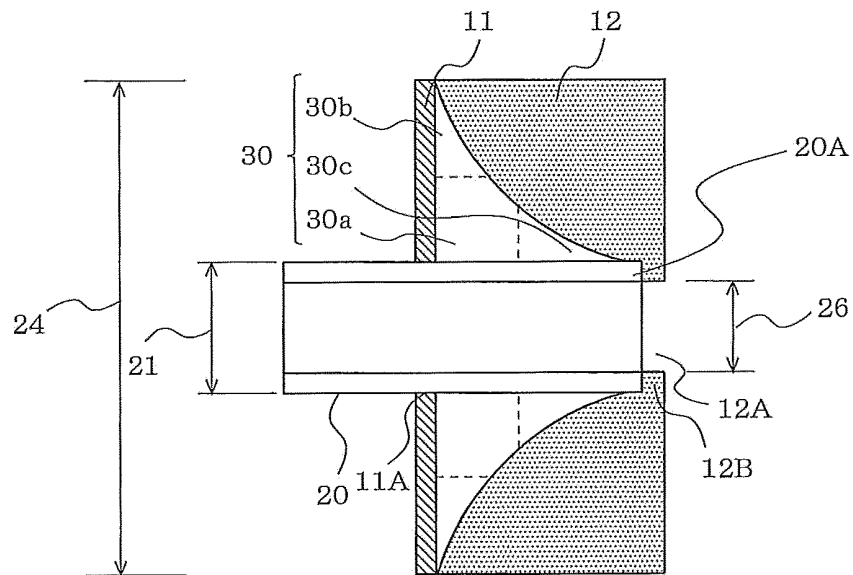

(b)

FIG. 6

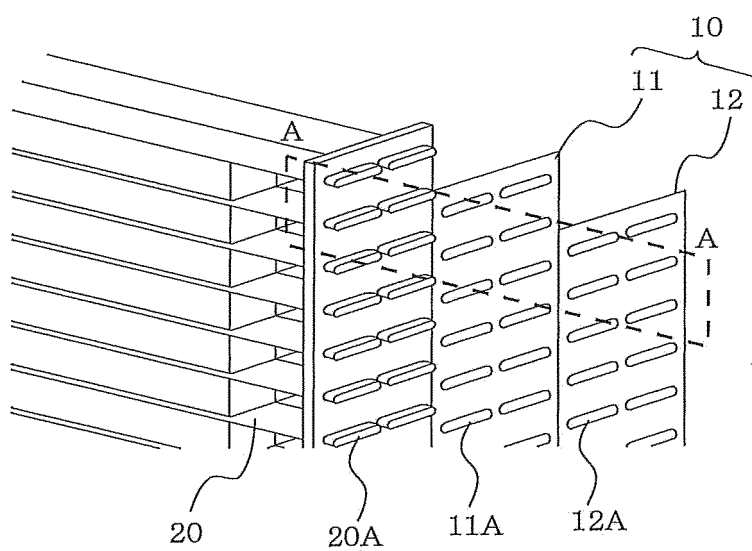


FIG. 7



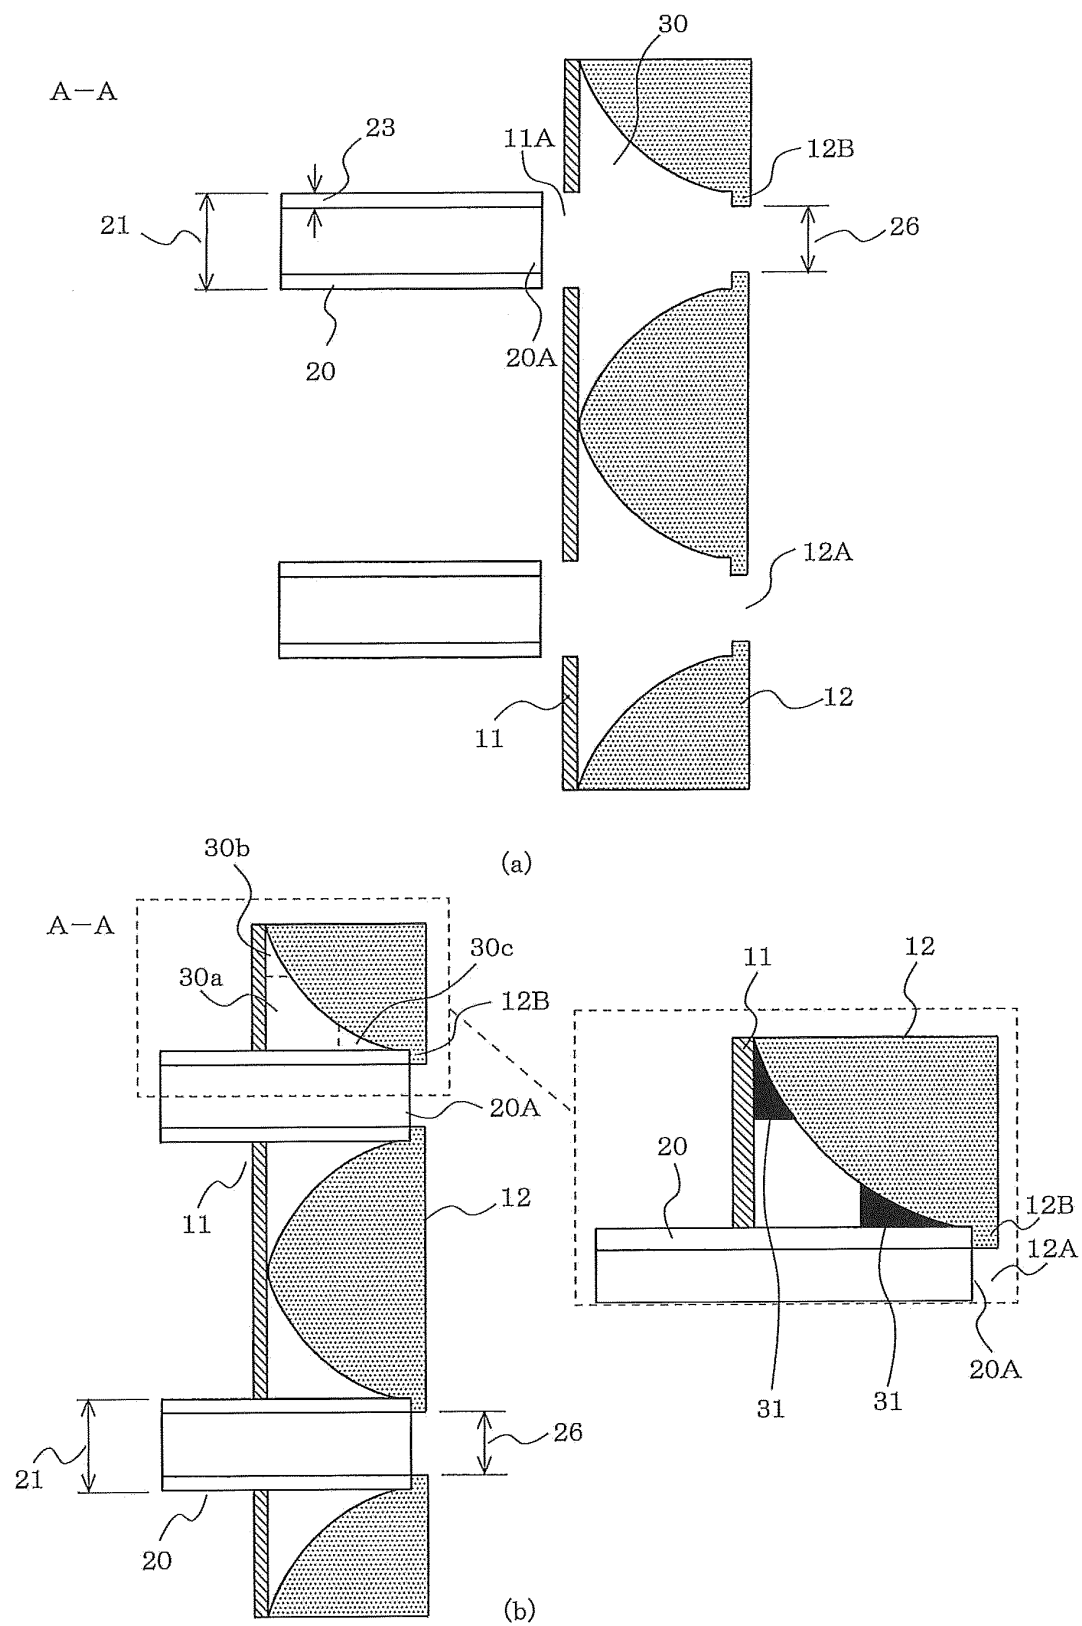


FIG. 8

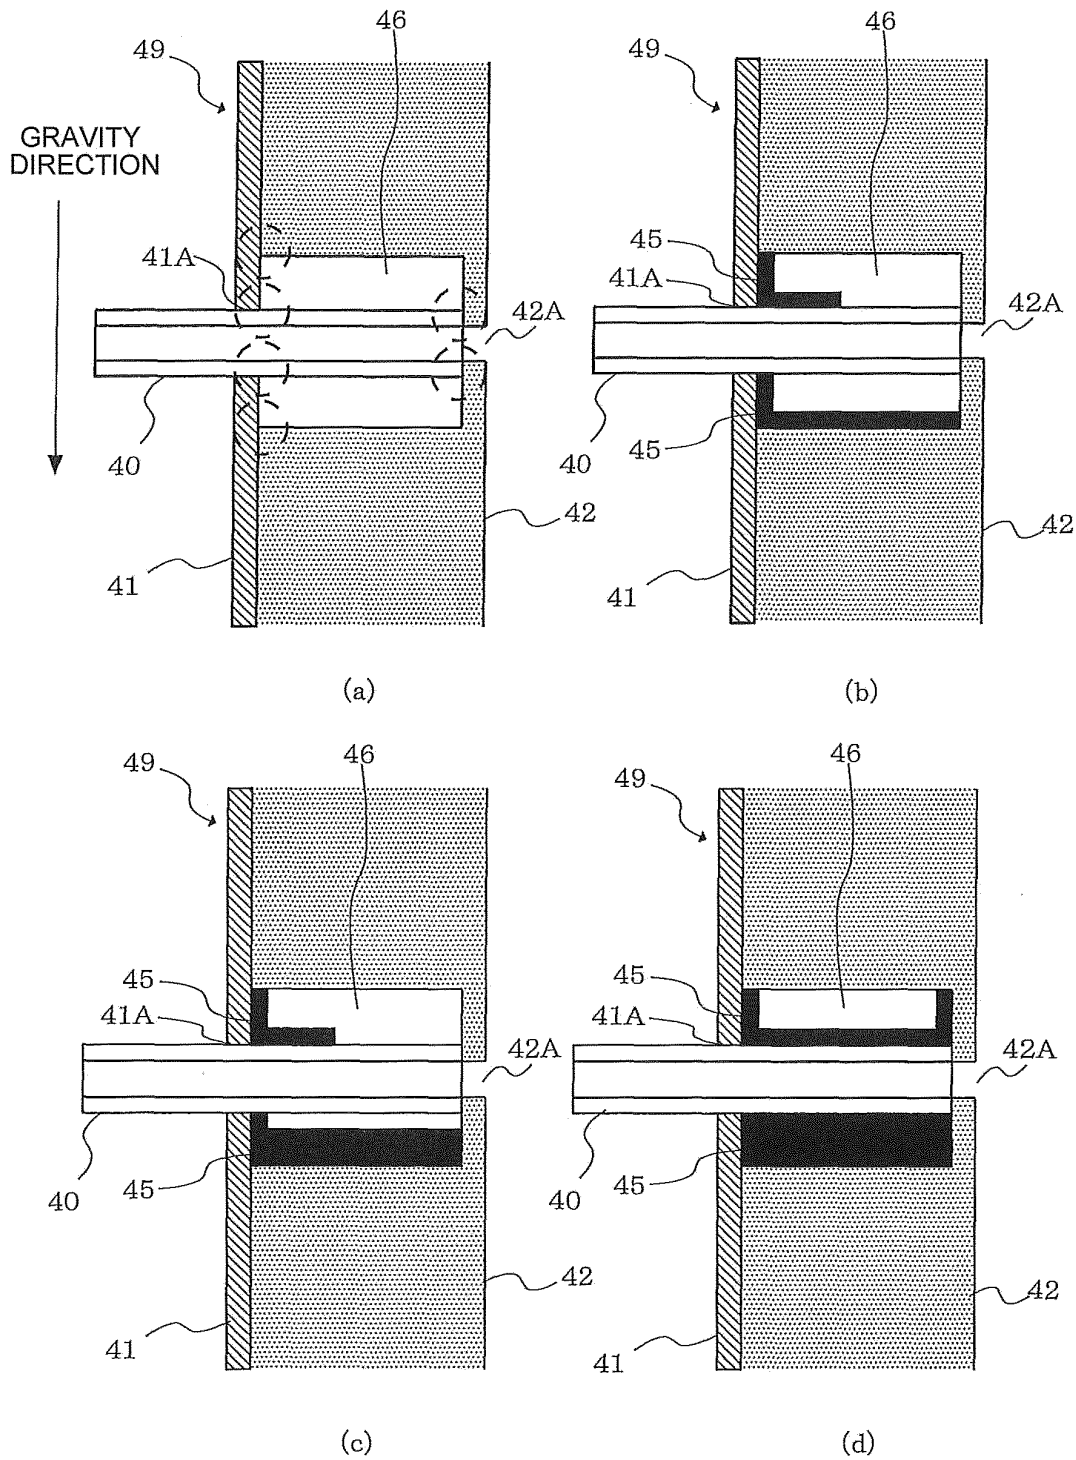


() : INTENDED FILLET FORMING PORTION

FIG. 9

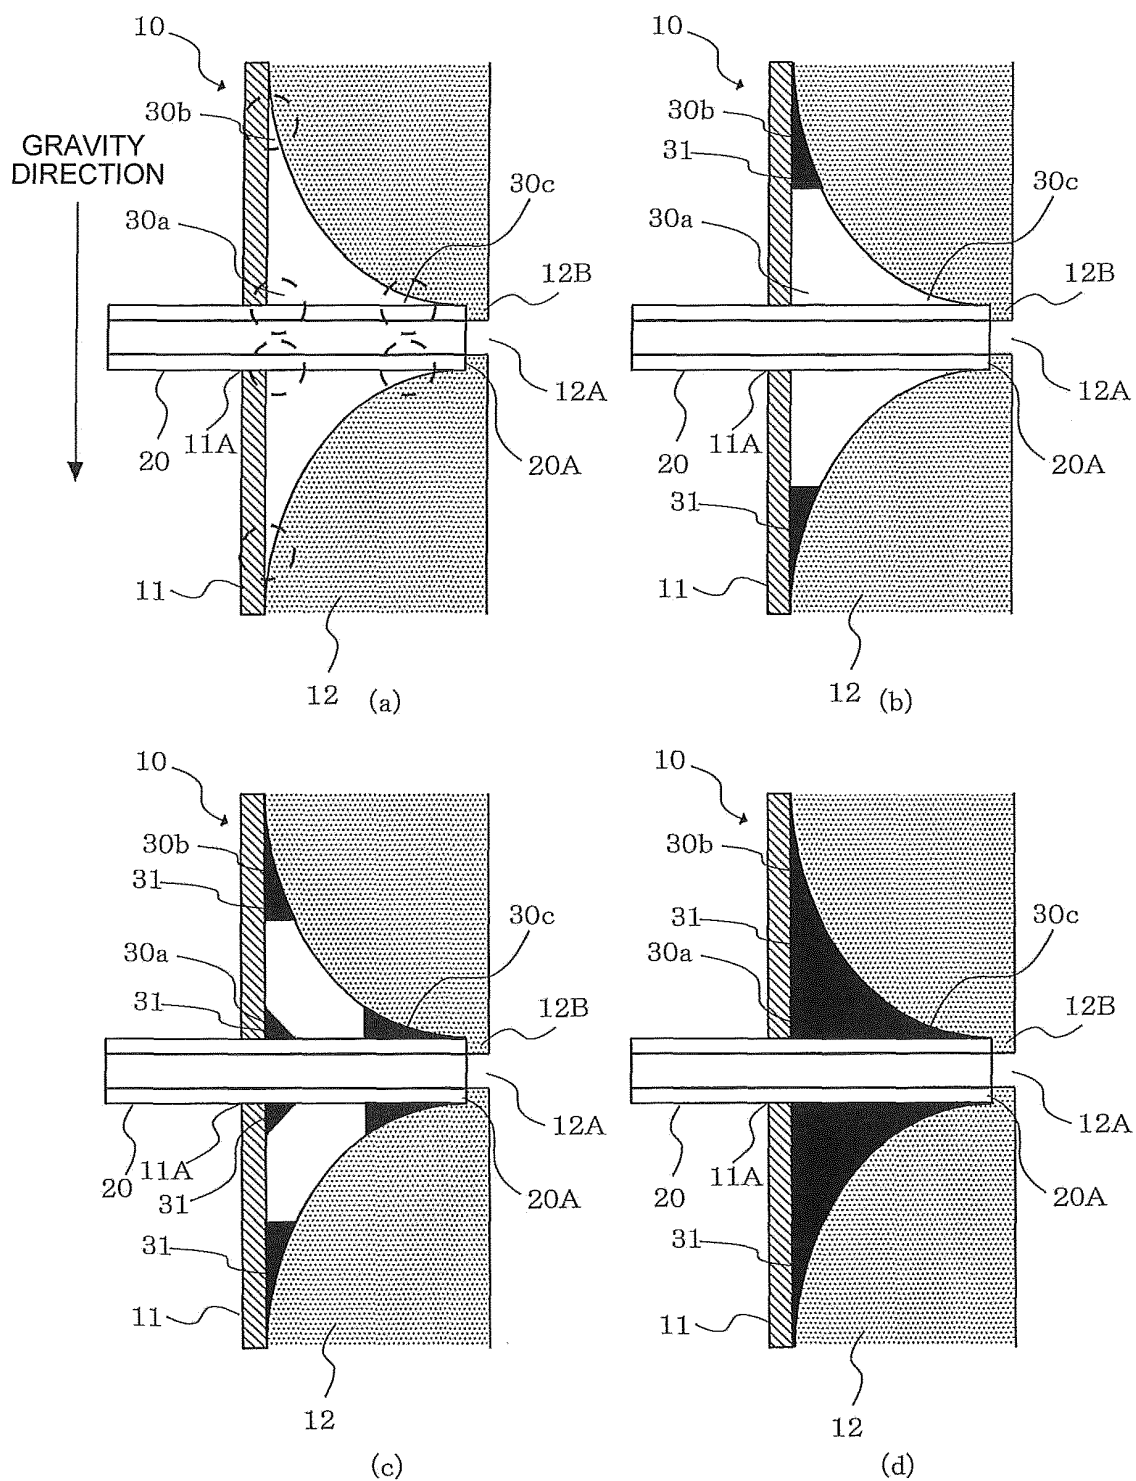


() : INTENDED FILLET FORMING PORTION

FIG. 10

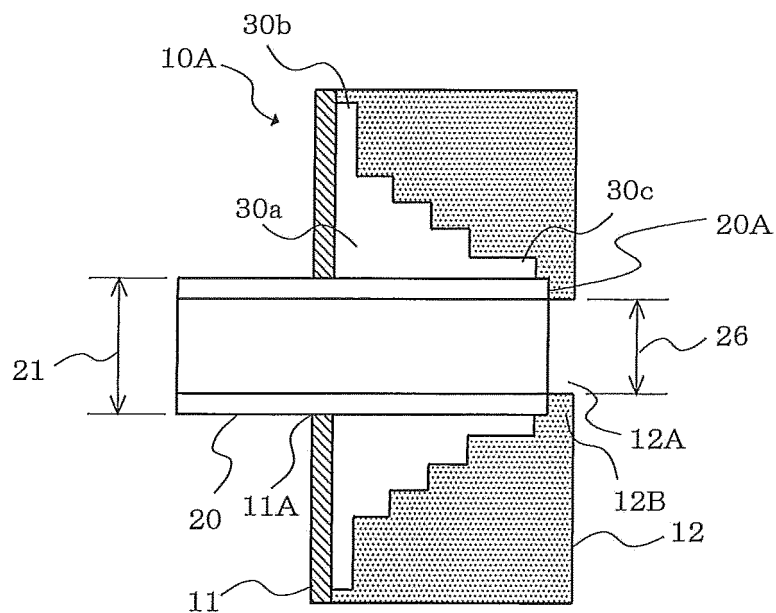


(a)

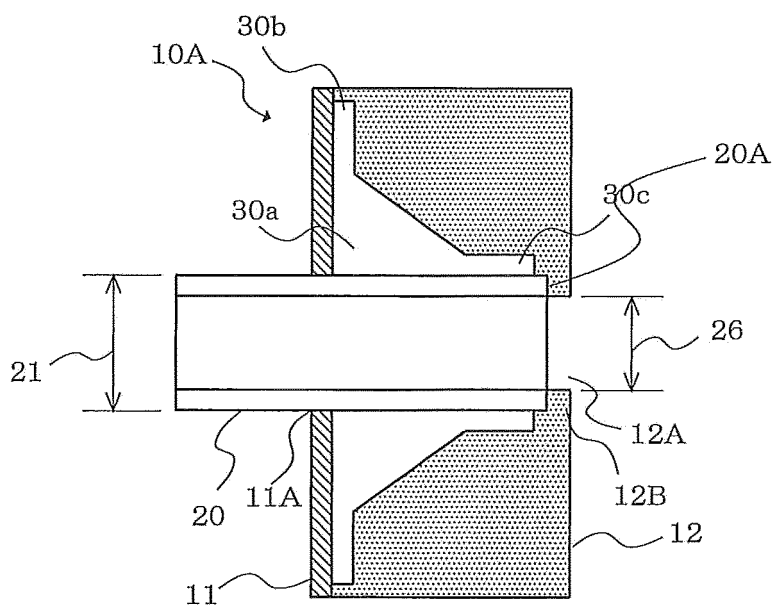

(b)

FIG. 11

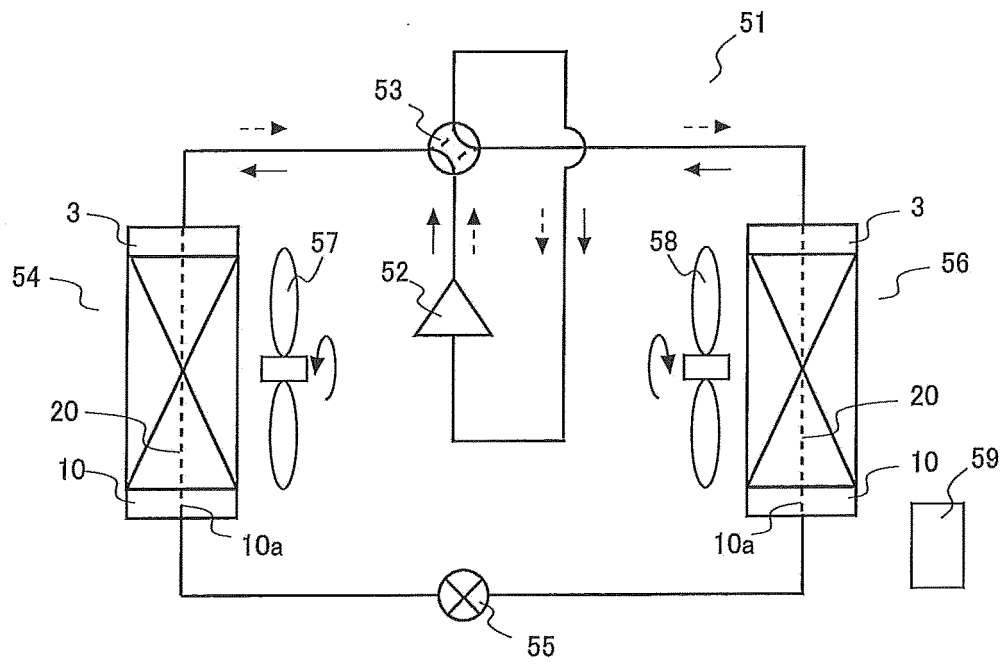

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2014/073998

A. CLASSIFICATION OF SUBJECT MATTER

F28F9/18(2006.01)i, B23K1/00(2006.01)i, F28D1/053(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F28F9/18, B23K1/00, F28D1/053

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2014
 Kokai Jitsuyo Shinan Koho 1971-2014 Toroku Jitsuyo Shinan Koho 1994-2014

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2012/018125 A1 (CKU Inc.), 09 February 2012 (09.02.2012), paragraphs [0027], [0038] to [0050]; fig. 6, 7 (Family: none)	1-9
Y	JP 2008-249241 A (Showa Denko Kabushiki Kaisha), 16 October 2008 (16.10.2008), paragraphs [0021], [0025], [0035]; fig. 6, 7 (Family: none)	1-9
Y	JP 2007-298197 A (Showa Denko Kabushiki Kaisha), 15 November 2007 (15.11.2007), paragraphs [0021], [0044]; fig. 4 & US 2007/0251682 A1 & DE 102007018879 A1	1-9

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
01 December, 2014 (01.12.14)Date of mailing of the international search report
09 December, 2014 (09.12.14)Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2014/073998

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2007-10296 A (Calsonic Kansei Corp.), 18 January 2007 (18.01.2007), paragraphs [0003], [0012] to [0020]; fig. 2, 5 (Family: none)	1-9
A	JP 2005-188787 A (Calsonic Kansei Corp.), 14 July 2005 (14.07.2005), paragraphs [0029] to [0032], [0035] to [0037]; fig. 8 (Family: none)	1-9

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2008249241 A [0004]
- JP 2006017442 A [0004]