

(19)



(11)

**EP 3 054 911 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:

**07.06.2023 Bulletin 2023/23**

(51) International Patent Classification (IPC):

**A61H 19/00** <sup>(2006.01)</sup> **A61H 21/00** <sup>(2006.01)</sup>  
**A61H 9/00** <sup>(2006.01)</sup> **A61H 23/02** <sup>(2006.01)</sup>

(21) Application number: **14852965.4**

(52) Cooperative Patent Classification (CPC):

**A61H 19/50; A61H 9/0078; A61H 19/32;**  
**A61H 19/44; A61H 21/00; A61H 23/02;**  
A61H 2201/0103; A61H 2201/0111;  
A61H 2201/165; A61H 2201/1692; A61H 2201/5097

(22) Date of filing: **08.10.2014**

(86) International application number:

**PCT/US2014/059780**

(87) International publication number:

**WO 2015/054436 (16.04.2015 Gazette 2015/15)**

(54) **DUAL-PENETRATION SEX TOY FOR HETEROSEXUAL COUPLES**

DOPPELPENETRATIONS-SEXSPIELZEUG FÜR HETEROSEXUELLE PAARE

JOUET SEXUEL À DOUBLE PÉNÉTRATION POUR COUPLES HÉTÉROSEXUELS

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**

(72) Inventor: **MILTON, Graham**

**Brooklyn, NY 11201 (US)**

(30) Priority: **08.10.2013 US 201361888371 P**

(74) Representative: **Baldwin, Mark**

**Firebird IP**  
**27 Old Gloucester Street**  
**London WC1N 3AX (GB)**

(43) Date of publication of application:

**17.08.2016 Bulletin 2016/33**

(56) References cited:

**WO-A1-2010/078655 WO-A1-2011/045588**  
**US-A- 2 478 786 US-A1- 2008 306 417**  
**US-A1- 2009 216 076 US-B1- 7 530 944**  
**US-B1- 8 062 208 US-B2- 7 604 587**  
**US-B2- 7 931 605**

(73) Proprietors:

- **GGM Products, LLC**  
**Brooklyn, NY 11201 (US)**
- **Hunziker Wintour, William Mark**  
**Boulder, CO 80302 (US)**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 3 054 911 B1**

**Description****BACKGROUND OF THE INVENTION****1. FIELD OF THE INVENTION**

**[0001]** The present invention is in the technical field of sex toys. More particularly, the present invention pertains to the field of sex toys that are inserted into the body of two partners at the same time.

**2. DESCRIPTION OF RELATED ART**

**[0002]** Sex toys have been around since the beginning of recorded history. As of 2013, the worldwide sex toy industry is estimated to be a \$15 billion dollar a year industry with approximately 70% of the manufacturing being done in China. Common older types of penetrative sex toys include: dildos, Ben Wa balls, horseshoes, double penetration dildos, strap-on dildos, kegel exercisers, motorized sex machines, butt-plugs, anal beads, and prostate massagers; any of which can be fitted with vibrators. These sex toys are traditionally made of silicon, rubber, hard plastic, metal, glass, or cyber skin; although stranger materials can be and are used.

**[0003]** More recently a product called a Feeldoe®, as described in US5690603, filed Jan 22, 1996 has entered the market. The Feeldoe® allows a woman to insert one end of the toy into her vagina, thereby holding it in place while she uses the other end to penetrate her sexual partner. Obviously, this design will not work well for a man and a woman. Other dual-pleasure toys, such as two-sided dildos either focus on vaginal penetration, or fail to transfer kinetic energy from one partner's anus to the other's. Likewise, strap-on dildos tend to focus on the sensations of the receiver and not the giver by butting the end of the dildo against the pubis, which has no erogenous sensitivity.

**[0004]** US2009/0216076 discloses a sex toy for insertion into the body of a wearer and a partner at the same time, comprising first and second elongated, resilient generally cylindrical end regions, each sized for receipt in an anal or vaginal cavity and having distal and proximate end portions and a centre region. The first and second end regions connect with opposing ends of the centre region. The first end region is provided with a suction cup to contact the skin and erogenous zones of one of the partners to enhance the sexual play of the partners.

**[0005]** WO2010/078655 discloses an interchangeable attachment connector system comprising a connector member to which a variety of sex toys may be attached. In one embodiment, two such connector members are connected by a chain.

**SUMMARY**

**[0006]** The invention provides a sex toy as specified in claim 1.

**[0007]** Embodiments of the invention may allow for the use of vibrators, waterproofing, rechargeable batteries, charging platforms, control systems to modulate vibration patterns, and bladders filled with air or fluid that allow for expansion or retraction of various parts of the sex toy.

**BRIEF DESCRIPTION OF THE DRAWINGS**

**[0008]** The above, and other, aspects, features, and advantages of several embodiments of the present disclosure will be more apparent from the following Detailed Description as presented in conjunction with the Drawings.

**1. FIGURES****[0009]**

Fig. 1 illustrates a perspective view of a sex toy, in accordance with an embodiment of the present disclosure.

Fig. 2 illustrates a side view of a sex toy, in accordance with an embodiment of the present disclosure.

Fig. 3 illustrates a side view of a sex toy with internal vibrators and power system, in accordance with an embodiment of the present disclosure.

Fig. 4 illustrates a side view of a sex toy with external vibrators and an internal cavity, in accordance with an embodiment of the present disclosure.

**[0010]** Corresponding reference characters indicate corresponding components throughout the several figures of the Drawings. Elements in the several figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be emphasized relative to other elements for facilitating understanding of the various presently disclosed embodiments. Also, common, but well-understood elements that are useful or necessary in commercially feasible embodiments are often not depicted in order to facilitate a less obstructed view of these various embodiments of the present disclosure.

**DETAILED DESCRIPTION**

**[0011]** The following description is not to be taken in a limiting sense, but is made merely for the purpose of describing the general principles of exemplary embodiments, many additional embodiments of this invention are possible within the scope of the appended claims. Reference throughout this specification to "one embodiment," "an embodiment," or similar language means that a particular feature, structure, or characteristic that is described in connection with the embodiment is included in

at least one embodiment of the present disclosure. Thus, appearances of the phrases "in one embodiment," "in an embodiment," and similar language throughout this specification may, but do not necessarily, all refer to the same embodiment.

**[0012]** Unless otherwise indicated, the drawings are intended to be read (e.g., arrangement of parts, proportion, degree, etc.) together with the specification, and are to be considered a portion of the entire written description of this invention. As used in the following description, the terms "horizontal", "vertical", "left", "right", "up" and "down", as well as adjectival and adverbial derivatives thereof (e.g., "horizontally", "rightwardly", "upwardly", etc.), simply refer to the orientation of the illustrated structure as the particular drawing figure would be seen by a perspective wearer of the sex toy looking down at it. Similarly, the terms "inwardly" and "outwardly" generally refer to the orientation of a surface relative to its axis of elongation, or axis of rotation, as appropriate. Also, as used herein, terms such as "positioned on" or "supported on" mean positioned or supported on but not necessarily in direct contact with the surface.

**[0013]** The phrases "at least one," "one or more," and "and/or" are open-ended expressions that are both conjunctive and disjunctive in operation. For example, each of the expressions "at least one of A, B and C", "at least one of A, B, or C", "one or more of A, B, and C", "one or more of A, B, or C" and "A, B, and/or C" means A alone, B alone, C alone, A and B together, A and C together, B and C together, or A, B and C together. The terms "a" or "an" entity refers to one or more of that entity. As such, the terms "a" (or "an"), "one or more" and "at least one" can be used interchangeably herein. It is also to be noted that the terms "comprising," "including," and "having" can be used interchangeably. Further, all numbers expressing dimensions, physical characteristics, and so forth, used in the specification and claims are to be understood as being modified in all instances by the term "about".

**[0014]** For the purposes of promoting an understanding of the principles of the present invention, reference will now be made to the embodiments illustrated in the drawings and specific language will be used to describe the same.

**[0015]** As stated above, anal play for couples is fun, but it is difficult to simultaneously please both partners anally while also performing vaginal intercourse. Very generally, embodiments of the sex toy described herein comprise one end that is an anal dildo for a receiver and another end that is a butt plug for the wearer with a point of attachment between the two for the attachment of the sex toy to the wearer. In a preferred embodiment, the butt plug end is inserted into a man and a cock ring is strung through the point of attachment, which is a hole, and acts as a fulcrum and rotates the toy backwards slightly upon the thrust of the dildo end into the woman's anus, thereby transferring movement to the butt plug end up and against the man's prostate. Additionally, because the toy can be inserted in both partner's anuses simulta-

neously, each partner can directly feel a connection with the anal movements of the other partner.

**[0016]** It is anticipated that this design could also be used between female-female couples using a strap-on dildo, harness, or other means of attachment; in which case, the user of the strap-on dildo or harness would take the man's place in the description above. It is anticipated that this design could also be used between male-male couples, albeit more awkwardly. The toy could also be used without a cock ring, but it would be harder to hold in place.

**[0017]** Now referring to the drawings Fig. 1 illustrates a perspective view of one embodiment of a sex toy **20** with an attached cock ring **30**. The sex toy **20** itself could be made of silicon, rubber, hard plastic, metal, glass, cyber skin, or any other material suitable to its purpose. The sex toy **20** could also be made of one solid piece or hollowed out entirely or only in certain portions. Methods of production are those of similar products in the market. Likewise, cock rings **30** are common in the market and can be made of silicon, rubber, hard plastic, metal, cyber skin, or any other material suitable to their purpose. A cock ring may also comprise an integrated or detachable vibrator **32**.

**[0018]** From the perspective of a potential wearer of the sex toy **20**, the sex toy is comprised of three primary regions which may create a generally hooked shape. The fulcrum region **40** is the centre region and comprises one or more points of attachment **42** and serves to connect the two elongated, resilient, and generally cylindrical end regions sized for receipt in an anal or vaginal cavity. The end regions are: the butt plug region **50**, which is a region in the rear, and the dildo region **60**, which is in the front.

**[0019]** In the present embodiment the point of attachment **42** is a hole from one side of the sex toy to the other. In other embodiments the point of attachment could be a hole with a slot whereby an attaching means, which could be a cock ring, strap, string, harness, rope, tether, fastener, leash, tie, band, strip, belt, bridle, halter, restraint, shackle, chain, Velcro or other means of attachment to a wearer could be removably slid into the hole such that the object for attachment is held securely. The point of attachment **42** need not be a hole. The point of attachment could be a point at which an integrated cock ring, strap, harness, rope, tether, fastener, leash, tie, band, strip, belt, bridle, halter, restraint, shackle, chain or other means of attachment to a wearer is permanently or detachably affixed with a ring, loop, hoop, circlet, snap, buckle, fastener, clip, latch, clasp, clutch, grip, clasp, staple, binder, button, press stud, crimp, tuck, fold, crease, lock, knot, Velcro or any other means of attachment known in the art.

**[0020]** The importance of the point of attachment is that it allows the wearer to attach the sex toy to their penis, thereby creating a pivot point or fulcrum for the butt plug **50** and dildo **60** regions of the sex toy **20** to move about. This creates a suspended seesaw lever for the forces applied to either end region of the sex toy

across the fulcrum and allowing more efficient transfer of kinetic energy allowing partners to experience the tiny tremors, clenches, and other movements of their partner, which in-turn creates a unique sensation of closeness.

**[0021]** Ideally, the means for attaching for a man would be a cock ring **30**, as it attaches the sex toy in precisely the right location, tight against the wearer's perineum, and may also serve additional useful purposes. A leather cock ring that comes apart is ideal as it would easily be strung through a hole in the sex toy and removed again.

**[0022]** The fulcrum region **40** may be either narrower or wider in cross-section than either the butt plug **50** or dildo **60** regions, but should be wide enough as not to injure the wearer. The fulcrum region should ideally be sized so that its top surface **44** is flat and extends in length from the base of the penis to the anus for ideal placement of the butt plug region **50**. Height wise, the fulcrum region **40** should be lower **46** where the sex toy could contact the male gonads to prevent injury thereto, which is typically just forward of the point of attachment **42**. Either end of the fulcrum region **40** may be tapered toward the butt plug **50** and/or dildo **60** regions respectively.

**[0023]** Fig. 2 illustrates a side view of an embodiment of a sex toy with an attached cock ring. The rear end of the sex toy comprises a butt plug region **50**, which extends upward and forward from a fulcrum region **40** and is intended to be inserted into a wearer's anus, or in rare cases, vagina. In a preferred embodiment, the dimensions of this region are ideally suited to stimulate a man's prostate while the sex toy **20** pivots about the point of attachment **42**. The proximate portion **52** of the butt plug region may be tapered to increase the wearer's comfort while inserted anally and to allow for greater flexibility of the distal portion **54** of the region as the entire region moves around during intercourse. In a preferred embodiment, the entire butt plug region **50** is smooth. However, it is contemplated that the region may comprise one or more bulbous, knobbed, textured, or ridged sub-regions.

**[0024]** Still referring to Fig. 2, the front end of the sex toy **10** comprises a dildo region **60**, which also extends upward and forward from a fulcrum region **40** and is intended to be inserted into the recipient's (not the wearer's) anus or vagina depending on their gender and sexual position. In a preferred embodiment, the length of this region is ideally sized to fill the anal cavity without pressuring the junction of the rectum and the sigmoid colon and will be longer than the butt plug region. The reason the dildo region is preferably longer than the butt plug region **50** is in order to provide appropriate space **62** for a wearer's testicles which would be located at the proximate end of the dildo region **66**.

**[0025]** The dildo region **60**, while elongated, resilient, and generally cylindrical; may be smooth; shaped like a penis; or may comprise one or more bulbous, knobbed, textured, or ridged sub-regions. In a preferred embodiment, the dildo region **60** may comprise one or more bulbous regions **64**. In this preferred embodiment the bulbous regions would have a smaller diameter at the distal end of

the dildo region **68** and would have wider diameters sequentially as they approach the proximate end of the dildo region **66**, with the possible exception of the bulbous region under the space **62** for the testicles which could be smaller and somewhat flattened. The increasing diameter of the bulbous regions **64** would allow for the sex toy to be inserted into a recipient's anus in a graduated manner appropriate for a more relaxed penetration, while the variable diameters also facilitate the recipient's ability to grip the dildo region **60** of the sex toy **20** during use for increased stimulation. The ability to grip the dildo region **60** of the sex toy is of increased importance in this design because the point of attachment **42** and means for attachment create a fulcrum point for a leveraged seesaw like transfer of kinetic energy from the dildo region **60** to the butt plug **50** region of the sex toy.

**[0026]** Figure 3 illustrates alternate embodiments of a sex toy without a cock ring attached. In one embodiment of a sex toy **22**, the sex toy may be waterproof and comprise internal vibrators **70**, a rechargeable battery **72**, a control system **74**, and a power input **76**. The internal vibrators **70** and control system **74** may be adapted to provide for variation in the duration and intensity of the vibration of the sex toy. The control system **74** may also be adapted to control the duration and intensity of vibration via a manual control **75** located on the sex toy or remotely via a separate wireless remote control **73**. The rechargeable battery **72** may be recharged via a power input **76**. The power input **76** may simply be a plug for a power cord, may be an electrically conductive plate designed to be paired with a cordless recharger **78**, or may be any other method for conferring a charge to the battery.

**[0027]** A cordless recharger **78** may comprise a stand that holds the sex toy in a position such that each of the electrical leads on the cordless recharger come into contact with an electrically conductive plate on the sex toy. The electrically conductive plate may comprise a metallic disk which is one electrical lead and a metallic ring encircling the disk which is a second electrical lead, each of which pair with another electrical lead on a cordless recharger; such cordless charging systems for sex toys are already known in the art and are used in high-end waterproof sex toys. The cordless recharger **78** may then be plugged into a power socket with a power cord **79**.

**[0028]** Figure 4 illustrates alternate embodiments of a sex toy without a cock ring attached. In one embodiment of a sex toy **24**, the sex toy may comprise one or more external vibrators **71** which may be removably inserted into said sex toy **24**. In another embodiment a sex toy could have one or more internal cavities **80** in either the butt plug **50** region, dildo region **60**, or running the length of the dildo region **60** of the sex toy to the butt plug region **50** of the sex toy. An internal cavity **80** may be filled with air or fluid. An internal cavity may also comprise one or more valves **82** whereby additional air or fluid may be added to or removed to said internal cavity.

**[0029]** In application, one region or another of the sex

toy could be pumped up to a larger size. For example, an air valve could allow the butt plug region **80** to be pumped up to a larger size to provide greater pressure against the prostate, or so the butt plug region **80** would be less likely to slip out of the wearers body when in use. In another application, a fluid filled cavity would facilitate the ability of one user to squeeze their end of the sex toy while in use and create a corresponding increase in size and pressure on the other end of the sex toy for the other partner. Fig 3 illustrates possible changes in dimensions of the corresponding ends when filled with fluids in dashed lines.

**[0030]** Embodiments of the present disclosure present a sex toy preferably designed to enhance penile to vaginal penetration in a missionary position with an anal-to-anal connection between the two partners. This may be accomplished by inserting one end of the sex toy into the anus of the wearer and using a cock ring or strap to fix the sex toy against the wearer's perineum by hooping over the wearer's penis, or strap-on, thereby creating a pivot-point which allows the wearer to transfer the motion of their thrusting directly back into their anal cavity. This design allows for a woman to receive vaginal and anal penetration, while the wearer is simultaneously being penetrated anally. Because of the pivot point and simultaneous anal penetration both the wearer and the receiver can feel a direct connection with the anal movements in their partner.

## CONCLUSION

**[0031]** Information as herein shown and described in detail is fully capable of attaining the above-described object of the present disclosure, the presently preferred embodiment of the present disclosure; and is, thus, representative of the subject matter; which is broadly contemplated by the present disclosure. The scope of the present disclosure fully encompasses other embodiments within the scope of the appended claims.

## Claims

1. A sex toy for insertion into the body of a wearer and a partner at the same time, comprising:

- (a) a first elongated, resilient, and generally cylindrical rear end region (50) sized for receipt in an anal or vaginal cavity and having proximate and distal end portions (52, 54);
- (b) a second elongated, resilient, and generally cylindrical front end region (60) sized for receipt in an anal or vaginal cavity and having proximate and distal end portions (66, 68); and
- (c) a centre region (40), wherein said first and said second end regions (50, 60) connect with opposing ends of said centre region (40), **characterised by**

a means for attaching (30) attached to a point of attachment (42) on said centre region (40), wherein said means for attaching (30) is capable of going around the wearer's penis or a strap on dildo worn by the wearer with said rear end region received in the wearer's anus and the front end region inserted in the partner's anus or vagina to enable simultaneous anal penetration of the wearer while performing anal or vaginal intercourse with the partner and said means for attaching (30) and said point of attachment (42) create a fulcrum or pivot point for transferring kinetic energy from one of said end regions (50, 60) to the other of said end regions (50, 60).

2. The apparatus of claim 1, wherein said means for attaching (30) is a cock ring.
3. The apparatus of claim, 1 or 2, wherein said point of attachment (42) comprises a hole through said centre region (40).
4. The apparatus of any one of the preceding claims, wherein said rear end region (50) is sized for receipt in an anal cavity and extends above and forward in a hook like fashion from where it attaches to the centre region (40).
5. The apparatus of any one of the preceding claims, wherein said front end region (60) further comprises one or more bulbous regions (64).
6. The apparatus of any one of the preceding claims, wherein said front end region (60) is phallic shaped with an enlarged tip.
7. The apparatus of any one of the preceding claims, further comprising a vibrator (32; 70; 71).
8. The apparatus of claim 7, wherein said vibrator (71) can be removably inserted into said sex toy.
9. The apparatus of claim 7, further comprising a power input that is an electrically conductive plate (76) that can pair with a cordless recharger (78).
10. The apparatus of claim 7, further comprising a control system (75) for said vibrator (70) that regulates duration and intensity of vibration.
11. The apparatus of claim 10, further comprising a remote control (73) that controls said control system (75).
12. The apparatus of any one of the preceding claims, wherein said sex toy further comprises an internal cavity (80).

13. The apparatus of claim 12, further comprising a valve (82), wherein the pressure in said cavity (80) may be increased or decreased by use of said valve.

### Patentansprüche

1. Sexspielzeug zum gleichzeitigen Einführen in den Körper eines Trägers und eines Partners, umfassend:

(a) eine erste längliche, elastische und allgemein zylindrische hintere Endregion (50), die zur Aufnahme in einer Anal- oder Vaginalhöhle dimensioniert ist und einen proximalen und einen distalen Endabschnitt (52, 54) aufweist;  
(b) eine zweite längliche, elastische und allgemein zylindrische vordere Endregion (60), die zur Aufnahme in einer Anal- oder Vaginalhöhle dimensioniert ist und einen proximalen und einen distalen Endabschnitt (66, 68) aufweist; und  
(c) eine Mittelregion (40), wobei die erste und die zweite Endregion (50, 60) sich mit entgegengesetzten Enden der Mittelregion (40) verbinden, **gekennzeichnet durch**

ein Befestigungsmittel (30), das an einem Befestigungspunkt (42) an der Mittelregion (40) befestigt wird, wobei das Befestigungsmittel (30) um den Penis des Trägers oder einen Umschnalldildo, der von dem Träger getragen wird, geführt werden kann, wobei die hintere Endregion in dem Anus des Trägers aufgenommen wird und die vordere Endregion in den Anus oder die Vagina des Partners eingeführt wird, um eine gleichzeitige anale Penetration des Trägers zu ermöglichen, während er mit dem Partner analen oder vaginalen Geschlechtsverkehr durchführt, und das Befestigungsmittel (30) und der Befestigungspunkt (42) einen Gelenkpunkt oder Drehpunkt zum Übertragen von kinetischer Energie von einer der Endregionen (50, 60) an die andere der Endregionen (50, 60) erzeugen.

2. Vorrichtung nach Anspruch 1, wobei das Befestigungsmittel (30) ein Penisring ist.  
3. Vorrichtung nach Anspruch 1 oder 2, wobei der Befestigungspunkt (42) ein Loch durch die Mittelregion (40) ist.  
4. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei die hintere Endregion (50) zur Aufnahme in einer Analhöhle dimensioniert ist und sich auf hakenartige Weise von der Stelle, an der sie sich mit der Mittelregion (40) verbindet, nach oben und nach vorne erstreckt.  
5. Vorrichtung nach einem der vorhergehenden An-

sprüche, wobei die vordere Endregion (60) weiterhin eine oder mehrere bauchige Regionen (64) umfasst.

6. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei die vordere Endregion (60) phallusförmig mit einer vergrößerten Spitze ist.  
7. Vorrichtung nach einem der vorhergehenden Ansprüche, weiterhin umfassend einen Vibrator (32; 70; 71).  
8. Vorrichtung nach Anspruch 7, wobei der Vibrator (71) herausnehmbar in das Sexspielzeug eingeführt werden kann.  
9. Vorrichtung nach Anspruch 7, weiterhin umfassend eine Stromaufnahme, die eine elektrisch leitende Platte (76) ist, die eine Verbindung mit einem schnurlosen Ladegerät (78) herstellen kann.  
10. Vorrichtung nach Anspruch 7, weiterhin umfassend ein Steuersystem (75) für den Vibrator (70), das die Vibrationsdauer und -Intensität regelt.  
11. Vorrichtung nach Anspruch 10, weiterhin umfassend eine Fernbedienung (73), die das Steuersystem (75) steuert.  
12. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei das Sexspielzeug weiterhin einen internen Hohlraum (80) umfasst.  
13. Vorrichtung nach Anspruch 12, weiterhin umfassend ein Ventil (82), wobei der Druck in dem Hohlraum (80) durch Verwendung des Ventils erhöht oder gesenkt werden kann.

### Revendications

1. Jouet sexuel servant à des fins d'insertion dans le corps d'un utilisateur et d'un partenaire en même temps, comportant :  
(a) une première région d'extrémité arrière allongée, élastique et généralement cylindrique (50) dimensionnée à des fins de réception dans une cavité anale ou vaginale et ayant des parties d'extrémité proximale et distale (52, 54) ;  
(b) une deuxième région d'extrémité avant allongée, élastique et généralement cylindrique (60) dimensionnée à des fins de réception dans une cavité anale ou vaginale et ayant des parties d'extrémité proximale et distale (66, 68) ; et  
(c) une région centrale (40), jouet sexuel dans lequel lesdites première et deuxième régions d'extrémité (50, 60) se raccordent au niveau des extrémités opposées de ladite région centrale


(40), **caractérisé par**

un moyen de fixation (30) qui est fixé au niveau d'un point de fixation (42) sur ladite région centrale (40), dans lequel ledit moyen de fixation (30) est en mesure d'entourer le pénis de l'utilisateur ou une sangle sur un godemiché porté par l'utilisateur avec ladite région d'extrémité arrière reçue dans l'anus de l'utilisateur et la région d'extrémité avant insérée dans l'anus ou le vagin du partenaire afin de permettre une pénétration anale simultanée de l'utilisateur tout en effectuant un rapport anal ou vaginal avec le partenaire et ledit moyen de fixation (30) et ledit point de fixation (42) créent un point d'articulation ou point de pivotement servant à des fins de transfert d'une énergie cinétique de l'une desdites régions d'extrémité (50, 60) à l'autre desdites régions d'extrémité (50, 60) .


2. Appareil selon la revendication 1, dans lequel ledit moyen de fixation (30) est un anneau pénien. 20
3. Appareil selon la revendication 1 ou la revendication 2, dans lequel ledit point de fixation (42) comporte un trou au travers de ladite région centrale (40). 25
4. Appareil selon l'une quelconque des revendications précédentes, dans lequel ladite région d'extrémité arrière (50) est dimensionnée à des fins de réception dans une cavité anale et s'étend au-dessus et vers l'avant à la façon d'un crochet depuis là où il s'attache au niveau de la région centrale (40). 30
5. Appareil selon l'une quelconque des revendications précédentes, dans lequel ladite région d'extrémité avant (60) comporte par ailleurs une ou plusieurs régions bulbeuses (64). 35
6. Appareil selon l'une quelconque des revendications précédentes, dans lequel ladite région d'extrémité avant (60) est de forme phallique avec un bout élargi. 40
7. Appareil selon l'une quelconque des revendications précédentes, comportant par ailleurs un vibromasseur (32 ; 70 ; 71) . 45
8. Appareil selon la revendication 7, dans lequel ledit vibromasseur (71) peut être inséré de manière amovible dans ledit jouet sexuel. 50
9. Appareil selon la revendication 7, comportant par ailleurs une entrée d'alimentation qui est une plaque électriquement conductrice (76) qui peut se coupler à une chargeur sans fil (78) . 55
10. Appareil selon la revendication 7, comportant par ailleurs un système de commande (75) pour ledit vibromasseur (70) qui régule la durée et l'intensité

de la vibration.

11. Appareil selon la revendication 10, comportant par ailleurs une télécommande (73) qui commande ledit système de commande (75) .
12. Appareil selon l'une quelconque des revendications précédentes, dans lequel ledit jouet sexuel comporte par ailleurs une cavité interne (80).
13. Appareil selon la revendication 12, comportant par ailleurs une valve (82), dans lequel la pression dans ladite cavité (80) peut être augmentée ou réduite par l'utilisation de ladite valve.

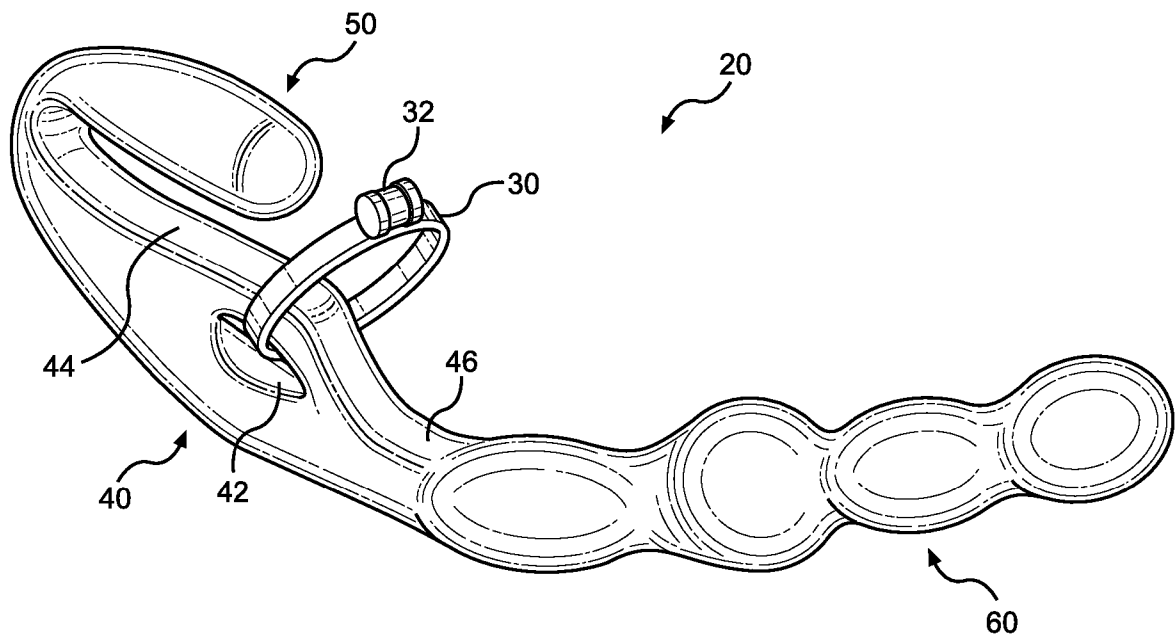


**FIG. 1**

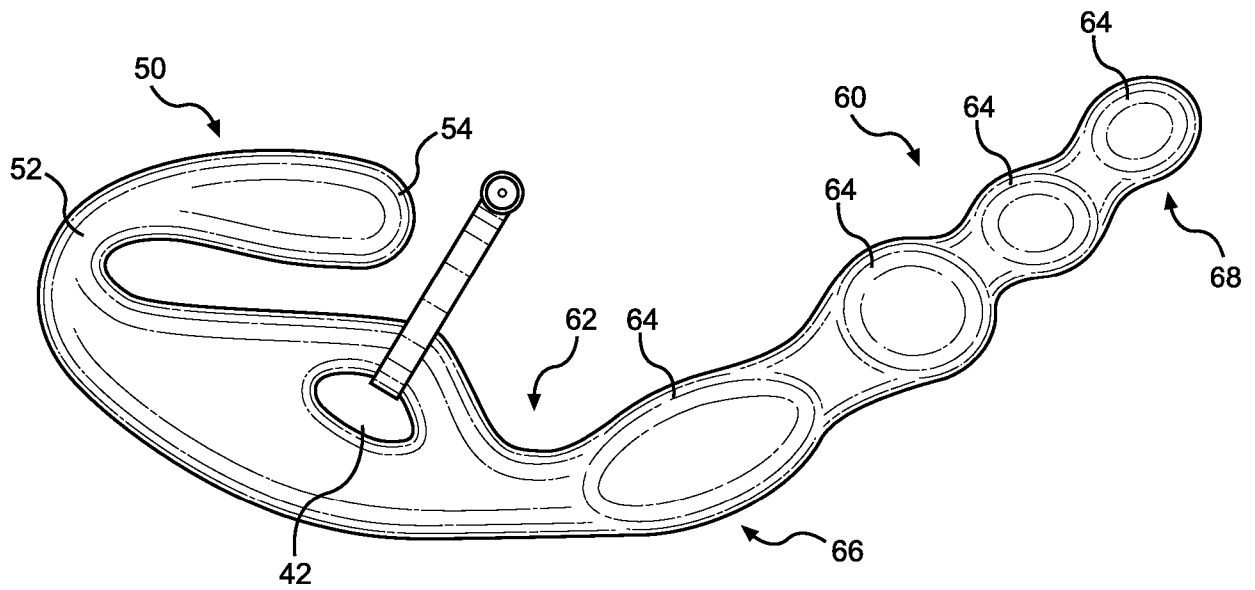


**FIG. 2**



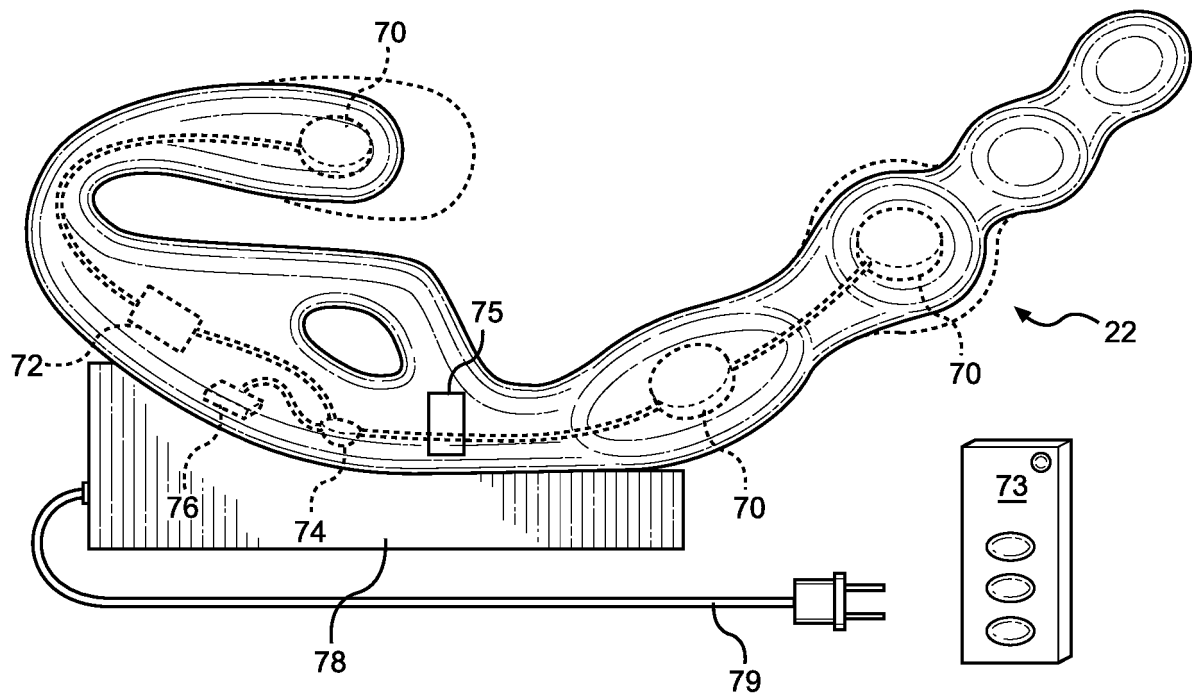

**FIG. 3**

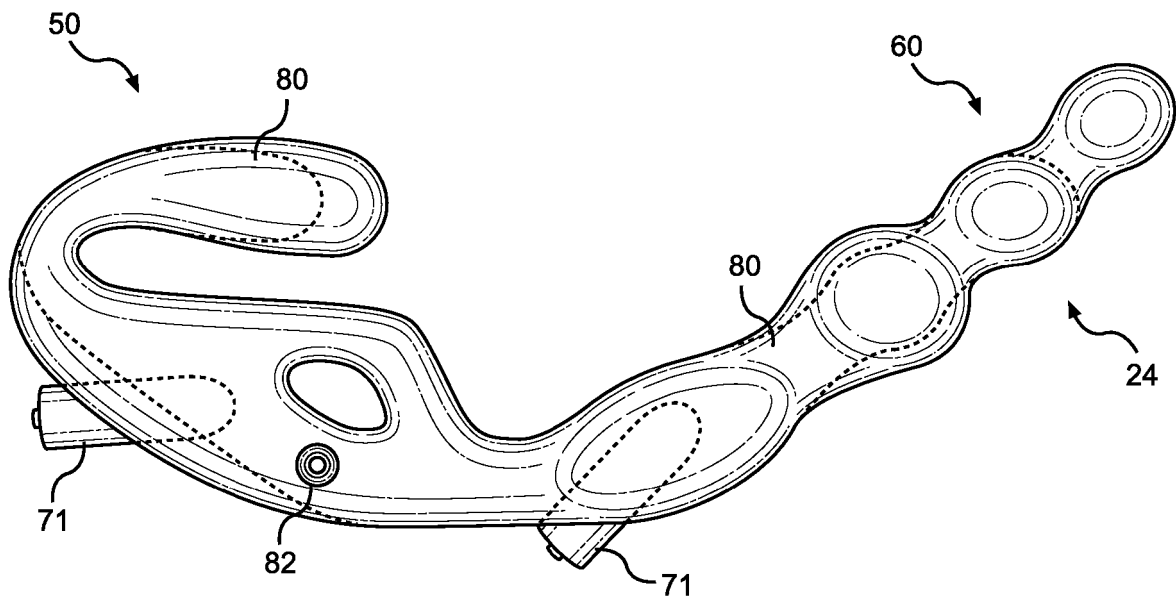

**FIG. 4**

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 5690603 A [0003]
- US 20090216076 A [0004]
- WO 2010078655 A [0005]