(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) **EP 3 061 367 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
30.01.2019 Bulletin 2019/05

(21) Application number: **15305285.7**

(22) Date of filing: **25.02.2015**

(51) Int Cl.:
A47F 11/10 *(2006.01)* ***F21V 33/00*** *(2006.01)*
F21V 21/35 *(2006.01)* ***H01R 25/16*** *(2006.01)*
A47F 5/10 *(2006.01)*

(54) System for supplying and distributing electricity and configured to equip a shelving device

System zur Versorgung mit und Verteilung von Elektrizität und Konfiguration zur Ausrüstung einer Regalvorrichtung

Système d'alimentation et de distribution d'électricité et configuré pour équiper un dispositif de rayonnage

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(43) Date of publication of application:
31.08.2016 Bulletin 2016/35

(73) Proprietor: **HMY Group**
89470 Moneteau (FR)

(72) Inventor: **Rillié, Quentin**
41000 Blois (FR)

(74) Representative: **Santarelli**
49, avenue des Champs-Elysées
75008 Paris (FR)

(56) References cited:
EP-A1- 0 007 071
EP-A2- 0 588 654
DE-U1-202012 008 355
DE-U1-202013 101 760

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 061 367 B1

Description

FIELD OF THE INVENTION

[0001] The invention relates to systems for supplying and distributing electricity and which equip shelving devices comprising at least one moveable shelf for displaying articles.

[0002] The invention further relates to a shelving device comprising such a system.

BACKGROUND ART

[0003] Shelving devices, also named gondola, are well known and generally comprise a base, two vertical columns which extend from the base, a back panel directly mounted on and between the vertical columns, and a plurality of shelves, also named sales shelves for displaying articles, each mounted on and hung to the vertical columns.

[0004] The shelving device described in the German utility model DE 20 2013 101 760 also comprises a rail mounted inside the vertical column and configured for supplying electricity to the shelving device and a connector mounted onto the vertical column and configured to mechanically and electrically cooperate with the rail in order to distribute the electricity for instance to the shelves.

[0005] In particular, the vertical column has a section of rectangular shaped defining a cavity and comprises two first portions which face each other, two second portions which face each other and which join each the two first portions, and a plurality of openings formed in the two second portions and configured for hanging the shelves to the vertical columns.

[0006] The rail comprises a body made in plastic material and located in the center of the cavity of the vertical column. The body comes into abutment against an internal face of each first portion and is clamped there between. The body comprises a first face and a second face opposite to the first face, and from each of which extend two lateral walls substantially parallel and remote to the first portions. Each couple of lateral walls defines a reception area there between. The rail further comprises a plurality of conductive tracks mounted on each of the lateral walls, on the side of the reception areas and thus not on the side of the internal faces of the respective first portions.

[0007] The connector comprises a base, a connecting head having two conductive pins and extending from the base and a connecting interface also extending from the base at the opposite of the connecting head. The connecting head and the connecting interface are electrically linked together. The base is configured to be partially introduced into an opening of the vertical column such that the connecting head is received in the reception area between two respective lateral walls, the conductive pins of the connecting head being in contact with the respective conductive tracks of the respective lateral walls of the rail. The base comprises a latching member or a guiding member configured to cooperate with the vertical column at the vicinity of the opening in which the head passes through in order to lock and/or to guide the connector relative to the vertical column.

[0008] EP 588 654 A discloses another system for supplying and distributing electricity known in the state of the art.

SUMMARY OF THE INVENTION

[0009] The invention is directed to a system for supplying and distributing electricity and which equips a shelving device having a plurality of moveable shelves, the system being particularly simple and convenient to operate and also particularly efficient in term of electrical continuity.

[0010] The invention accordingly provides a system according to claim 1.

[0011] Thanks to the invention, the connecting device is partially housed in the support device. When the actuating device is in its second configuration, the rod of the actuating device puts the connecting device in the predetermined position in which the electrical connection is enhanced and the electrical continuity is ensured.

[0012] In such a predetermined position, the configuration of the second electrical conductive member of the connecting device with regard to the first electrical conductive member of the support device is further obtained thanks to the cooperation of the free end portion of the head of the connecting device with the free end portion of the support device, and also thanks to the cooperation between the locking member of the connecting device and the vertical column.

[0013] The system according to the invention thus facilitates the introduction and the locking of the connecting device relative to the support device, because the system has members which allows to repositionning ou correctly positionning the connecting device relative to the support.

[0014] Furhtermore, the support device is invisible from the outside of the vertical column and the connecting device is placed into an opening advantageously in the vicinity of another opening for fastening the shelf. Thus, the openings may be used for hanging a shelf or for the introduction of the conencting device and the system does not need supplemental openings formed in the vertical column.

[0015] The system according to the invention is thus particularly simple and convenient to operate and also particularly efficient in term of electrical continuity.

[0016] According to features preferred as being very simple, convenient and economical for embodying the system according to the invention:

- said support device comprises at least a longitudinal groove in which is clamped said first electrical con-

ductive member, the latter being formed by a conductive track, and said second electrical conductive member are formed by a metallic flexible piece having an arcuate free end which is configured to come into contact with said conductive track;

- said connecting device comprises a longitudinal tongue having a free pushing end, said main wall of said support device comprises a support edge opposite to said end wall, and said rod of said actuating device is configured for acting on said longitudinal tongue in said second configuration of said actuating device, said free pushing end abutting against said support edge for positioning said connecting device relative to said support device;

- said longitudinal tongue is fastened to said head of said connecting device, at the vicinity of said free end portion of said head, such that, when said actuating device is in its second configuration, said longitudinal tongue brings said head closer to said main wall of said support device;
- said locking member of said connecting device comprises a latching tab formed in said head and said rod of said actuating device comprises a pushing portion configured to act on said latching tab;
- said pushing portion has an inclined face which is formed by a recess made in said rod, such that said latching tab is progressively move away from a rest position when said actuating device is in its second configuration and said pusher and said rod are displaced from said first position to said second position;
- said pusher and said rod are in an intermediate position during the passage of said actuating device from its first configuration to its second configuration, intermediate position in which said free pushing end of said rod abuts against said support edge of the support device and in which said latching tab is in its rest position;
- said pusher comprises a locking strip and said base comprises a window configured for receiving at least partially said locking strip when said pusher is in its second position in order to maintain said actuating device in its second configuration;
- said actuating device further comprises a spring member acting both on said pusher and on said base, said spring member being configured to return said pusher in its first position and thus said actuating device in its first configuration when said locking strip is released from said window;
- said base comprises a plug having third conductive member electrically linked with said second conductive member;
- the system further comprises a power supply device configured to be mounted on said support device, said power supply device comprising fourth electrical conductive member configured to establish an electrical contact with said first electrical conductive member of said support device; and/or
- said power supply device has a main body located against said main wall of said support device and a lateral edge protruding from said main body and being housed in a channel formed in said main wall of said support device, at the opposite of said end wall; such that said power supply device is housed in said support device.

[0017] The invention further accordingly provides a shelving device comprising at least one system for supplying and distributing electricity as described above and at least one shelf hung to said vertical column of said system.

[0018] According to features preferred as being very simple, convenient and economical, the shelving device according to the invention comprises a base, two vertical columns extending from said base, a back panel structure extending from said base and disposed between said two vertical columns, a plurality of shelves hung to said two vertical columns and which overhang said base, at least one support device mounted in at least one of said vertical columns, at least one connecting device fastened to said vertical column and located in a predetermined position relative to said at least one support device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] The description of the invention now continues with a detailed description of a preferred embodiment given hereinafter by way of non-limiting example and with reference to the appended drawings. In these drawings:

- Figure 1 is a perspective and partial view of a shelving device comprising a system for supplying and distributing electricity according to the invention;
- Figure 2 represents partially a first detail of the shelving device illustrated in Figure 1, showing in particular a vertical column partially cut, a support device and a connecting device;
- Figure 3 is a perspective view of the support device and the connecting device illustrated in Figure 2, taken isolated;
- Figure 4 represents partially a second detail of the shelving device illustrated in Figure 1, showing in particular the vertical column partially cut and a supplying device;
- Figures 5 and 6 are perspective views of the support device and the supplying device illustrated in Figure 4, taken isolated;
- Figures 7 and 8 represent the connecting device according to different view angles, in a first configuration and taken isolated;
- Figures 9a and 9b are similar to Figures 7 and 8, the connecting device being in an exploded state;
- Figures 10 and 11 represent the connecting device according to different view angles, in a second configuration and taken isolated;

- Figures 12a and 12b are similar to Figure 10, the connecting device being in an exploded state; and
- Figures 13 to 15 are respectively partial and section views showing the connecting device in different positions relative to the support device.

DETAILED DESCRIPTION OF PREFERED EMBODIMENTS

[0020] Figure 1 shows a shelving device 1, also named gondola, which is used to display articles (not represented).

[0021] The shelving device 1 is configured to be disposed for instance in a supermarket and to receive articles to display for instance for sale.

[0022] The shelving device 1 comprises a base 2, two vertical columns 3 extending from the base 2, a back panel structure 4 also extending from the base 2 and disposed between the two vertical columns 3 and a plurality of shelves 5 (only one is illustrated), also named support for displaying articles, which are hung to the vertical columns 3 thanks to brackets 6.

[0023] The base 2 is made from metal and comprises horizontal stringers (not represented) which form a frame, four side walls whose only two side walls 7 and 8 are visible on Figure 1 and a panel 9 which covers the frame.

[0024] The panel 9 is flat and comprises a ledge 10 extending in front of the side wall 8.

[0025] The base 2 further comprises feet (not represented) whose only two are visible on Figure 1.

[0026] The two vertical columns 3 are made from metal and have each a general shape of a hollow tube having a rectangular section.

[0027] Each vertical column 3 comprises an interior lateral wall 11, also named first wall, an exterior lateral wall 12, also named second wall, opposite to the interior lateral face 11, a front wall 13, also named third wall, and a back wall 14, also named fourth wall, opposite to the front wall 13.

[0028] The front wall 13 and the back wall 14 are each linked both to the interior lateral wall 11 and to the exterior lateral wall 12.

[0029] The walls 11 to 14 define a cavity 15 in each of vertical column 3.

[0030] A plurality of first openings 16 are provided both in the front wall 13 and in the back wall 14 and a plurality of second openings 17 are provided both in the interior lateral wall 11 and in the exterior lateral wall 12.

[0031] Each first opening 16 and each second opening 17 have a rectangular general shape, the second opening 17 being here bigger than the first opening 16.

[0032] The front wall 13 and the back wall 14 comprise here two rows of first openings 16 which are arranged in a vertical superposition from the bottom to the top of the shelving device 1, while the interior lateral wall 11 and the exterior lateral wall 12 comprises only one row of second openings 17 which are also arranged in a vertical superposition from the bottom to the top of the shelving device 1.

[0033] The back panel structure 4 comprises a plurality of flat metal back panel modules 18 which are arranged in a vertical superposition from the bottom to the top of the shelving device 1 and sandwiched between the two vertical columns 3, and some spacers 19 interposed between two adjacent back panel modules 18. In particular, a spacer 19 is here interposed between each group of three back panel modules 18 vertically superimposed.

[0034] Each back panel module 18 comprises a first lateral end and a second lateral end opposite to the first lateral end, which are each mounted on a respective front wall 13 of a vertical column 3 thanks to hook member 27 (see Figure 2) introduced into the respective first openings 16.

[0035] Each spacer 19 is mounted between the two vertical columns 3 on the same manner that the back panel modules 18.

[0036] The shelf 5 is configured to be hung to the two vertical columns 3 thanks to the brackets 6 which support laterally the shelf 5 and which comprise hook members (not shown) configured to be introduced into respective first openings 16 of the front walls 13 of the vertical columns 3.

[0037] The shelf 5 is further configured to be removable from the vertical columns 3.

[0038] The shelf 5 comprises an upper face 20, a lower face (not shown), two lateral faces 21 (only one is visible) which are opposite to each other and a front face (not shown). The lateral faces 21 and the front face are configured to form a roof-deck for the shelf 5.

[0039] The shelf 5 further comprises a label holder 22 configured for receiving a digital label and/or a lighting system (not shown) formed for instance by an illuminating strip (not shown).

[0040] Such a digital label and/or a lighting system need to be electrically supplied.

[0041] The shelving device 1 thus comprises a system for supplying and distributing electricity which is formed by one or the two vertical columns 3 and which further comprises at least one support device 24 located in the cavity 15 of one of the vertical columns 3 (see Figure 2), at least one power supply device 23 mounted on the support device 24 (see Figure 4), at least one connecting device 25 mounted on the vertical column 3 and connected to the support device 24, and at least one electrical connection cord 26 connected both to the connecting device 25 and to the digital label and/or a lighting system.

[0042] The electrical connection cord 26 is here configured to connected indirectly to the digital label and/or to the lighting system thanks to an electrical module 53 which is configured to be plug in with the digital label and/or with the lighting system.

[0043] The electrical connection cord 26 comprises a male connector (not represented) at a first extremity, a female connector 52 at a second extremity opposite to the first extremity, and a cord interposed between and

linking these male/femal connectors.

[0044] The female connector 52 here receives a male part of the electrical module 53, the latter further comprising a printed circuit configured to cooperate with the digital label and/or with the lighting system.

[0045] In reference in particular to Figures 2 and 3, the support device 24, which is made in plastic material, extends longitudinally and has, in section, an L-shaped.

[0046] The support device 24, also named rail, is housed vertically in the cavity 15 of the vertical column 3 and thus extends longitudinally substantially from the bottom to the top of the shelving device 1.

[0047] The rail 24 comprises a body 28 having a main wall 29 configured to be disposed against an internal face 30 of the interior lateral wall 11 of the vertical column 3.

[0048] The body 28 further has an end wall 31 linked to the main wall 29 and comprising an inclined portion 32 which faces the main wall 29.

[0049] The end wall 31 is disposed substantially facing a first opening 16 formed in the front wall 13.

[0050] The body 28 further has a free edge 33 protruding from the end wall 31 and extending substantially parallel to the main wall 29.

[0051] The arrangement of the main wall 29, the end wall 31 and the free edge 33 create a first reception area 34.

[0052] The main wall 29 forms a first arm of the L and the end wall 31 together with the free edge 33 form a second arm of the L, the first arm being longer than the second arm.

[0053] The rail 24 further comprises two independent grooves 35 formed in an internal face 36 of the main wall 29 and two conductive tracks 37, also named first electrical conductive members, which are clamped in the respective grooves 35. The conductive tracks 37 are insulated one from each other and thus may be of distinct polarity.

[0054] The rail 24 further comprises a recess 38 formed next to the grooves 35 in the main wall 29. The recess 38 allows deformation of the main wall 29 in the vicinity of the two conductive tracks 37.

[0055] The rail 24 further comprises a support edge 39 opposite to the end wall 31, protruding from an end of the main wall 29 and which define a channel 40.

[0056] As shown in Figure 2, the rail 24 does not block the second openings 17 formed in the interior lateral wall 11 of the vertical column 3, nor one of the rows of first openings 16 formed in the front wall 13.

[0057] The rail 24 has here an overall size which obstructs substantially quarter (or less) of a volume of the cavity 15 of the vertical column 3.

[0058] Therefore, the vertical column 3 may comprise up to four rail 24 in its cavity 15, correctly arranged inside.

[0059] The connecting device 25 comprises a base 41 configured to stay outside of the cavity 15 of the vertical column 3, and a head 42 protruding from the base 41 and configured to be at least partially received in this cavity 15 by passing through the first opening 16 which substantially face the end wall 31 of the rail 24 (see in detail below).

[0060] The power supply device 23 is here located at the bottom of the shelving device 1 and housed in the rail 24.

[0061] The power supply device 23 comprises a main body 43 disposed against the internal face 36 of the main wall 29 of the rail 24 and a first lateral edge 44 protruding from the main body 43 and partially introduced into the channel 40 of the rail 24.

[0062] The main body 43 is also received by a second edge 45 opposite to the first lateral edge 44, in the first reception area 34 of the rail 24; the second edge 45 of the main body 43 being disposed against the inclined portion 32 of the end wall 31 of the rail 24 and being maintained in the reception area 34 by the free edge 33 of the rail 24.

[0063] The power supply device 23 further comprises two conductive tongues 46, also named fourth electrical conductive members, which emerge from respective windows 47 provided in the main body 43 and which protrudes from a contact face 48 of the main body 43. Each conductive tongue 46 comes against a respective conductive track 37 of the rail 24 and thus establishes an electrical contact therewith for electrically supplying the two conductive tracks 37.

[0064] The power supply device 23 comprises at least one fastening screw 50 passing through the main body 43 and having an actuating head protruding from an external face 51 of the main body 43, opposite to the contact face 48, and a stem protruding from the contact face 48 and configured to be secured to the rail 24.

[0065] The power supply device 23 further comprises a power cable 49 having electrical wires (not represented) which are electrically linked to the two conductive tongues 46.

[0066] We will now describe in detail the connecting device 24 in particular in reference to Figures 7 to 12.

[0067] In reference to Figures 7 and 8, the connecting device, also named connector 25, further comprises two second electrical conductive members 54 which emerge from a first longitudinal face 55 of the head 42 and which are configured to establish an electrical contact with the two conductive tracks 37 of the rail 24.

[0068] The connector 25 further comprises a locking member 56 emerging from a second longitudinal face 57 of the head 42, opposite to the first longitudinal face 55, and configured to be partially introduced into one first opening 16 and received in the cavity 15 and also configured to cooperate with the vertical column 3 for fastening the connector 25 thereto.

[0069] The head 42 here comprises a free end portion 59, opposite to the base 41, and configured to cooperate with the end wall 29 of the rail 24.

[0070] The base 41 comprises a plug 58 formed by a female connector having two third conductive members 60 electrically linked with the two second electrical conductive members 54 and which is configured to receive

the male connector of the electrical connection cord 26 thanks to an aperture 61 provided in the plug 58.

[0071] The connector 25 further comprises an actuating device 62 having a pusher 63 mounted moveable relative to the base 41 and a rod 64 (see Figures 9 and 12) cooperating with the pusher 63 and which extends both in the base 41 and in the head 42.

[0072] The actuating device has a first configuration (Figures 7 to 9) in which the pusher 63 and the rod 64 are in a first position and a second configuration (Figures 10 to 12) in which the pusher 63 and the rod 64 are in a second position.

[0073] In the second configuration, the rod 64 is configured to act both on the two second electrical conductive members 54 and on the locking member 56 for positioning the connector 25 relative to the rail 24 in a predetermined position wherein the two second electrical conductive members 54 are respectively constraints on the two conductive tracks 37.

[0074] In reference to Figures 9a, 9b, 12a and 12b, the connector 25 and in particular the base 41 and the head 42 are partially formed by a first shell 65 and by a second shell 65 which are latched one to each other.

[0075] The first shell 65 (Figures 7, 9a and 12b) comprises a first head wall 67 and a first base wall 68 made in a single piece.

[0076] The first head wall 67 comprises two external and longitudinal grooved edges 69, the free end portion 59 opposite to the first base wall 68 and the locking member 56 which is formed both by an aperture 71 and by a latching tab 70 extending in the aperture 71.

[0077] The free end portion 59 has an external inclined face 72 which is configured to cooperate substantially in a complementary manner with the inclined face 32 of the end wall 29 of the rail 24.

[0078] The latching tab 70 comprises an external detent defining a shoulder configured to cooperate with the vertical column 3, and an internal tooth configured to cooperate with the rod 64.

[0079] The first base wall 68 comprises a hollow 73 for the passage of a screw 74, two latching hooks 75 (see in particular Figure 12b) and a window 76 of substantially cross-shaped.

[0080] The second shell 66 (Figures 8, 9b, 10 and 12a) comprises a second head wall 77 and a second base wall 78 made in a single piece, and also a flange 79 partially covering the second base wall 78 and snap fitted on the second head wall 77.

[0081] The second head wall 77 comprises a plurality of detent members 80 configured to cooperate with the external and longitudinal grooved edges 69 of the first head wall 67, and corresponding windows 81 for the access of the detent members 80 in order to disengage them from the external and longitudinal grooved edges 69.

[0082] In the second head wall 77, two of the windows 81 are further used for the passage of snap member (not represented) of the flange 79.

[0083] The second head wall 77 further comprises two openings 82 through which emerge the two second conductive members 54, one of the openings 82 being formed together with one of the windows 81.

[0084] The second head wall 77 comprises a plurality of pins 83 configured for fastening the two second conductive members 54 in the head 42.

[0085] The second head wall 77 further comprises a longitudinal aperture 87 interrupted by an external bridge portion 86, and an internal bridge portion 84 located between a free end of the second head wall 77 and the external bridge portion 86 and facing a section of the longitudinal aperture 87; a central hollow 85 being provided on the internal bridge portion 84.

[0086] The second base wall 78 comprises a receiving part 89 for the screw 74, a cavity 90 configured to receive the pusher 63, an internal wall 91 delimiting at least partially the cavity 90 and two studs 92 which protrude from the internal wall 91 and which extend in the cavity 90.

[0087] The second base wall 78 further comprises a channel 93 and an exit 94 at an end of the channel 93, the latter forming a path for the two third electrical conductive members 60.

[0088] The second base wall 78 comprises two notches 95 located from either side of the cavity 90 and configured to cooperate with the two latching hooks 75 of the first shell 65.

[0089] The connector 25 comprises an internal space (not represented) in which are housed the actuating device 62, at least partially the two second electrical conductive members 54 and at least partially the two third electrical conductive members 60.

[0090] The connector 25 further comprises an entrance 96 for the reception of the pusher 63 in the cavity 90 provided in the second shell 66.

[0091] The plug 58 is assembled to an upper part of the base 41 of the connector 25, defined by the first and second base walls 68 and 78.

[0092] The plug 58 is located in front of the exit 94, the aperture 61 of the plug 58 being opposite to this exit 94. An aperture (not represented) is formed on the back of the plug 58 for the routing of the two third electrical conductive members 60.

[0093] The two second electrical conductive members are each formed by a metallic flexible piece 54 having an arcuate free end 97 which are configured to come into contact with a respective conductive track 37 of the rail 24.

[0094] Each arcuate free end 97 protrudes from the head 42 by emerging from a corresponding opening 82 provided in the second shell 66.

[0095] Each metallic flexible piece 54 further has a longitudinal strip 98 in which are provided holes 99 and an end portion 101 (Figure 9a), opposite to the respective arcuate free end 97.

[0096] Each end portion 101 has substantially a shape of gutter and is configured to receive a section of a respective third electrical conductive member 60 for estab-

lishing an electical connection there between.

[0097] The longitudinal strip 98 of each metallic flexible piece 54 is fastened on the second shell 66 thanks to the pins 83 which pass through the holes 99 and also thanks to a respective bracket 100 (Figures 9b and 12a) which is applied against the longitudinal strip 98 and which is fixed, for instance by crimping, with the pins 83.

[0098] The actuating device 62 further comprises a longitudinal tongue 102 having a protuberance (not shown) at an extremity and a free pushing end 103 opposite to the protuberance.

[0099] The longitudinal tongue 102 extends substantially and partially along the longitudinal aperture 87 of the second shell 66, and is clamped between the internal bridge portion 84 and the external bridge portion 86 of the second shell 66, the protuberance of the longitudinal tongue 102 being inserted in the hole 85 provided in the internal bridge portion 84.

[0100] The longitudinal tongue 102 further comes into abutment against an internal protuberance 104 (see Figure 9a) provided in the first head wall 67 of the first shell 65, for positionning the free pushing end 103 in the longitudinal aperture 87 when the longitudinal tongue 102 is not solicited and thus at rest.

[0101] The pusher 63 and the rod 64 of the actuating device 62 are here two distinct pieces which mecanically cooperate together.

[0102] The pusher 63 is configured to be moved under a solicitation of a user and to cause moving of the rod 64, each from a first position towards a second position.

[0103] The rod 64 comprises a finger 105 at a free end, which protrudes from a first side of the rod 64.

[0104] The finger 105 is configured for acting on the longitudinal tongue 102 in the second configuration of the actuating device 62, the free pushing end 103 of the tongue 102 abutting against the support edge 39 of the rail 24 for positioning the connector 25 relative to said rail 24.

[0105] More generally, the longitudinal tongue 102 being fastened to the head 42, at the vicinity of its free end portion 59, when the actuating device 62 is in its second configuration, the longitudinal tongue 102 brings the head 42 closer to the main wall 29 of the rail 24.

[0106] The rod 64 is configured to slip on the protuberance 104 for displacing the longitudinal tongue 102 and for putting the free pushing end 103 of this tongue 102 out from the longitudinal aperture 87 in order to meet the support edge 39.

[0107] The rod 64 further comprises a pushing portion 106 provided on a second side of the rod 64, opposite to the first side, and configured to act on the latching tab 70 for fastening the connector 25 relative to the front wall 13 of the vertical column 3.

[0108] The pushing portion 106 has an inclined face 107 which is formed by a recess 108 made in the second side of the rod 64, such that the latching tab 70 is progressively move away from a rest position when the actuating device 62 is in its second configuration and when the pusher 63 and the rod 64 are displaced from the first position to the second position.

[0109] The rod 64 extends through the internal wall 91 of the second base wall 78 of the second shell 66 and is received in an internal space (not represented) of the pusher 63.

[0110] The pusher 63 comprises a hollow body 109 delimiting the internal space and having a rim 110 facing the internal wall 91 and configured to be stopped by a stop edge (not represented) of the base 41 when the pusher 63 is in its second position, and a bearing face 111, opposite to the rim 110, and configured to be solicited by the user for moving the pusher 63.

[0111] The pusher 63 further comprises a locking strip 112 which is configured to be at least partially received in the window 76 provided in the first base wall 68 of the first shell 65, when the pusher 63 is in its second position, in order to maintain the actuating device 62 in its second configuration.

[0112] The locking strip 112 is at least partially flexible and comprises two extensions 113 (only one is visible) which are configured to cooperate with the cross-shaped window 76 for maintaining the pusher 63 in its second position.

[0113] The actuating device 62 further comprises two spring members 114 having each a first end in abutment against the internal wall 91 and a second end, opposite to the first end, received in the internal space of the pusher 63; such that the spring members 114 act both on the pusher 63 and on the base 41.

[0114] The spring members 114 are configured to return the pusher 63 from its second position to its first position and thus the actuating device 62 from its second configuration to its first configuration when the extensions 113 of the locking strip 112 are released from the window 76.

[0115] We will now describe in particular in reference to Figures 13 to 15, the assembling of the connector 25 with the vertical column 3 and with the rail 24.

[0116] Figure 13 represents the connector 25 in a first state relative to the rail 24 and to the vertical column 3, wherein the actuating device 62 is in its first configuration. The pusher 63 and the rod 64 are thus in the respective first position.

[0117] The head 42 of the connector 25 is introduced into the opening 16 which face the end wall 31 of the rail 24, the inclined face 72 of the free end portion 59 of the head 42 being received in the first reception area 34.

[0118] The head 42 is remote to the main wall 29 of the rail 24 and the inclined face 72 of the free end portion 59 of the head 42 comes into abutment against both the inclined portion 32 of the end wall 31 and the free edge 33.

[0119] The arcuate free ends 97 of the metallic flexible pieces 54 are only slightly in contact or are not in contact with the respective conductive tracks 37.

[0120] Both the latching tab 70 and the longitudinal tongue 102 are in a respective rest position, respectively in which the latching tab 70 is located in the first opening

16 and is not snap fitted on the front wall 13 of the vertical column 3, and in which the longitudinal tongue 102 is located in the longitudinal aperture 87 and its free push end 103 is remote to and thus not in contact with the support edge 39 of the rail 24.

[0121] Figure 14 represents the connector 25 in a second state relative to the rail 24 and to the vertical column 3, wherein the actuating device 62 is moved from its first configuration to its second configuration. The pusher 63 and the rod 64 are each in an intermediate position.

[0122] The pusher 63 is moved and causes the displacement of the rod 64.

[0123] The finger 105 acts on the longitudinal tongue 102 and the free pushing end 103 of the tongue 102 abuts against the support edge 39 of the rail 24.

[0124] The head 42 is moved towards the main wall 29 of the rail 24 and the inclined face 72 of the free end portion 59 of the head 42 slips on the inclined portion 32 of the end wall 31. This inclined face 72 is thus moved away from the free edge 33 and moved close to the main wall 29.

[0125] The arcuate free ends 97 of the metallic flexible pieces 54 are in contact with the respective conductive tracks 37.

[0126] The latching tab 70 may be in its rest position or may be slightly moved relative to its rest position, depending of the stroke traveled by both the pusher 63 and the rod 64.

[0127] The latching tab 70 is here located at least partially in the cavity 15 of the rail 24 but is not snap fitted on the front wall 13 of the vertical column 3.

[0128] Figure 15 represents the connector 25 in a third state relative to the rail 24 and to the vertical column 3, wherein the actuating device 62 is in its second configuration. The pusher 63 and the rod 64 are thus in the respective second position.

[0129] The pusher 63 is moved to the stop, wherein the rim 110 comes into abutment against the internal wall 91, and causes the displacement of the rod 64.

[0130] The finger 105 further acts on the longitudinal tongue 102 and the free pushing end 103 of the tongue 102 abuts against the support edge 39 of the rail 24.

[0131] The latching tab 70 is moved away from its rest position and is here located in the cavity 15 of the rail 24 and is now snap fitted on the front wall 13 of the vertical column 3.

[0132] The head 42 is further moved towards the main wall 29 of the rail 24 and the inclined face 72 of the free end portion 59 of the head 42 further slips on the inclined portion 32 of the end wall 31. This inclined face 72 is thus remote to the free edge 33 and comes into abutment against or is at least close to the main wall 29, in particular at the junction 115 of this main wall 29 and of the end wall 31.

[0133] The flexible pieces 54 are at least slightly distorted and the arcuate free ends 97 of these pieces 54 are constraints on the respective conductive tracks 37.

[0134] In variants that are not shown:

- a spacer may be interposed between each group of two or four or more back panel modules which are vertically superimposed;
- the back panel modules and/or the spacer are mounted on the respective interior lateral walls rather than on the front wall, thanks to hook member introduced into the respective second openings;
- the electrical connection cord may be connected directly to the digital label and/or to the lighting system thanks to a corresponding plug provided on the second extremity of the electrical connection cord;
- the flexible metallic pieces may have a straight free ends rather than arcuate free ends;
- the plug is formed by a male connector rather than a female connector; and/or
- there are not two but one or more than two, for instance three of four of the first, second, third and fourth electrical conductive members.

[0135] It should be noted more generally that the invention is not limited to the examples described and represented.

Claims

1. System for supplying and distributing electricity and configured to equip a shelving device (1) comprising at least one moveable shelf (5), said system comprising:

- a vertical column (3) forming by a hollow rectangular tube defining a cavity (15) and in which are formed a plurality of openings (16) configured for hanging said at least one shelf (5);
- a support device (24) located in said cavity (15) and comprising two first electrical conductive members (37); and
- a connecting device (25) comprising two second electrical conductive members (54) and a locking member (56) and being configured to be partially introduced into one said opening (16) and received in said cavity (15) such that each said second electrical conductive member (54) establishes an electrical contact with a respective said first electrical conductive member (37) of said support device (24) and said locking member (56) cooperates with said vertical column (3) for fastening said connecting device (25) to said vertical column (3);

said system being **characterized in that**:

- said support device (24) comprises a body (28) having, in section, a L-shaped provided with a main wall (29) forming a first arm of the L and disposed against an internal face (30) of said vertical column (3) and on which are mounted

said first electrical conductive members (37), said body (28) further having an end wall (31) linked to said main wall (29), and a free edge (33) protruding from said end wall (31) and extending substantially parallel to said main wall (29), said end wall (31) and said free edge (33) forming a second arm of the L and, the first arm (29) being longer than the second arm (31), and wherein the arrangement of the main wall (29), the end wall (31) and the free edge (33) create a first reception area (34), and said end wall (31) comprises an inclined portion (32) which faces said main wall (29);

- said connecting device (25) comprises a base (41) configured to stay outside of said cavity (15) of said vertical column (3), a head (42) protruding from said base (41) and configured to be at least partially received in said cavity (15), said head (42) comprising a free end portion (59) configured to cooperate with said end wall (31) of said support device (24) and a longitudinal face (55) from which the two second electrical conductive members (54) emerge, the longitudinal face (55) facing the main wall (29) of the support device (24) when the head (42) is received in said cavity (15) of said vertical column (3), and an actuating device (62) comprising a pusher (63) mounted moveable relative to said base (41) and a rod (64) connected to said pusher (63) and which extends both in said base (41) and in said head (42); said actuating device (62) having a first configuration in which said pusher (63) and said rod (64) are in a first position and a second configuration in which said pusher (63) and said rod (64) are in a second position, and said connecting device (25) is configured so that, in said second configuration of said actuating device (62), said rod (64) acts both on said head (42) and on said locking member (56) of said connecting device (25) for positioning the latter relative to said support device (24) in a predetermined position wherein each said second electrical conductive member (54) is respectively constraints on a respective said first electrical conductive member (37); and

- said support device (24) extends longitudinally, said vertical column (3) comprises a first wall (11), a second wall (12) opposite to said first wall (11), a third wall (13) joined both to said first wall (11) and to said second wall (12), and a fourth wall (14) opposite to the third wall (13) and joined both to said first wall (11) and to said second wall (12), at least said third wall (13) having a plurality of said openings (16); and said main wall (29) of said support device (24) is disposed against said first wall (11) and said end wall (31) of said support device (24) is disposed substantially facing one of said opening (16) of said third wall (13).

2. System according to claim 1, wherein said support device (24) comprises two longitudinal grooves (35) in each of which is clamped a respective of said two first electrical conductive members (37), the latter being formed by conductive tracks, and said second electrical conductive members (54) are each formed by a metallic flexible piece having an arcuate free end (97) which is configured to come into contact with a respective said conductive track.

3. System according to any one of claims 1 or 2, wherein said connecting device (25) comprises a longitudinal tongue (102) having a free pushing end (103), said main wall (29) of said support device (24) comprises a support edge (39) opposite to said end wall (31), and said rod (64) of said actuating device (62) is configured for acting on said longitudinal tongue (102) in said second configuration of said actuating device (62), said free pushing end (103) abutting against said support edge (39) for positioning said connecting device (25) relative to said support device (24).

4. System according to claim 3, wherein said longitudinal tongue (102) is fastened to said head (42) of said connecting device (25), at the vicinity of said free end portion (59) of said head (42), such that, when said actuating device (62) is in its second configuration, said longitudinal tongue (102) brings said head (42) closer to said main wall (29) of said support device (24).

5. System according to any one of claims 1 to 4, wherein said locking member of said connecting device (25) comprises a latching tab (70) formed in said head (42) and said rod (64) of said actuating device (62) comprises a pushing portion (106) configured to act on said latching tab (70).

6. System according to claim 5, wherein said pushing portion (106) has an inclined face (107) which is formed by a recess (108) made in said rod (64), such that said latching tab (70) is progressively move away from a rest position when said actuating device (62) is in its second configuration and said pusher (63) and said rod (64) are displaced from said first position to said second position.

7. System according to claims 3 and 6, wherein said pusher (63) and said rod (64) are in an intermediate position during the passage of said actuating device (62) from its first configuration to its second configuration, intermediate position in which said free pushing end (103) of said rod (64) abuts against said support edge (39) of the support device (24) and in which said latching tab (70) is in its rest position.

8. System according to any one of claims 1 to 7, wherein said pusher (63) comprises a locking strip (112) and said base (41) comprises a window (76) configured for receiving at least partially said locking strip (112) when said pusher (63) is in its second position in order to maintain said actuating device (62) in its second configuration.

9. System according to claim 8, wherein said actuating device (62) further comprises a spring member (114) acting both on said pusher (63) and on said base (41), said spring member (114) being configured to return said pusher (63) in its first position and thus said actuating device (62) in its first configuration when said locking strip (112) is released from said window (76).

10. System according to any one of claims 1 to 9, wherein said base (41) comprises a plug (58) having two third conductive members (60) electrically linked with said two second conductive members (54).

11. System according to any one of claims 1 to 10, further comprising a power supply device (23) configured to be mounted on said support device (24), said power supply device (23) comprising two fourth electrical conductive members (46) configured to establish an electrical contact with said two first electrical conductive members (37) of said support device (24).

12. System according to claim 11, wherein said power supply device (23) has a main body (43) located against said main wall (29) of said support device (24) and a lateral edge (44) protruding from said main body (43) and being housed in a channel (40) formed in said main wall (29) of said support device (24), at the opposite of said end wall (31).

13. Shelving device for displaying articles, comprising at least one system for supplying and distributing electricity according to any one of claims 1 to 12 and at least one shelf (5) hung to said vertical column (3) of said system.

14. Shelving device according to claim 13, comprising a base (2), two vertical columns (3) extending from said base (2), a back panel structure (4) extending from said base (2) and disposed between said two vertical columns (3), a plurality of shelves (5) hung to said two vertical columns (3) and which overhang said base (2), at least one support device (24) mounted in at least one of said vertical columns (3), at least one connecting device (25) fastened to said vertical column (3) and located in a predetermined position relative to said at least one support device (24).

Patentansprüche

1. System zur Versorgung mit und Verteilung von Elektrizität und Konfiguration zur Ausrüstung einer Regalvorrichtung (1) mit wenigstens einem beweglichen Regalboden (5), wobei das System aufweist:

   - einen vertikalen Pfosten (3), der durch ein hohles, vertikales Rohr gebildet wird, das einen Hohlraum (15) definiert, und in dem eine Mehrzahl von Öffnungen (16) gebildet ist, die zum Einhängen des wenigstens einen Regalboden (5) ausgebildet ist;
   - eine Stützvorrichtung (24), die sich in dem Hohlraum (15) befindet und zwei erste elektrisch leitfähige Elemente (37) aufweist; und
   - eine Verbindungsvorrichtung (25), die zwei zweite elektrisch leitfähige Elemente (54) und ein Verriegelungselement (56) aufweist und dazu ausgebildet ist, zum Teil in eine Öffnung (16) eingesetzt zu werden und in dem Hohlraum (15) aufgenommen zu werden, sodass jedes zweite elektrisch leitfähige Element (54) einen elektrischen Kontakt mit einem jeweiligen ersten elektrisch leitfähigen Element (37) der Stützvorrichtung (24) herstellt und das Verriegelungselement (56) mit dem vertikalen Pfosten (3) zusammenwirkt, um die Verbindungsvorrichtung (25) an dem vertikalen Pfosten (3) zu befestigen;

   wobei das System **dadurch gekennzeichnet ist, dass**:

   - die Stützvorrichtung (24) einen Körper (28) mit einer L-Form im Querschnitt aufweist, der mit einer Hauptwand (29) ausgestattet ist, die einen ersten Arm des L bildet und an einer Innenfläche (30) des vertikalen Pfostens (3) angeordnet ist und an der die ersten elektrisch leitfähigen Elemente (37) montiert sind, wobei der Körper (28) ferner eine mit der Hauptwand (29) verbundene Stirnwand (31) und eine freie Kante (33) aufweist, die von der Stirnwand (31) vorspringt und sich im Wesentlichen parallel zu der Hauptwand (29) erstreckt, wobei die Stirnwand (31) und die freie Kante (33) einen zweiten Arm des L bilden und der erste Arm (29) länger als der zweite Arm (31) ist, und wobei die Anordnung der Hauptwand (29), der Stirnwand (31) und der freien Kante (33) einen ersten Aufnahmebereich (34) bildet und die Stirnwand (31) einen schrägen Bereich (32) aufweist, der der Hauptwand (29) zugewandt ist;
   - die Verbindungsvorrichtung (25) ein Basisteil (41), das dazu ausgebildet ist, außerhalb des Hohlraums (15) des vertikalen Pfostens (3) zu bleiben, einen Kopf (42), der von dem Basisteil (41) vorspringt und dazu ausgebildet ist, we-

nigstens zum Teil in dem Hohlraum (15) aufgenommen zu werden, wobei der Kopf (42) einen freien Endbereich (59), der dazu ausgebildet ist, mit der Stirnwand (31) der Stützvorrichtung (24) zusammenzuwirken, und eine Längsfläche (55) aufweist, aus der die beiden zweiten elektrisch leitfähigen Elemente (54) hervortreten, wobei die Längsfläche (55) der Hauptwand (29) der Stützvorrichtung (24) zugewandt ist, wenn der Kopf (42) in dem Hohlraum (15) des vertikalen Pfostens (3) aufgenommen ist, und eine Betätigungsvorrichtung (62) aufweist, die einen Schieber (63), der relativ zu dem Basisteil (41) beweglich montiert ist, und eine Stange (64) aufweist, die mit dem Schieber (63) verbunden ist und die sich in das Basisteil (41) und in den Kopf (42) erstreckt; wobei die Betätigungsvorrichtung (62) eine erste Ausführung, in der sich der Schieber (63) und die Stange (64) in einer ersten Stellung befinden, und eine zweite Ausführung aufweist, in der sich der Schieber (63) und die Stange (64) in einer zweiten Stellung befinden, und die Verbindungsvorrichtung (25) so ausgebildet ist, dass die Stange (64) in der zweiten Ausführung der Betätigungsvorrichtung (62) auf den Kopf (42) und auf das Verriegelungselement (56) der Verbindungsvorrichtung (25) wirkt, um letztere relativ zu der Stützvorrichtung (24) in einer vorgegebenen Stellung zu positionieren, wobei jedes zweite elektrisch leitfähige Element (54) jeweils an ein entsprechendes erstes elektrisch leitfähiges Element (37) gepresst wird; und

- sich die Stützvorrichtung (24) in Längsrichtung erstreckt, wobei der vertikale Pfosten (3) eine erste Wand (11), eine zweite Wand (12) gegenüber der ersten Wand (11), eine dritte Wand (13), die mit der ersten Wand (11) und der zweiten Wand (12) verbunden ist, und eine vierte Wand (14) gegenüber der dritten Wand (13) aufweist, die mit der ersten Wand (11) und der zweiten Wand (12) verbunden ist, wobei wenigstens die dritte Wand (13) eine Mehrzahl der Öffnungen (16) aufweist; und die Hauptwand (29) der Stützvorrichtung (24) an der ersten Wand (11) angeordnet ist und die Stirnwand (31) der Stützvorrichtung (24) im Wesentlichen einer der Öffnungen (16) der dritten Wand (13) zugewandt angeordnet ist.

2. System nach Anspruch 1, wobei die Stützvorrichtung (24) zwei Längsnuten (35) aufweist, in die jeweils ein entsprechendes der beiden ersten elektrisch leitfähigen Elemente (37) geklemmt ist, wobei letztere durch leitfähige Bahnen gebildet sind, und die zweiten elektrisch leitfähigen Elemente (54) jeweils durch ein flexibles Metallteil mit einem gebogenen freien Ende (97) gebildet sind, das dazu ausgebildet ist, mit einer jeweiligen leitfähigen Bahn in Kontakt zu kommen.

3. System nach einem beliebigen der Ansprüche 1 oder 2, wobei die Verbindungsvorrichtung (25) eine Längszunge (102) mit einem freien Schiebeende (103) aufweist, wobei die Hauptwand (29) der Stützvorrichtung (24) eine Stützkante (39) gegenüber der Stirnwand (31) aufweist und die Stange (64) der Betätigungsvorrichtung (62) dazu ausgebildet ist, in der zweiten Ausführung der Betätigungsvorrichtung (62) auf die Längszunge (102) zu wirken, wobei das freie Schiebeende (103) mit der Stützkante (39) in Anlage kommt, um die Verbindungsvorrichtung (25) relativ zu der Stützvorrichtung (24) zu positionieren.

4. System nach Anspruch 3, wobei die Längszunge (102) in der Nähe des freien Endabschnitts (59) des Kopfes (42) so an dem Kopf (42) der Verbindungsvorrichtung (25) befestigt ist, dass die Längszunge (102), wenn sich die Betätigungsvorrichtung (62) in ihrer zweiten Ausführung befindet, den Kopf (42) der Hauptwand (29) der Stützvorrichtung (24) annähert.

5. System nach einem beliebigen der Ansprüche 1 bis 4, wobei das Verriegelungselement der Verbindungsvorrichtung (25) eine in dem Kopf (42) gebildete Rastlasche (70) aufweist und die Stange (64) der Betätigungsvorrichtung (62) einen Schiebebereich (106) aufweist, der dazu ausgebildet ist, auf die Rastlasche (70) zu wirken.

6. System nach Anspruch 5, wobei der Schiebebereich (106) eine schräge Fläche (107) aufweist, die durch eine in der Stange (64) gebildete Vertiefung (108) gebildet ist, sodass die Rastlasche (70) zunehmend aus einer Ruhestellung wegbewegt wird, wenn sich die Betätigungsvorrichtung (62) in ihrer zweiten Ausführung befindet und der Schieber (63) und die Stange (64) aus der ersten Stellung in die zweite Stellung verlagert werden.

7. System nach Anspruch 3 und 6, wobei sich der Schieber (63) und die Stange (64) während des Übergangs der Betätigungsvorrichtung (62) aus ihrer ersten Ausführung in ihre zweite Ausführung in einer Zwischenstellung befinden, wobei in der Zwischenstellung das freie Schiebeende (103) der Stange (64) an der Stützkante (39) der Stützvorrichtung (24) anliegt und sich die Rastlasche (70) in ihrer Ruhestellung befindet.

8. System nach einem beliebigen der Ansprüche 1 bis 7, wobei der Schieber (63) eine Verriegelungsleiste (112) aufweist und das Basisteil (41) eine Aussparung (76) aufweist, die dazu ausgebildet ist, die Verriegelungsleiste (112) wenigstens zum Teil aufzunehmen, wenn der Schieber (63) sich in seiner zwei-

ten Stellung befindet, um die Betätigungsvorrichtung (62) in ihrer zweiten Ausführung zu halten.

9. System nach Anspruch 8, wobei die Betätigungsvorrichtung (62) ferner ein Federelement (114) aufweist, das auf den Schieber (63) und auf das Basisteil (41) wirkt, wobei das Federelement (114) dazu ausgebildet ist, den Schieber (63) in seine erste Stellung und folglich die Betätigungsvorrichtung (62) in ihre erste Ausführung zurückzuführen, wenn die Verriegelungsleiste (112) aus der Aussparung (76) gelöst wird.

10. System nach einem beliebigen der Ansprüche 1 bis 9, wobei das Basisteil (41) einen Anschluss (58) mit zwei dritten leitfähigen Elementen (60) aufweist, die mit den beiden zweiten leitfähigen Elementen (54) elektrisch verbunden sind.

11. System nach einem beliebigen der Ansprüche 1 bis 10, dass ferner eine Stromversorgungsvorrichtung (23) aufweist, die dazu ausgebildet ist, an der Stützvorrichtung (24) montiert zu werden, wobei die Stromversorgungsvorrichtung (23) zwei vierte elektrisch leitfähige Elemente (46) aufweist, die dazu ausgebildet sind, einen elektrischen Kontakt mit den beiden ersten elektrisch leitfähigen Elementen (37) der Stützvorrichtung (24) herzustellen.

12. System nach Anspruch 11, wobei die Stromversorgungsvorrichtung (23) einen an der Hauptwand (29) der Stützvorrichtung (24) befindlichen Hauptkörper (43) und eine Seitenkante (44) aufweist, die von dem Hauptkörper (43) vorspringt und in einem in der Hauptwand (29) der Stützvorrichtung (24) gebildeten Kanal (40) gegenüber der Stirnwand (31) untergebracht ist.

13. Regalvorrichtung zum Ausstellen von Waren, die wenigstens ein System zur Versorgung mit und Verteilung von Elektrizität nach einem beliebigen der Ansprüche 1 bis 12 und wenigstens einen in den vertikalen Pfosten (3) des Systems eingehängten Regalboden (5) aufweist.

14. Regalvorrichtung nach Anspruch 13, die einen Sockel (2), zwei sich von dem Sockel (2) erstreckende vertikale Pfosten (3), eine Rückwandstruktur (4), die sich von dem Sockel (2) erstreckt und zwischen den beiden vertikalen Pfosten (3) angeordnet ist, eine Mehrzahl von Regalböden (5), die in die beiden vertikalen Pfosten (3) eingehängt ist und die über den Sockel (2) überhängt, wenigstens eine in wenigstens einem der vertikalen Pfosten (3) montierte Stützvorrichtung (24), wenigstens eine Verbindungsvorrichtung (25), die an dem vertikalen Pfosten (3) befestigt ist und sich in einer vorgegebenen Stellung relativ zu der wenigstens einen Stützvorrichtung (24) befindet, aufweist.

Revendications

1. Système pour distribuer et répartir de l'électricité et configuré pour équiper un dispositif de rayonnage (1) comprenant au moins une tablette mobile (5), ledit système comprenant :

- un montant vertical (3) formé par un tube rectangulaire creux définissant une cavité (15) et dans lequel sont formées une pluralité d'ouvertures (16) configurées pour suspendre ladite au moins une tablette (5) ;
- un dispositif de support (24) situé dans ladite cavité (15) et comprenant deux premiers organes conducteurs d'électricité (37) ; et
- un dispositif de connexion (25) comprenant deux deuxièmes organes conducteurs d'électricité (54) et un organe de verrouillage (56) et étant configuré pour être introduit partiellement dans une dite ouverture (16) et reçu dans ladite cavité (15) de manière que chaque dit deuxième organe conducteur d'électricité (54) établit un contact électrique avec un premier organe conducteur d'électricité (37) respectif dudit dispositif de support (24) et ledit organe de verrouillage (56) coopère avec ledit montant vertical (3) pour fixer ledit dispositif de connexion (25) audit montant vertical (3) ;

ledit système étant **caractérisé en ce que** :

- ledit dispositif de support (24) comprend un corps (28) ayant, en section, une forme de L doté d'une paroi principale (29) formant un premier jambage du L et disposée contre une face interne (30) dudit montant vertical (3) et sur laquelle sont montés lesdits premiers organes conducteurs d'électricité (37), ledit corps (28) comportant en outre une paroi d'extrémité (31) reliée à ladite paroi principale (29), et un bord libre (33) faisant saillie depuis ladite paroi d'extrémité (31) et s'étendant sensiblement parallèlement à ladite paroi principale (29), ladite paroi d'extrémité (31) et ledit bord libre (33) formant un deuxième jambage du L, et le premier jambage (29) étant plus long que le deuxième jambage (31), et dans lequel l'agencement de la paroi principale (29), de la paroi d'extrémité (31) et du bord libre (33) créé une première zone de réception (34), et ladite paroi d'extrémité (31) comporte une partie inclinée (32) qui fait face à ladite paroi principale (29) ;
- ledit dispositif de connexion (25) comprend une base (41) configurée pour rester en dehors de ladite cavité (15) dudit montant vertical (3), une

tête (42) faisant saillie depuis ladite base (41) et configurée pour être au moins partiellement reçue dans ladite cavité (15), ladite tête (42) comprenant une partie d'extrémité libre (59) configurée pour coopérer avec ladite paroi d'extrémité (31) dudit dispositif de support (24) et une face longitudinale (55) de laquelle émergent les deux deuxièmes organes conducteurs d'électricité (54), la face longitudinale (55) faisant face à la paroi principale (29) du dispositif de support (24) lorsque la tête (42) est reçue dans ladite cavité (15) dudit montant vertical (3), et un dispositif d'actionnement (62) comprenant un poussoir (63) monté mobile par rapport à ladite base (41) et une barre (64) reliée audit poussoir (63) et qui s'étend à la fois dans ladite base (41) et dans ladite tête (42) ; ledit dispositif d'actionnement (62) ayant une première configuration dans laquelle ledit poussoir (63) et ladite barre (64) se trouvent dans une première position et une deuxième configuration dans laquelle ledit poussoir (63) et ladite barre (64) se trouvent dans une deuxième position, et ledit dispositif de connexion (25) est configuré de sorte que, dans ladite deuxième configuration dudit dispositif d'actionnement (62), ladite barre (64) agisse à la fois sur ladite tête (42) et sur ledit organe de verrouillage (56) dudit dispositif de connexion (25) pour positionner ce dernier par rapport audit dispositif de support (24) dans une position prédéterminée dans laquelle chaque dit deuxième organe conducteur d'électricité (54) est respectivement contraint sur un dit premier organe conducteur d'électricité (37) respectif ; et

- ledit dispositif de support (24) s'étend longitudinalement, ledit montant vertical (3) comprend une première paroi (11), une deuxième paroi (12) opposée à ladite première paroi (11), une troisième paroi (13) reliée à la fois à ladite première paroi (11) et à ladite deuxième paroi (12), et une quatrième paroi (14) opposée à la troisième paroi (13) et reliée à la fois à ladite première paroi (11) et à ladite deuxième paroi (12), au moins ladite troisième paroi (13) comportant une pluralité desdites ouvertures (16) ; et ladite paroi principale (29) dudit dispositif de support (24) est disposée contre ladite première paroi (11) et ladite paroi d'extrémité (31) dudit dispositif de support (24) est disposée sensiblement en regard de l'une desdites ouvertures (16) de ladite troisième paroi (13).

2. Système selon la revendication 1, dans lequel ledit dispositif de support (24) comprend deux rainures longitudinales (35) dans chacune desquelles est serré un organe respectif desdits deux premiers organes conducteurs d'électricité (37), ces derniers étant formés par des pistes conductrices, et lesdits deuxièmes organes conducteurs d'électricité (54) sont chacun formés par une pièce souple métallique comportant une extrémité libre arquée (97) qui est configurée pour entrer en contact avec une dite piste conductrice respective.

3. Système selon l'une quelconque des revendications 1 ou 2, dans lequel ledit dispositif de connexion (25) comprend une languette longitudinale (102) comportant une extrémité de poussée libre (103), ladite paroi principale (29) dudit dispositif de support (24) comprend un bord de support (39) opposé à ladite paroi d'extrémité (31), et ladite barre (64) dudit dispositif d'actionnement (62) est configurée pour agir sur ladite languette longitudinale (102) dans ladite deuxième configuration dudit dispositif d'actionnement (62), ladite extrémité de poussée libre (103) butant contre ledit bord de support (39) pour positionner ledit dispositif de connexion (25) par rapport audit dispositif de support (24).

4. Système selon la revendication 3, dans lequel ladite languette longitudinale (102) est fixée à ladite tête (42) dudit dispositif de connexion (25), au voisinage de ladite partie d'extrémité libre (59) de ladite tête (42), de sorte que, lorsque ledit dispositif d'actionnement (62) se trouve dans sa deuxième configuration, ladite languette longitudinale (102) amène ladite tête (42) près de ladite paroi principale (29) dudit dispositif de support (24) .

5. Système selon l'une quelconque des revendications 1 à 4, dans lequel ledit organe de verrouillage dudit dispositif de connexion (25) comprend une patte de verrouillage (70) formée dans ladite tête (42) et ladite barre (64) dudit dispositif d'actionnement (62) comprend une partie de poussée (106) configurée pour agir sur ladite patte de verrouillage (70).

6. Système selon la revendication 5, dans lequel ladite partie de poussée (106) comporte une face inclinée (107) qui est formée par un évidement (108) ménagé dans ladite barre (64), de sorte que ladite patte de verrouillage (70) s'éloigne progressivement d'une position de repos lorsque ledit dispositif d'actionnement (62) se trouve dans sa deuxième configuration et ledit poussoir (63) et ladite barre (64) sont déplacés de ladite première position à ladite deuxième position.

7. Système selon les revendications 3 et 6, dans lequel ledit poussoir (63) et ladite barre (64) sont dans une position intermédiaire au cours du passage dudit dispositif d'actionnement (62) de sa première configuration à sa deuxième configuration, position intermédiaire dans laquelle ladite extrémité de poussée libre (103) de ladite barre (64) bute contre ledit bord de support (39) du dispositif de support (24) et dans

laquelle ladite patte de verrouillage (70) est dans sa position de repos.

8. Système selon l'une quelconque des revendications 1 à 7, dans lequel ledit poussoir (63) comprend une bande de verrouillage (112) et ladite base (41) comprend une fenêtre (76) configurée pour recevoir, au moins en partie, ladite bande de verrouillage (112) lorsque ledit poussoir (63) se trouve dans sa deuxième position afin de maintenir ledit dispositif d'actionnement (62) dans sa deuxième configuration.

9. Système selon la revendication 8, dans lequel ledit dispositif d'actionnement (62) comprend en outre un organe ressort (114) agissant à la fois sur ledit poussoir (63) et sur ladite base (41), ledit organe ressort (114) étant configuré pour ramener ledit poussoir (63) dans sa première position et donc ledit dispositif d'actionnement (62) dans sa première configuration lorsque ladite bande de verrouillage (112) est libérée de ladite fenêtre (76).

10. Système selon l'une quelconque des revendications 1 à 9, dans lequel ladite base (41) comprend un bouchon (58) ayant deux troisièmes organes conducteurs d'électricité (60) reliés électriquement auxdits deuxièmes organes conducteurs d'électricité (54).


11. Système selon l'une quelconque des revendications 1 à 10, comprenant en outre un dispositif d'alimentation en électricité (23) configuré pour être monté sur ledit dispositif de support (24), ledit dispositif d'alimentation en électricité (23) comprenant deux quatrièmes organes conducteurs d'électricité (46) configurés pour établir un contact électrique avec lesdits deux premiers organes conducteurs d'électricité (37) dudit dispositif de support (24) .

12. Système selon la revendication 11, dans lequel ledit dispositif d'alimentation en électricité (23) comporte un corps principal (43) situé contre ladite paroi principale (29) dudit dispositif de support (24) et un bord latéral (44) faisant saillie dudit corps principal (43) et étant logé dans un canal (40) ménagé dans ladite paroi principale (29) dudit dispositif de support (24), à l'opposé de ladite paroi d'extrémité (31).

13. Dispositif de rayonnage pour présenter des articles, comprenant au moins un système pour distribuer et répartir de l'électricité selon l'une quelconque des revendications 1 à 12 et au moins une tablette (5) suspendue audit montant vertical (3) dudit système.

14. Dispositif de rayonnage selon la revendication 13, comprenant une base (2), deux montants verticaux (3) s'étendant depuis ladite base (2), une structure de panneau de fond (4) s'étendant depuis ladite base (2) et disposée entre lesdits deux montants verticaux (3), une pluralité de tablettes (5) suspendues auxdits deux montants verticaux (3) et qui surplombent ladite base (2), au moins un dispositif de support (24) monté dans au moins l'un desdits montants verticaux (3), au moins un dispositif de connexion (25) fixé audit montant vertical (3) et situé dans une position prédéterminée par rapport audit au moins un dispositif de support (24).

Fig. 1

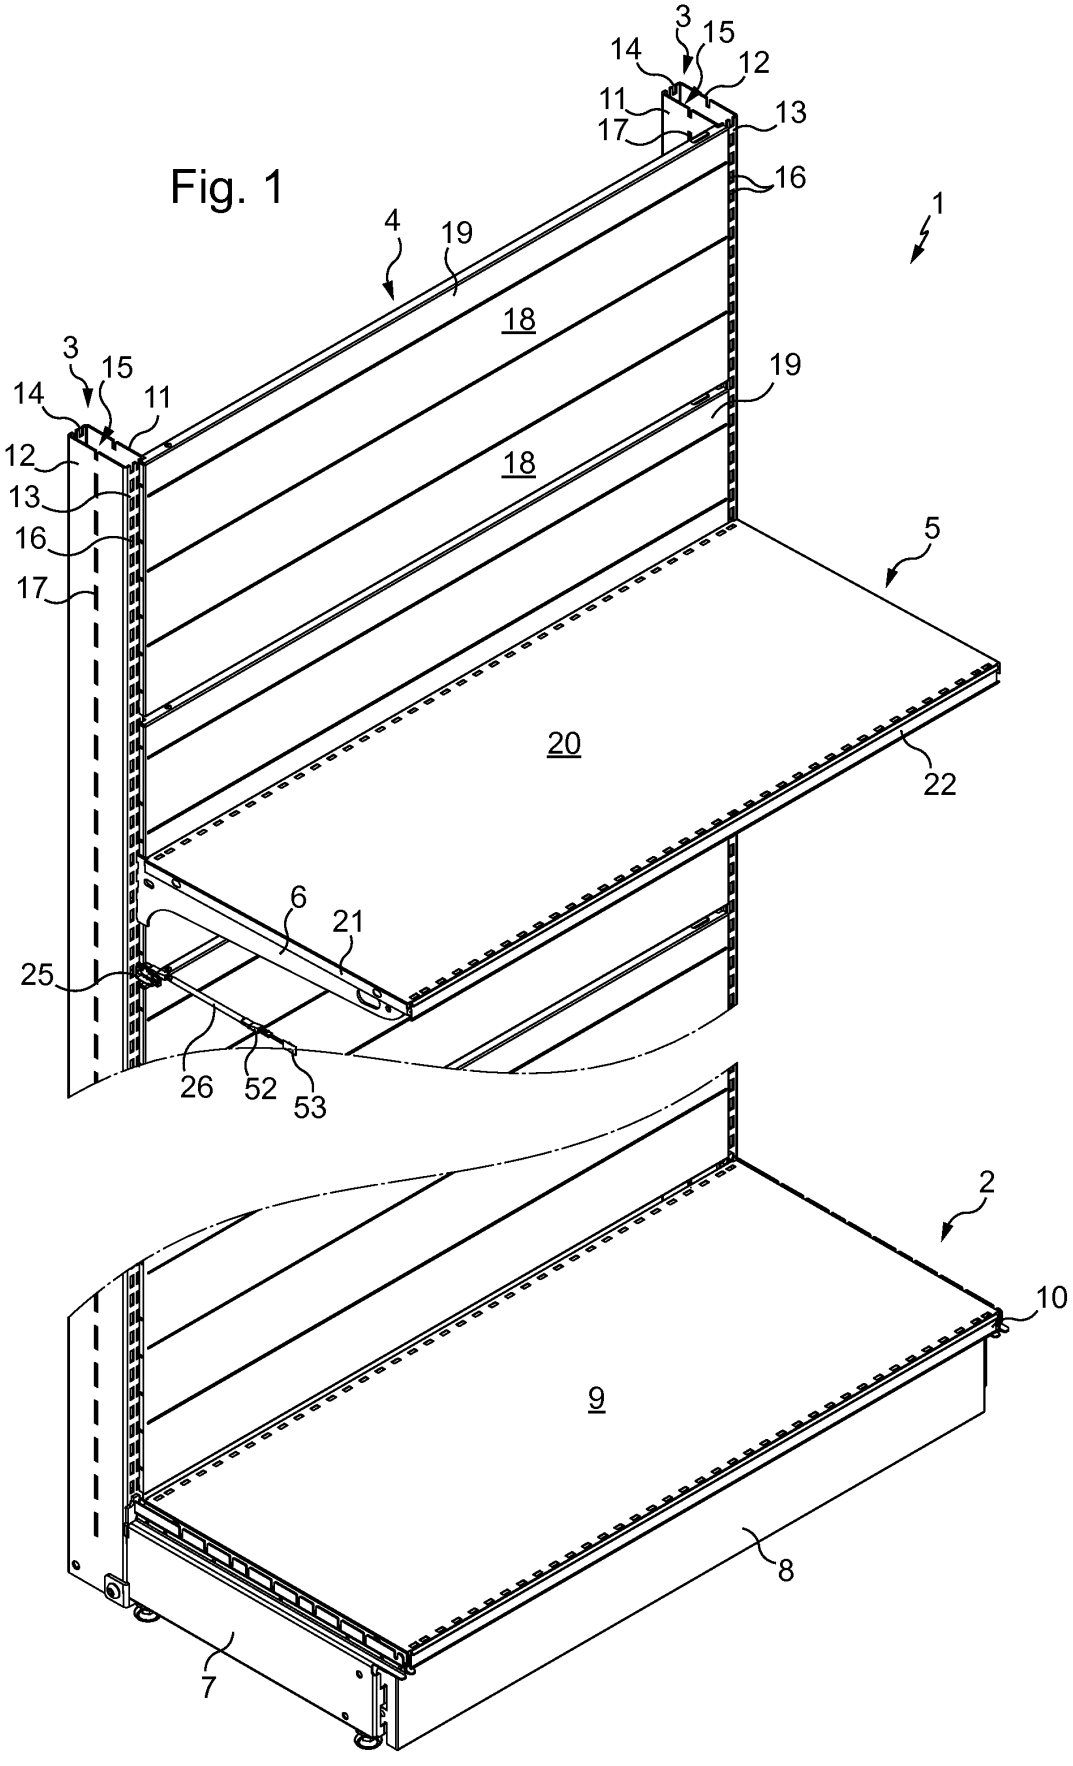
3
15
14
12
11
13
17
16
1
4
19
18
3
15
14
11
19
12
18
13
16
5
17
20
22
6
21
25
26
52
53
2
10
9
8
7

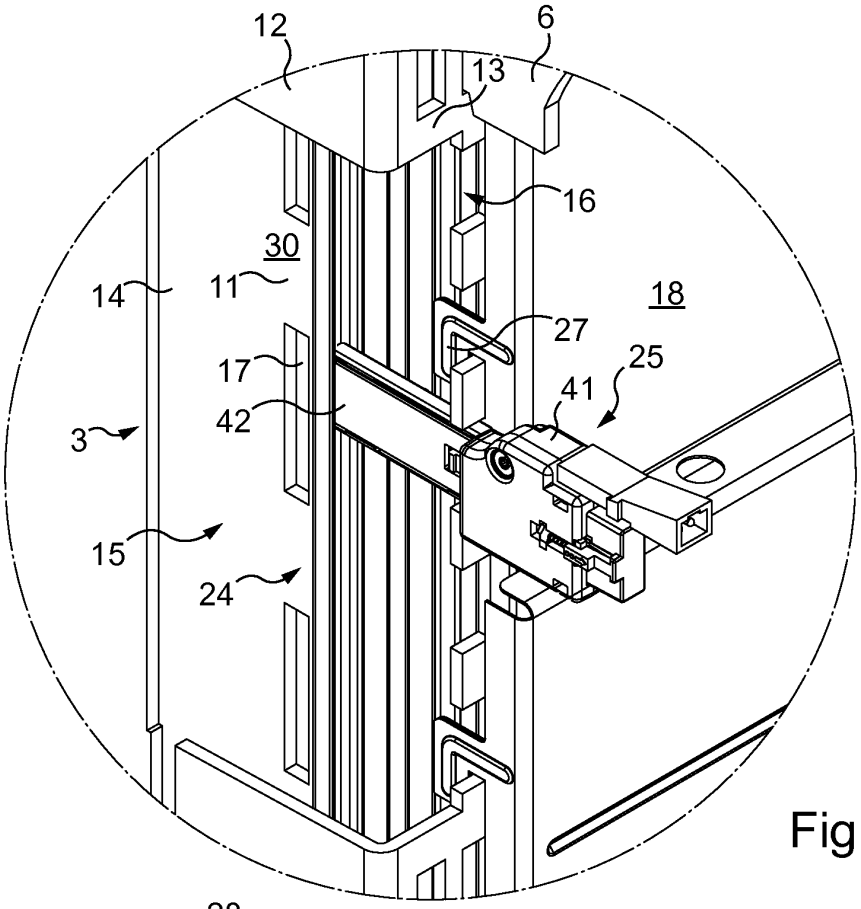

12
6
13
16
30
14
11
18
27
25
17
41
42
3
15
24

Fig. 2

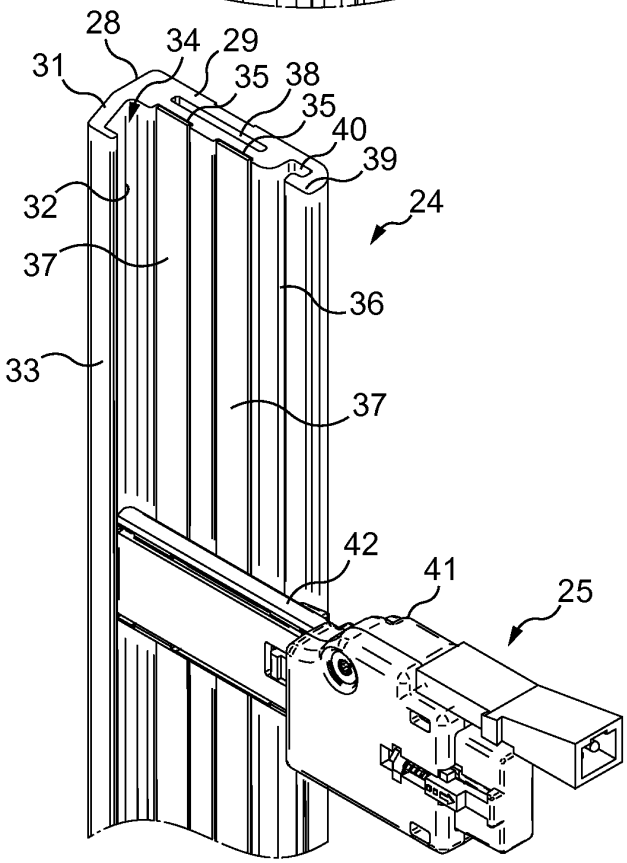

28
34
29
31
35
38
35
40
39
32
24
37
36
33
37
42
41
25

Fig. 3

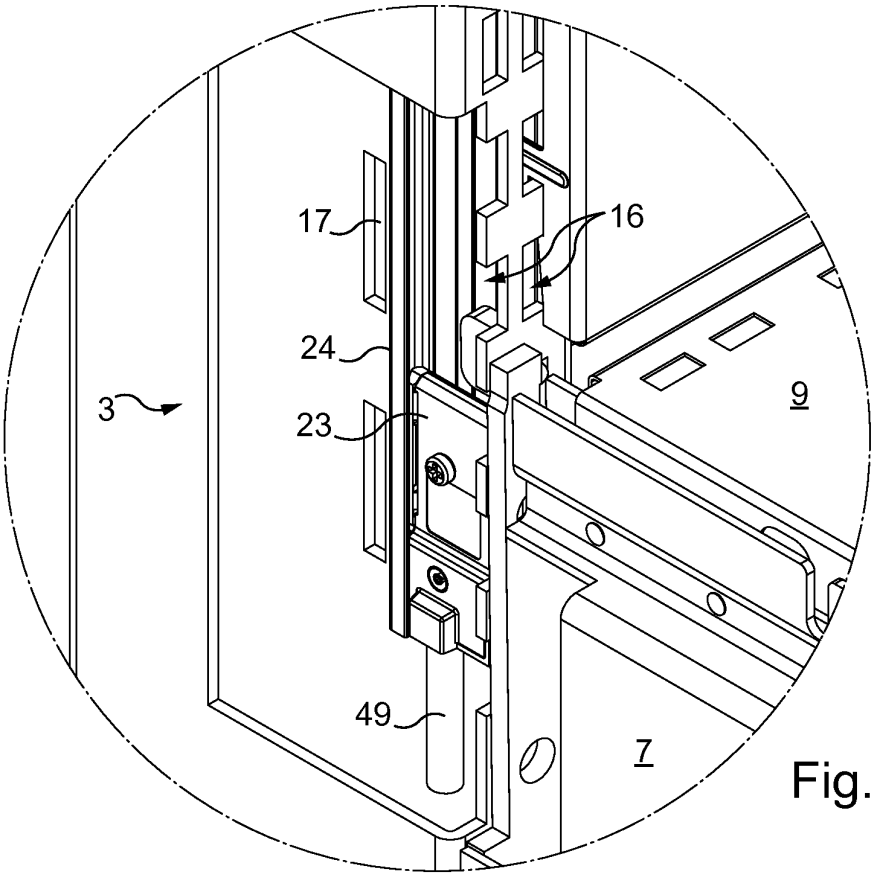


Fig. 4

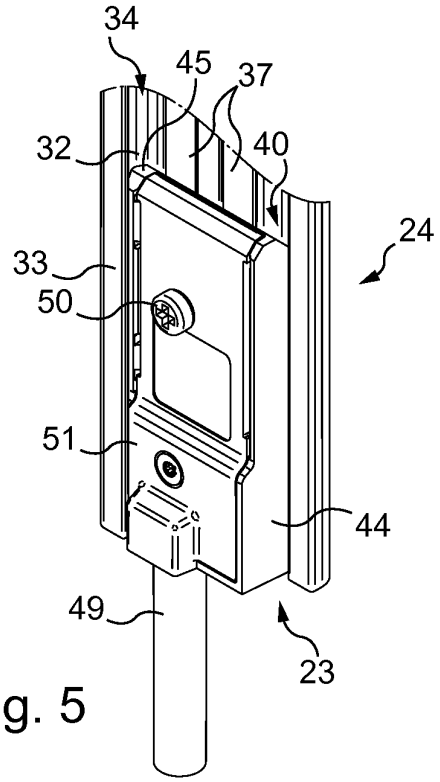


Fig. 5

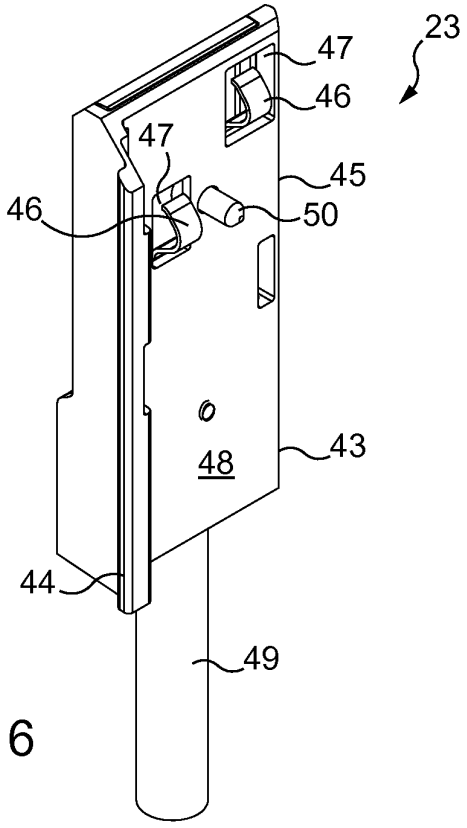


Fig. 6

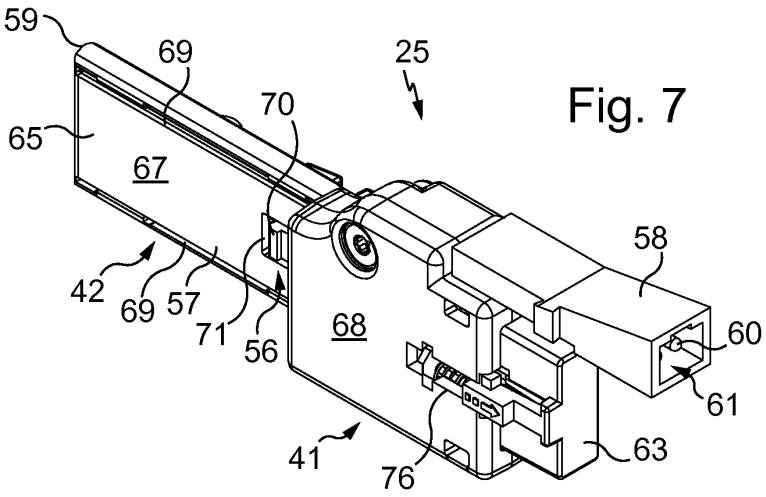


Fig. 7

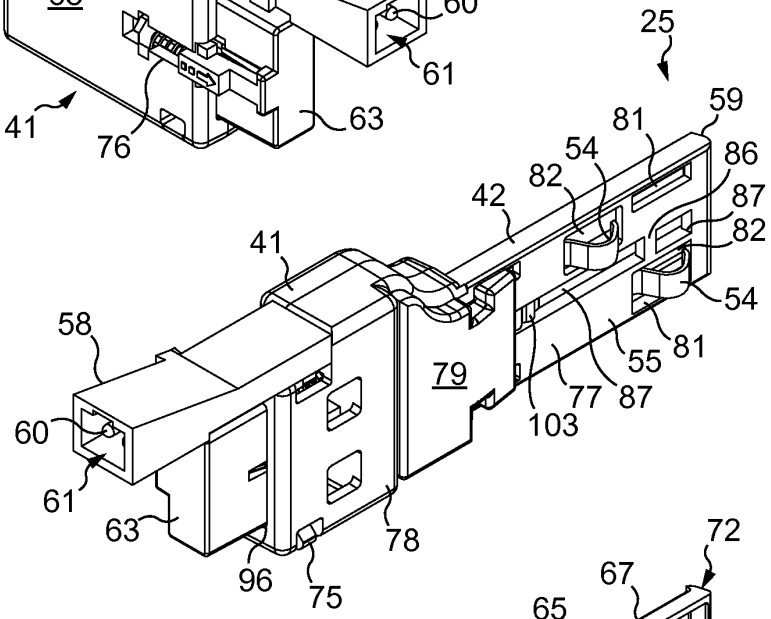


Fig. 8

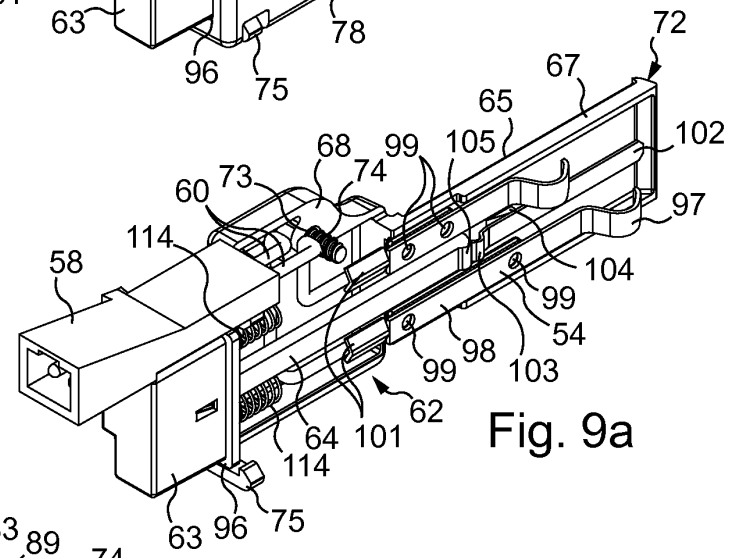


Fig. 9a

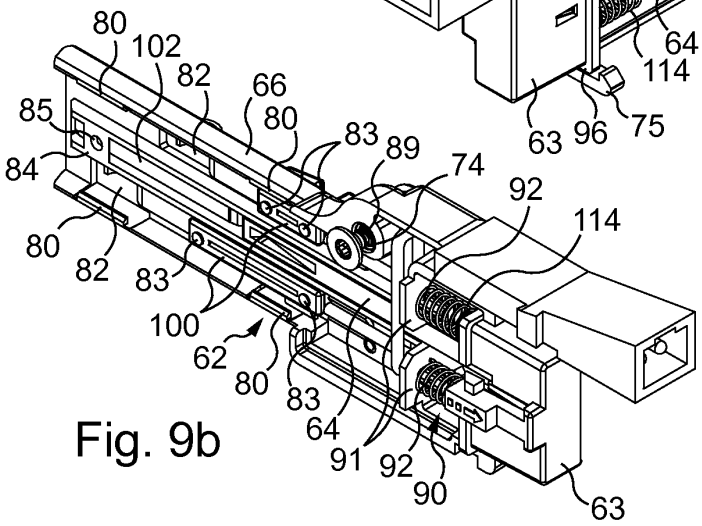
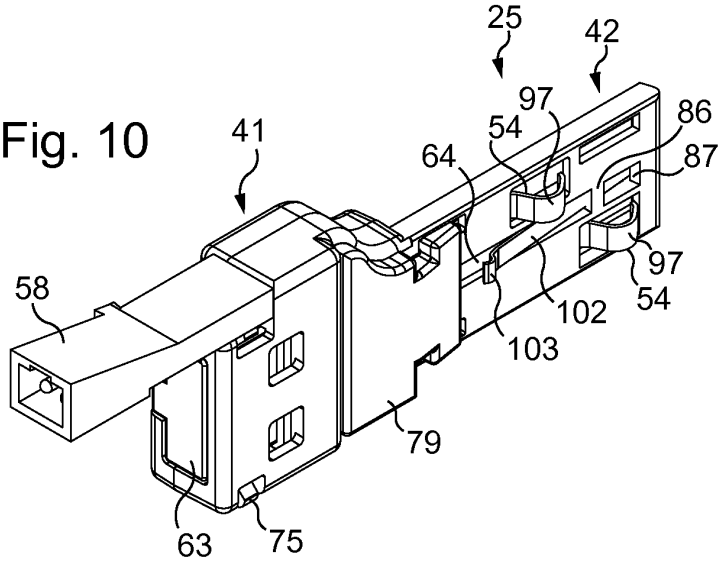


Fig. 9b

Fig. 10



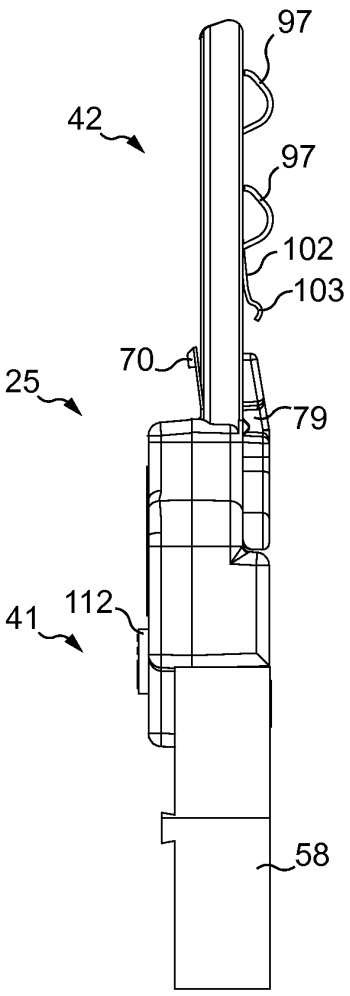


Fig. 11

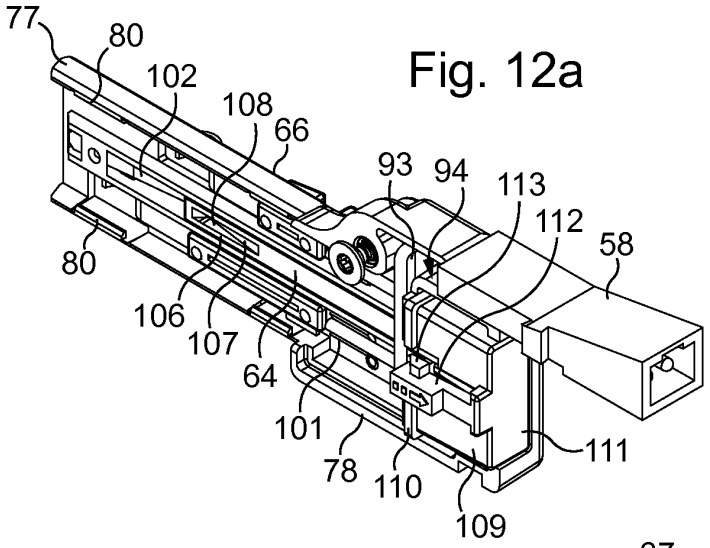


Fig. 12a

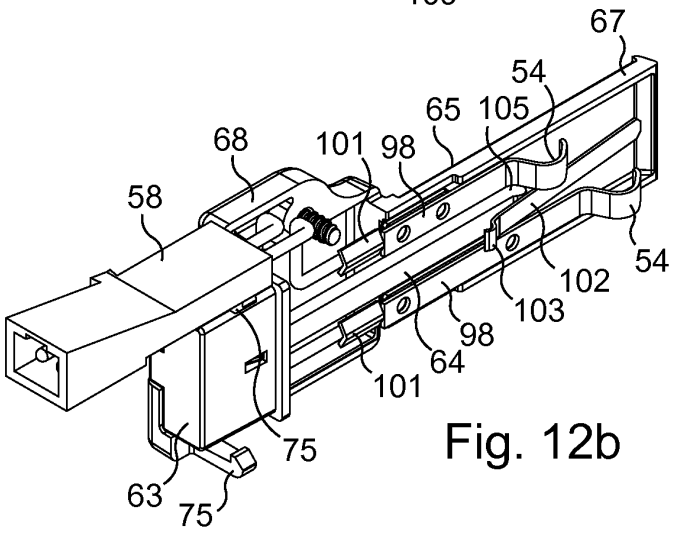


Fig. 12b

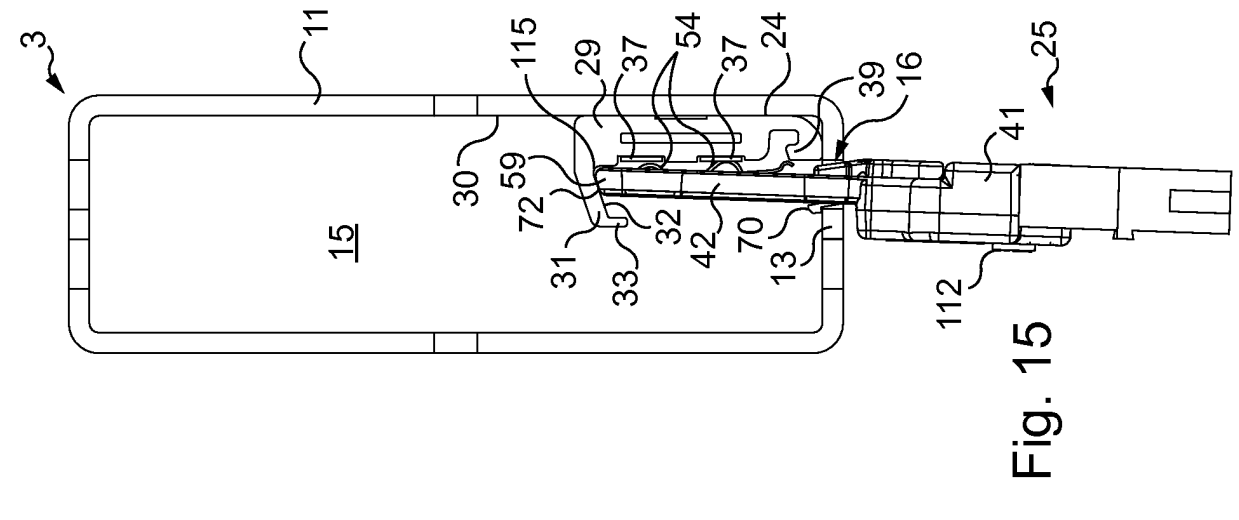


Fig. 15

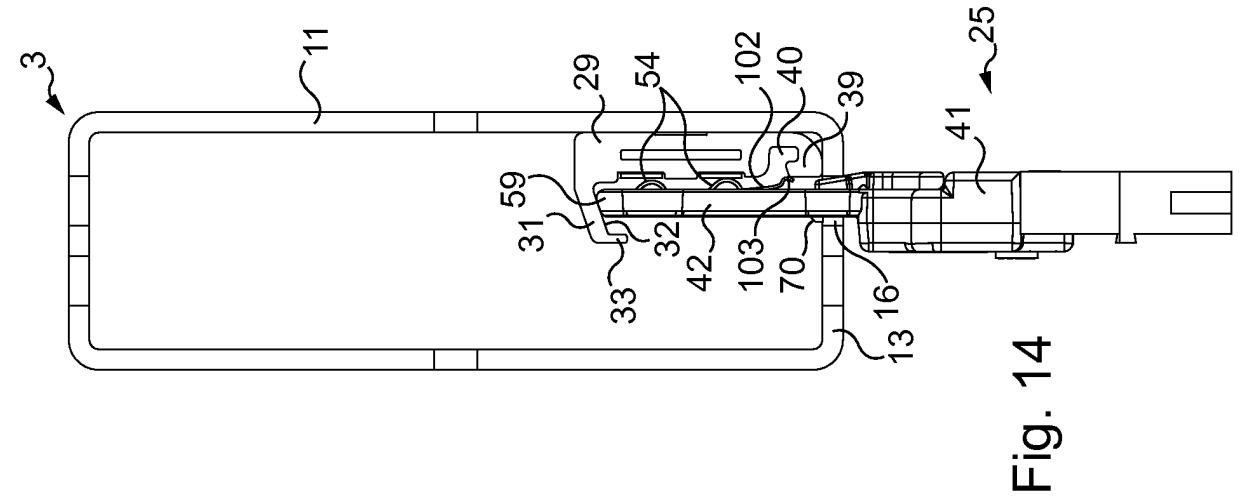


Fig. 14

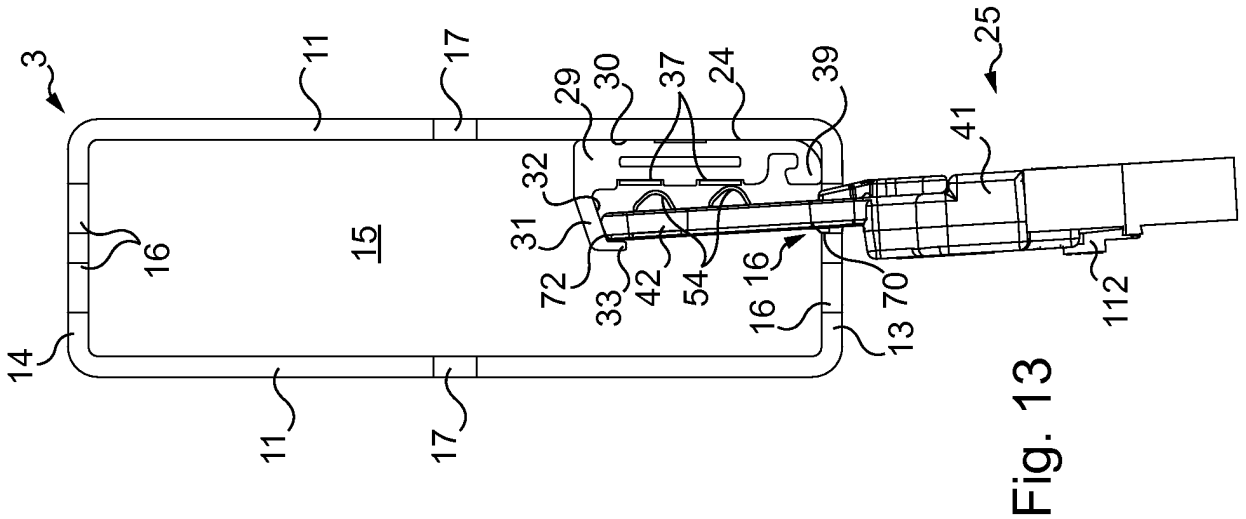


Fig. 13

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 202013101760 **[0004]**
- EP 588654 A **[0008]**