

(19)



(11)

EP 3 070 258 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
21.09.2016 Bulletin 2016/38

(51) Int Cl.:
E21B 23/14 (2006.01) **E21B 4/06** (2006.01)
E21B 4/12 (2006.01) **E21B 4/14** (2006.01)
E21B 23/01 (2006.01)

(21) Application number: **15160029.3**

(22) Date of filing: **20.03.2015**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
MA

(71) Applicant: **Welltec A/S**
3450 Allerød (DK)

(72) Inventor: **Sommer, Rasmus**
2500 Valby (DK)

(74) Representative: **Hoffmann Dragsted A/S**
Rådhuspladsen 16
1550 Copenhagen V (DK)

(54) DOWNHOLE STROKING TOOL

(57) A downhole stroking tool comprising a housing (2), a first chamber (3), a first tool part comprising a pump unit (5) providing pressurised fluid to the chamber, a shaft (6) penetrating the chamber (3), and a first piston (7) dividing the first chamber into a first chamber section (8, 8a) and a second chamber section (9, 9b). The piston (7) is connected to or forming part of the housing forming part of a second tool part (10) and is slidable in relation

to the shaft (6) so that the housing (10) moves in relation to the shaft (6), the shaft being stationary in relation to the pump unit during pressurisation of the first or the second chamber section, generating a pressure on the piston, wherein the shaft is fixedly connected with the first tool part, and wherein the housing is slidable in relation to the first tool part and overlaps the first tool part.

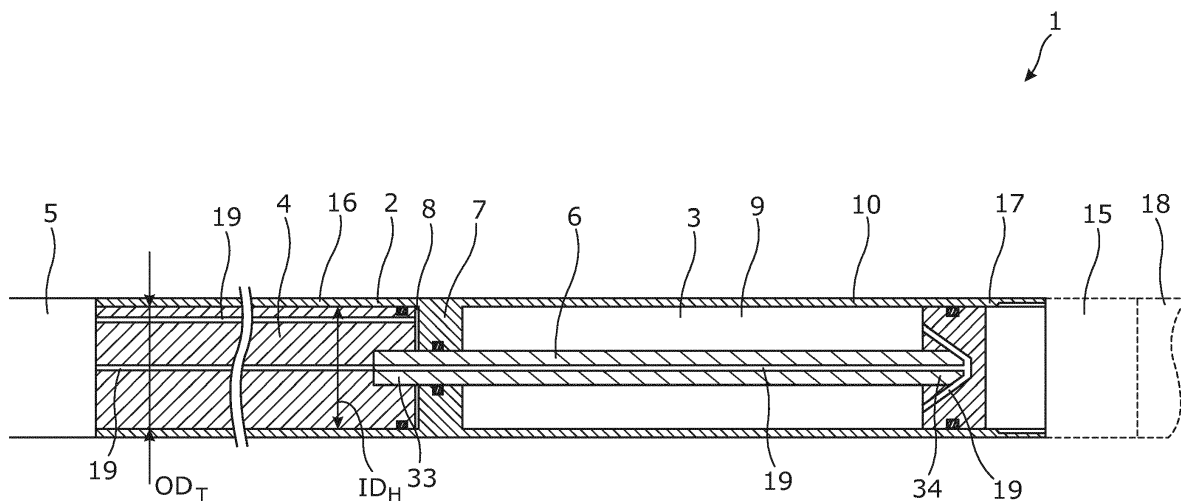


Fig. 2

Description

Field of the invention

[0001] The present invention relates to a downhole stroking tool for providing an axial force in an axial direction, comprising a housing, a first chamber, a first tool part comprising a pump unit providing pressurised fluid to the chamber, a shaft penetrating the chamber, and a first piston dividing the first chamber into a first chamber section and a second chamber section. Furthermore, the invention relates to a downhole system comprising the downhole stroking tool and a driving unit, such as a downhole tractor, for propelling the system forward in a well and to the use of a downhole stroking tool for pulling a plug in a well.

Background art

[0002] When operating in a well a high axial force is sometimes needed for example to pull a plug, such as a bridge plug. However, the known tools are at the present not designed to generate sufficient high amount of power to pull certain plugs or old plugs which are often further stuck in the well due to precipitated scale on the plug.

Summary of the invention

[0003] It is an object of the present invention to wholly or partly overcome the above disadvantages and drawbacks of the prior art. More specifically, it is an object to provide an improved tool providing a higher axial force than the known tools to be able to pull all kinds of plugs.

[0004] The above objects, together with numerous other objects, advantages and features, which will become evident from the below description, are accomplished by a solution in accordance with the present invention by a downhole stroking tool for providing an axial force in an axial direction, comprising:

- a housing,
- a first chamber,
- a first tool part comprising a pump unit providing pressurised fluid to the chamber,
- a shaft penetrating the chamber, and
- a first piston dividing the first chamber into a first chamber section and a second chamber section,

wherein the piston is connected to or forming part of the housing forming part of a second tool part and is slidable in relation to the shaft so that the housing moves in relation to the shaft, the shaft being stationary in relation to the pump unit during pressurisation of the first or the second chamber section, generating a pressure on the piston, wherein the shaft is fixedly connected with the first tool part, and wherein the housing is slidable in relation to the first tool

part and overlaps the first tool part.

[0005] By the shaft being fixed and the housing with the piston sliding, the force generated by the downhole stroking tool is mainly transferred via the housing and not as in prior art tools via the shaft to e.g. a plug. By displacing the housing in relation to the shaft and the first part, a higher bending stiffness of the downhole stroking tool is obtained. The housing is supported along its stroke by the piston, whereby the downhole stroking tool is capable of transferring a higher axial force substantially without bending compared to prior art tools.

[0006] In an embodiment, the tool may further comprise a pressure intensifier arranged downstream of the pump to increase the pressure before being fed to the chamber.

[0007] By having a pressure intensifier, the downhole stroking tool is capable of generating a higher fluid pressure than the pump is capable of providing, and thus, the downhole stroking tool is capable of providing a higher axial force than without the pressure intensifier. Due to the restrictions downhole in a well, the size of the pump is also restricted.

[0008] The shaft may have a through-bore for allowing an electrical conductive means to run through the shaft.

[0009] Furthermore, by the shaft being fixed and the housing with the piston sliding, the shaft does not transfer any forces during the stroke and can thus have several through-bores for fluid channels and for electrical wiring.

[0010] The downhole stroking tool may further comprise a connector, the housing comprising a first end part overlapping the first tool part.

[0011] By having the housing overlapping the first part, an even higher bending stiffness of the downhole stroking tool is obtained, as the housing is supported also by the first part during a stroke.

[0012] Furthermore, the housing may comprise a second end part connected to the connector.

[0013] Also, the downhole stroking tool may further comprise an operational tool connected with the housing.

[0014] Moreover, the operational tool may be a fishing neck, a key tool or a setting tool.

[0015] Further, the operational tool may be electrically powered.

[0016] In an embodiment, the housing may have an inner diameter substantially corresponding to an outer diameter of the first tool part.

[0017] In addition, the housing may have an inner diameter substantially corresponding to an outer diameter of the first tool part along the first tool part which overlaps the housing.

[0018] Also, the shaft and/or the housing may comprise one or more fluid channels for providing fluid to and/or from the chamber during pressurisation of the first or the second chamber section, generating a pressure on the piston.

[0019] In an embodiment, the first tool part may have at least one sealing element for providing a seal against the housing.

[0020] Furthermore, the tool may comprise a valve block for controlling which chamber section is fed the pressurised fluid and thus whether the downhole stroking tool provides an upstroke or downstroke movement.

[0021] Additionally, the housing may transfer the axial force.

[0022] The downhole stroking tool may further comprise a second chamber divided by a second piston.

[0023] Moreover, the second chamber may comprise a first chamber section and a second chamber section.

[0024] Also, the first and second chambers may be comprised in the housing.

[0025] In addition, the shaft may comprise an intermediate part dividing the first and the second chamber.

[0026] The intermediate part may support the housing, allowing the housing to slide in relation to the intermediate part.

[0027] In an embodiment, the tool may be powered by a battery in the tool and thus be wireless.

[0028] Furthermore, the pump may be powered by high pressured fluid from surface down through a pipe, coiled tubing or the casing.

[0029] The downhole stroking tool may further comprise an anchoring section having projectable fixation units for fixating the downhole stroking tool in a well.

[0030] The present invention furthermore relates to a downhole system comprising the downhole stroking tool described above and a driving unit, such as a downhole tractor, for propelling the system forward in a well.

[0031] Finally, the present invention relates to the use of a downhole stroking tool described above for pulling a plug in a well.

Brief description of the drawings

[0032] The invention and its many advantages will be described in more detail below with reference to the accompanying schematic drawings, which for the purpose of illustration show some non-limiting embodiments and in which

Fig. 1 shows a downhole stroking tool in a casing in a well,

Fig. 2 shows a partly cross-sectional view of the downhole stroking tool in which the tool is in a fully upstroke position ready to provide a downstroke position,

Fig. 3 shows a partly cross-sectional view of the downhole stroking tool of Fig. 2 in which the tool is performing a downstroke movement,

Fig. 4 shows a partly cross-sectional view of another downhole stroking tool having a pressure intensifier,

Fig. 5 shows a partly cross-sectional view of the downhole stroking tool having a through-bore for pro-

viding electrical power to an operational tool,

Fig. 6 shows a partly cross-sectional view of the downhole stroking tool having two chambers, and

Fig. 7 shows a downhole system having a downhole stroking tool, an anchoring section and a driving unit.

[0033] All the figures are highly schematic and not necessarily to scale, and they show only those parts which are necessary in order to elucidate the invention, other parts being omitted or merely suggested.

Detailed description of the invention

[0034] Fig. 1 shows a downhole stroking tool 1 for providing an axial force in an axial direction of the tool, being also the axial direction of the well, e.g. for pulling a plug 41 and a casing 45. The downhole stroking tool comprises a housing 2, a first chamber inside the tool, and a first tool part 4 comprising a pump unit 5 for providing pressurised fluid to the chamber. The downhole stroking tool further comprises an electrical motor 42 and an electronic section 43 for controlling the function of the tool. The tool is electrically powered through a wireline 44.

[0035] In Fig. 2, the downhole stroking tool 1 comprises a shaft 6 penetrating the chamber 3 and a first piston 7 dividing the first chamber into a first chamber section 8 and a second chamber section 9. The piston forms part of the housing which forms part of a second tool part 10. The second tool part 10, the housing 2 and the piston 7 are slidable in relation to the shaft 6 and the first tool part 4 so that the housing moves in relation to the shaft and the shaft is stationary in relation to the pump unit 5 during pressurisation of the first or the second chamber section 8, 9. The fluid is fed to one of the chamber sections through a fluid channel 19 in the first part and a fluid channel 19 in the shaft 6 for providing fluid to and/or from the chamber 3 during pressurisation of the first or the second chamber section 8, 9, generating a pressure on the piston 7.

[0036] The pressurisation of the first chamber section generates a pressure on the piston and a down stroke in that the housing moves down away from the pump, as shown in Fig. 3. While fluid is led into the first chamber section 8, fluid is forced out of the second chamber section. When providing pressurised fluid into the second chamber section 9, a pressure is generated on the piston, providing an up stroke movement in that the housing moves from the position in Fig. 3 to the position in Fig. 2 and thus moves towards the pump. The shaft is fixedly connected with the first tool part, and the housing is slidable in relation to the first tool part and a first end part 16 of the housing overlaps the first tool part. When overlapping, the housing is supported partly by the first part, since the first part 4 has an outer diameter OD_T which is substantially the same as an inner diameter ID_H of the housing. The housing comprises a second end part 17

connected to a connector 15, illustrated by dotted lines. The connector may furthermore be connected to an operational tool 18, also illustrated with dotted lines.

[0037] By the shaft being fixed and the housing with the piston being slidable, the force generated by the downhole stroking tool is mainly transferred via the housing and not as in prior art tools via the shaft to e.g. a plug. When transferring a high force close to the centre of the tool and when the tool is not fully aligned with the element it presses onto, the shaft bends easier than when being aligned with the element. When transferring the high axial force mainly via the housing, the force is transferred further away from the centre and thus eliminates the risk of bending when being off the centre in relation to the element. The tool of the present invention is therefore capable of transferring a higher amount of force as the risk of the shaft bending while transferring a high force is substantially decreased. In prior art tools transferring the generated axial force via the shaft, the shaft bends when the force exceeds a certain level. Increasing the shaft diameter reduces the area of the piston and thus reduces the force the piston is capable of providing. The prior art tools cannot provide a force substantially above 50,000 pounds but the tool of present invention can provide a force of 100,000 pounds. Furthermore, by moving the housing in relation to the stationary shaft and the stationary first part, a higher bending stiffness of the downhole stroking tool is obtained. The housing is supported along its stroke by the piston, whereby the downhole stroking tool is capable of transferring a higher axial force substantially without bending compared to prior art tools.

[0038] Furthermore, by the shaft being fixed and the housing with the piston sliding, the shaft does not transfer any forces and thus does not have to have a certain diameter, and the shaft diameter can therefore be reduced and the piston area increased, enabling the tool to generate a higher axial force.

[0039] In another embodiment, the tool is powered by a battery in the tool and is thus wireless. In another not shown embodiment, the pump may be powered by high pressured fluid from surface down through a pipe, coiled tubing or the casing.

[0040] In Fig. 4, the downhole stroking tool 1 further comprises a pressure intensifier 11 arranged downstream of the pump to increase the pressure before being fed to the chamber 3. The pressure intensifier comprises an intensifier piston 36 having one surface area closest to the pump unit 5 which is larger than another surface area closest the chamber. The pressure intensifier further comprises fluid channels 26 for providing fluid to and from the pressure intensifier 11, and comprises at least one valve 37.

[0041] By having a pressure intensifier, the downhole stroking tool is capable of generating a higher fluid pressure than the pump is capable of providing, and thus, the downhole stroking tool is capable of providing a higher axial force than without the pressure intensifier. Due to the restrictions downhole in a well, the size of the pump

is also restricted.

[0042] In Fig. 4, the first tool part has at least one sealing element 32 for providing a seal against the housing. The sealing element is arranged in a groove in the first tool part closest to the piston so as to provide a seal even when the housing moves. A first end 33 of the shaft 6 is fixedly arranged in the first tool part, and a second end part 34 of the shaft 6 is fastened in the tool end element 35, the tool end element defining one end of the chamber and the first tool part 4 defining the other end. Another sealing element 32 is arranged in a circumferential groove in the tool end element 35 so as to provide a seal between the sliding housing 2 and the tool end element 35.

[0043] In Fig. 4, the tool further comprises a valve block 31 for controlling which chamber section is fed pressurised fluid and thus if the downhole stroking tool 1 provides an upstroke or downstroke movement.

[0044] In Fig. 5, the shaft has a through-bore 12 in which an electrical conductive means 14 runs through the shaft to provide electric power to e.g. an operational tool 18. The shaft thus comprises both a fluid channel and a through-bore for electrical means. By the shaft being fixed and the housing with the piston sliding, the shaft does not transfer any forces and can thus have several through-bores for fluid channels and for electrical wiring. Thus, the operational tool may be electrically powered through the electrical conductive means 14 running through the shaft. The operational tool may be a plug connector, a fishing neck, a key tool or a setting tool.

[0045] The downhole stroking tool according to Fig. 6 further comprises a second chamber 21 divided by a second piston 22. The second chamber comprises a first chamber section 8b and a second chamber section 9b. The first chamber section 8b and a second chamber section 9b of the second chamber 21 have the same configuration as the first chamber section 8a and a second chamber section 9a of the first chamber 3 as they are divided by a piston. The first and second chambers 3, 21 are both comprised in the housing 2, and both the first piston 7 and the second piston 22 are connected to or form part of the housing and slide along the housing 2. The shaft comprises an intermediate part 23 dividing the first and the second chamber and forming the ends of both the first and the second chamber. Thus, the first chamber 3 is defined by the first tool part 4, the housing 2, the shaft 6 and the intermediate part 23. The second chamber 21 is defined by the intermediate part 23, the housing 2, the shaft 6 and the tool end element 35. The intermediate part supports the housing, also while the housing slides in relation to the intermediate part. As can be seen, the shaft has several fluid channels, one in fluid communication with the second chamber section 9a of the first chamber 3 and one in fluid communication with the second chamber section 9b of the second chamber 21. A second fluid channel is in fluid communication with the first chamber section 8b of the second chamber 21. The fluid communication with the second chamber sec-

tion 9b of the second chamber 21 may be in a separate fluid channel.

[0046] In Fig. 7, the downhole stroking tool further comprises an anchoring section 51 having projectable fixation units 55 for fixating the downhole stroking tool in the casing in the well 101.

[0047] Fig. 7 discloses a downhole system 100 comprising the downhole stroking tool 1 and a driving unit 52, such as a downhole tractor, for propelling the system forward in a well.

[0048] By fluid or well fluid is meant any kind of fluid that may be present in oil or gas wells downhole, such as natural gas, oil, oil mud, crude oil, water, etc. By gas is meant any kind of gas composition present in a well, completion, or open hole, and by oil is meant any kind of oil composition, such as crude oil, an oil-containing fluid, etc. Gas, oil, and water fluids may thus all comprise other elements or substances than gas, oil, and/or water, respectively.

[0049] By a casing is meant any kind of pipe, tubing, tubular, liner, string etc. used downhole in relation to oil or natural gas production.

[0050] In the event that the tool is not submergible all the way into the casing, a downhole tractor can be used to push the tool all the way into position in the well. The downhole tractor 52 may have projectable arms 56 having wheels 57, wherein the wheels contact the inner surface of the casing for propelling the tractor and the tool forward in the casing. A downhole tractor is any kind of driving tool capable of pushing or pulling tools in a well downhole, such as a Well Tractor®.

[0051] Although the invention has been described in the above in connection with preferred embodiments of the invention, it will be evident for a person skilled in the art that several modifications are conceivable without departing from the invention as defined by the following claims.

Claims

1. A downhole stroking tool (1) for providing an axial force in an axial direction, comprising:

- a housing (2),
- a first chamber (3),
- a first tool part (4) comprising a pump unit (5) providing pressurised fluid to the chamber,
- a shaft (6) penetrating the chamber, and
- a first piston (7) dividing the first chamber into a first chamber section (8, 8a) and a second chamber section (9, 9b),

wherein the piston is connected to or forming part of the housing forming part of a second tool part (10) and is slidable in relation to the shaft so that the housing moves in relation to the shaft, the shaft being stationary in relation to the pump unit during pres-

surisation of the first or the second chamber section, generating a pressure on the piston, wherein the shaft is fixedly connected with the first tool part, and

wherein the housing is slidable in relation to the first tool part and overlaps the first tool part.

2. A downhole stroking tool according to claim 1, wherein the tool further comprises a pressure intensifier (11) arranged downstream of the pump to increase the pressure before being fed to the chamber.
3. A downhole stroking tool according to claim 1 or 2, the shaft having a through-bore (12) for allowing an electrical conductive means (14) to run through the shaft.
4. A downhole stroking tool according to any of the preceding claims, further comprising a connector (15), the housing comprising a first end part (16) overlapping the first tool part.
5. A downhole stroking tool according to any of the preceding claims, further comprising an operational tool (18) connected with the housing.
6. A downhole stroking tool according to any of the preceding claims, wherein the operational tool is electrically powered.
7. A downhole stroking tool according to any of the preceding claims, wherein the housing has an inner diameter (ID_H) substantially corresponding to an outer diameter (OD_T) of the first tool part.
8. A downhole stroking tool according to any of the preceding claims, wherein the shaft and/or the housing comprises one or more fluid channels (19) for providing fluid to and/or from the chamber during pressurisation of the first or the second chamber section, generating a pressure on the piston.
9. A downhole stroking tool according to any of the preceding claims, wherein the housing transfers the axial force.
10. A downhole stroking tool according to any of the preceding claims, further comprising a second chamber (21) divided by a second piston (22).
11. A downhole stroking tool according to claim 10, wherein the first and second chambers are comprised in the housing.
12. A downhole stroking tool according to claim 10 or 11, wherein the shaft comprises an intermediate part (23) dividing the first and the second chamber.

13. A downhole stroking tool according to any of the preceding claims, further comprising an anchoring section (51) having projectable fixation units for fixating the downhole stroking tool in a well.

5

14. A downhole system comprising the downhole stroking tool according to any of claims 1-13 and a driving unit (52), such as a downhole tractor, for propelling the system forward in a well.

10

15. Use of a downhole stroking tool according to any of claims 1-13 for pulling a plug in a well.

15

20

25

30


35


40

45

50

55

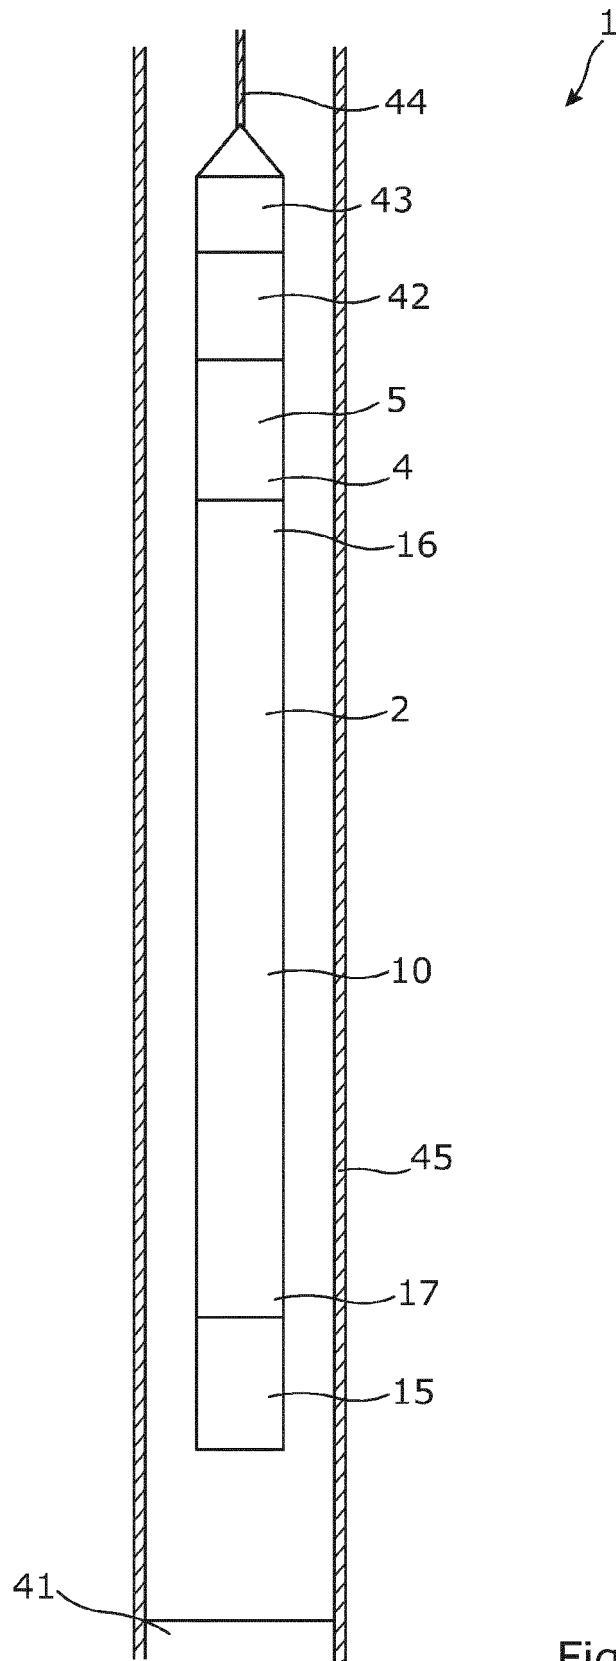

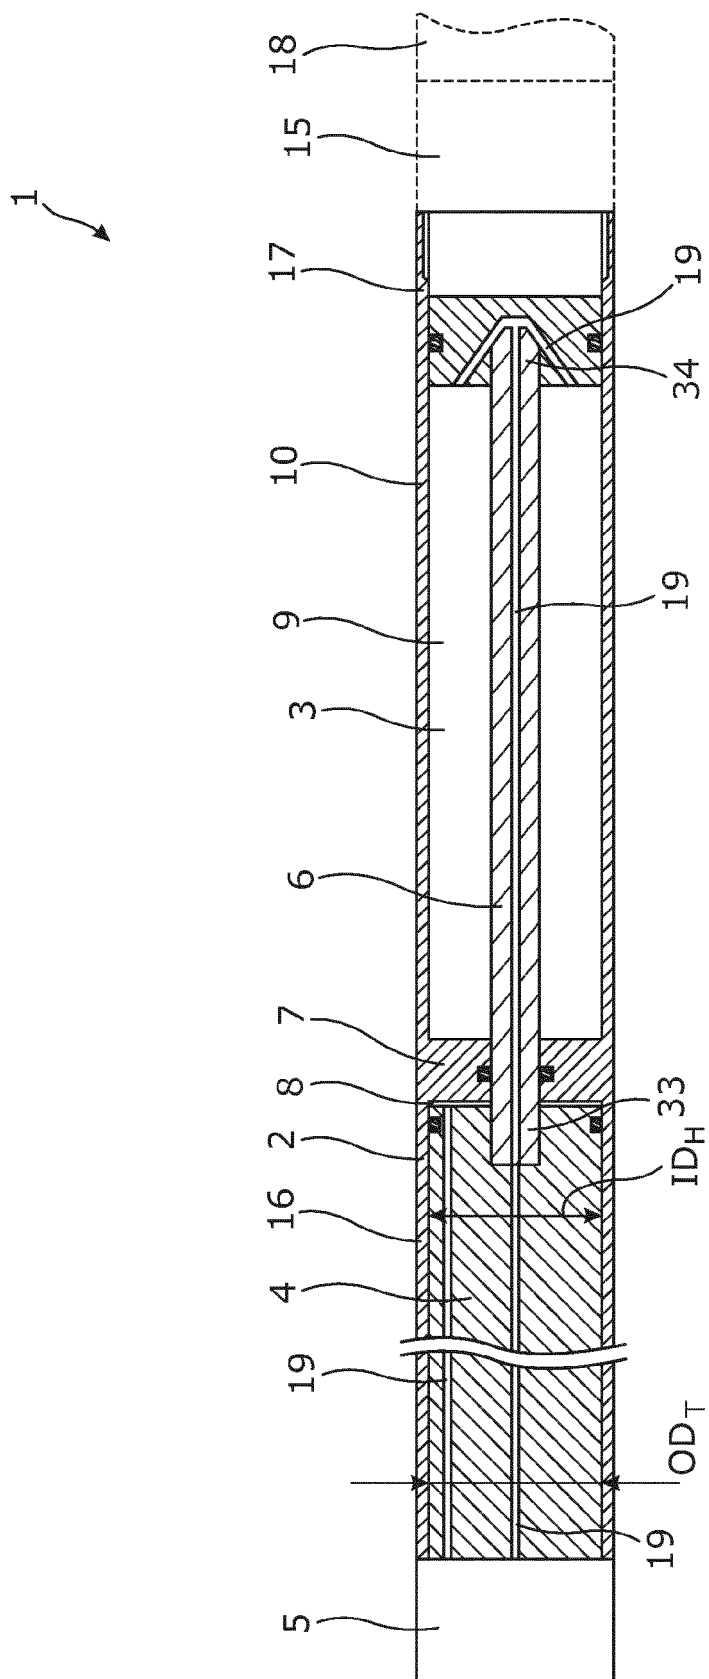

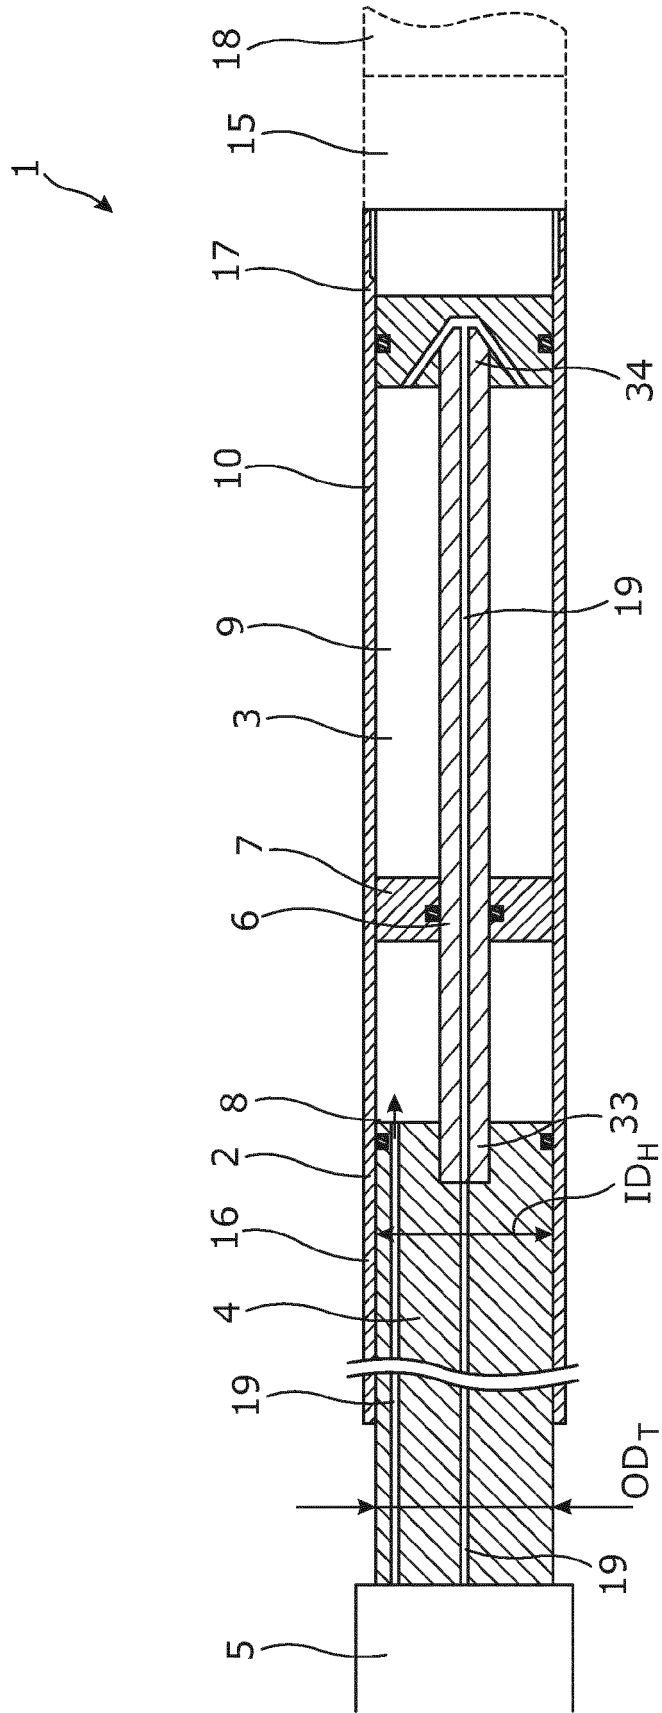


Fig. 3

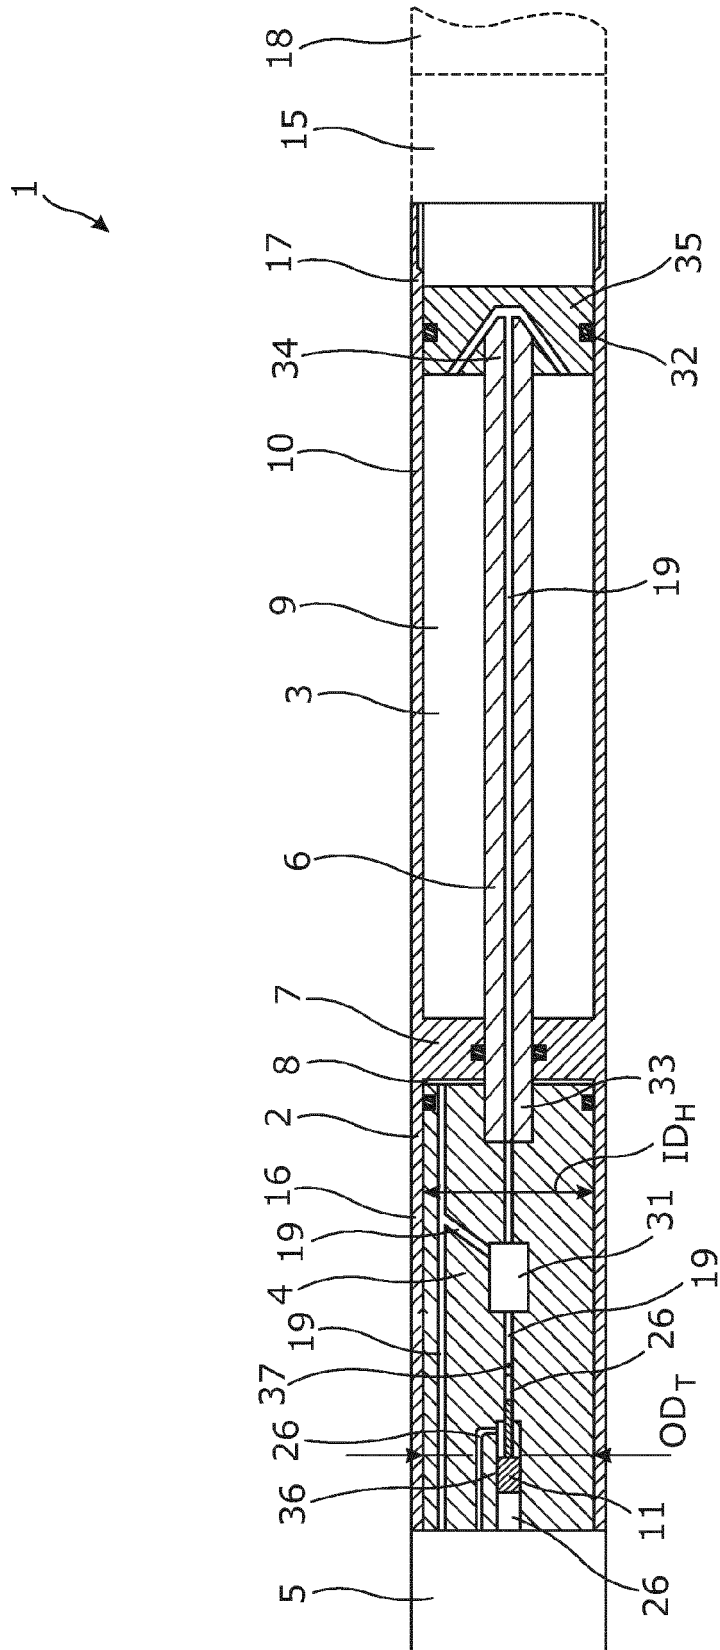


Fig. 4

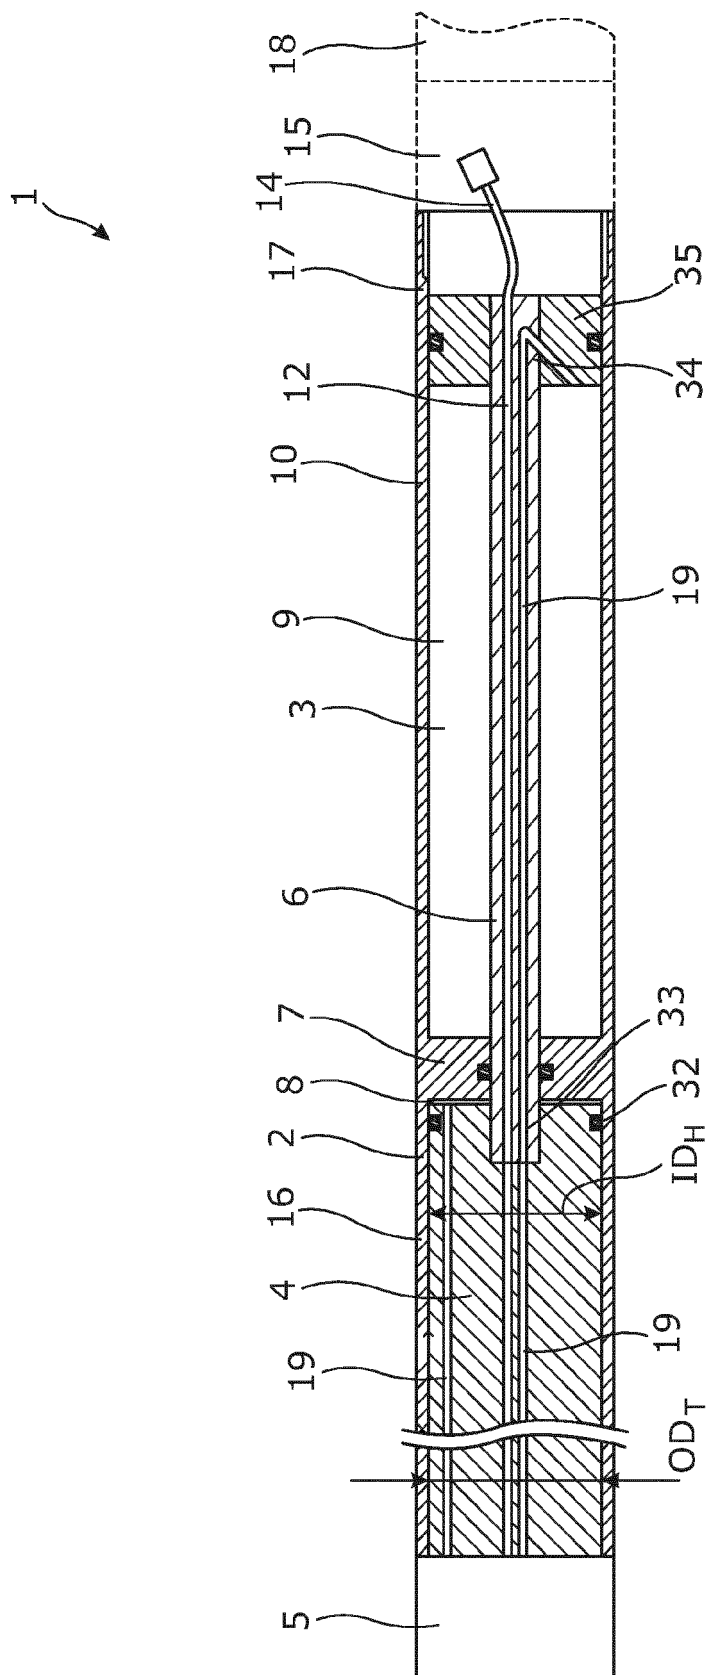


Fig. 5

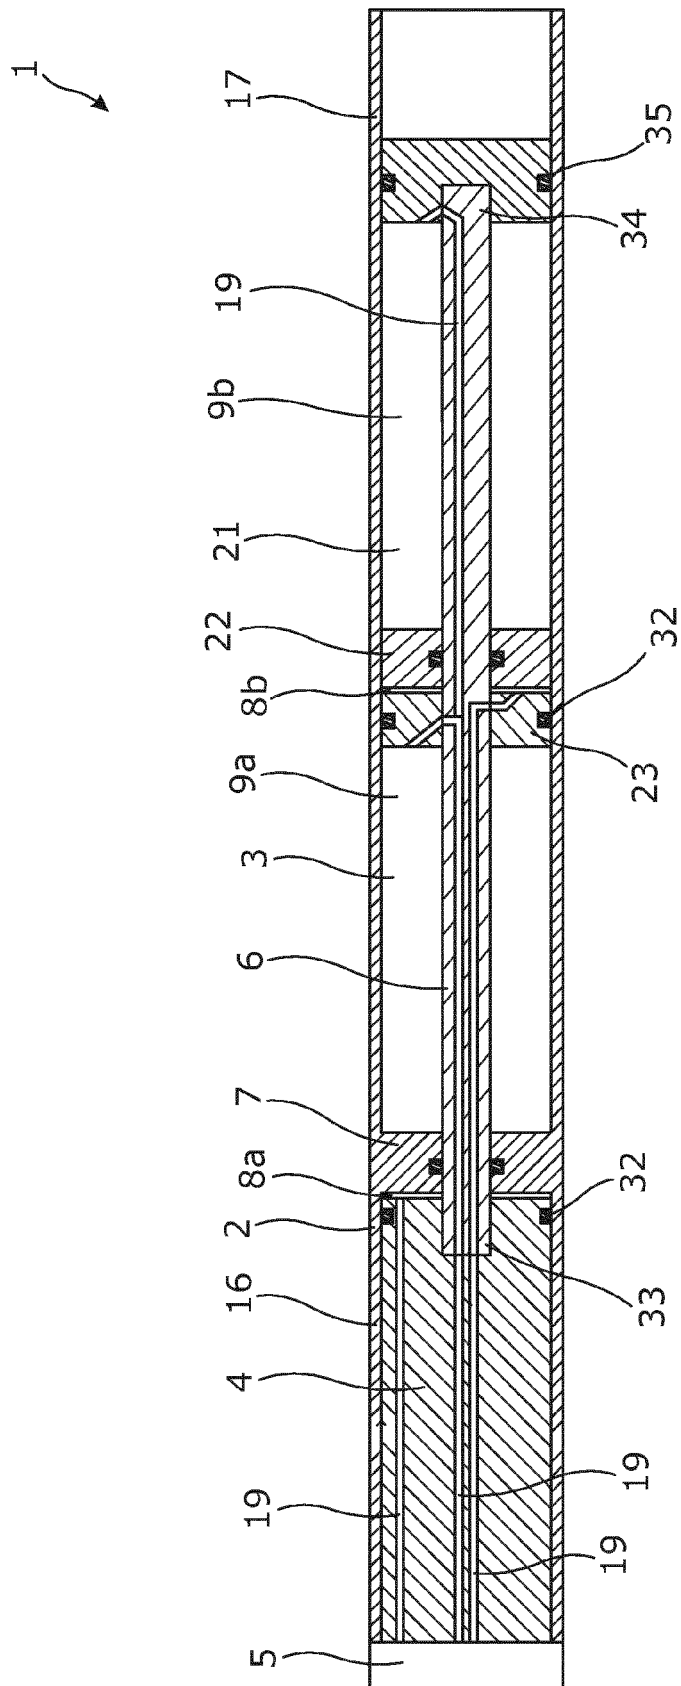


Fig. 6

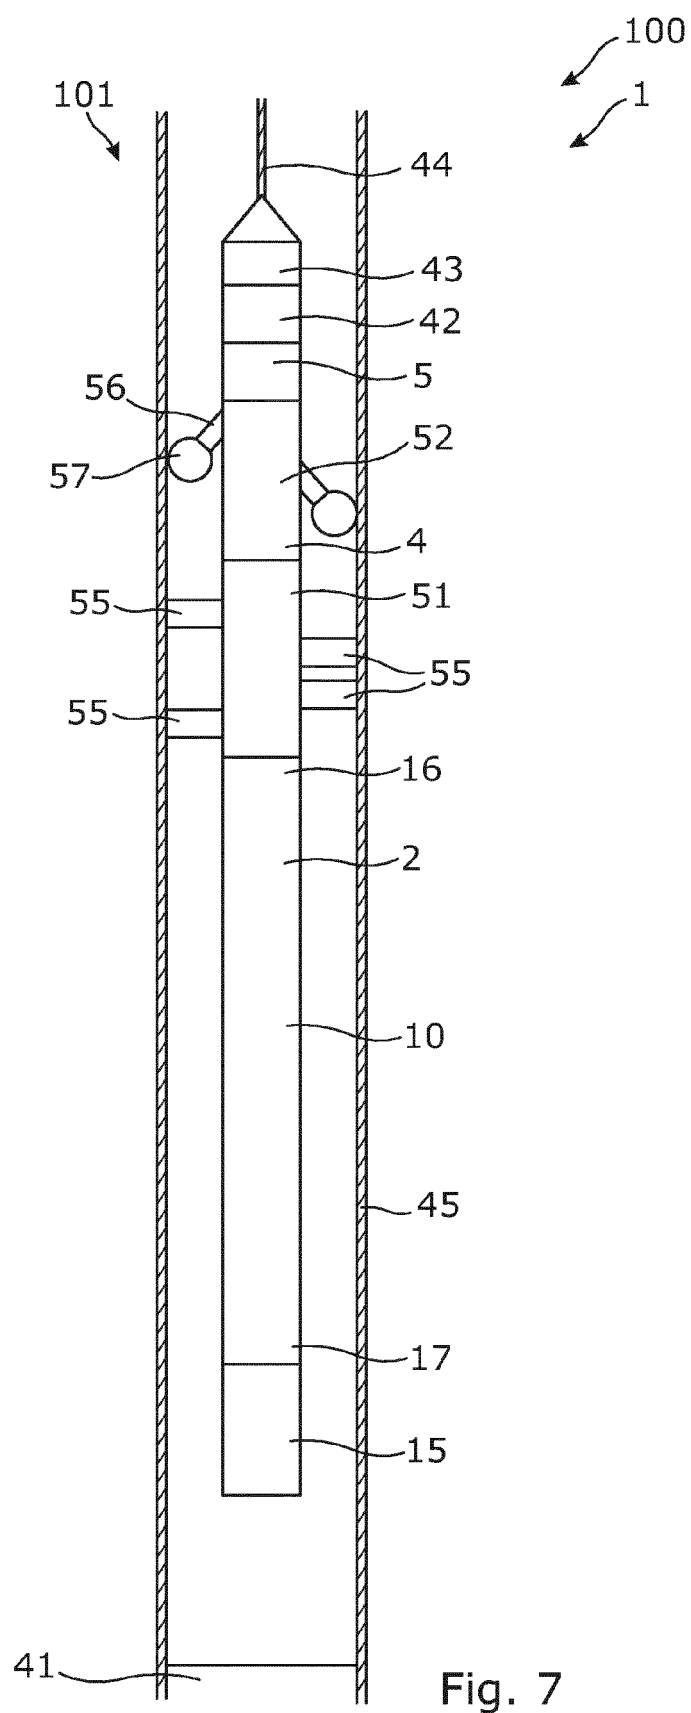


Fig. 7



EUROPEAN SEARCH REPORT

Application Number
EP 15 16 0029

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 2002/157867 A1 (MOORE TERENCE ALEXANDER [GB]) 31 October 2002 (2002-10-31) * the whole document *	1-15	INV. E21B23/14 E21B4/06 E21B4/12 E21B4/14 E21B23/01
A	US 3 497 019 A (ORTLOFF JOHN E) 24 February 1970 (1970-02-24) * the whole document *	1	
A	US 2014/048288 A1 (CLEMENS JACK GAMMILL [US] ET AL) 20 February 2014 (2014-02-20) * the whole document *	1	
A	US 2 937 007 A (FRANK WHITTLE) 17 May 1960 (1960-05-17) * the whole document *	1	
A	EP 2 341 211 A1 (WELLTEC AS [DK]) 6 July 2011 (2011-07-06) * the whole document *	1	
			TECHNICAL FIELDS SEARCHED (IPC)
			E21B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 10 September 2015	Examiner Manolache, Iustin
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 15 16 0029

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-09-2015

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002157867 A1	31-10-2002	EP 1247936 A1 US 2002157867 A1	09-10-2002 31-10-2002
US 3497019 A	24-02-1970	NONE	
US 2014048288 A1	20-02-2014	US 2014048288 A1 WO 2014031092 A1	20-02-2014 27-02-2014
US 2937007 A	17-05-1960	DE 1084216 B GB 755207 A US 2937007 A	30-06-1960 15-08-1956 17-05-1960
EP 2341211 A1	06-07-2011	CA 2785939 A1 CN 102713138 A DK 2519707 T3 EP 2341211 A1 EP 2519707 A1 ES 2443318 T3 RU 2012127112 A US 2013014957 A1 WO 2011080292 A1	07-07-2011 03-10-2012 03-02-2014 06-07-2011 07-11-2012 18-02-2014 10-02-2014 17-01-2013 07-07-2011

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82