

(19)



(11)

EP 3 081 884 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
29.11.2017 Bulletin 2017/48

(51) Int Cl.:
F25C 3/04 ^(2006.01) **B05B 7/00** ^(2006.01)

(21) Application number: **16164968.6**

(22) Date of filing: **12.04.2016**

(54) **WATER SPRAY NOZZLE FOR A SNOW GUN**

WASSERSPRÜHDÜSE FÜR EINE SCHNEEKANONE

BUSE DE VAPORISATION D'EAU D'UN CANON A NEIGE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **14.04.2015 IT MI20150534**

(43) Date of publication of application:
19.10.2016 Bulletin 2016/42

(73) Proprietor: **Cortech S.r.l.
38050 Canal San Bovo (TN) (IT)**

(72) Inventors:
• **CORONA, Italo
38050 CANAL SAN BOVO (IT)**
• **CORONA, Luca
38050 CANAL SAN BOVO (IT)**

(74) Representative: **Faggioni, Marco et al
Fumero S.r.l.
Pettenkoferstrasse 20/22
80336 München (DE)**

(56) References cited:
**EP-B1- 1 114 287 WO-A1-95/23320
CN-U- 202 170 255 FR-A1- 2 376 384**

EP 3 081 884 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to an apparatus for the artificial snow production, the so-called "snow gun" and, in particular, an improved nozzle for this apparatus. As used herein, the term "snow gun" is meant to refer to all those devices that are used to turn water into snow while projecting it on the ski slopes, to obtain an artificial snowfall in case of scarcity of natural atmospheric precipitation.

PRIOR STATE OF THE ART

[0002] It is known that the snow guns comprise a gun body, i.e., an essentially tubular, cylindrical shaped structure, open at both its ends, inside which on one end a motorized fan is arranged and, and on the other end a main nozzle or more main nozzles are arranged annularly for atomising water.

[0003] In snow guns of more recent construction "nucleating devices" are also provided, i.e. secondary nozzles, arranged near or around the main nozzles, able to spray a mixture of water and compressed air, so as to give rise to the rapid formation of very small ice particles, which have the function of nuclei to trigger the formation of snowflakes using the water atomised into droplets of larger size coming from the main nozzles.

[0004] Thanks to this structure, the current snow guns are able to obtain a good artificial snowfall. However, this is very dependent on both the physical features of the slope to be covered with snow and, above all, the local environmental conditions, namely humidity and temperature. Under low temperature and humidity conditions, in fact, the formation of snowflakes takes place easily even with high water flow rates in the main nozzles, while in higher humidity and temperature conditions, i.e. temperatures near 0°C, the flow rate to the nozzles must be maintained at the minimum levels so that there is a sufficient contact time between water droplets, ice nuclei and ambient air to cause a proper formation of the snowflakes.

[0005] For these reasons, the main nozzles of the snow guns are currently built in different shapes and dimensions, which depend on the snow-making power to be obtained. Since the replacement of the nozzles is an operation that requires a certain amount of time and the environmental conditions at the snow gun plants vary even with considerable speed, the snow guns are currently equipped with nozzles suitable to the average environmental conditions of a certain seasonal period, thus accepting a sub-optimal operation of the snow gun when the actual conditions significantly depart from those expected, and, therefore, the nozzle must be operated with water flow rates which are different from that for which the nozzle has been optimized. Alternatively, it is known to equip a snow gun with a plurality of nozzles, possibly having different nominal flow rate, and then equip the snow gun with a control system allowing the activation

of one or more of the present nozzles, to obtain a flow rate suitable to the current environmental conditions. Of course, this latter solution entails higher costs of construction and installation of the snow gun. Document EP1114287 is considered to be the prior art closest to the subject-matter of the independent claim 1 and discloses all the technical features of the preamble of this claim. To overcome, at least in part, the problem of an insufficient or sub-optimal atomisation when the main nozzles are operated at flow rates which are different from the planned one, it is also known to equip the snow guns with fan groups, able to form an air flow at high speed inside the snow gun, said air flow helping the further fragmentation of the water jet coming out from the main nozzles, thus allowing the snow formation even with flow rate and environmental conditions which are not compatible with each other. However, the use of air fans for this purpose entails a high energy consumption and, therefore, makes the use of snow guns uneconomical.

SUMMARY OF THE INVENTION

[0006] Object of the present invention is, therefore, to provide an improved nozzle for snow guns which overcomes the mentioned drawback and which allows, in particular, to change the flow rate features of the atomised water jet while maintaining an optimal atomisation in every flow rate condition, in a simple way and without requiring laborious replacement operations of the main nozzles or the progressive activation of more nozzles, depending on the ski plant requirements and/or the actual environmental conditions, so as to allow an efficiency improvement of the snow gun and a consequent reduced need for resorting to more expensive functionality with forced ventilation of the gun.

[0007] This object is achieved by a nozzle for snow guns having the features defined in claim 1. Other preferred features of the invention are defined in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Further features and advantages of the invention will anyhow be more evident from the following detailed description of some preferred embodiments, given by mere way of non-limiting example and illustrated in the accompanying drawings, wherein:

Fig. 1 is a very schematic longitudinal sectional view of the general structure of a snow gun incorporating an improved nozzle according to the invention;
Fig. 2 is a schematic perspective view of the gun of Fig. 1;
Fig. 3 is a partial longitudinal sectional view of the main nozzle of the snow gun according to the invention, in operating conditions;
Fig. 4 is a view identical to the upper portion of Fig. 3, but at a larger scale;

Fig. 5 is a view similar to that of Fig. 3, but in a complete shutdown condition of the main nozzle operation;

Fig. 6 is a longitudinal sectional view of an alternative embodiment of the main nozzle of the snow gun according to the invention; of which

Fig. 7 represents a schematic front view.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0009] As illustrated in the drawings, the snow gun according to the invention comprises a main body 1, having the shape of a cylindrical or preferably slightly conical tube open at both ends, respectively the entry 1E and the exit 1U ends.

[0010] Inside the body 1, near its entry mouth 1E, a motor 2 which rotates the blades 3 of a fan is arranged: this is apt to create an important ventilation air flow within the body 1, directed from the entry mouth 1E towards the exit mouth 1U.

[0011] Also inside the body 1, near the exit mouth 1U, a main nozzle 4 is also arranged which is centred on the longitudinal axis X-X of the body 1 and apt to form a water jet, shown schematically by the cone profile G1 in Fig. 1. The shape of the nozzle 4 and the supplied water pressure are apt to form, in a manner known per se, a jet of atomised water.

[0012] In correspondence of the edge of the exit mouth 1U of the body 1, nucleating devices 5 are evenly provided. When supplied with compressed air and water, these nucleating devices are apt to release smaller jets G2, having a conical shape, of minute water particles, called nuclei, which freeze immediately in contact with air and are suitable to form, in a way also known per se, initiator elements of the atomised water transformation of the main jet G1 into snowflakes.

[0013] According to the fundamental feature of the present invention, said main nozzle 4 has the structure represented schematically in Fig. 3 and, in greater detail, in Fig. 4. Here, it can be seen that this structure comprises a fixed case 10, provided with an entry opening 11 of the water under pressure and an exit opening 12 of the atomised water jet G1. The water entering through the opening 11 distributes in a lower chamber 10a and in an upper chamber 10b, between which a distributor 13 is interposed.

[0014] This distributor 13 is in the form of a cylindrical body, arranged axially movable within the case 10. The size and shape of the distributor 13 is such that at least part of its cylindrical surface is substantially abutted against a corresponding cylindrical zone of the inner circular wall of the case 10, which delimits the bottom of the upper distribution chamber 10b.

[0015] More precisely, said cylindrical surface of the distributor 13 comprises an upper area, where a real waterproofing is carried out, this area being comprised between the level l_1 and the level l_2 (Fig. 4) and a lower

area, comprised between the level l_0 and the level l_1 which forms a water intake zone, as better explained below.

[0016] In fact, on said outer cylindrical surface of the distributor 13 a plurality of helical grooves 14 is formed, which lead the water from said lower chamber 10a towards the upper chamber 10b and then towards the exit 12 of the nozzle, while simultaneously imparting to the water a strong rotary motion able to cause the formation of a conical jet G1 having suitable shape and speed for an efficient water atomisation.

[0017] More precisely, the lower ends of the helical grooves are arranged in the lower area of the cylindrical surface of the distributor 13, i.e. the aforementioned intake zone, and, thus, they form the water entry point; in fact, said water intake zone freely faces the chamber 10a and the water, as a result of its pressure, is forced to go up along the helical grooves 14.

[0018] According to an important feature of the invention, the grooves 14 formed on the cylindrical wall of the distributor 13 have helical profiles which are parallel and identical, except with regard to the lower starting point (with respect to the drawing of Fig. 4) of each groove. As can be clearly seen from the drawing, while all the exits of the grooves 14 at their upper end are aligned on a single circumferential plane P_u , the entries of said grooves, at their lower end, are sequentially staggered in height, starting from a point P_{e1} , which is located at the previously mentioned level l_0 , then the point P_{e2} , and so on up to the point P_{en} , this latter being at level l_1 , as it appears from Fig. 4.

[0019] In other words, said lower ends of the grooves, forming the entrance way of the water coming from the lower chamber 10a and going into the upper chamber 10b, are staggered at progressively increasing height with respect to the axial height of said cylindrical intake zone of the distributor 13.

[0020] According to a further important feature of the invention, said distributor is movable along its axis X-X, to progressively hide said intake zone, or vice versa, inside said cylindrical zone that delimits, at the bottom, the wall of the upper chamber 10b.

[0021] Thanks to this construction, it is therefore possible to obtain, in an extremely simple manner, through a displacement of the distributor 13 along the axis direction X-X, a reduction of the number of grooves 14 actually operating. The axial movement of the distributor 13 is preferably obtained by means of an electric motor M of small size of the stepper type, axially mounted behind the nozzle and connected to the distributor 13 through a screw/nut system. Thanks to this, the longitudinal position of the distributor 13 inside the nozzle can be easily adjusted, even remotely, by imposing the desired number of rotations to the stepper motor M. Any other control system, either manual or motorized, which allows obtaining a controlled axial movement of the distributor 13 is equally usable and, therefore, comprised within the scope of protection of the present invention.

[0022] In the example shown in Fig. 4 it can be seen that all the grooves 14 are operational, since also the groove end indicated with reference P_{en} , i.e. the most spaced from the level l_0 , is open towards the chamber 10a; therefore, all the grooves carry water. Starting from this position of the distributor 13, a reduction of the water flow rate is obtained by making the distributor 13 go up in the direction of the arrow F, so as to bring one or more of the lower ends of the grooves 14 in correspondence of the cylindrical zone of the upper chamber 10a of the distributor, where the sealing effect with the cylindrical surface of the lower part of the distributor 13 free from grooves 14, prevents the water to reach the lower ends of said grooves.

[0023] According to a further important feature of the present invention, the annular exit 12 of the water from the upper mouth of the main nozzle 4 is formed between the inner edge of this mouth and the upper end surface of the distributor 13, which surface includes a terminal conical zone 13a, arranged downstream of a cylindrical zone 13b, which, therefore, makes up a connection with the body of the distributor 13, to perform the nozzle function better described hereinafter.

[0024] Thanks to this arrangement it is in fact possible - through the movement of the distributor 13 in the direction of the arrow F - to cause, at first, a gradual reduction of the exit 12 width, as a result of the approach of the conical-surface zone 13a towards the edge of the mouth, and subsequently the complete closure of the exit 12 when the cylindrical-surface zone 13b is in contact with the edge of the mouth.

[0025] This closed position is highlighted in Fig. 5, where it can be seen that the surface of the cylindrical-surface zone 13b is in contact with the edge of the mouth and, at the same time, the grooved portion of the distributor 13 is almost entirely above the level l_0 , i.e., with the lower ends of all the grooves 14, except the first P_{e1} , which are in a sealing area, and that is no longer in communication with the lower chamber 10a of the water entry. Thus, in this closed position, a minimum flow rate passes in the only active groove 14 and leaks through the thin annular clearance 12 which is formed between the cylindrical zone 13b and the inner edge of the nozzle mouth, where, in fact, no sealing is provided to this purpose. Said minimum flow rate is necessary to maintain the nozzle in active condition, when the operation of the same - due to any reason - must be done in a discontinuous manner.

[0026] Thanks to this construction it is possible to simultaneously achieve two effects, namely, on the one hand, it is possible to optimally and gradually adjust the flow rate of the water coming from the nozzle and, on the other hand, to maintain a full flow within the grooves 14 also at low flow rates, since the reduction of the flow rate caused by the width reduction of the exit 12 corresponds to a progressive reduction of the number of grooves 14 in which water can enter. In this way, the rotation effect impressed by the distributor 13 maintains its effectiveness unaltered even at low flow rates; thus the formation

of the cone jet G1 and its proper atomisation are optimal in any condition of use. In summary, it is just the intrinsic structure of the nozzle of the present invention - wherein at a higher flow rate corresponds a higher number of operating grooves 14 to properly supply the upper chamber 10b - which allows an always optimal atomisation effect of the water jet G1.

[0027] In Figures 6 and 7 it is illustrated a second embodiment of the nozzle of the present invention, in which, around the main nozzle 4, laterally to the annular exit 12, it is further arranged a crown of minimum flow-rate small nozzles 15. These nozzles are connected, through a thin duct 16, to the lower chamber 10a of the water supply. The nozzles 15 have the function of maintaining a well-defined minimal flow rate of water, thus a minimum spraying effect, when the main nozzle 4 is closed.

[0028] As already said above, in fact, it may be appropriate to maintain a minimum activity of the gun, on the one hand, to allow the continuous formation of a finishing layer of snow on the skiing surface and, on the other hand, to maintain a water flow in the nozzle, suitable to avoid the local ice formation, and, therefore, to maintain the nozzle in the active condition for a possible successive period of full flow rate operability.

[0029] Fig. 7 illustrates an arrangement in which a plurality of nozzles 15 is evenly provided around the main nozzle 4; however, the number of these nozzles can be, obviously, modified according to the user's needs.

[0030] In this embodiment, the minimum flow rate is precisely controlled by the number and the opening section of the nozzles 15 and, therefore, it is no longer necessary to maintain a minimum flow rate through the exit 12 of the main nozzle, as described above; to this purpose in the cylindrical zone 13b a groove 17 for housing an O-ring sealing is provided, which O-ring sealing allows to obtain a sealing closure of the main nozzle when said O-ring sealing comes into contact with the exit edge of the upper chamber 10a of the nozzle.

[0031] In a third embodiment of the nozzle of the present invention (not shown), the conical-surface zone (13a) has a higher conicity, i.e., a higher inclination of the conical wall, in correspondence of the semicircumference of the nozzle which faces upwards in operating conditions. This arrangement causes an exit 12 having a greater width in the upper area of the jet G1 with respect to the lower one. Moreover the width of the exit 12 is the greater, the more the distributor 13 is positioned backwards and, therefore, the greater the water flow rate. This modified conicity, therefore, causes a differentiated distribution of the flow rate of the water jet G1, whose upper portion is more rich of water with respect to the lower one. In certain operating conditions this arrangement may be advantageous to increase the contact time of the water particles with the nuclei and, thus, to facilitate a better formation of snowflakes.

[0032] It is easily understood that, thanks to the above disclosed nozzle structure an improved nozzle for a snow gun has been provided, the water flow rate of which can

easily be adapted to environmental conditions which can be also very different one from the other, so that it is no longer necessary to provide different embodiments of the snow gun, suitable to meet the different needs of the user, as well as it is no longer necessary to provide a snow gun with a plurality of nozzles to be progressively activated, thus fully achieving the first object of the invention.

[0033] In practice, it has been found that, through this structure of the spray nozzle, it is possible to obtain a much more precise and accurate control of the spray cone G1. As a result, it becomes also possible to use a single main nozzle mounted in axial position, while the nucleating devices remain positioned on the exit edge of the tubular body of the snow gun, as shown in Fig. 2. Mixing between the two flows G1 and G2 is, therefore, more efficient and the structure of the snow gun is considerably simplified and, therefore, a lower cost thereof can be achieved.

[0034] The possibility to adjust the nozzle flow rate in a precise manner, while maintaining a high quality of the cone jet G1, allows to quickly make the snow gun flexible to changed environmental conditions, reducing - also automatically - the snow gun flow rate when the environmental conditions are less favourable to snow formation and increasing it in the opposite case. This allows a drastic reduction of the time periods in which it is necessary to operate the motor 2 and the fan 3, thus reaching also the second object of the present invention.

Claims

1. Water spray nozzle for a snow gun, of the type comprising a distributor (13), housed between a water-supply lower chamber (10a) and a water-distribution upper chamber (10b) ending in an annular exit (12), said distributor (13) having a cylindrical surface, at least part of which (band I₁-I₂) seals against a corresponding cylindrical area of the wall of the upper chamber (10b), on said cylindrical surface of the distributor a plurality of helical grooves (14) being formed, which grooves receive the water coming from the lower chamber (10a) and lead it into the upper chamber (10b) and towards the annular exit (12) of the nozzle, simultaneously imparting to the same a rotary motion, **characterised in that** the ends of said helical grooves (14) in connection with the lower chamber (10a) are formed at axially different heights on the circumference of the distributor (13) and **in that** said distributor (13) is axially movable for connecting a different number of said helical grooves (14) with the lower chamber (10a).
2. Water spray nozzle as in claim 1, **characterised in that** said distributor (13) is provided, at the end thereof facing the annular exit (12) of the nozzle, with a conical-surface zone (13a) apt to cooperate with the exit edge of the upper chamber (10b), for causing a width change of said annular exit (12) upon changing the axial position of said distributor (13).
3. Water spray nozzle as in claim 2, **characterised in that** said distributor (13) is furthermore provided, at the end thereof facing the annular exit (12) of the nozzle, with a cylindrical-surface zone (13b) upstream of said conical-surface zone (13a), apt to cooperate with the exit edge of the upper chamber (10b), for causing a closed position of the nozzle.
4. Water spray nozzle as in claim 3, wherein in said closed position of the nozzle a thin annular clearance remains between said cylindrical-surface zone (13b) and the exit edge of the upper chamber (10b) for allowing the passage of a minimum water flow rate.
5. Water spray nozzle as in any one of the preceding claims, wherein the axial movement of the distributor (13), between the positions of minimum flow rate and of maximum flow rate is controlled by an electric step motor (M) coaxial with the distributor and connected thereto through a screw/nut system.
6. Water spray nozzle as in any one of the preceding claims, **characterised in that** it furthermore comprises, arranged crown-like around said annular exit mouth (12), one or more minimum flow-rate nozzles (15) connected to said lower chamber (10a) through thin water supply ducts (16).
7. Water spray nozzle as in claim 4 and 6, furthermore comprising a sealing housed in a groove (17) of said cylindrical-surface zone (13b), for sealingly closing the thin annular clearance between said cylindrical-surface zone (13b) and the exit edge of the upper chamber (10b).
8. Water spray nozzle as in any one of the preceding claims, wherein said conical-surface zone (13a) has a higher conicity in the nozzle semicircumference which faces upwards in operating conditions.
9. Snow gun, of the type consisting of a cylindrical or slightly conical tubular body (1), within which there are arranged: a fan (3) operating at an entry end (1E) for generating a ventilation air flow, at least a water spray nozzle (4) at the opposite exit end (1U), and a plurality of nucleating devices (5) which surround said water spray nozzle (4), **characterised in that** said water spray nozzle (4) is according any one of the preceding claims.
10. Snow gun as in claim 9, wherein said nucleating devices (5) are located on the exit edge of the gun tubular body (1) and said water spray nozzle is in an axial position.

Patentansprüche

1. Wassersprühdüse für eine Schneekanone, die einen Verteiler (13) aufweist, der zwischen einer Wasserversorgungsunterkammer (10a) und einer Wasserverteilungsoberkammer (10b) angeordnet ist, die in einem ringförmigen Austritt (12) endet, wobei der Verteiler (13) eine zylindrische Oberfläche aufweist, von der mindestens ein Teil (Streifen L_1 - L_2) gegen einen entsprechenden zylindrischen Bereich der Wand der oberen Kammer (10b) dichtet, wobei auf der zylindrischen Oberfläche des Verteilers eine Mehrzahl von Spiralnuten (14) gebildet ist, deren Nuten das aus der unteren Kammer (10a) kommende Wasser aufnehmen und in die obere Kammer (10b) und in Richtung des ringförmigen Austritts (12) der Düse führen, wobei sie gleichzeitig eine Drehbewegung auf dasselbe übertragen, **dadurch gekennzeichnet, dass** die Enden der Spiralnuten (14) in Verbindung mit der unteren Kammer (10a) in axial unterschiedlichen Höhen am Umfang des Verteilers (13) ausgebildet sind und dass der Verteiler (13) axial bewegbar ist, um eine unterschiedliche Anzahl an Spiralnuten (14) mit der unteren Kammer (10a) zu verbinden.
2. Wassersprühdüse nach Anspruch 1, **dadurch gekennzeichnet, dass** der Verteiler (13) an seinem dem ringförmigen Austritt (12) der Düse zugewandten Ende mit einer konischen Oberflächenzone (13a) versehen ist, die geeignet ist, mit der Austrittskante der oberen Kante (10b) zusammenzuwirken, um bei einer Veränderung der axialen Position des Verteilers (13) eine Breitenänderung des ringförmigen Austritts (12) zu bewirken.
3. Wassersprühdüse nach Anspruch 2, **dadurch gekennzeichnet, dass** der Verteiler (13) ferner an seinem dem obigen Austritt (12) der Düse zugewandten Ende mit einer zylindrischen Oberflächenzone (13b) stromaufwärts der konischen Oberflächenzone (13a) versehen ist, die geeignet ist, mit der Austrittskante der oberen Kammer (10b) zusammenzuwirken, um eine geschlossene Position der Düse zu bewirken.
4. Wassersprühdüse nach Anspruch 3, wobei in der geschlossenen Position der Düse ein dünner Ringspalt zwischen der zylindrischen Oberflächenzone (13b) und der Austrittskante der oberen Kammer (10b) verbleibt, um den Durchgang der minimalen Wasserdurchflussrate zu ermöglichen.
5. Wassersprühdüse nach einem der vorhergehenden Ansprüche, wobei die axiale Bewegung des Verteilers (13) zwischen den Positionen der minimalen Durchflussrate und der maximalen Durchflussrate durch einen elektrischen Schrittmotor (M), der koaxial mit dem Verteiler ist und über ein Schrauben-/Muttersystem mit diesem verbunden ist, gesteuert wird.
6. Wassersprühdüse nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** sie weiterhin eine oder mehrere kronenartig um den ringförmigen Austrittsmund (12) angeordnete Düsen (15) umfasst, die mit der unteren Kammer (10a) durch dünne Wasserzuführungskanäle (16) verbunden sind.
7. Wassersprühdüse nach Anspruch 4 und 6, weiterhin eine Abdichtung umfassend, die in einer Nut (17) der zylindrischen Oberflächenzone (13b) untergebracht ist, um den dünnen Ringspalt zwischen der zylindrischen Oberflächenzone (13b) und der Austrittskante der oberen Kammer (10b) dichtend zu verschließen.
8. Wassersprühdüse nach einem der vorhergehenden Ansprüche, wobei die konische Oberflächenzone (13a) eine höhere Konizität zu dem Düsenhalbkreis aufweist, der unter Betriebsbedingungen nach oben weist.
9. Schneekanone, bestehend aus einem zylindrischen oder leicht konischen Rohrkörper (1), innerhalb dessen angeordnet sind: ein Gebläse (3), das an einem Eintrittsende (1E) zur Erzeugung eines Ventilationsluftstroms arbeitet, mindestens eine Wassersprühdüse (4) an den gegenüberliegenden Austrittsende (1U) und eine Mehrzahl von Nukleirvorrichtungen (5), die die Wassersprühdüse (4) umgeben, **dadurch gekennzeichnet, dass** die Wassersprühdüse (4) einem der vorhergehenden Ansprüche entspricht.
10. Schneekanone nach Anspruch 9, wobei die Nukleirvorrichtungen (5) an der Austrittskante des Rohrkörpers (1) der Kanone angeordnet sind und die Wassersprühdüse in einer axialen Position ist.

Revendications

1. Buse de pulvérisation d'eau pour un canon à neige, du type comprenant un distributeur (13), logé entre une chambre inférieure d'alimentation en eau (10a) et une chambre supérieure de distribution d'eau (10b) se terminant par une sortie annulaire (12), ledit distributeur (13) ayant une surface cylindrique, dont au moins une partie (bande L_1 - L_2) réalise l'étanchéité contre une zone cylindrique correspondante de la paroi de la chambre supérieure (10b), sur ladite surface cylindrique du distributeur, une pluralité de rainures hélicoïdales (14) étant formées, lesquelles rainures reçoivent l'eau provenant de la chambre inférieure (10a) et la conduisent dans la chambre supé-

rieure (10b) et vers la sortie annulaire (12) de la buse, communiquant simultanément à cette dernière un mouvement rotatif, **caractérisée en ce que** les extrémités desdites rainures hélicoïdales (14) par rapport à la chambre inférieure (10a) sont formées à des hauteurs axialement différentes sur la circonférence du distributeur (13) et **en ce que** ledit distributeur (13) est axialement mobile pour raccorder un nombre différent desdites rainures hélicoïdales (14) avec la chambre inférieure (10a).

2. Buse de pulvérisation d'eau selon la revendication 1, **caractérisée en ce que** ledit distributeur (13) est pourvu, au niveau de son extrémité faisant face à la sortie annulaire (12) de la buse, d'une zone de surface conique (13a) apte à coopérer avec le bord de sortie de la chambre supérieure (10b), pour provoquer un changement de largeur de ladite sortie annulaire (12) suite au changement de position axiale dudit distributeur (13).

3. Buse de pulvérisation d'eau selon la revendication 2, **caractérisée en ce que** ledit distributeur (13) est en outre pourvu, au niveau de son extrémité faisant face à la sortie annulaire (12) de la buse, d'une zone de surface cylindrique (13b) en amont de ladite zone de surface conique (13a), apte à coopérer avec le bord de sortie de la chambre supérieure (10b), pour provoquer une position fermée de la buse.

4. Buse de pulvérisation d'eau selon la revendication 3, dans laquelle, dans ladite position fermée de la buse, il reste un jeu annulaire mince entre ladite zone de surface cylindrique (13b) et le bord de sortie de la chambre supérieure (10b) pour permettre le passage d'un débit d'eau minimum.

5. Buse de pulvérisation d'eau selon l'une quelconque des revendications précédentes, dans laquelle le mouvement axial du distributeur (13), entre les positions de débit minimum et de débit maximum, est contrôlé par un moteur pas à pas électrique (M) coaxial par rapport au distributeur et raccordé à ce dernier par le biais d'un système de vis/écrou.

6. Buse de pulvérisation d'eau selon l'une quelconque des revendications précédentes, **caractérisée en ce qu'elle** comprend en outre, agencées en forme de couronne autour de ladite bouche de sortie annulaire (12), une ou plusieurs buses de débit minimum (15) raccordées à ladite chambre inférieure (10a) par le biais de conduits minces d'alimentation en eau (16).

7. Buse de pulvérisation d'eau selon les revendications 4 et 6, comprenant en outre un joint d'étanchéité logé dans une rainure (17) de ladite zone de surface cylindrique (13b), pour fermer, de manière étanche, le

jeu annulaire mince entre ladite zone de surface cylindrique (13b) et le bord de sortie de la chambre supérieure (10b).

8. Buse de pulvérisation d'eau selon l'une quelconque des revendications précédentes, dans laquelle ladite zone de surface conique (13a) a une plus grande conicité dans la semi-circonférence de la buse qui est orientée vers le haut dans des conditions de fonctionnement.

9. Canon à neige du type se composant d'un corps tubulaire cylindrique ou légèrement conique (1), à l'intérieur duquel sont agencés : un ventilateur (3) fonctionnant au niveau d'une extrémité d'entrée (1E) pour générer un flux d'air de ventilation, au moins une buse de pulvérisation d'eau (4) au niveau de l'extrémité de sortie opposée (1U), et une pluralité de dispositifs de nucléation (5) qui entourent ladite buse de pulvérisation d'eau (4), **caractérisé en ce que** ladite buse de pulvérisation d'eau (4) est selon l'une quelconque des revendications précédentes.

10. Canon à neige selon la revendication 9, dans lequel lesdits dispositifs de nucléation (5) sont positionnés sur le bord de sortie du corps tubulaire de canon (1) et ladite buse de pulvérisation d'eau est dans une position axiale.

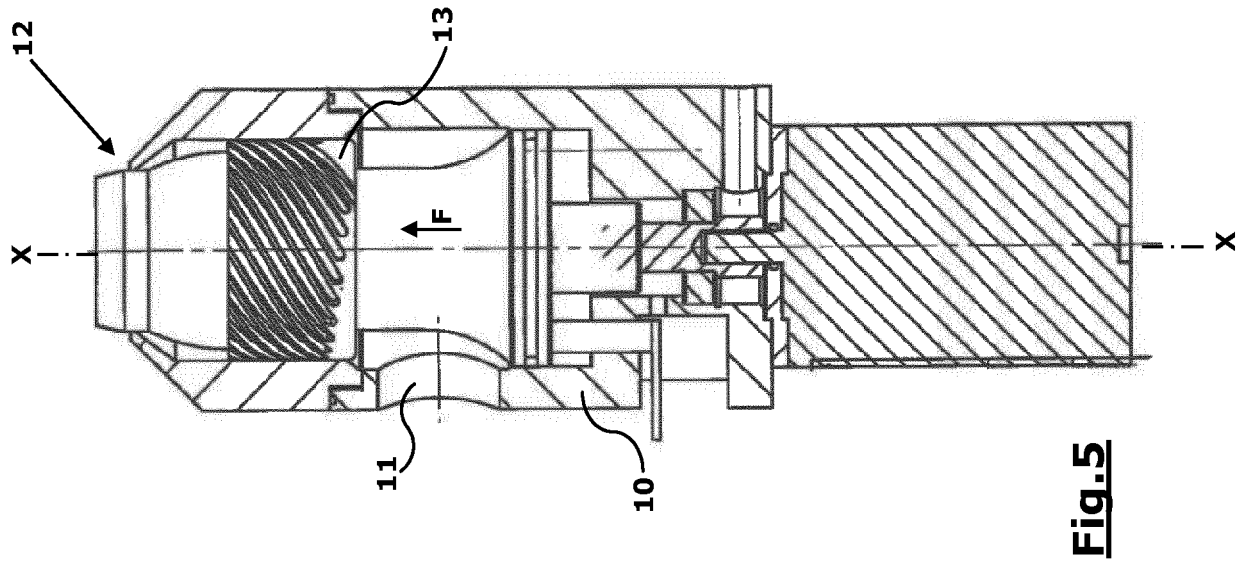


Fig. 5

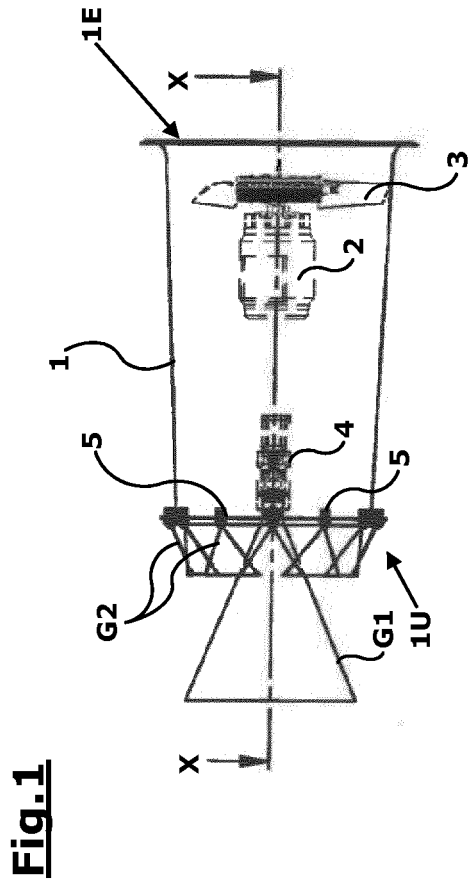


Fig. 1

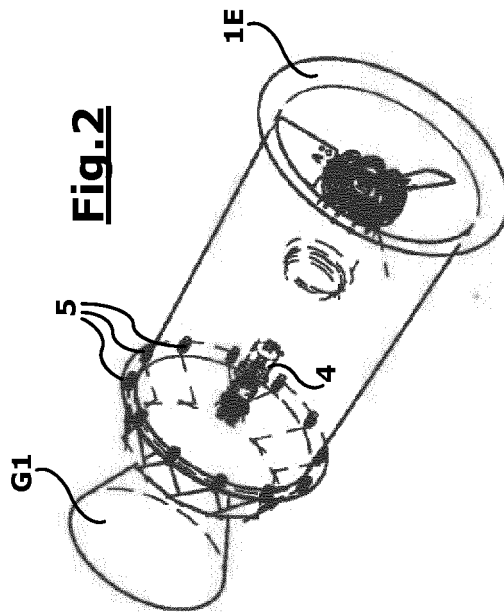


Fig. 2

Fig.3




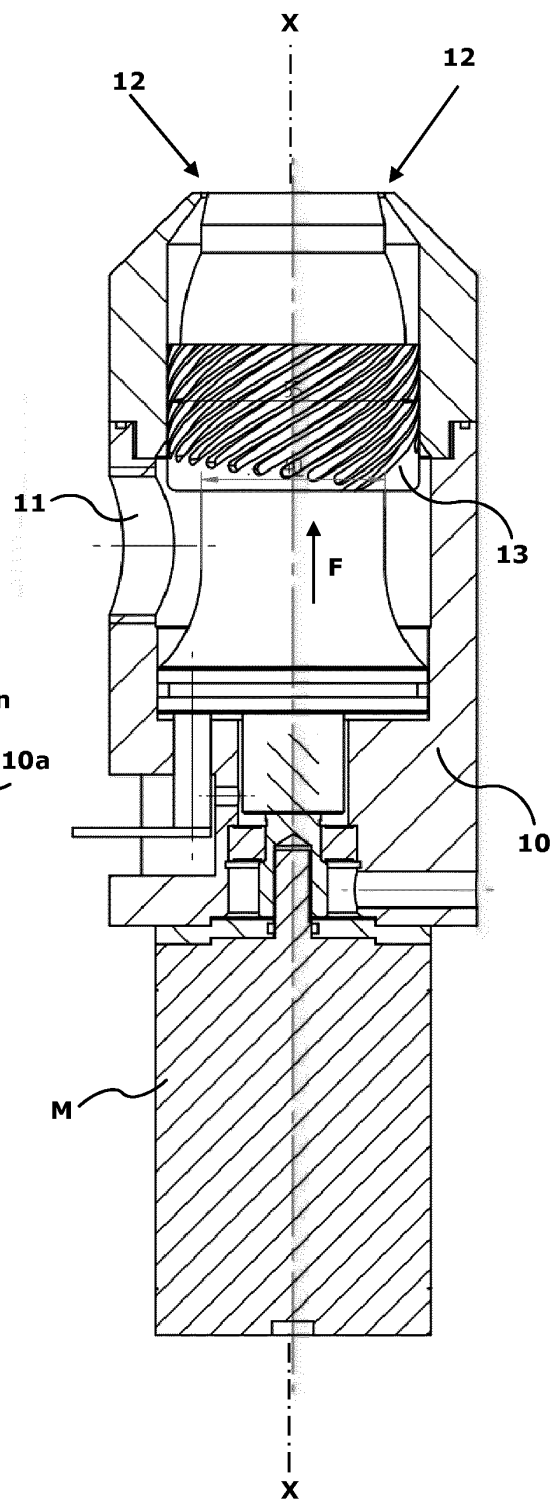


Fig.4

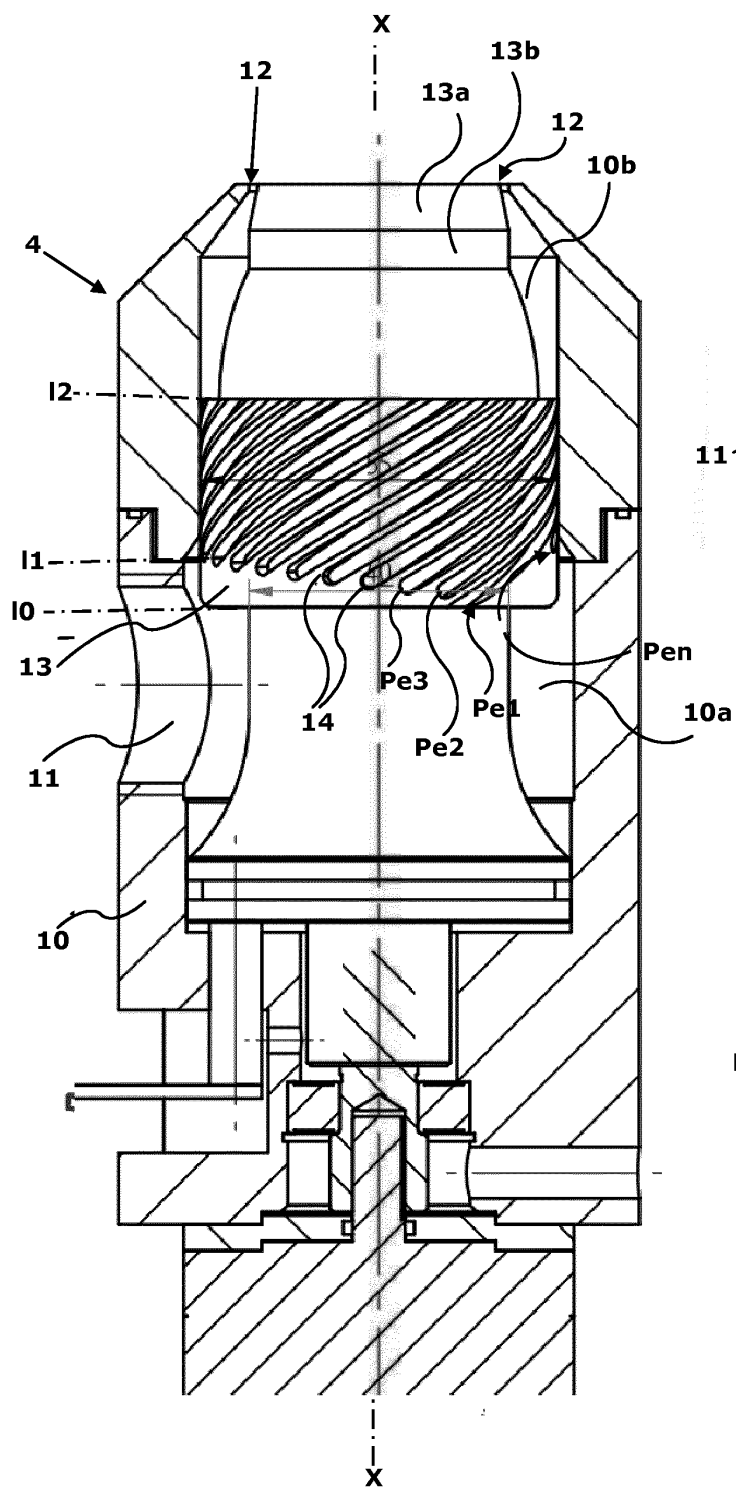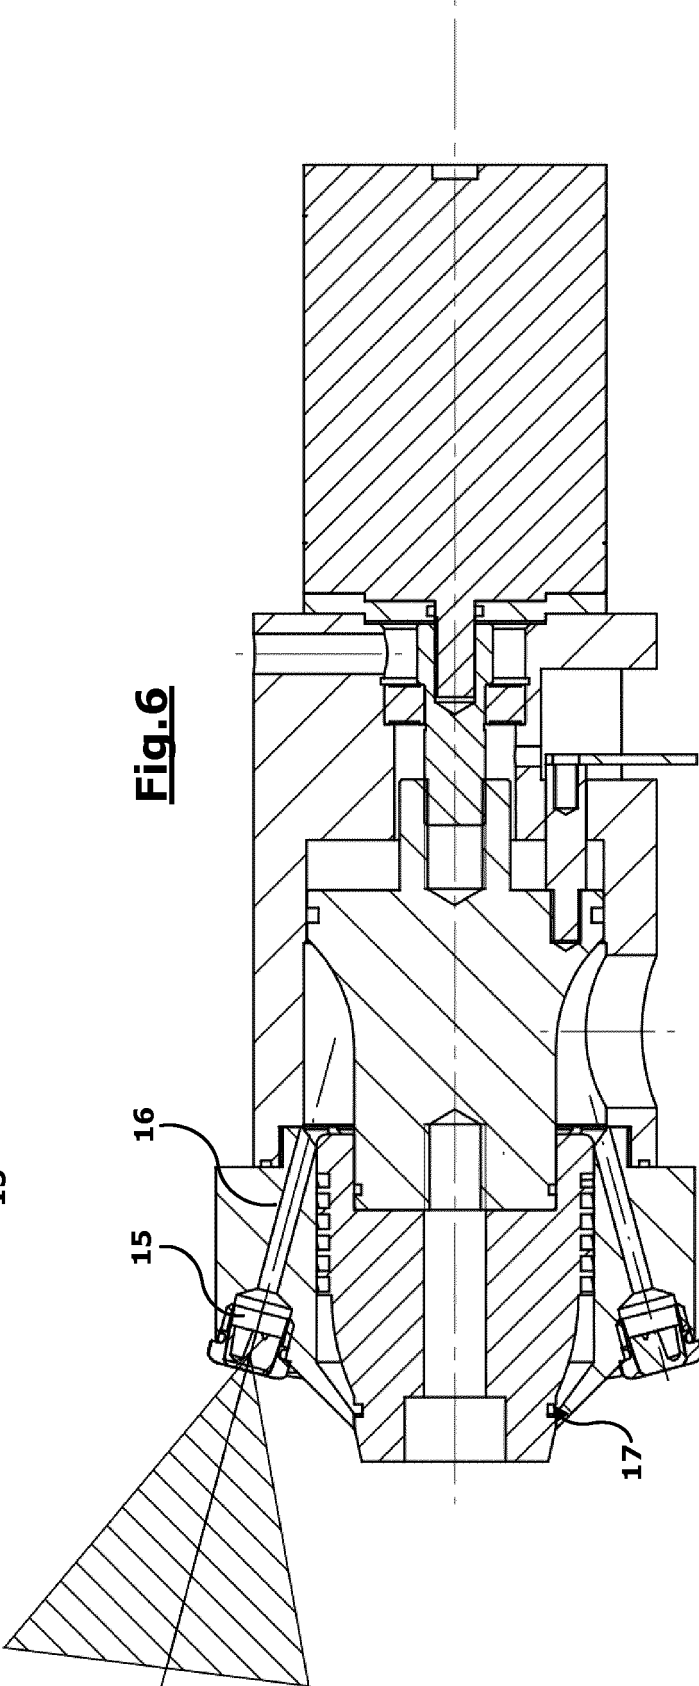

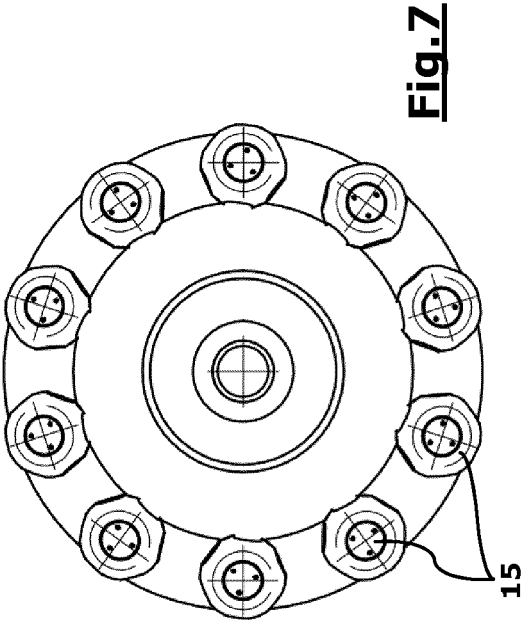

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1114287 A [0005]