



(11)

EP 3 101 189 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
07.12.2016 Bulletin 2016/49

(51) Int Cl.:
E04B 2/18 (2006.01)
B65D 21/02 (2006.01)
E04B 2/02 (2006.01)
E04B 2/22 (2006.01)
B65D 81/36 (2006.01)

(21) Application number: **16156563.5**

(22) Date of filing: **19.02.2016**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(72) Inventors:
• **NOVÁKOVÁ, Katerina**
10100 Praha 10 (CZ)
• **PROKOP, Simon**
130 00 Praha 3 (CZ)
• **CAPEK, Jan**
15000 Praha 5 - Smíchov (CZ)

(30) Priority: **20.02.2015 CZ 20150115**

(74) Representative: **Kratochvil, Vaclav**
Patent and Trademark Office
P.O. Box 26
295 01 Mnichovo Hradiste (CZ)


(71) Applicant: **Ceské vysoké ucení technické v Praze**
16634 Praha 6 (CZ)

(54) **BUILDING UNIT OF PLASTIC, IN PARTICULAR BOTTLE-SHAPED**

(57) A building unit of plastic according to this invention has the shape of a prism whose bottom (n) has an aspect ratio of 1 : 2 and bevelled edges (z) at an angle of 45° with rounded corners (f) with a unified radius and the height of the prism is also equal to once to twice its width, with one shorter side of the prism having projection (a) in the shape of two continuous equal-armed crosses, with rounding on inner corners (b) and the opposite shorter side having negative depression (e) matching projec-

tion (a), and bottom (n) having depression (o) for up to three necks of other building units, including caps, on its central axis and with projections (a) on all edges (i) being bevelled at an angle of 45° and depressions (e) on all edges (j) being bevelled at an angle of 45°. It is a self-supporting multi-functional building component using recycled plastics, which itself does not degrade. The element can be filled with various materials and mixtures thereof, its shape allows joining individual elements.

Axonometrie přední

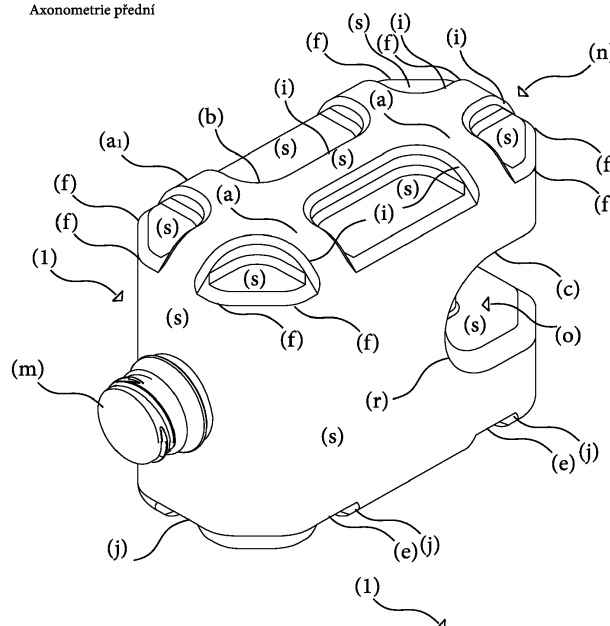

Description

Technical field

[0001] The invention aims to reuse the recycled material in architecture and civil engineering. So far, architecture has not focused on recycling materials too much and, therefore, there is a lot of untapped potential. As regards weight-based building units, it is a brick-sized unit, lightweight but load-bearing, which allows mobility and flexibility of structures, specifically temporary ones.

State of the art

[0002] PET bricks, as known at present, are described and documented on the Czech market. Two prototypes of PET bricks - star-shaped and bottle-shaped PET bricks - are known in the world. The brick sizes correspond to the sizes of bottles of different volumes because they are manufactured on a standardized line for bottle production.

[0003] The star-shaped brick from Taiwan consists of two parts in the shape of a cylinder, which are turned relative to one another so they fit into each other when installed. They are developed in three sizes by volume: 400 ml, 670 ml and 6,000 ml. The disadvantage of the star-shaped brick design is that although the bricks are adapted in shape to fit into each other, they do not hold together, there is no interlocking mechanism. They need to be bonded with silicone and, moreover, connected with auxiliary plates.

[0004] A plastic bottle-shaped brick is also known, i.e. a container for drinking water and a building unit in one. On the peripheral shell of the bottle there are projections and depressions and the individual units are held together so that these projections fit into the depressions; however the connecting method does not allow standard bond between bricks. This Swiss solution is problematic in particular in corners as well as on the brick-wall interface where additional structures, wires, must be used. With this bottle-shaped brick it is not possible to create multi-layered walls and conventional bonds between individual units. Another disadvantage of this solution is that it is shape-dependent, i.e. it looks like a bottle, can be gripped in one hand, even for the first use of the object, which is a user-friendly shape for beverage consumption. Another disadvantage is the very costly material these bottle-shaped bricks are made of. No information has been found that they are made from recycled materials. A container for beverages made of plastic has been found in German patent No. 19960520, designed to have interlocking projections and depressions, but it is not clear from the drawings how the closure is resolved, for example for connecting additional parts.

[0005] A transparent building element with a cavity is known under Czech utility model No. 27743; it is filled with a substance accumulating solar energy. This element consists of two parts and its material is not clear. It

cannot be joined without mortar. A system of embedding PET bottles in a prefabricated wall is also known - Czech utility model No. 12054 and Czech patent No. 294 646 - wherein the binder is concrete, which is a disadvantage from an environmental viewpoint. Bottles only form air insulation in this case. PET bottles were also used in the building design of Czech patent No. 294 667, in the prefabricated element of outer walls. The bottles act as self-acting shuttering there and help form cavities, but they are not load-bearing.

[0006] An interlocking modular system is protected by Czech utility model No. 6946, where moulded blocks are made of concrete, therefore lacking all the benefits that could be derived from the characteristics of plastics. PET bottle types of unusual shapes are also registered, for example Czech triangular bottles under Czech industrial design No. 34615 and bottles with tongue and groove on the vertical plane under Czech industrial design No. 28247. These have a potential that has not been used for unit connectivity. A Lego-type bottle with a projection and depressions is registered under Czech industrial design No. 33409. It is obvious from the type of projections that the bottles do not hold together connected by themselves and the purpose of the design the purpose of the design is not constructional, but only compositive. Bottles intended for construction purposes are known and designed primarily of glass, Heineken WOBO and Bottle Brick of GlassLab, both in the United States of America. It is impossible to connect such units, produced from a hard and rigid material, such as glass and concrete, without using any other means.

[0007] Czech invention application No. 2624-97 has also been found, concerning the use of waste bottles of plastics for building purposes, where the author claims that it is possible to lay the bottles absolutely freely between vertical structures. Experiments and research using 150,000 PET bottles imply that such a solution does not have an actual determined and documented form. Another brick for mortar-less walls is Czech industrial design No. 13 800 from 1983, which proposes a brick of a similar shape, made of a rigid material. The bricks fit together, but only in two axes, with no regard given to their front and back joints.

The use of recycled PET is known even from Chinese patent application No. 201410001247, where the brick is created from construction grit with many layers, among other things with a layer of fluorescent materials and PET on top, which protects the brick from weather. PET bottles are just one of the layers. Several Romanian patents have been found regarding a building and roof construction unit of plastic and, specifically, also PET, where the bottles are cast in other substances, such as concrete, etc., so they cannot be individually connected again. None of these examples allows binding between the components in the vertical direction and does not provide load-carrying capacity of the element.

Essence of invention

[0008] The deficiencies mentioned above are, to a large extent, eliminated by a building unit of plastic, in particular bottle-shaped, based on this invention. Its essence is that it has the shape of a prism whose bottom has an aspect ratio of 1:2 and a bevel angle of 45°, with rounded corners with a unified radius. The prism height is equal to once to twice its width, with one shorter side of the prism having a projection in the shape of two continuous equal-armed crosses with rounding in the inner corners and the opposite shorter side has a negative depression matching the projection. Along its central axis, the bottom has a depression for up to three necks of other building units, including caps, and the projections are bevelled on all sides at an angle of 45°, with the recesses being bevelled at an angle of 45° on all sides.

[0009] The depression in the prism body has advantageously a spacing of 180° and its depth corresponds to the height of the neck with the cap, with the depression being terminated with a semi-circle whose radius matches the outer perimeter of the neck with the cap.

[0010] The height of the projections is advantageously 0.2 mm smaller than the depth of the recesses and their width is 0.2 mm smaller than the width of the recesses, The corners have a unified radius of 10 mm.

[0011] The building unit is advantageously made of recycled plastic, in particular materials selected from the group of PET, HDPE, LDPE, PE, PP. The building unit can be filled with a material selected from the group of liquid, gas and bulk materials and its walls can be covered with an adhesive substance.

[0012] The essence of the invention is based on the need to address excessive plastic waste. The solution is derived from experiments carried out on PET bottles, where PET bottles turned out to be a load-carrying building unit. The building unit is self-supporting and can be connected without any additional adhesives, thus retaining its recyclability. It uses the flexibility of the plastic - polyethylene terephthalate - in the sense that the building units have a shape that allows their interconnection, thus the cohesion of units without any additional bonding material, such as an adhesive etc. The possibility of connection is provided by projections on the building unit - "brick", which fit into the recesses. The bricks can be connected using construction methods - by interlocking them together. The bricks can also be installed perpendicularly, i.e. at an angle of 90°. Unlike the familiar drinking bottle, the proposed solution allows multi-layer masonry, which can be more rugged and stable against external forces thanks to its joints. The bricks fit into one another on four sides: from the top, from the bottom, from the front - cap and from the back - bottom of the bottle. Furthermore, it is primarily made from recycled materials or from PET with a high share of recycled materials, thus entering the recycling cycle and extending its duration. Units can be advantageously made from plastics such as HDPE, LDPE, PE, PP, but especially from PET.

[0013] The building unit has the potential to fulfil several functions dependent on the specific composition of the recycled material: in construction but also as a container for beverages. Subject to compliance with sanitary regulations using the bottle to bottle recycling method, the building unit meets the conditions for beverage filling. It is also possible to make a multi-layer unit with a high share of recycled materials, where only the inner layer complies with sanitary regulations.

[0014] It is possible to fill the building unit with a liquid, especially water, gas, and especially with air and air with a high share of CO₂ and with solids, in particular bulk. It can also be filled with mixtures of substances.

[0015] The building unit can be made in different sizes while preserving the principle of joining. The aspect ratio must comply with the proposed scheme, the size ratios depend on the shape and size of the closure.

Clarification of drawings

[0016] The building unit as described in this invention will be described in greater detail on a specific embodiment using the attached charts, where figure 1 shows an exemplary building unit in an exploded view. Figure 2 shows this unit in a bottom view. Figure 3 shows a side view and figure 4 a plan view.

Embodiment of the invention

[0017] Most of the restrictions on the dimensions of the building unit are based on the specificities of the production technology, mostly the dimensions of the injection / blowing mould. It has three parts, one bottom and two opposite parts enclosing the bottle perfectly from all sides. Considering the maximum height of 50 mm of the bottom part of this mould, all the other dimensions must be adapted. Another determining factor is the shape of the neck and the shape of the cap - i.e. Also the proposed brick. The aspect ratio is the principal property of the proposed solution. The layout aspect ratio must be 1 : 2, so that individual bricks can be easily joined into the resulting wall.

[0018] The plan view of the building unit is based on a rectangle with an aspect ratio of 1 : 2, with edges bevelled at an angle of 45°. In all eight corners, rounding f has a unified radius of $r =$ from 6 to 20 mm. Height h of the entire product is determined as once to twice the width, plus the height of projections a . Height g of the brick body is also defined: $g = h - (v + p)$. See the drawings.

[0019] On the top surface of the building unit there is projection a in the shape of two continuous equal-armed crosses, with rounding on inner corners b . Projection a has thickness t of 6 to 40 mm and edge rounding a_1 in the vertical direction, see the brick view. There is a matching negative recess on the bottom side of the unit, which the above-mentioned projection a fits in a holds fast. The difference in the vertical dimensions of projection a and the recess is defined using parameter q of 0 to 2 mm.

[0020] Height v of 2 to 20 mm for these projections a is associated with depth p of depressions e on the bottom side of the brick as follows: $p = v + q$. The difference in the contour of depressions e from the contour of projections a in the plan view is also described by parameter q of 0 to 2 mm. Projections a are then bevelled again at an angle of 45° on all sides i , where they touch the plan view perimeter. The peripheral edges of depressions i at the bottom of the unit - product - are solved similarly.

[0021] The building unit - brick is unique in terms of materials and shape in combination with the method of sorting and joining without any additional materials. In addition, this brick is produced using the same method as PET bottles, without significant interference with standard technology.

[0022] On side n , which is opposite neck m , there is depression o on the central axis, which can accommodate up to three necks of other bricks, including caps. This depression o sinks in the body of the product with a spacing of 180° at a depth corresponding to the height of neck m , including the standard size of the cap, to which the material thickness is added. This depression o is, at the plane of view, terminated with semi-circle r whose radius of 17.2 mm is equal to the outer perimeter of the neck with a standard-size cap. The total profile of the mould for this depression o must run in a length not exceeding 55 mm from the edge of the product.

[0023] All edges pertaining to surfaces s , which would contain a right angle, are bevelled once more at an angle of 45° , edge c is bevelled at a gradually changing angle between o and 45° , where o° is located at the tip of arc r .

[0024] The building unit has the potential to fulfil several functions dependent on the specific composition of the recycled material: in construction but also as a container for beverages. The building unit can be produced in different sizes while maintaining its principle of joining, in particular from preforms which are intended for the production of 1.5 litre bottles. The aspect ratio must comply with the proposed scheme, the size ratios depend on the shape and size of the closure.

[0025] Furthermore, the building unit is primarily made from recycled materials or from E with a high share of recycled materials. Units can be advantageously made from plastics such as HDPE, LDPE, PE, PP, but especially from PET. It is possible to fill the unit with a liquid, especially water, gas, and especially with air and air with a high share of CO_2 with the advantage of pressurizing, and with solids, in particular bulk. It can also be filled with mixtures of substances. The bricks can be connected using construction methods - by interlocking them together. The bricks can also be installed perpendicularly, i.e. at an angle of 90° . The bricks fit into one another on four sides: from the top, from the bottom, from the front and from the back.

[0026] The building unit - brick is made from recycled polyethylene terephthalate (rPET) of any colour. It can be transparent, translucent as well as dull. Other materials suitable for production are recycled HDPE, LDPE,

PE and PP.

Industrial use

[0027] The building unit of plastic according to this invention can be used in the construction of temporary buildings or mobile structures. However, the shape of the brick makes it also possible to build ordinary structures, too. The building unit is designed as a construction element intended for dry walling. When walling, individual construction elements are generally arranged in different patterns so as to achieve a rigid and strong final structure. For this purpose, it is desirable to produce individual elements industrially.

Claims

1. A building unit of plastic, in particular bottle-shaped, **characterized in that** it has the shape of a prism whose bottom (n) has an aspect ratio of 1 : 2 and bevelled edges (z) at an angle of 45° with rounded corners (f) with a unified radius and the height of the prism is also equal to once to twice its width, with one shorter side of the prism having projection (a) in the shape of two continuous equal-armed crosses, with rounding on inner corners (b) and the opposite shorter side having negative depression (e) matching projection (a), and bottom (n) having depression (o) for up to three necks of other building units, including caps, on its central axis and with projections (a) on all edges (i) being bevelled at an angle of 45° and depressions (e) on all edges (j) being bevelled at an angle of 45° .
2. The building unit as in Claim 1, *wherein* depression (o) has a spacing of 180° in the body of the prism and a depth corresponding to the height of neck (m) with a cap, with depression (o) being terminated in the plane of view with semi-circle (r) whose radius matches the outer perimeter of the neck with the cap.
3. The building unit as in Claim 1 or 2, *wherein* the height of projections (a) is up to 0.2 mm smaller than the depth of depression (e) and the width of projections (a) is up to 0.2 mm smaller than the width of depression (e).
4. The building unit as in any of the above Claims, *wherein* corners (f) have a unified radius of 10 mm.
5. The building unit as in any of the above Claims, *wherein* the unit is made from recycled plastics.
6. The building unit as in any of the above Claims 1 to 4, *wherein* the unit is made from a material selected from the group of PET, HDPE, LDPE, PE, PP.

7. The building unit as in any of the above Claims,
wherein the unit is filled with a material selected from
the group of liquid, gas and bulk materials.
8. The building unit as in any of the above Claims,
wherein its walls are covered with an adhesive sub-
stance.

10

15

20

25

30

35


40

45


50

55


Axonometrie přední

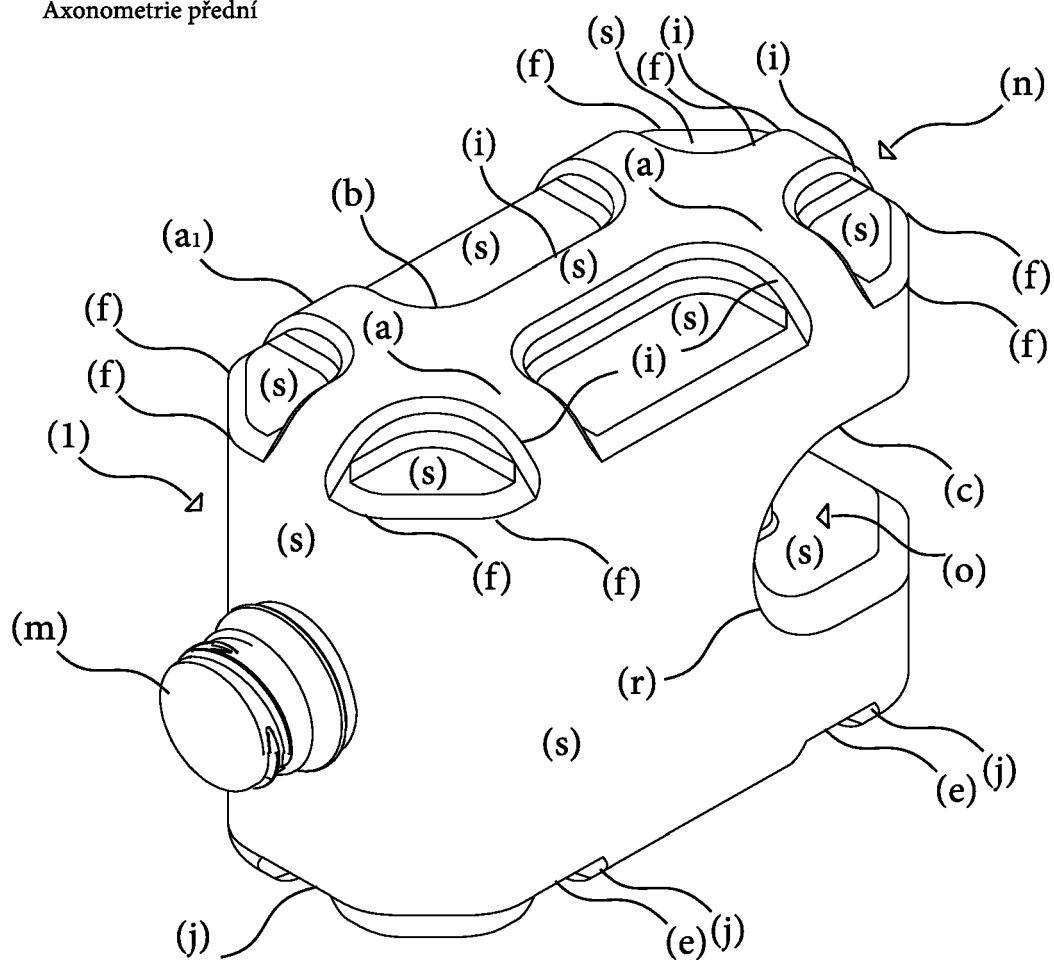


Pohled zespoda

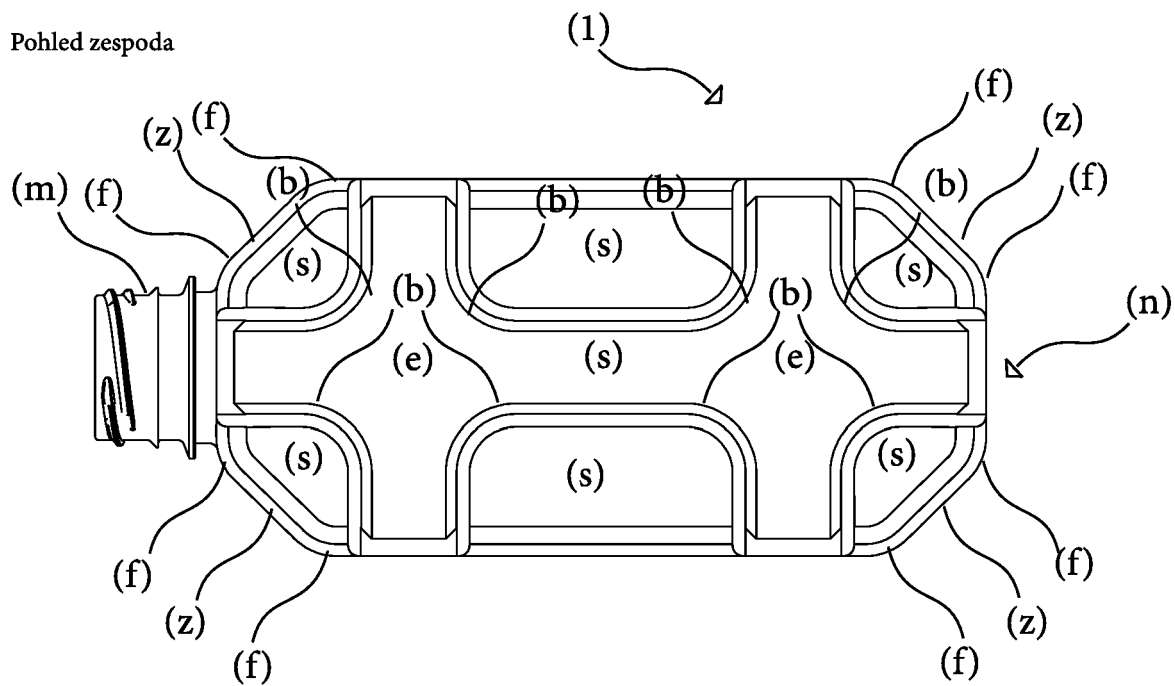

Boční pohled

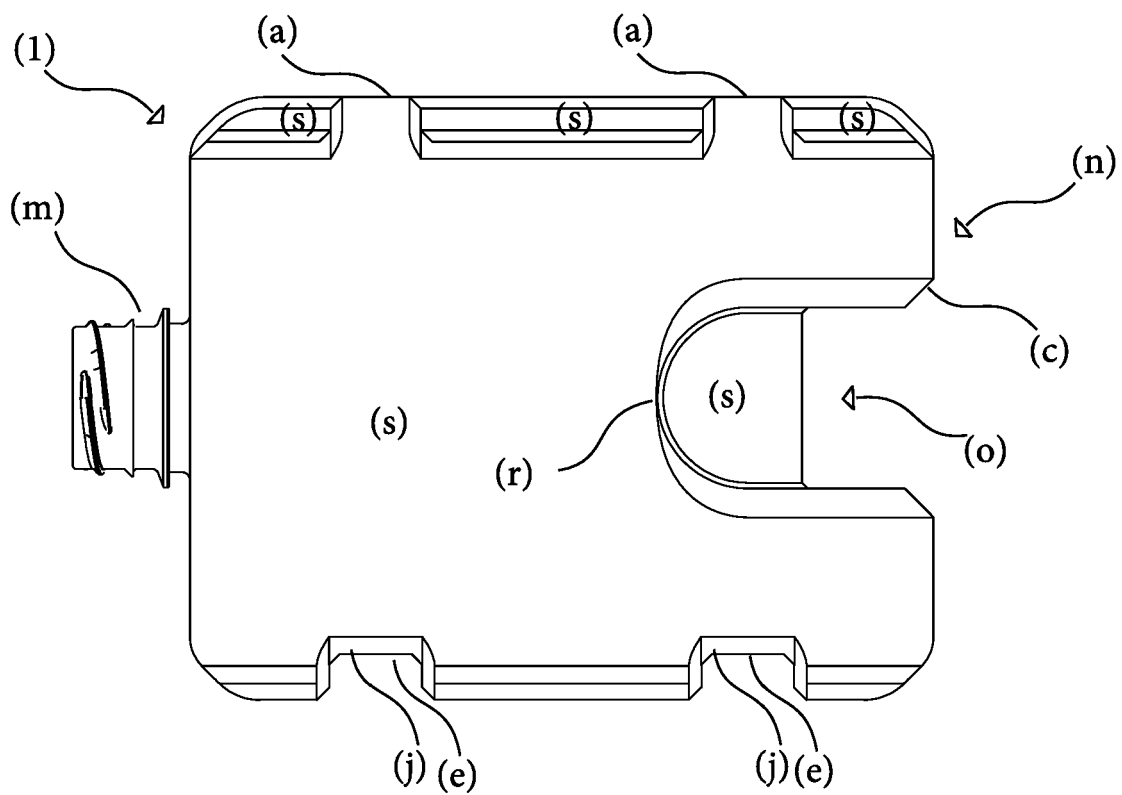

Pohled shora

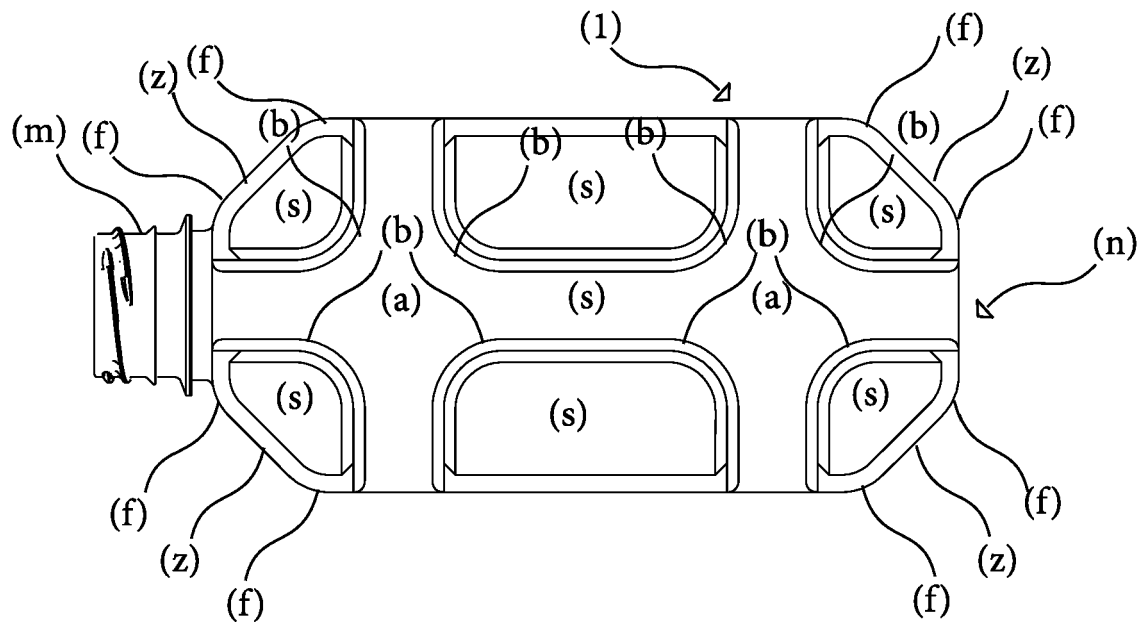



EUROPEAN SEARCH REPORT

 Application Number
 EP 16 15 6563

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	WO 2015/001275 A1 (FBC SARL [FR]) 8 January 2015 (2015-01-08) * pages 6-10; figures 1-7 * -----	1-8	INV. E04B2/18 E04B2/22 B65D21/02 B65D81/36 E04B2/02
A	GB 2 185 276 A (PLESSIS ANDRIES HENDRIK DU) 15 July 1987 (1987-07-15) * figures; abstract * -----	1	
A	US 5 779 051 A (BOUTIN RAYMOND [CA]) 14 July 1998 (1998-07-14) * figures; abstract * -----	1	
A	US 2013/213846 A1 (HENDRICKSON B EVERETT [US] ET AL) 22 August 2013 (2013-08-22) * figures; abstract * -----	1	
A	US 2009/090647 A1 (PANCHAL RAHUL [US] ET AL) 9 April 2009 (2009-04-09) * figures; abstract * -----	1	
A	US 2003/132184 A1 (DORN JAMES C [US] ET AL) 17 July 2003 (2003-07-17) * figures; abstract * -----	1	TECHNICAL FIELDS SEARCHED (IPC) E04B B65D
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 25 October 2016	Examiner Vratsanou, Violandi
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
 EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 15 6563

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-10-2016

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2015001275 A1	08-01-2015	FR 3008075 A1	09-01-2015
		WO 2015001275 A1	08-01-2015
GB 2185276 A	15-07-1987	AU 6757587 A	16-07-1987
		BR 8700201 A	08-12-1987
		GB 2185276 A	15-07-1987
US 5779051 A	14-07-1998	NONE	
US 2013213846 A1	22-08-2013	NONE	
US 2009090647 A1	09-04-2009	NONE	
US 2003132184 A1	17-07-2003	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 19960520 [0004]
- CH 294667 [0005]
- CN 201410001247 [0007]