



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**28.12.2016 Bulletin 2016/52**

(51) Int Cl.:  
**B65D 75/00** (2006.01) **B65D 75/58** (2006.01)  
**B65B 9/20** (2012.01) **B65B 61/18** (2006.01)

(21) Application number: **16177869.1**

(22) Date of filing: **08.08.2008**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT  
RO SE SI SK TR**

(30) Priority: **08.08.2007 US 954609 P**  
**09.11.2007 US 987031 P**  
**21.11.2007 US 989635 P**  
**26.12.2007 US 16802 P**

(62) Document number(s) of the earlier application(s) in  
accordance with Art. 76 EPC:  
**08826982.4 / 2 188 189**

(71) Applicant: **Clear Lam Packaging, Inc.**  
**Elk Grove Village, IL 60007 (US)**

(72) Inventors:  
• **SANFILIPPO, John, E.**  
**Barrington Hills, IL 60010 (US)**  
• **SANFILIPPO, James, J.**  
**Barrington Hills, IL 60010 (US)**  
• **SKAGGS, Jeanne, M.**  
**Arlington Heights, IL 60004 (US)**  
• **SPEER, Roy**  
**Barrington, IL 60010 (US)**


(74) Representative: **Cabinet Plasseraud**  
**66, rue de la Chaussée d'Antin**  
**75440 Paris Cedex 09 (FR)**

Remarks:

This application was filed on 05-07-2016 as a  
divisional application to the application mentioned  
under INID code 62.

(54) **FLEXIBLE, STACKABLE CONTAINER AND METHOD FOR MANUFACTURING SAME**

(57) A flexible, stackable container (10) for storing a quantity of a product may include a sealed package formed from a single sheet of film (26) and retaining the quantity of the product disposed therein, and a lid fitment (14) attached to a first side (42) of the package. The first side of the package may have an outer first surface of the film and outwardly extending first corner seals (58, 60) formed in the film at the edges of the first side and surrounding the first side of the package. The package may also have a second side disposed opposite the first side and outwardly extending second corner seals (62, 64) formed in the film at the edges of the second side and surrounding the second side of the package. The lid fitment may include a base (16) having a central opening and a lid (18) having a complimentary shape to the base to form a seal therebetween when the lid is closed down onto the base. The base may be sealed to one of the first surface of the first side, to the first corner seals surrounding the first side, or to both, such that a portion of the first surface is accessible from the exterior of the container when the lid is separated from the base of the lid fitment.

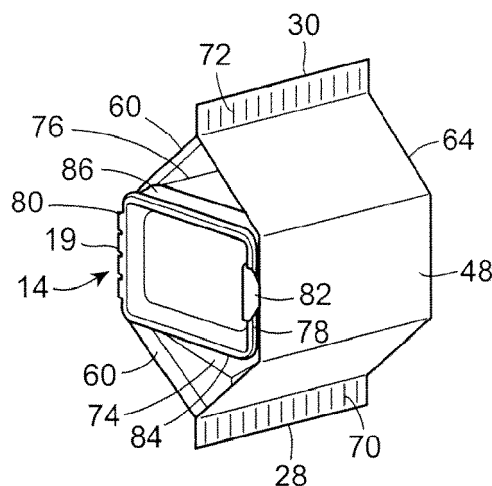

**FIG. 7**

## Description

### Technical Field

[0001] The present disclosure is directed to a flexible, stackable container for transporting and storing food items, liquids, powders, chemicals, detergent, dry goods pharmaceuticals, nutraceuticals and other packaged products, for example, and to methods and systems for manufacturing the same and, in particular to a flexible, stackable container having a sealed bag or package formed from a flexible film and recloseable fitment or lid attached thereto, or having a recloseable flap or other easy-opening feature without an additional fitment and/or lid.

### Background of the Disclosure

[0002] Vertical form, fill, and seal (VFFS) packaging machines are commonly used in the snack food industry for forming, filling and sealing bags of nuts, chips, crackers and other products. Such packaging machines take a packaging film from a sheet roll and form the film into a vertical tube around a product delivery cylinder. One disadvantage of these packages is that the resulting filled package is not rigid enough to allow the stacking of one package on top of another in a display.

[0003] Another disadvantage to these packages is that they do not retain their shape after the package is opened, and a portion of the contents removed.

[0004] There are rigid packages and canisters that are stackable and do retain their shape after opening. However, these rigid packages that may overcome these disadvantages have their own disadvantages. One disadvantage is that the packages are often composed of composite material that is costly to produce. Another disadvantage is that rigid composite packages are often not recyclable. The ability to recycle a product container is increasingly becoming a demand from companies that produce and/or sell consumable products as well as a demand from consumers that are environmentally conscious. A demand also exists for containers that, if not recyclable, minimize the waste transported to a landfill. Once in the landfill, a demand also exists for materials that are degradable or biodegradable to further reduce the amount of material contained in the landfill.

[0005] Yet another disadvantage of many non-flexible and/or rigid containers is the shape of the container. Many product containers have cross sections that are round. In the market place where shelf space is at a premium, round containers require more shelf space than a square or rectangular container holding the same amount of product. Similarly, shipping round or other irregularly shaped containers requires more space than shipping square or rectangular containers that are more efficiently packed together in the transport containers. Moreover, round containers do not display graphics as well as containers having flatter sides. The graphics wrap around

the curved surfaces of the containers, and the containers must be in order to fully view and read the graphical information. Inefficiency in shipping and displaying packaged products adds to the overall cost of the product.

Additionally, inefficiency in packing round or irregularly shaped containers increases the number of shipping containers and vehicles, ships and planes required to transport the shipping containers. This adds to the cost of the product, but more importantly, results in the increased emission of environmentally damaging pollutants.

[0006] Another disadvantage to shipping many non-flexible containers is the weight of the container as compared to the weight of a flexible container manufactured to hold a like amount of product. Increased weight adds to shipping costs as well as adds to the amount of material that, if not recyclable, ends up in a landfill. Additionally, the material cost for the non-flexible containers is usually greater than the material cost for flexible containers.

[0007] It would, therefore, be desirable to provide a container that overcomes these and other disadvantages.

### Brief Description of the Drawings

#### [0008]

Fig. 1 is an isometric view of a flexible, stackable container in accordance with the present disclosure;

Fig. 2 is an isometric view of an unfolded sheet of film and a lid fitment of the flexible, stackable container of Fig. 1;

Fig. 3 is an isometric view of the sheet of film of Fig. 2 formed to define top, bottom and lateral sides;

Fig. 4 is an isometric view of the sheet of film of Fig. 3 having corner seals formed at the corners;

Fig. 5 is an isometric view of the sheet of film of Fig. 4 and lid fitment of Fig. 2 with the lateral edges of the sheet of film folded and sealed to form a combined fin seal and corner seal;

Fig. 5A is an isometric view of an alternative embodiment of the sheet of film of Fig. 4 and lid fitment of Fig. 2 with the lateral edges disposed and forming a fin seal on the bottom side of the package;

Fig. 6 is an isometric view of the sheet of film of Fig. 5 with the lid fitment attached to a top side thereof;

Fig. 7 is an isometric view of the sheet of film and lid fitment of Fig. 6 with the leading and trailing edges sealed to form leading and trailing seals;

Fig. 8 is an isometric view of the sheet of film and lid fitment of Fig. 7 with the leading and trailing seals

folded over and tacked to the outer surfaces of the package;

Fig. 9 is a schematic illustration of a packaging machine configured to produce the flexible, stackable container of Fig. 1;

Fig. 10 is a schematic illustration of a further alternative embodiment of a packaging machine configured to produce the flexible, stackable container of Fig. 1 with the container being filled with the quantity of product to be stored therein on the conveyor;

Figs. 11a and 11b are isometric illustrations of an alternative embodiment of a flexible, stackable container and lid fitment directed to a spice can;

Figs. 12a and 12b are isometric illustrations of a further alternative embodiment of a flexible, stackable container and lid fitment directed to a cereal container;

Figs. 13a and 13b are isometric illustrations of another alternative embodiment of a flexible, stackable container and lid fitment directed to liquid container;

Figs. 14a and 14b are isometric illustrations of a still further alternative embodiment of a flexible, stackable container and lid fitment directed to a condiment dispenser;

Figs. 15a and 15b are multiple plan views of an easy-opening feature that may be implemented in the flexible, stackable container of Fig. 1;

Figs. 16a-16c are multiple plan views of an alternative embodiment of an easy-opening feature that may be implemented in the flexible, stackable container of Fig. 1;

Figs. 17a-17c are multiple plan views of a further alternative embodiment of an easy-opening feature that may be implemented in the flexible, stackable container of Fig. 1;

Figs. 18a-18c are multiple plan views of another alternative embodiment of an easy-opening feature that may be implemented in the flexible, stackable container of Fig. 1;

Figs. 19a-19c are multiple plan views of a still further alternative embodiment of an easy-opening feature that may be implemented in the flexible, stackable container of Fig. 1; and

Figs. 20a and 20b are cross-sectional views of embodiments of the lid fitment of Fig. 2 taken through line 20--20.

**[0009]** While the method and device described herein are susceptible to various modifications and alternative constructions, certain illustrative embodiments thereof have been shown in the drawings and will be described below in detail. It should be understood, however, that there is no intention to limit the invention to the specific forms disclosed, but on the contrary, the intention is to cover all modifications, alternative constructions, and equivalents falling within the spirit and scope of the disclosure and the claims.

## Detailed Description

**[0010]** Although the following text sets forth a detailed description of numerous different embodiments of the invention, it should be understood that the legal scope of the invention is defined by the words of the claims set forth at the end of this patent. The detailed description is to be construed as exemplary only and does not describe every possible embodiment of the invention since describing every possible embodiment would be impractical, if not impossible. Numerous alternative embodiments could be implemented, using either current technology or technology developed after the filing date of this patent, which would still fall within the scope of the claims defining the invention.

**[0011]** It should also be understood that, unless a term is expressly defined in this patent using the sentence "As used herein, the term ' ' is hereby defined to mean..." or a similar sentence, there is no intent to limit the meaning of that term, either expressly or by implication, beyond its plain or ordinary meaning, and such term should not be interpreted to be limited in scope based on any statement made in any section of this patent (other than the language of the claims). To the extent that any term recited in the claims at the end of this patent is referred to in this patent in a manner consistent with a single meaning, that is done for sake of clarity only so as to not confuse the reader, and it is not intended that such claim term be limited, by implication or otherwise, to that single meaning. Finally, unless a claim element is defined by reciting the word "means" and a function without the recital of any structure, it is not intended that the scope of any claim element be interpreted based on the application of 35 U.S.C. § 112, sixth paragraph.

**[0012]** Fig. 1 illustrates an embodiment of a flexible, stackable container 10 in accordance with the present disclosure. The container 10 includes a flexible package 12 having a lid fitment 14 attached to one end to provide a recloseable/resealable access to the package 12 and to reinforce the package 12 to allow for stacking of the package 12 without collapsing. The package 12 as illustrated is the type of flexible packaging known to those skilled in the art as a quad seal package for the four corner seals formed in the corners of the bag. This feature will be described more fully below. The package 12 has a generally rectangular shape to conform to the shape of the lid fitment 14, but other shapes may be used. The lid

fitment 14 is attached to a top side of the package 12 and is encircled by the corresponding corner seals. Depending on the particular configuration of the package 12 and lid fitment 14, and the requirements for the product packaged therein, the lid fitment 14 may be secured to the package 12 by seals formed between the lid fitment 14 and the corner seals, between the lid fitment and the surface of the side of the package 12 at which the lid fitment 14 is disposed, or a combination thereof. Alternative attachment configurations will be discussed more fully below. The lid fitment 14 includes a base 16 and a lid 18 pivotally connected by a living hinge 19 (Fig. 2). The base 16 and lid 18 have complimentary shapes so that a seal is formed therebetween when the lid 18 is closed down onto the base 16. In the illustrated embodiment, the top side of the package 12 disposed under the lid 18 has perforations 20 defining a flap 22 that may be punctured and removed by a consumer after purchase in order to access the interior of the package 12. To facilitate the removal of the flap 22, a pull tab 24 may be attached thereto in a manner that causes the perforations 20 to yield and the flap 22 to tear away when the pull tab 24 is pulled upwardly.

**[0013]** In alternative embodiments, the containers 10 may be constructed with lid fitments 14 having varying configurations, or without lid fitments. For example, the container 10 may include a fitment having the base 16 of the lid fitment 14, but omitting the lid 18 to leave the surface of the top side exposed. The perforations 20 may extend around a portion of the flap 22 so that the flap 22 may be opened but not completely detached from the package 12, and the pull tab 24 may cover and extend beyond the flap 22 and include a tacky substance that allows the pull tab 24 to reseal to the top surface of the package. Still further, the fitment may be eliminated completely in favor of the recloseable flap 22. Additional configurations are contemplated by the inventors as having use in containers 10 in accordance with the present disclosure.

**[0014]** The formation of the container 10 will now be described with reference to Figs. 2-8. Referring to Fig. 2, a film sheet 26 from which the package 12 will be formed and the lid fitment 14 are shown separately. The container 10 may be formed by manually folding the film sheet 26 and attaching the lid fitment 14 thereto. However, when the containers 10 are mass produced, the film sheets 26 are formed on a continuous web of film that may be fed through a VFFS packaging machine. While the discussion herein relates to the formation of the containers 10 on VFFS machines, those skilled in the art will understand that the containers 10 may be formed by other types of machines or combinations of machines, such as horizontal form, fill and seal (HFFS) machines, Stand-Up Pouch type machines and the like, and the use of such machines or combinations of machines performing the various tasks in forming containers in accordance with the present disclosure is contemplated by the inventors. For consistency with the discussion below of the

VFFS packaging machine 100 shown in Fig. 9, the elements of the film sheet 26 will be referenced with respect to their orientation as the film sheet 26 passes through the packaging machine 100. Consequently, the film sheet 26 has a lower leading edge 28, an upper trailing edge 30, and oppositely disposed lateral edges 32, 34. The dashed lines 36-40 in Fig. 2 indicate the separate top, bottom, rear and front sides 42-48 of the package 12 that will be defined as the film sheet 26 is folded and sealed to form the package 12. Prior to forming the package 12 from the film sheet 26, the perforations 20 are formed in a top side 42 by laser scoring, mechanical scoring or a similar process for forming perforations 42 in the film sheet 26 without puncturing the sheet 26, but allowing puncturing if necessary or desired based on the requirements for the container 10 and/or the stored product. Alternatively, blade scoring with approximately 60%-80% penetration, for example, may be used to form a score line defining the flap 22 instead of individual perforations 20. In other embodiments, full penetration through the top side 42 of the film sheet 26 may be performed by blade scoring to facilitate detachment of the flap 22. For example, a continuous blade score with full penetration through the sheet 26 may be performed with intermittent interruptions or bridges in the score line being provided to hold the flap 22 in place until a peel tab may be put in place of the consumer opens the container 10. The distance between the bridges may range from 0.1" to 2.0", and the length of the bridges may fall within the range of 0.002" to 0.090" depending on the implementation. Various alternative easy-opening features are discussed further below.

**[0015]** The lid fitment 14 is oriented with a bottom surface 50 facing the top side 42 to be formed in the film sheet 26. The lid fitment 14 has a front side 78 that may be oriented at the front of the container 10 and a rear side 80 opposite thereof. The living hinge 19 may rotatably connect the lid 18 to the base 16 at the rear side 80 of the lid fitment 14, and the front of the lid 18 may include a grip 82 to assist in opening the lid 18. Additional leverage tabs (not shown) may extend from the base 16 proximate the grip 82 to further facilitate opening of the lid 18 by allowing a user to press upwardly on the grip 82 and downwardly on the tab(s) to separate the lid 18 from the base 16. Lateral sides 84, 86 of the lid fitment 14 further assist in defining the shape of the container 10 as discussed more fully below.

**[0016]** The first step in forming the package 12 is illustrated in Fig. 3. The film sheet 26 is wrapped inwardly to form the desired shape based on the characteristics of the final package design. In the present example, the formed sheet 26 has a generally square or rectangular shape with corners 52-56 defining the top, bottom, rear and front sides 42-48. The lateral edges 32, 34 are disposed proximate each other and will ultimately be joined to form a fin seal at the fourth corner of the formed sheet 26. With the lateral edges 32, 34 and corresponding fin seal being disposed at the corner of the package 12.

However, while the lateral edges 32, 34 are illustrated as meeting at one of the corners of the package 12, those skilled in the art will understand that the edges 32, 34 and the fin or other appropriate seal may be disposed at any corner 52-56 or at any point along one of the sides 42-48 of the package 12 if desired.

**[0017]** Turning to Fig. 4, after forming the film sheet into the desired shape, corner seals 58-64 are formed at the corners 52-56 and at the corner at which the lateral edges 32, 34 meet. Folds are made in the top and bottom sides 42, 44 of the film sheet 26 inwardly from both corners 52-56 to bring the folded portions into contact with the inner surfaces of the sides 46, 48. Once folded inwardly, the folded portions are welded, adhered or otherwise sealed to sides 46, 48. As a result, the four corner seals 58-64 extend outwardly substantially perpendicular to the top and bottom sides 42, 44 of the film sheet 26. The lateral edges 32, 34 may also be sealed together to form a combination fin seal and corner seal 64 as shown in Fig. 5. The inner surface of the folded portion of the bottom side 44 is brought into alignment and contact with the inner surface of the corresponding portion of the front side 48 proximate the lateral edge 34. The surfaces are then sealed together in a similar manner as the other corner seals 58-62. To further reinforce the combination fin seal and corner seal 64, a portion of the seal 64 may be folded inwardly and into contact with the unfolded portion of the combination seal 64. If necessary or desired, the folded and unfolded portions of the combination seal 64 may also be sealed for further reinforcement. With the corner seals 58-64 formed, the lid fitment 14 may be connected to the package 12 proximate the flap 22 on the top side 42. Those skilled in the art will understand that the forming steps illustrated in Figs. 3-5 may occur separately or may be performed together by an appropriately configured packaging machine.

**[0018]** If desired or dictated by the requirements of the particular container 10, the film sheet 26 and the packaging machine 100 may be configured to form a package 12 having the fin seal disposed at a location other than at one of the corner seals. As shown in an alternative configuration of the package 12 in Fig. 5A, the lateral edges 32, 34 of the film sheet 26 may meet in the middle of the bottom side 44. Instead of being a combined corner and fin seal, the seal 64 is a corner seal formed in a similar manner as the other corner seals 58-62. At the point where the edges 32, 34 meet, a fin seal 65 is formed by bringing the inner surfaces of the film sheet 26 proximate the lateral edges 32, 34 together and forming a seal therebetween using heat sealing or other appropriate sealing method. Once sealed, the fin seal 65 may be folded over and tacked to the outer surface of the bottom side 44 if desired.

**[0019]** As shown in Fig. 6, the lid fitment 14 is disposed with the bottom surface 50 facing the outer surface of the top side 42 of the package 12. In this embodiment, the front and rear sides 78, 80 of the lid fitment 14 are disposed adjacent to the corner seals 58, 60 of the top side

42. In one embodiment, the corner seals 58, 60 are then sealed to the sides 78, 80 of the base 16 of the lid fitment 14. For example, the corner seals 58, 60 may be heat sealed to the sides 78, 80 of the lid fitment 14, or may be attached using time or pressure seals, adhesive seals, welding or any other appropriate fastening mechanism. In alternative embodiments, the bottom surface 50 of the base 16 of the lid fitment 14 may be sealed to the outer surface of the top side 42 of the package 12 using one of the sealing mechanisms discussed above or another appropriate mechanism. Still further, the lid fitment 14 may be attached with seals formed with both the corner seals 58, 60 and the outer surface of the top side 42.

**[0020]** Once the lid fitment 14 is attached, the open ends of the package 12 may be sealed to close the package 12, and folded and tacked down to conform the shape of the package 12 to the lid fitment 14. Referring to Fig. 7, the lateral side portions of the leading and trailing edges 28, 30 are brought toward each other and sealed together to form leading and trailing seals 70, 72. In order to ensure the leading and trailing seals 70, 72 of the package 12 wrap around the outer surface of the package 12 and the lid fitment 14 neatly to form a relatively smooth and uniform outer surface for the container 10, it may be necessary to tuck the film between the corner seals 58-64 on the top and/or bottom sides 42, 44 of the package 12 at the time the leading and trailing seals 70, 72 are formed. To accomplish this, when the leading and trailing edges 70, 72 of the package 12 are brought together, the corresponding portions of the top and bottom sides 42, 44 may be moved inwardly to tuck the sides 42, 44 as the edges 28, 30 move together and are sealed to form the leading and trailing seals 70, 72 of the package 12. As the leading and trailing seals 70, 72 are being formed, the package 12 may be filled with a quantity of the product for which the container 10 is designed. Consequently, the leading seal 70 may be formed first, the product deposited in the package 12, and then the trailing seal 72 may be formed, or the trailing seal 72 may be formed first if necessary to facilitate the manufacturing of the container 10.

**[0021]** Having formed the leading and trailing seals 70, 72, the seals 70, 72 and the corresponding loose portions of the film proximate thereto may be folded over and attached to the outer surface of the package 12 to complete the formation of the container 10 as shown in Fig. 8. The seals 70, 72 may be wrapped around the lid fitment 14 to conform the loose portion to the outer surfaces of the lid fitment 14 and the package 12, and the seals 70, 72 may be attached to the outer surface of the package 12. The seals 70, 72 may be attached to the surface of the package 12 using heat, time or pressure sealing techniques, or by applying a hot tack adhesive between the seal 70, 72 and the outer surface, or other welding processes. The loose portion of the film should lay relatively flat and conform to the stationary portion of the package 12 when folded and sealed due to the tucks 74, 76 made in the sides 42, 44 at the time the leading and trailing

seals 70, 72 were formed. Once the seals 70, 72 are folded and tacked, the portions of the corner seals 58, 60 proximate the lateral sides 84, 86 of the lid fitment 14 may be sealed thereto in a similar manner as to the front and rear sides 78, 80.

**[0022]** The steps performed in the process described in Figs. 2-8 and the orders in which they are formed are exemplary. Those skilled in the art will understand that the process may be varied to form the container 10, and the configuration of the container 10 may also be varied, and such variations are contemplated by the inventors. For example, the lid fitment 14 may be attached to film sheet 26 prior to folding the sheet 26 to form the sides 42-48. Alternatively, the package 12 may be fully formed as shown in Fig. 8 before the lid fitment 14 is sealed thereto. Even where the lid fitment 14 is attached to the top side 42 as shown in Fig. 6, the lid fitment 14 may be merely tacked in place at that time to assist in properly shaping the package 12, with the seals between the base 16 of the lid fitment 14 and the corner seals 58, 60 and/or the top surface of the top side 42 being made after the package 12 is fully formed. Still further, in a manner illustrated more fully below, the package 12 may be formed with the leading edge 28 sealed and the trailing edge 30 open, and with the lid fitment 14 being attached before or after the product is dispensed into the package 12. Of course, the container 10 may be formed with the lid fitment 14 attached to any of the sides of the package, as well as without including a lid fitment 14 as discussed above. The steps may also be varied to allow the product to be deposited in the package 12 at an appropriate point in the process. As an example, it may be advantageous to form the leading seal 70, and fold over and tack the seal 70 to the surface of the package 12 before depositing the product in the package 12 so that the product does not interfere with folding over the seal 70. Once the product is deposited, the trailing seal 72 may then be formed, folded over and tacked to the surface of the package 12.

**[0023]** The configuration of the container 10 may also be varied as desired while still forming a sealed package 12 from a sheet of film 26 and sealing a lid fitment 14 thereto in a manner that allows the container 10 to be reclosed after the package 12 is opened. For example, the package 12 may be formed with only the corner seals 58, 60 that surround the top side 42 of the package, and without the corner seals 62, 64 at the bottom side 44, thereby allowing the container 10 to rest on the outer surface of the bottom side 44 when stored on a shelf or when stacked on top of another container 10. In some implementations, an additional sheet of film, paper label, fitment structure or the like may be attached to the flat bottom side 44 to ensure the integrity of the seals of the film sheet 26 on the bottom side 44, to facilitate the stacking of the container 10 on a shelf or on other containers 10 and/or to provide additional usable printable space on the exterior of the container 10 for bar codes and other relevant product information. The corner seals 58, 60 may be formed with an orientation other than perpendic-

ular to the top side 42 of the package 12, and the base 16 of the lid fitment 14 may have a complimentary shape to the orientation of the corner seals 58, 60 so that the corner seals 58, 60 may be sealed thereto. Alternatively, the corner seals 58, 60 may also be omitted, and the bottom surface 50 of the base 16 may be sealed directly to outer surface of the top side 42. Where the corner seals 58, 60 are not formed to surround the top side 42, the base 16 may be configured to slip over the edges of the top side 44 and have an inner surface sealed to the outer surfaces of the front, rear and lateral sides of the package 12 proximate the top side 42. Still further, the package 12 may be formed into other shapes than the generally cubic shapes illustrated herein, and may have more or fewer than the six sides. For example, the container may have a substantially cylindrical shape such that the top and bottom sides are circular or ovoid, with the lid fitment 14 having a complimentary shape to facilitate formation of the seal(s) between the package 12 and the lid fitment 14. Other package 12 and lid fitment 14 geometries that may be used in containers 10 in accordance with the present disclosure will be apparent to those skilled in the art and are contemplated by the inventors.

**[0024]** The type of seals formed at the seals 58-64, 70, 72 and between the sides 78, 80, 84, 86 of the lid fitment 14 and the top side 42 and/or corner seals 58, 60 may be dictated by the product to be stored within the container 10. The seals formed for the container 10 may be only those necessary to retain the product within the container 10 both when the package 12 is sealed and when the top surface of the package 12 is punctured and the lid 18 is closed down onto the base 16 of the lid fitment 14 to reclose the container 10. For example, it may not be necessary to incur the expense of forming air and water tight seals where the container 10 will store non-perishable or non-spoilable products, such as BBs and the like. These types of products may also allow for greater fault tolerance for gaps, channels, wrinkles and other imperfections or "channel leakers" that are unintentionally formed in the seals but do not allow the stored produce to leak from the container 10. Of course, non-perishable items having smaller granules, such as powdered detergents, may require more impervious types of seals, as well as greater reliability and fewer imperfections in the sealing processes. Liquids may similarly require liquid-impervious seals that are reliably formed in the container 10.

**[0025]** For food items such as potato chips and cereal where freshness and crispness of the product should be maintained prior to and after the package 12 is opened, hermetic seals may be formed to protect from or prevent the passage of air and/or moisture through the seals. Other food items may require packaging that can breathe for proper storage. For example, lettuce and other produce may continue to respire while in the container to convert carbon dioxide into oxygen, and consequently require a certain level of venting of the air within the pack-

age to maintain a desired atmosphere in the container 10. Alternatively, a specific film structure having the desired venting properties or some other form of appropriate package venting may be used instead of relying on the seals to provide the necessary ventilation. As another example, coffee beans may continue to release gases after roasting, thereby increasing the pressure within the package, and consequently necessitating air flow through the seals and/or the film so that excessive pressure does not build up within the package after the package is sealed. Still other products may require certain levels of water vapor transmission rates to adequately store the product in the container 10 for the expected storage duration. Those skilled in the art will understand that the particular seals formed in the container 10 as well as the properties of the sheet of film 26 from which the package 12 is manufactured in a particular implementation may be configured as necessary to meet the varying needs of the stored products, if any, for air and water transmission between the interior of container 10 and the external environment. Consequently, seals as used herein in the descriptions of the various embodiments of the containers 10 is not intended to be limiting on the type of seal being formed except where noted.

**[0026]** Fig. 9 schematically illustrates one example of a packaging machine 100 configured to produce flexible stackable containers 10 in accordance with the present disclosure. For example, the machine 100 may produce the container 10 discussed previously. The machine 100 may be of the type known to those skilled in the art as a vertical form, fill and seal (VFFS) packaging machine. The packaging machine 100 is capable of continuously forming a series of containers 10 from a web of film that may be fed into the packaging machine 100. In most applications, the web is pre-printed with graphics relating to the product to be disposed within the container, such as product information, manufacturer information, nutritional information, bar coding and the like. The web of packaging film is provided on a film roll 102 rotatably mounted on a shaft at the inlet end of the packaging machine 100. The packaging film is typically fed into the packaging machine 100 over a series of dancer rolls and guide rolls 104, one or more of which may be driven to direct the web of film in the direction of the transport path of the packaging machine 100.

**[0027]** Before being formed into the shape of the flexible package 12 for the container 10, the film may be directed through a pre-processing station 106 for additional treatment of the film that may not have been practical or desired at the time the film was prepared and wound onto the film roll 102. The treatments performed at the pre-processing station 106 may include mechanical or laser perforating, scoring or punching or other appropriate processing for defining the flap 22 that may be disposed under the lid fitment 14, application of a peel or pull tab 24 to the flap 22, code dating, applying RFID chips, or any other appropriate pre-processing of the film that should occur at the time the containers 10 are

formed. In some embodiments of the packaging machine 100, it may even be desirable to attach the lid fitments 14 at the pre-processing station 106 prior to forming the film into the flexible packages 12. In other embodiments, the pre-processing station 106 may be omitted such that no pre-processing occurs as the sheet of film is unrolled from the film roll 102.

**[0028]** After passing through the pre-processing station(s) 106, the web of film is directed to a forming station 108 having a forming shoulder 110, or other device such as a forming box or sequential folding system, configured to wrap the film around a forming tube 112 in a manner known in the art. In the present example, the forming tube 112 is a product fill tube 114 having a funnel 116 for receiving the product to be disposed in the container 10 and filling the container 10 with the product as the film proceeds along the forming tube 112 as discussed more fully below. The forming tube 112 is configured to form the film into the desired shape based on the characteristics of the final package design, such as square, rectangular, oval, trapezoidal, round, irregular and the like. Depending on the characteristics of the film being processed and/or the container 10 being manufactured and other factors, the film may merely be wrapped completely or partially around the forming tube 112 to shape the film, or folding devices may be used to form creases at the corners 52-56 of the film if more permanent shaping is desired during the initial stages of the package forming process. Of course, where other types of non-VFFS packaging machines are used, a forming tube may not necessarily be used, and instead the film may be wrapped directly around the product to be stored in the container 10.

**[0029]** After the film is formed around the forming tube 112, the web of film moves along the transport path to a combination fin seal/corner seal station 118 to form corner seals 58-62 at the corners 52-56 between the sides 42-48 of the package 12, and to create a combination fin seal and corner seal 64 at the lateral edges 32, 34 of the web of film. In one implementation of the packaging machine 100, the corner seals 56-64 may be formed at the station 118 by providing flat forming plates projecting outwardly from the square or rectangular forming tube 112. The forming plates each extend from a corner of the forming tube 112 in parallel planes that are perpendicular to the surface of the side 42 to which the lid fitment 14 is to be secured and to the opposite side 44 of the package 12 such that two plates extend from the corners defining the lateral edges of the top side 42 and two plates extend from the corners defining the bottom side 44 of the package 12. So that the film properly wraps around the forming plates, the station 118 may further include a shaping bar disposed between each pair of forming plates to shape the film in preparation for sealing the corner seals 58-64. After the web of film passes the forming plates and shaping bars, the web of film is directed past welding devices of the station 118 that weld the overlapping portions of the film at the corners 52-56 and lateral edges 32, 34 to

complete the corner seals 58-64. Depending on the configuration of the container 10, the forming plates could project outwardly in planes that are not perpendicular to the surface of the top side 42 such that the corner seals 58-64 are not perpendicular to the top side 42. In such implementations, the base 16 of the lid fitment 14 may be formed with a shape that is complementary to the orientation of the corner seals 58-64.

**[0030]** At one corner of the forming tube 112, portions of the film proximate the lateral edges 32, 34 of the film are joined to form the combination fin seal and corner seal 64. The fin seal is formed by joining the inner surfaces of the film. To ensure the integrity of the combined fin seal 64 and corner seal during the use of the container 10, an additional fold may be formed at the corner, with the folded portion being welded to the mating portion of the seal 64 to reinforce the corner seal 64. Downstream of the corner seal welding devices, an additional forming shoulder may be provided to fold a portion of the corner seal 64 formed at the lateral edges 32, 34 inwardly upon itself to overlap the unfolded portion. An additional welding device may be provided to form a second weld at the corner seal 64 after the film passes the forming shoulder to preserve the additional fold. Alternatively, the portion of the corner seal 64 may be folded outwardly and welded in a similar manner. While the present example illustrates the lateral edges 32, 34 meeting at a corner of the package 12 and being welded to form the combination seal and corner seal 64, those skilled in the art will understand that the packaging machine 100 may be configured such that the lateral edges 32, 34 meet at any of the corners 52, 56 of the package 12, or at any point along any of the flat surfaces such that the fin seal or, alternatively, a lap seal is formed separately from the corner seals. In the illustrated example, the fin seal may be formed at one of the corner seals 64 to maximize the amount of printable space available on the exterior of the container 10. As discussed above, the fin seal may be disposed along a side of the package 12 instead of at one of the corners. In such configurations, the station 118 may be configured to form the corner seal 64 in a similar manner as the other corner seals 58-62, and to form a fin or lap seal at the intersection of the lateral edges 32, 34.

**[0031]** In order to further control the movement of the web of film along the forming tube 112 and the transport path, pull belts 120 may be provided after the stations 118 to engage the film and pull the film through the previous stations 106, 108, 118. Once the corner seals 58-64 are formed in the corners of the package 12, the lid fitment 14 may be installed on the package 12 at a desired location and preferably overlying the removable/recloseable flap 22 at a lid application station 122. The lid fitments 14 may be delivered to the lid application station 122 from a supply of lid fitments 14 at a lid bulk hopper 124. Lid fitments 14 from the hopper 124 may be transferred via a lid elevator 126 to a lid sorter/orientator 128. The sorter/orientator 128 is configured to position the lid fitments 14 in the proper orientation for delivery to the lid applica-

tion station 122. At the outlet of the sorter/orientator 128, the properly oriented lid fitments 14 may be delivered to the lid application station 122 by a lid feed conveyor 130.

**[0032]** At the lid application station 122, the lid fitments 14 are positioned against and secured to the proper location on the packages 12 as the packages 12 pass the lid application station 122 on the forming tube 112. In the present example, the bottom surface 50 of the lid fitment 14 is placed against the top side 42 of the package 12 at the location of the removable flap 22 with front and rear sides 78, 80 of the lid fitment 14 being disposed at corresponding portions of the corner seals 58, 60 defining the edges of the top side 42. When the package 12 is disposed at the proper location adjacent the lid application station 122, a plunger, mandrel or other positioning device of the lid application station 122 may actuate to push the next lid fitment 14 from the lid feed conveyor 130 toward the forming tube 112 with the bottom surface 50 of the lid fitment 14 engaging the surface of the top side 42 of the package 12. The head of the mandrel or plunger may be shaped to conform to the inner recess of the top surface of the lid fitment 14 for properly aligning the lid fitment 14 with the surface of the package 12 and for applying an appropriate amount of pressure to the surface of the film. Once in place, sealing devices of the station 122 may form seals between the front and rear sides 78, 80 of the lid fitment 14 and the corresponding portions of the corner seals 58, 60 of the top side 42. For example, the sealing devices may be heat sealers forming heat seals between the sides 78, 80 of the lid fitment 14 and the corner seals 58, 60 of the package 12. Of course, other types of seals may be formed such that the sides 78, 80 of the lid fitment 14 are sealed to the corner seals 58, 60 such as by heat, time or pressure sealing techniques, adhesive attachment, welding and the like. Moreover, the lid fitment 14 may alternatively be connected to the top side 42 of the package 12 by forming a seal between the bottom surface 50 of the lid fitment 14 and the surface of the top side 42 of the package 12. The particular sealing mechanism and location may be determined based on the particular configurations of the lid fitments 14 and the packages 12 to which they are being attached or based on the processes used to attach the lid fitment 14 to the package 12, and alternative attachment configurations will be apparent to those skilled in the art.

**[0033]** Once the lid fitment 14 is attached, the leading and trailing edges 28, 30 of the package 12 may be sealed to close the package 12, and folded and tacked down to conform the shape of the package 12 to the lid fitment 14. The package 12 with the lid fitment 14 attached passes from the lid application station 122 to a closing station 132. In order to ensure the edges 28, 30 of the package 12 wrap around the lid fitment 14 neatly to form a relatively smooth and uniform outer surface for the container 10, it may be necessary to tuck the film between the corner seals 58-64 on the top and/or bottom sides 42, 44 of the package 12 at the time the leading and trailing seals 70,

72 are formed. To accomplish this, the closing station 132 may include film tuck bars 134 disposed above seal bars 136 of the closing station 132. When the leading edge 28 of the package 12 is aligned at the seal bars 136, the film tuck bars 134 may move inwardly toward the corresponding sides 42, 44 of the package 12 and engage the surfaces of the sides 42, 44 to tuck the sides 42, 44 inwardly as the seal bars 136 move together to engage and seal the leading edge 28 of the package 12. It should be noted that since the packages 12 are being formed from a continuous web of film, the seal bars 136 simultaneously close upon the film and may seal the trailing edge 30 of the preceding package 12. Consequently, additional film tuck bars 134 may be provided below the seal bars 136 to tuck the sides 42, 44 at the trailing edge 30 of the preceding package 12. While not shown in the present process of Fig. 9, in an alternate embodiment the closing station 132 may seal only the leading seal 28 of the upper package 12 and leave the trailing edge 30 of the packages 12 open. For example, the seal bars 136 may be double seal bars that are heated separately to seal either the trailing seal 72 of the bottom package 12 or the leading seal 70 of the upper package 12 if desired. Moreover, the double seal bars may engage separately so that only one of the packages 12 is engaged by the seal bars 136 when the packages 12 pass through the closing station 132.

**[0034]** As discussed above, the forming tube 112 of the illustrated embodiment of the packaging machine 100 is a product fill tube 114. Once the leading edge 28 of the package 12 is closed during the sealing process at the closing station 132, the product may be added to the package 12. At that point, a specified amount of the product may be poured through the funnel 116 into the fill tube 114 and drop into the package 12 where the product is retained due to the seal 70 at the leading edge 28 of the package 12. After or as the package 12 receives the product, the package 12 advances to align the trailing edge 30 of the package 12 at the closing station 132 and the trailing edge 30 is tucked and sealed in the manner described above, thereby sealing the package 12 with the product disposed therein. In some implementations, the additional weight of the product in the package 12 may pull on the film and increase the tightness of the film at the closing station 132. In order to control the tightness in the film while forming the seals 70, 72 at the closing station 132, it may be necessary to provide a lifting mechanism to engage and lift the downstream package 12 sufficiently to relieve some or all of the tension in the film such that the seals 70, 72 are properly formed in the packages 12.

**[0035]** At the same time the seals 70, 72 of the adjacent packages 12 are formed, a gas flushing operation may be performed if necessary to place a desired atmosphere in the package 12. Of course, gas flushing may occur continuously or at other times as the package 12 is formed and filled. Additionally, deflators or inflators, or heated gas or cooled gas may be provided and used

during one or more of the previous steps to achieve a desired looseness or tightness to the package 12. Once the package 12 is sealed, it may be detached from the web of film in preparation for any final processing steps and containerization. Consequently, the closing station 132 may further include a knife or other separation device (not shown) proximate the seal bars 136 to cut the common seal 70/72 and separate the adjacent packages 12. Alternatively, the separation may occur at a downstream station. After separation, the package 12 may drop or otherwise be transported to a conveyor 138 for delivery to the remaining processing stations.

**[0036]** The conveyor 138 may include a timing belt or timing chain 140 for maintaining proper spacing between the packages 12 and alignment with the remaining processing stations. Other types of conveyors may be used, such as intermittent motion type conveyor belts, shuttle type transfer devices and the like. If necessary, the conveyor 138 may include guide rails or other package control devices to ensure that the packages are properly aligned and spaced as they move along the conveyor 138. The first station along the conveyor 138 may be a top bag seal folder/sealer station 142. The folder/sealer station 142 may fold the trailing seal 72 and the corresponding loose portion of the film around the lid fitment 14 and outer surface of the relatively stationary portion of the package 12 to conform the loose portion to the outer surfaces of the lid fitment 14 and the package 12, and attach the seal to the outer surface of the package 12. The seal 72 may be attached to the surface of the package 12 using heat, time or pressure sealing techniques, or by applying a hot tack adhesive between the seal and the outer surface, or other welding processes. The loose portion of the film should lay relatively flat and conform to the stationary portion of the package 12 when folded and sealed due to the tucks made in the sides 42, 44 at the time the edge seals 70, 72 were formed. After the trailing seal 72 is sealed to the package 12, the timing belt or chain 140 may reposition the package 12 at a first package turner 144 that may reorient the package 12 for folding and sealing of the leading seal 70. The reorientation may be a 180° rotation of the container to place the leading seal 70 at the top of the package 12. Once the package 12 is rotated, the timing belt or chain 140 may transfer the package 12 to a bottom bag seal folder/sealer station 146 for attaching the leading seal 70 to the outer surface of the package 12 in a similar manner as described for the folder/sealer station 142. Alternatively, the leading seal 70 may be folded and attached without reorienting the package 12 or at the same time as the trailing seal is folded and attached.

**[0037]** Once the seals 70, 72 are attached to the outer surface of the package 12, the lateral sides 84, 86 of the lid fitment 14 may be sealed to the corresponding portions of the corner seal 58, 60 of the package 12 so that the container 10 may properly store and maintain the freshness of the product stored therein after the flap 22 is removed and the package 12 is no longer sealed. In prep-

aration, the timing belt or chain 140 may first position the package 12 at a second package turner 148 that may rotate the package 12 so that the lid fitment 14 is disposed at the top. The timing belt or chain 140 may then move the package 12 to a lid final sealer 150 that may be configured to seal the lateral sides 84, 86 of the lid fitment 14 to the corresponding portions of the corner seals 58, 60 and/or seal the bottom surface 50 of the base 16 to the top surface of the top side 42. The final sealer 150 may perform a similar sealing process as that performed at the lid application station 122, such as heat sealing, adhesive sealing or the like, or other welding processes. If necessary, a post-processing station(s) (not shown) may be included along the conveyor 138 for any additional operations to be performed prior to shipment, such as code dating, weight checking, quality control, labeling or marking, RFID installation, and the like. At the conclusion of the sealing and post-processing activities, the finished containers 10 may be removed from the conveyor 138 by a case packer 152 and placed into a carton 154 for storage and/or shipment to retail customers.

**[0038]** The components of the packaging machine 100 and the steps for forming the containers 10 therein may be rearranged as necessary to properly form the containers 10, and to do so in an efficient and cost-effective manner. For example, if necessary to correctly form and shape the package 12, the lid application station 122 may be positioned upstream of the seal station 118 to apply the lid fitment 14 to the sheet of film 26 prior to forming the corner seals 58-64. Alternatively, to increase efficiency or to compensate for space limitations, for example, it may be necessary or desired to position the lid application station 122 along the conveyor 138 to apply and seal the lid fitment 14 to the package 12 after the package 12 is formed. For example, the lid application station 122 could be positioned upstream of the folder/sealer station 142 to apply the lid fitment 14 to the package 12 prior to attaching the trailing seal 72 to the surface of the package 12. Other configurations of the components of the packaging machine 100 will be apparent to those skilled in the art.

**[0039]** Fig. 10 is a schematic illustration of an alternative embodiment of a packaging machine configured to produce the flexible, stackable container 10 of Fig. 1. The packaging machine in Fig. 10 and many of its components are generally similar to the packaging machine 100 and components of Fig. 9. However, in this embodiment, the product fill tube and funnel are separate from the forming tube and disposed along the conveyor to fill the package 12 after the sheet of film 26 is detached from the web of film. The closing station along the forming tube is configured to form the leading seal 70 of one package 12 without sealing the adjacent trailing edge 30 of the preceding package 12, and to sever the concurrent leading and trailing edges 28, 30 to separate the downstream package 12 from the web of film.

**[0040]** The separated packages 12 having the unsealed trailing edges 30 are transferred to the conveyor

via an appropriate active or passive transfer mechanism and disposed along the timing belt or chain with the trailing edges 30 facing upwardly. As the packages 12 are moved into alignment with the lower end of the product fill tube, a specified amount of the product may be poured through the funnel into the fill tube 114 and drop into the package 12. The product-filled packages 12 move along the conveyor to a trailing seal closing station having a pair of seal bars that engage the trailing edges 30 of the packages 12 to form the trailing seal 102 and seal the packages 12. Once sealed, the packages 12 may be conveyed through folder/sealer stations and a lid final sealer station similar to those illustrated and described for the packaging machine of Fig. 9. As a further alternative, the lid application station 122 may be positioned along the conveyor for attachment of the lid fitment 14 at an appropriate location, such as upstream of sealing and folding the trailing seal 72.

**[0041]** Figs. 11a and 11b illustrate an alternate embodiment of a container 200 and lid fitment 202. The lid fitment 202 includes a base 204 that may be similar to the base 16 described above for the lid fitment 14 that may be heat sealed or otherwise attached to the corner seals 58, 60 and/or the surface of the top side 42 of the package 12 and having a central opening for access to a portion of the top surface of the top side 42. In this embodiment, however, the lid fitment 202 may include a plurality of recloseable lids similar to the recloseable lids of a pepper or spice can. For example, the lid fitment 202 may include a first lid 206 that opens to expose a fast pour or free-flowing opening, a second lid 208 that opens to expose a medium pour or large sifting area, and a third lid 210 that opens to expose a slow pour or small sifting area. Each of the lids may have a complementary shape to a portion of the base of the lid fitment to form a seal therebetween when the lid is closed down onto the base 204.

**[0042]** Figs. 12a and 12b illustrate a further alternate embodiment of a container 212 and lid fitment 214 that may be particularly applicable to a container in accordance with the present disclosure configured for use as a cereal container. As shown in Fig. 12a, the package 216 formed by the packaging machine may be taller and wider than the previously illustrated packages, and components of the packaging machine may be configured to form such a package 216. The lid fitment 214 for the cereal container 212 may be dimensioned to be applied to only a portion of the top side of the package 216 and form a spout for pouring the cereal out of the container 212. Because the lid fitment 214 does not cover the entire top surface of the top side surrounded by the corner seals 58, 60, it may be necessary to seal the bottom surface 218 of the base 220 to the surface of the top side 42 to ensure the necessary moisture and aroma barrier is provided when the lid 222 is closed down onto the base 220 to reseal the cereal box 212. The base 220 may further include an outwardly extending flange 224 at the bottom surface 218 to ensure that a sufficient area of contact exists between the bottom surface of the lid fitment 214

and the top surface of the top side to form the necessary seal there between. In other embodiments, the lid fitment 214 for the cereal container 212 may extend across the entire width of the package 216. Such a configuration may be desirable where the cereal container 212 encloses a toy or prize, and the opening of the lid fitment 214 may be dimensioned such that a person may insert their hand into the container 212 to remove the toy or prize without pouring out the cereal or destroying the cereal container 212. It should also be noted again that the lid fitment for the container 212 or other containers in accordance with the present disclosure may be attached to faces of the package other than the top face or side depending on the product to be stored therein and the manner in which the product is to be dispensed. For example, a fitment configured as a pouring spout may be attached to a side surface of a package to facilitate pouring from a salt or liquid container.

**[0043]** Figs. 13a and 13b illustrate a further alternate embodiment of a container 230 and lid fitment 232 that may be particularly applicable to a container in accordance with the present disclosure configured for use as a water bottle or container for other liquids. In contrast to the lid fitments previously illustrated and described herein, the lid fitment 232 for the liquid container 230 may include a base 234 having an externally threaded neck 236, and a detachable lid or cap 238 having internal threads mating with the external threads of the neck 236 so that an appropriate seal may be formed between the base/neck 234/236 and the cap 238 when the cap 238 is screwed onto the base 234. If necessary, an additional gasket, washer or other appropriate sealing device or tamper-evident feature may be included. The base 234 may extend outwardly toward the corner seals 58, 60 of the package 240 so that the bottom surface 50 may be sealed to the top surface of the top side of the package 240 with sufficient area of contact to form the necessary seal therebetween. Alternatively, the sides of the base 234 may be sealed to the corner seals 58, 60. The top side of the liquid container 230 may include an easy-opening feature similar to those previously discussed that may be configured to be accessible through neck 236 when the cap 238 is removed to open that package 240 and allow the liquid contained therein to be poured out. Alternatively, the packaging machine may be reconfigured to include a punch or other device for punching a hole in the top side of the package before the lid fitment 232 is sealed thereto so that the liquid may be poured out when the cap 238 is unscrewed from the neck.

**[0044]** Fig. 14a and 14b illustrate an alternate embodiment similar to the liquid container 250 of Figs. 13a and 13b in the form of a condiment bottle 250 having a removable spout 254. As with the liquid container 230 of Figs. 13a and 13b, the lid fitment 252 of the condiment container 250 may include a base 256 having an externally threaded neck, and a detachable cap 254 having internal threads mating with the external threads of the neck. If necessary, an additional gasket, washer or other

appropriate sealing device or tamper-evident feature may be included. The base 256 may extend outwardly toward the corner seals 58, 60 of the package 258 so that the bottom surface 50 may be sealed to the top surface of the top side of the package 258 with sufficient area of contact to form the necessary seal therebetween. Alternatively, the sides of the base 256 may be sealed to the corner seals 58, 60 in a similar manner as discussed above. Three spouts 260 are shown on the cap 254, but fewer or more spouts 260 may be provided, and the spouts 260 may be spaced about the cap 254 as shown on in another desired pattern, or arranged in-line or collinearly if desired.

**[0045]** Figs. 15a and 15b provide a graphical illustration of an embodiment of an easy-opening feature for the top side 42 of the flexible, stackable containers, such as the container 10 of Fig. 1. A series of perforations 20 to an approximate maximum depth of 50% of the thickness of the film sheet 26 are made in a manner that defines the shape of the flap 22. Indicia 270 may be visible from the outer surface of the top side 42 on the flap 22 and may indicate to a user the location at which to apply pressure to detach the flap 22 from the top side 42. A greater frequency of perforations 20, such as approximately 66.7 perforations per inch, may be provided proximate the indicia 270 to initiate the detachment of the flap 22, while a relatively lower frequency of perforations 20, such as approximately 20.4 perforations per inch, may be provided along the remainder of the line of perforations 20 defining the flap 22. When pressure is applied, the sheet of film 26 yields at the perforations 20 to breach the outer surface of the package 12 and expose the interior of the package 12. If desired, the flap 22 may be pulled outwardly for complete detachment from the package 12. Other penetration depths, shapes, spacing, etc. for the perforations 20 and flap 22 are contemplated by the inventors. For example, the depth of the perforations may be a factor of the materials and the film structure of the film sheet 26. For some films, 50% percent penetration may be adequate for detachment of the flap 22, while other films may require more or less penetration for the perforations 20.

**[0046]** Figs. 16a-16c illustrate an alternative embodiment of an easy-opening feature for the top side 42 of the flexible, stackable container 10 of Fig. 1. In this embodiment, the flap 22 may be defined by perforations 20 in a similar manner as in the previous embodiment. The feature may further include the pull tab 24 to be used to pull up on the flap 22 and separate the flap 22 from the sheet of film 26. The pull tab 24 may have a portion 280 welded or otherwise tightly sealed to the flap 22, and an additional tack seal area 282 that may hold the pull tab 24 against the outer surface of the sheet of film 26 as the container 10 is formed. When the lid 18 of the lid fitment 14 is opened, the pull tab 24 may be pulled to detach the flap 22. The relatively weak tack seal area 282 may detach as the pull tab 24 is pulled, but the stronger seal at the welded portion 280 may hold such that the perfora-

tions 20 defining the flap 22 yield before the weld separates to detach the flap 22 from the package 12. The frequency of perforations 20 may be adjusted accordingly to ensure that the flap 22 begins to separate from the sheet of film 26 in the desired location, such as proximate the welded portion 280 of the pull tab 24.

**[0047]** Figs. 17a-17c graphically illustrate a further alternative embodiment of an easy-opening feature for the top side 42 of the flexible, stackable container 10 of Fig. 1. In this embodiment, the flap 22 may be defined by perforations 20 penetrating 100% through the sheet of film 26 and defining the flap 22. The feature may further include the pull tab in the form of a cover portion 290 formed from foil or another appropriate material and having a complimentary geometric shape but being larger than the flap 22 so that the cover portion 290 of the pull tab extend beyond the edges of the flap 22 with tabs 292 being folded over at folds 294 to form the graspable portions of the pull tab. Tack seal areas 296 may hold the tabs 292 to the top surface of the cover portion 290 as the container 10 is being formed. The area 298 of the cover portion 290 overlying the flap 22 may be secured thereto with a lock-up seal that will not detach when the flap 22 is pulled free of the sheet of film 26. The lock-up seal area 298 may extend to the perforations 20, or may be disposed inwardly from the perimeter of the flap 22. The portions of the pull tab 24 extending beyond the lock-up seal area 298 may be attached to the outer surface of the top side 42 to form a peelable seal area 300, such as that formed by a pressure sensitive adhesive or other similar coating. When the pull tab is initially attached to the top side 42, the cover portion 290 completely overlies the flap 22 with the peelable seal area 300 serving to seal the package 12 despite the full penetration of the perforations 20. Moreover, the cover portion 290 covers the perforations 20 to prevent the perforations 20 and air or liquids that may be able to pass there through from affecting the barrier properties of the film sheet 26. After the pull tab is pulled to separate the flap 22 from the sheet of film 26, the flap 22 and cover portion 290 may be pressed back down onto the top side 42 such that the peelable seal is reformed around the opening created by the detachment of the flap 22 to re-seal the package 12 and provide a level of barrier protection for the product stored therein.

**[0048]** Figs. 18a-18c graphically illustrate another alternative embodiment of an easy-opening feature for the top side 42 of the flexible, stackable container 10 of Fig. 1. The easy-opening feature includes the flap 22 and a cover portion 310 of a pull tab in similar configurations as in Figs. 17a-17c, but configured so the flap does not completely detach from the film sheet 26 during normal use. The perforations 20 may extend most of the way but not entirely around the entire periphery of the flap 22. The cover portion 310 also includes a single tab 312 folded back over a fold 314 and held down by a tack seal area 316. The tab 312 may be disposed opposite the side of the flap 22 that is not perforated. The perforations

20 may also be provided at the peel tab area in a zig-zag configuration 318 to create a point of weakness at which the tearing or peeling of the flap 22 will be initiated. The cover portion 310 further includes a lock-up seal area 320 attached to the flap 22 within the area defined by the perforations, and a peelable seal area 322 extending beyond the flap 22. When the tab 312 is pulled, the flap 22 does not completely detach from the sheet of film 26 and the flap 22 and cover portion 310 are not completely removed from the package 12. Configured in this way, the flap 22 and cover portion 310 are properly aligned with the opening in the top side 42 of the package 12 when they are replaced over the opening to reclose and seal the package 12.

**[0049]** Figs. 19a-19c graphically illustrate a still further alternative embodiment of an easy-opening feature for the top side 42 of the flexible, stackable container 10 of Fig. 1. In this embodiment, the flap 22 may be defined by a line of reduced strength formed by a series of alternating score lines 330 and interruptions in the scoring or bridges 332. The score lines 330 may have full penetration through the film sheet 26, while the bridges 332 are areas of no penetration, or of partial penetration but less than 100% penetration such that the bridges 332 maintain the attachment of the flap 22. The length of the score lines between the bridges may range from 0.1" to 2.0", and the length of the bridges may fall within the range of 0.002" to 0.090" depending on the implementation. The pull tab may be similar to that shown in Figs. 17a-17c, and include a cover portion 334 overlying the flap 22, and with a single tab 336 folded back over a fold 338 and held down by a tack seal area 340. A lock-up seal area 342 of the cover portion 334 is attached to the film sheet 26 at the flap 22, and may extend to the score lines 330 as shown, or may be disposed inwardly from the perimeter of the flap 22. A peelable seal area 344 extends beyond the lock-up seal area 342 and may be attached to the outer surface of the top side 42 with a pressure sensitive adhesive or other similar coating. When the pull tab is initially attached to the top side 42, the cover portion 334 completely overlies the flap 22 with the peelable seal area 344 serving to seal the package 12 despite the full penetration of the score lines 330. The tab 336 is pulled away from the top side 42 of the package 12 to detach the flap 22 at the bridges 332 for removal of the flap 22 and cover portion 334. If desired, the flap 22 and cover portion 334 may be pressed back down onto the top side 42 such that the peelable seal is reformed around the opening created by the detachment of the flap 22 to re-seal the package 12. Depending on the adhesive being used, the configurations of the score lines and the bridges and the properties of the film sheet 26, the same adhesive may be used in both the lock-up seal area 342 and the peelable seal area 344 if the strength of the adhesive is sufficient to detach the flap 22 at the bridges without the cover portion 334 separating from the flap 22.

**[0050]** As discussed previously, containers in accordance with the present disclosure such as those described

herein may be stacked efficiently side-by-side in shipping cartons and on display shelves, and may be stacked vertically on top of each other. To facilitate vertical stacking, the bottom sides of the packages and the top surfaces of the lid fitments may be configured with complimentary shapes fostering stability in stacking the containers. Referring to Fig. 20a, the embodiment of the lid fitment 14 of Fig. 2 is shown in cross-section. The lid 18 and the base 16 of the lid fitment 14 have complimentary generally concave shapes so that the lid 18 nests within the base 16 and forms the necessary seal for the container 10. The lid 18 has an outer wall 88 extending around the lid 18 and having an upper edge 90 upon which the bottom side 44 of a container 10 stacked thereupon will rest. For the container 10 of Figs. 2-8, the corner seals 62, 64 of the package 12 are aligned with the upper edge 90 of the lid 18. If necessary, the lid 18 may include an additional rim 92 extending upwardly from the upper edge 90 of the outer wall 88 and having its outer edge disposed inwardly from the outer edge of the outer wall 88 such that the corner seals 62, 64 slide over the rim. In some embodiments, the rim 92 may be disposed approximately one-eighth inch inwardly from the outer edge of the outer wall 88, and may extend approximately one-eighth inch upwardly from the upper edge 90 of the outer wall 88. The engagement between the rim and the corner seals 62, 64 may prevent relative horizontal movement between the stacked containers 10 that may cause instability of the stack.

**[0051]** Fig. 20b illustrates an alternative embodiment of the lid fitment 14 that may further promote stable stacking of the containers 10 having corner seals 62, 64. Depending on the density of the product stored in the package 12, the bottom side 44 of the package 12 may tend to sag under the weight of the product because the bottom side 44 is normally disposed above the bottom edges of the corner seals 62, 64. To provide additional support for the bottom sides 44 when the containers 10 are stacked, the lid 18 may have an upwardly extending central raised portion 94 with a top surface 96 that is higher than the upper edge 90 of the outer wall 88. The vertical distance between the top surface 96 and the upper edge 90 may typically be less than or equal to the height of the corner seals 62, 64. Consequently, in some implementations the top surface 96 may be in the range of 1/16" to 1/4" above the upper edge 90. When one container 10 is stacked on another, the bottom side 44 of the upper container 10 may sag, but the central portion 94 of the lid 18 of the lower container 10 will prevent the bottom side 44 from sagging below the bottom edges of the corner seals 62, 64.

**[0052]** While the present invention has been described with reference to specific examples, which are intended to be illustrative only and not to be limiting of the invention, it will be apparent to those of ordinary skill in the art that changes, additions or deletions may be made to the disclosed embodiments without departing from the spirit and scope of the invention.

**[0053]** The following paragraphs describe further aspects of the invention:

A1. A flexible, stackable container for storing a quantity of a product, comprising:

a sealed package formed from a single sheet of film and retaining the quantity of the product disposed therein, the package having a first side having an outer first surface of the film and outwardly extending first corner seals formed in the film at the edges of the first side and surrounding the first side of the package, and a second side disposed opposite the first side and outwardly extending second corner seals formed in the film at the edges of the second side and surrounding the second side of the package; and

a lid fitment attached to the first side of the package, wherein the lid fitment comprises a base having a central opening and a lid having a complimentary shape to the base to form a therebetween when the lid is closed down onto the base, and wherein the base is sealed to one of the first surface of the first side and the first corner seals surrounding the first side such that a portion of the first surface is accessible from the exterior of the container when the lid is separated from the base of the lid fitment.

A2. The flexible, stackable container of paragraph A1, wherein the package is hermetically sealed to retain the product disposed therein.

A3. The flexible, stackable container of paragraph A1, wherein the first and second corner seals extend outwardly perpendicular to the first surface of the first side of the package.

A4. The flexible, stackable container of paragraph A1, wherein the first surface comprises a flap defined by a line of reduced strength in the film forming the first surface such that the line of reduced strength yields to separate the flap from the first surface when a force is applied to the first surface.

A5. The flexible, stackable container of paragraph A4, wherein the line of reduced strength comprises a series of perforations through the first surface of the film.

A6. The flexible, stackable container of paragraph A5, wherein the perforations extend approximately 50% of the distance through the thickness of the film.

A7. The flexible, stackable container of paragraph A5, wherein the distance the perforations extend through the film is in the range of 40% to 60% of the

thickness of the film.

A8. The flexible, stackable container of paragraph A5, wherein the perforations extend 100% of the distance through the film and through the inner surface of the film. 5

A9. The flexible, stackable container of paragraph A4, wherein the line of reduced strength is a continuous score line through the first surface of the film. 10

A10. The flexible, stackable container of paragraph A4, wherein the line of reduced strength is a series of alternating score lines having 100% penetration through the film and bridge portions having less than 100% penetration through the film. 15

A11. The flexible, stackable container of paragraph A4, comprising a pull tab attached to the outer surface of the flap and having a gripping portion that is grasped by a user, wherein the pull tab is attached to the flap such that the flap detaches from the film along the line of reduced strength before the pull tab detaches from the flap when the gripping portion is pulled by a user. 20 25

A12. The flexible, stackable container of paragraph A11, wherein the perimeter of the pull tab extends beyond the perimeter of the flap. 30

A13. The flexible, stackable container of paragraph A12, wherein the perimeter of the pull tab has a pressure sensitive adhesive disposed on a surface thereof to reattach the perimeter of the pull tab to the first surface to reclose the package after the flap is detached from the first surface. 35

A14. The flexible, stackable container of paragraph A4, wherein the line of reduced strength defines three sides of the flap such that the flap does not completely detach from the package when the flap detaches from the film at the line of reduced strength. 40

A15. The flexible, stackable container of paragraph A1, where the base of the lid fitment is heat sealed to one of the first surface of the first side and the corner seals surrounding the first side. 45

A16. The flexible, stackable container of paragraph A1, wherein the lid fitment comprises a living hinge connecting the lid to the base. 50

A17. The flexible, stackable container of paragraph A1, wherein the base of the lid fitment is sealed to the corner seals surrounding the first side. 55

A18. The flexible, stackable container of paragraph A1, wherein the base of the lid fitment has a bottom

surface surrounding the central opening of the base, and wherein the bottom surface of the base is sealed to the first surface of the first side.

A19. The flexible, stackable container of paragraph A1, wherein the lid of the lid fitment comprises an outer wall extending around the perimeter of the lid and having an upper edge, and a central raised portion within the outer wall and extending upwardly with a top surface of the central raised portion being higher than the upper edge of the outer wall.

A20. The flexible, stackable container of paragraph A19, wherein the top surface of the central raised portion is approximately one-eighth inch above the upper edge of the outer wall.

A21. The flexible, stackable container of paragraph A1, wherein the lid of the lid fitment comprises an outer wall extending around the perimeter of the lid and having an upper edge, and a rim extending upwardly from the upper edge of the outer wall with an outer edge of the rim being disposed inwardly from an outer edge of the outer wall.

A22. The flexible, stackable container of paragraph A21, wherein the outer edge of the rim is disposed approximately one-eighth inch inwardly from the outer edge of the outer wall.

A23. The flexible, stackable container of A21, wherein the rim extends approximately one-eighth inch upwardly from the upper edge of the outer wall.

A24. The flexible, stackable container of paragraph A1, wherein the container is sealed to retain the product disposed in the package when a portion of the first surface is penetrated to expose the interior of the package and the lid is closed down onto the base of the lid fitment.

A25. A flexible, stackable container for storing a quantity of a product, comprising:

a sealed package formed from a single sheet of film having oppositely disposed lateral edges and oppositely disposed leading and trailing edges, the sheet of film being wrapped inwardly with the lateral edges being disposed proximate each with one side of the sheet of film being the inner surface of the package and the opposite side of the sheet of film being the outer surface of the package, at least three folds being formed in the sheet of film parallel to the lateral edges of the sheet of film to form corners defining oppositely disposed top and bottom sides and oppositely disposed front and rear sides of the package, folds parallel to the folds defining the

top and bottom sides of the package being formed on the top and bottom sides of the package, each fold being made proximate a corresponding one of the folds defining the top or bottom sides and bringing the inner surface of the corresponding top or bottom side into contact with a corresponding portion of inner surface of the adjacent side of the package, with the contacting inner surfaces being sealed to form corner seals, the portions of the sheet of film proximate the lateral edges being sealed to each other to form a fin seal, the front and rear side portions of the leading edge of the sheet of film being brought together with the inner surfaces of the sheet of film proximate thereto being sealed together to form a leading seal of the package, the front and rear side portions of the trailing edge of the sheet of film being brought together and the inner surfaces of the sheet of film proximate thereto being sealed together to form a trailing seal of the package such that the package is sealed once the fin seal, the leading seal and the trailing seal are formed, and wherein the leading and trailing seals are folded over toward corresponding portions of the outer surface of the package and attached thereto such that the leading and trailing seals and portions of the front and rear sides of the package form lateral sides of the container, with the corners seals at the top side extending outwardly from and surrounding a top surface of the top side, and the corner seals at the bottom side extending outwardly from and surrounding a bottom surface of the bottom side; and

a lid fitment attached to the top side of the package, wherein the lid fitment comprises a base having a central opening and a lid having a complementary shape to the base to form a seal therebetween when the lid is closed down onto the base, and wherein the base is sealed to one of the top surface of the top side and the corner seals surrounding the top side such that a portion of the top surface of the top side is accessible from the exterior of the container when the lid is separated from the base of the lid fitment.

A26. The flexible, stackable container of paragraph A25, wherein a quantity of the produce is deposited in the package after one of the leading seal and the trailing seal are formed and before the other of the leading seal and the trailing seal are formed.

A27. The flexible, stackable container of paragraph A25, wherein the corner seals extend outwardly perpendicular to the top surface of the top side of the package.

A28. The flexible, stackable container of paragraph A25, wherein the top surface comprises a flap defined by a line of reduced strength in the film forming the top surface such that the line of reduced strength yields to separate the flap from the top surface when a force is applied to the top surface.

A29. The flexible, stackable container of paragraph A28, wherein the line of reduced strength comprises a series of perforations through the top surface of the film.

A30. The flexible, stackable container of paragraph A29, wherein the perforations extend approximately 50% of the distance through the thickness of the film.

A31. The flexible, stackable container of paragraph A29, wherein the distance the perforations extend through the film is in the range of 40% to 60% of the thickness of the film.

A32. The flexible, stackable container of paragraph A29, wherein the perforations extend 100% of the distance through the film and through the inner surface of the film.

A33. The flexible, stackable container of paragraph A28, wherein the line of reduced strength is a continuous score line through the top surface of the film.

A34. The flexible, stackable container of paragraph A28, wherein the line of reduced strength is a series of alternating score lines having 100% penetration through the film and bridge portions having less than 100% penetration through the film.

A35. The flexible, stackable container of paragraph A28, comprising a pull tab attached to the outer surface of the flap and having a gripping portion that is grasped by a user, wherein the pull tab is attached to the flap such that the flap detaches from the film along the line of reduced strength before the pull tab detaches from the flap when the gripping portion is pulled by a user.

A36. The flexible, stackable container of paragraph A35, wherein the perimeter of the pull tab extends beyond the perimeter of the flap.

A37. The flexible, stackable container of paragraph A36, wherein the perimeter of the pull tab has a pressure sensitive adhesive disposed on a surface thereof to reattach the perimeter of the pull tab to the top surface to reclose the package after the flap is detached from the top surface.

A38. The flexible, stackable container of paragraph A28, wherein the line of reduced strength defines

three sides of the flap such that the flap does not completely detach from the package when the flap detaches from the film at the line of reduced strength.

A39. The flexible, stackable container of paragraph A25, where the base of the lid fitment is heat sealed to one of the top surface of the top side and the corner seals surrounding the top side. 5

A40. The flexible, stackable container of paragraph A25, wherein the lid fitment comprises a living hinge connecting the lid to the base. 10

A41. The flexible, stackable container of paragraph A25, wherein the base of the lid fitment is sealed to the corner seals surrounding the top side. 15

A42. The flexible, stackable container of paragraph A25, wherein the base of the lid fitment has a bottom surface surrounding the central opening of the base, and wherein the bottom surface of the base is sealed to the top surface of the top side. 20

A43. The flexible, stackable container of paragraph A25, wherein the lid of the lid fitment comprises an outer wall extending around the perimeter of the lid and having an upper edge, and a central raised portion within the outer wall and extending upwardly with a top surface of the central raised portion being higher than the upper edge of the outer wall. 25 30

A44. The flexible, stackable container of paragraph A43, wherein the top surface of the central raised portion is approximately one-eighth inch above the upper edge of the outer wall. 35

A45. The flexible, stackable container of paragraph A25, wherein the lid of the lid fitment comprises an outer wall extending around the perimeter of the lid and having an upper edge, and a rim extending upwardly from the upper edge of the outer wall with an outer edge of the rim being disposed inwardly from an outer edge of the outer wall. 40

A46. The flexible, stackable container of paragraph A45, wherein the outer edge of the rim is disposed approximately one-eighth inch inwardly from the outer edge of the outer wall. 45

A47. The flexible, stackable container of paragraph A45, wherein the rim extends approximately one-eighth inch upwardly from the upper edge of the outer wall. 50

A48. The flexible, stackable container of paragraph A25, wherein the package is hermetically sealed to retain the product disposed therein. 55

A49. The flexible, stackable container of paragraph A25, wherein the container is sealed to retain the product disposed in the package when a portion of the first surface is penetrated to expose the interior of the package and the lid is closed down onto the base of the lid fitment.

A50. A method of manufacturing a flexible, stackable container for storing a quantity of a product, the container including a sealed package formed from a single sheet of film and a lid fitment attached thereto, the sheet of film having oppositely disposed lateral edges and oppositely disposed leading and trailing edges, the method comprising:

wrapping the sheet of film inwardly with the lateral edges being disposed proximate each with one side of the sheet of film being the inner surface of the package and the opposite side of the sheet of film being the outer surface of the package;

forming at least three folds in the sheet of film parallel to the lateral edges of the sheet of film to form corners defining oppositely disposed first and second sides and oppositely disposed third and fourth sides of the package;

forming folds parallel to the folds defining the first and second sides of the package on the first and second sides of the package, each fold being made proximate a corresponding one of the folds defining the first or second sides and bringing the inner surface of the corresponding first or second side into contact with a corresponding portion of inner surface of the adjacent side of the package, and sealing the contacting inner surfaces to form corner seals;

sealing the portions of the sheet of film proximate the lateral edges to each other to form a fin seal;

bringing the third and fourth side portions of the leading edge of the sheet of film together and sealing the inner surfaces of the sheet of film proximate thereto together to form a leading seal of the package;

bringing the third and fourth side portions of the trailing edge of the sheet of film together and sealing the inner surfaces of the sheet of film proximate thereto together to form a trailing seal of the package such that the package is sealed once the fin seal, the leading seal and the trailing seal are formed;

folding the leading and trailing seals over toward

corresponding portions of the outer surface of the package and attaching the leading and trailing seals thereto such that the leading and trailing seals and portions of the third and fourth sides of the package form lateral sides of the container, and the corners seals at the first side extend outwardly from and surround a first surface of the first side, and the corner seals at the second side extend outwardly from and surround a second surface of the second side; and

attaching the lid fitment to the first side of the package, wherein the lid fitment comprises a base having a central opening and a lid having a complimentary shape to the base to form a seal therebetween when the lid is closed down onto the base, wherein the base is sealed to one of the first surface of the first side and the corner seals surrounding the first side such that a portion of the first surface of the first side is accessible from the exterior of the container when the lid is separated from the base of the lid fitment.

A51. The method of manufacturing a flexible, stackable container of paragraph A50, comprising hermetically sealing the fin seal, the leading seal and the trailing seal to hermetically seal the package.

A52. The method of manufacturing a flexible, stackable container of paragraph A50, comprising hermetically sealing the base of the lid fitment to one of the first surface of the first side and the corner seals surrounding the first side.

A53. The method of manufacturing a flexible, stackable container of paragraph A50, comprising attaching the lid fitment to the first side of the package after forming the corner seals and prior to folding over and attaching the leading and trailing seals.

A54. The method of manufacturing a flexible, stackable container of paragraph A50, wherein the base of the lid fitment comprises a front side, a rear side and oppositely disposed lateral sides, the method comprising sealing the front side and the rear side of the base of the lid fitment and the corresponding portions of the corner seals prior to folding over and attaching the leading and trailing seals.

A55. The method of manufacturing a flexible, stackable container of paragraph A54, comprising sealing the lateral sides of the base of the lid fitment and the corresponding portions of the corner seals after folding over and attaching the leading and trailing seals.

A56. The method of manufacturing a flexible, stackable container of paragraph A50, comprising attaching the lid fitment to the first side of the package after

folding over and attaching the leading and trailing seals

A57. The method of manufacturing a flexible, stackable container of paragraph A50, comprising defining a flap on the first surface of the first side of the package with a line of reduced strength in the film forming the first surface such that the line of reduced strength yields first to separate the flap from the first surface when a force is applied to the first surface.

A58. The method of manufacturing a flexible, stackable container of paragraph A50, comprising attaching a pull tab having a gripping portion to the outer surface of the flap such that the flap detaches from the first surface along the line of reduced strength before the pull tab detaches from the flap when the gripping portion is pulled away from the package.

A59. The method of manufacturing a flexible, stackable container of paragraph A50, wherein the container is sealed when a portion of the first surface of the first side is penetrated to expose the interior of the package and the lid is closed down onto the base of the lid fitment.

A60. The method of manufacturing a flexible, stackable container of paragraph A50, comprising depositing a quantity of the produce in the package between the steps of forming the leading seal and the trailing seal.

## Claims

1. A flexible, stackable container (10) for storing a quantity of a product, comprising:

a sealed package formed from a single sheet of film (26) and retaining the quantity of the product disposed therein, the package having a first side (42) having an outer, planar first surface, a second side (44) disposed opposite the first side, and outwardly extending first corner seals (58,60) formed in the film at the edges of the first side and surrounding the first side of the package and/or outwardly extending second corner seals (62, 64) formed in the film at the edges of the second side and surrounding the second side of the package; and

a lid fitment attached to the planar first surface of the first side of the package or a reclosable flap (22) defined by a line of reduced strength in the film in the planar first surface of the first side such that the line of reduced strength yields to separate the flap from a remaining portion of the film when a force is applied to the flap to define an opening in the planar first surface of the first

side of the package,

wherein the film sheet (26) has a lower leading edge (28), an upper trailing edge (30), and oppositely disposed lateral edges (32, 34),  
the lateral edges (32, 34) being sealed together to form a combination fin seal and corner seal in which the fin seal forms at least a portion of the second corner seals,  
lateral side portions of the leading and trailing edges (28, 30) are brought toward each other and sealed together to form leading and trailing seals (70, 72), portions of the first side and portions of the second side are tucked inwardly toward the interior of the package, and  
the leading and trailing seals (70, 72) being attached to the outer surface of the package (12).

2. The flexible, stackable container of claim 1, wherein the package comprising first and second corners seals, and the first and second corner seals extend outwardly perpendicular to the first surface of the first side of the package.
3. The flexible, stackable container of claim 1, wherein the package comprises the recloseable flap and the flap comprises a cover portion overlying the flap, adapted to reseal the flap to the remaining portion of the film.
4. The flexible, stackable container of claim 3, comprising a pull tab attached to the outer surface of the flap and having a gripping portion that is grasped by a user, wherein the pull tab is attached to the flap such that the flap detaches from the film along the line of reduced strength before the pull tab detaches from the flap when the gripping portion is pulled by a user.
5. The flexible, stackable container of any one of claims 1 to 4, wherein the package comprises the lid fitment, wherein the lid fitment comprises a base having a central opening and a lid having a complimentary shape to the base to form a seal therebetween when the lid is closed down onto the base, and wherein the base is sealed to one of the first surface of the first side and the first corner seals surrounding the first side such that a portion of the first surface is accessible from the exterior of the container when the lid is separated from the base of the lid fitment.
6. The flexible, stackable container of claim 5, wherein the base of the lid fitment is sealed to the corner seals surrounding the first side.
7. The flexible, stackable container of claims 5 or 6, wherein the base of the lid fitment has a bottom surface surrounding the central opening of the base, and wherein the bottom surface of the base is sealed

to the first surface of the first side.

8. The flexible, stackable container of any one of claims 5 to 7, wherein the lid of the lid fitment comprises an outer wall extending around the perimeter of the lid and having an upper edge, and a central raised portion within the outer wall extending upwardly with a top surface of the central raised portion being higher than the upper edge of the outer wall.
9. The flexible, stackable container of any one of claims 5 to 8, wherein the lid of the lid fitment comprises an outer wall extending around the perimeter of the lid and having an upper edge, and a rim extending upwardly from the upper edge of the outer wall with an outer edge of the rim being disposed inwardly from an outer edge of the outer wall.
10. A method of manufacturing a flexible, stackable container for storing a quantity of a product, the container including a sealed package formed from a single sheet of film and one of a lid fitment attached thereto or a reclosable flap defined by a line of reduced strength in the film, the sheet of film having oppositely disposed lateral edges and oppositely disposed leading and trailing edges, the method comprising:
  - wrapping the sheet of film inwardly with the lateral edges being disposed proximate each with one side of the sheet of film being the inner surface of the package and the opposite side of the sheet of film being the outer surface of the package;
  - forming at least three folds in the sheet of film parallel to the lateral edges of the sheet of film to form corners defining oppositely disposed first and second sides and oppositely disposed third and fourth sides of the package, wherein the first side has a first planar surface;
  - forming folds parallel to the folds defining the first and second sides of the package on the first and second sides of the package, each fold being made proximate a corresponding one of the folds defining the first or second sides and bringing the inner surface of the corresponding first or second side into contact with a corresponding portion of inner surface of the adjacent side of the package, and sealing the contacting inner surfaces to form first and second corner seals, the first corner seal surrounding the first side of the package and the second corner seal surrounding the second side of the package;
  - sealing the portions of the sheet of film proximate the lateral edges to each other to form a fin seal, wherein the fin seals forms at least a part of the second corner seal to create a combination fin seal and corner seal;
  - bringing the third and fourth side portions of the

leading edge of the sheet of film together and sealing the inner surfaces of the sheet of film proximate thereto together to form a leading seal of the package;

bringing the third and fourth side portions of the trailing edge of the sheet of film together and sealing the inner surfaces of the sheet of film proximate thereto together to form a trailing seal of the package such that the package is sealed once the fin seal, the leading seal and the trailing seal are formed;

folding the leading and trailing seals over toward corresponding portions of the outer surface of the package and attaching the leading and trailing seals thereto using heat, time, or pressure sealing such that the leading and trailing seals and portions of the third and fourth sides of the package form lateral sides of the container, and the corners seals at the first side extend outwardly from and surround a first surface of the first side, and the corner seals at the second side extend outwardly from and surround a second surface of the second side; and

attaching the lid fitment to the planar first surface of the first side of the package, or defining a recloseable flap in the film by forming a line of reduced strength in the film at the planar first surface of the first side such that the line of reduced strength yields to separate the flap from a remaining portion of the film when a force is applied to the flap to define an opening in the planar first surface of the first side.

11. The method of manufacturing a flexible, stackable container of claim 10, wherein the method comprises attaching the lid fitment, and the lid fitment comprises a base having a central opening and a lid having a complimentary shape to the base to form a seal therebetween when the lid is closed down onto the base, wherein the base is sealed to one of the first surface of the first side and the corner seals surrounding the first side such that a portion of the first surface of the first side is accessible from the exterior of the container when the lid is separated from the base of the lid fitment.
12. The method of manufacturing a flexible, stackable container of claim 10, comprising attaching the lid fitment to the first side of the package after forming the corner seals and prior to folding over and attaching the leading and trailing seals.
13. The method of manufacturing a flexible, stackable container of claim 10, wherein the base of the lid fitment comprises a front side, a rear side and oppositely disposed lateral sides, the method comprising sealing the front side and the rear side of the base of the lid fitment and the corresponding portions

of the corner seals prior to folding over and attaching the leading and trailing seals.

14. The method of manufacturing a flexible, stackable container of claim 10, wherein the base of the lid fitment comprises a front side, a rear side and oppositely disposed lateral sides, the method comprising sealing the lateral sides of the base of the lid fitment and the corresponding portions of the corner seals after folding over and attaching the leading and trailing seals.
15. The method of manufacturing a flexible, stackable container of claim 10, comprising attaching the lid fitment to the first side of the package after folding over and attaching the leading and trailing seals.
16. The method of manufacturing a flexible, stackable container of any one of claims 10 to 14, comprising depositing a quantity of the product in the package between the steps of forming the leading seal and the trailing seal.
17. The method of manufacturing a flexible, stackable container of claim 11, comprising defining the recloseable flap and further comprising attaching a cover portion overlying the reclosable flap, the cover portion adapted to reseal the flap to the remaining portion of the film.




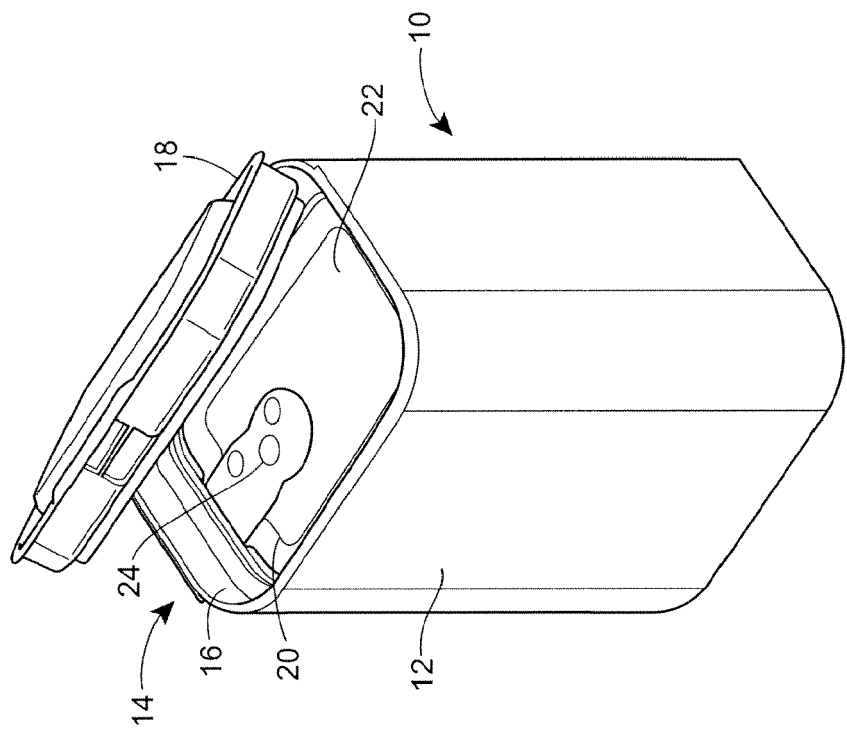


FIG. 1

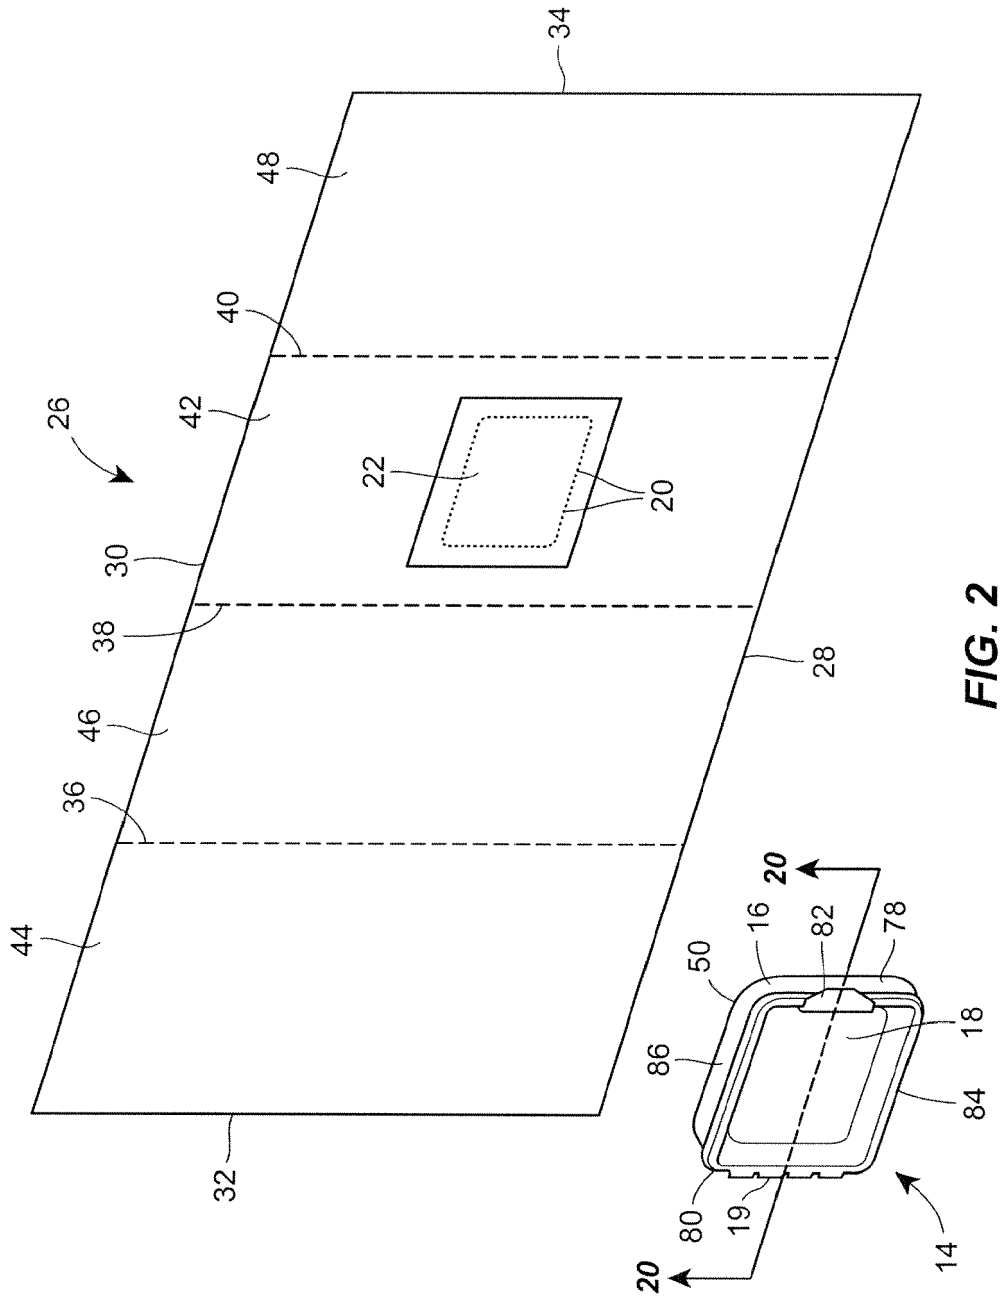

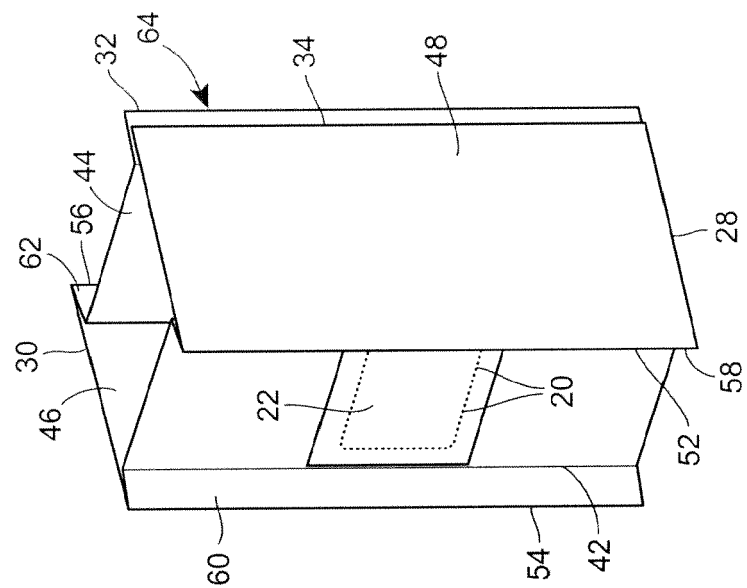

**FIG. 4**

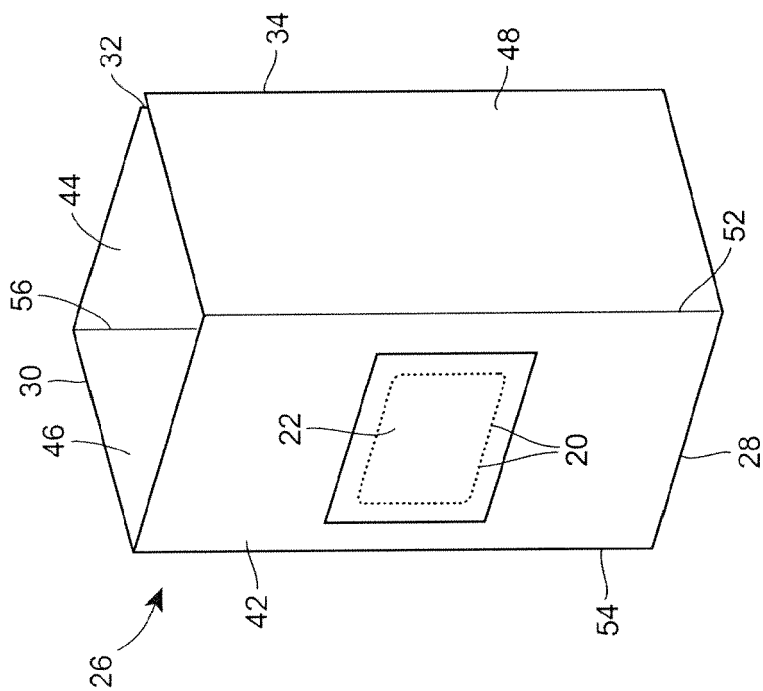

**FIG. 3**

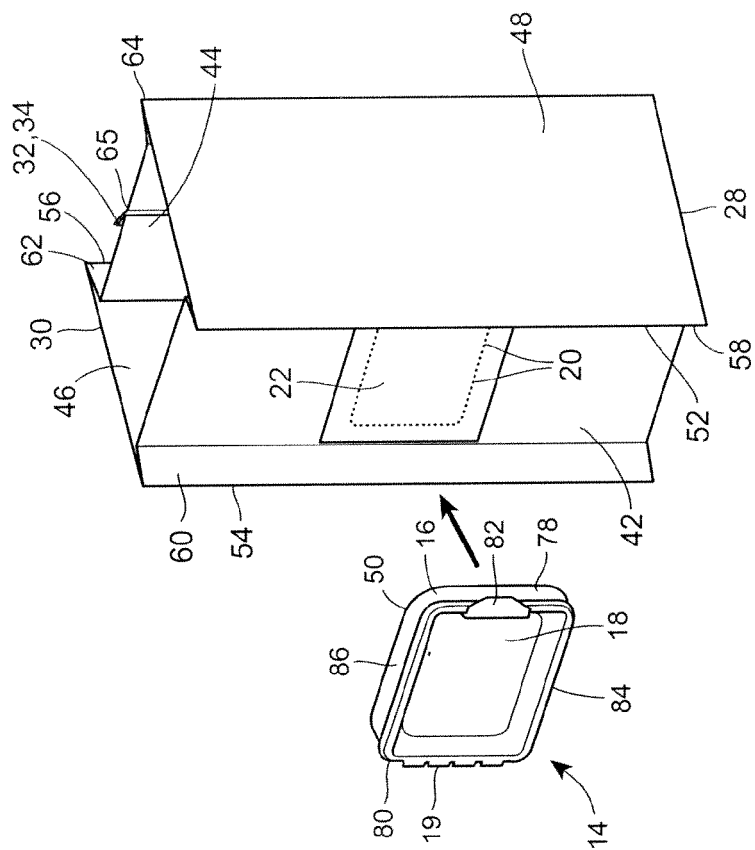


FIG. 5A

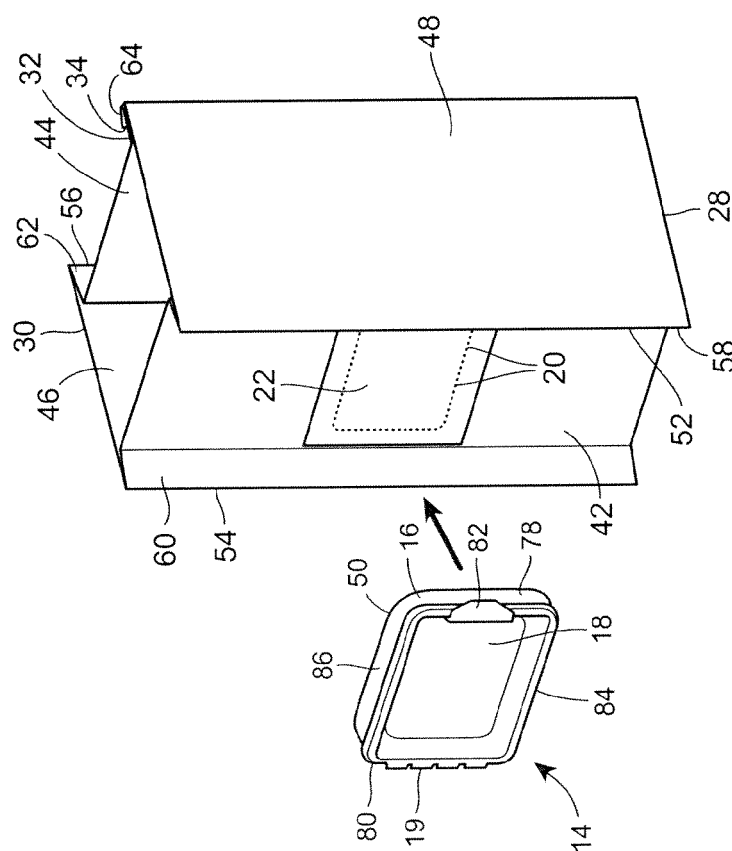


FIG. 5

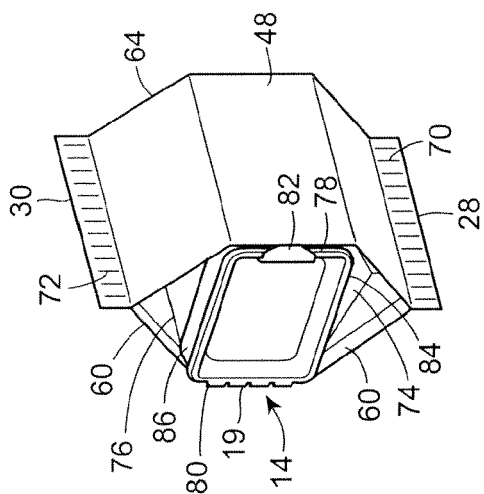


FIG. 7

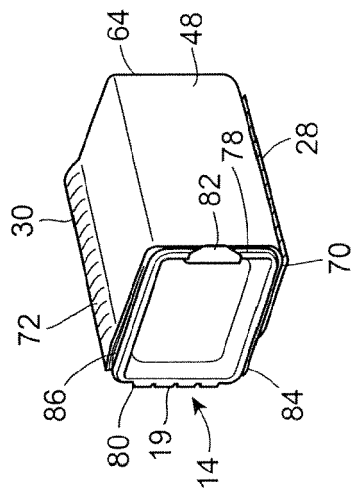


FIG. 8

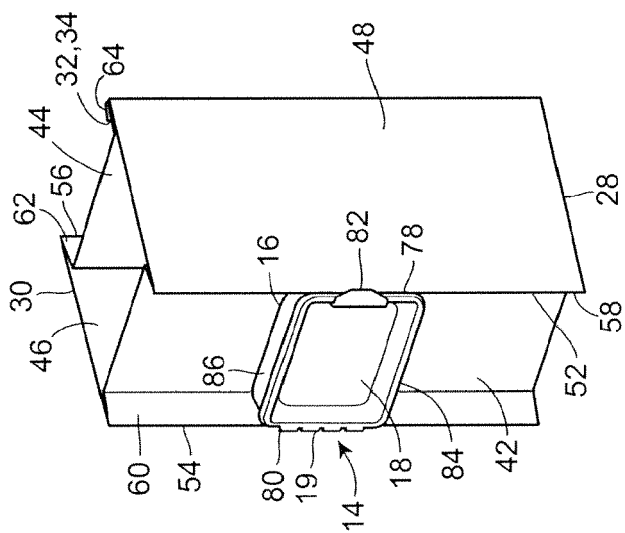


FIG. 6

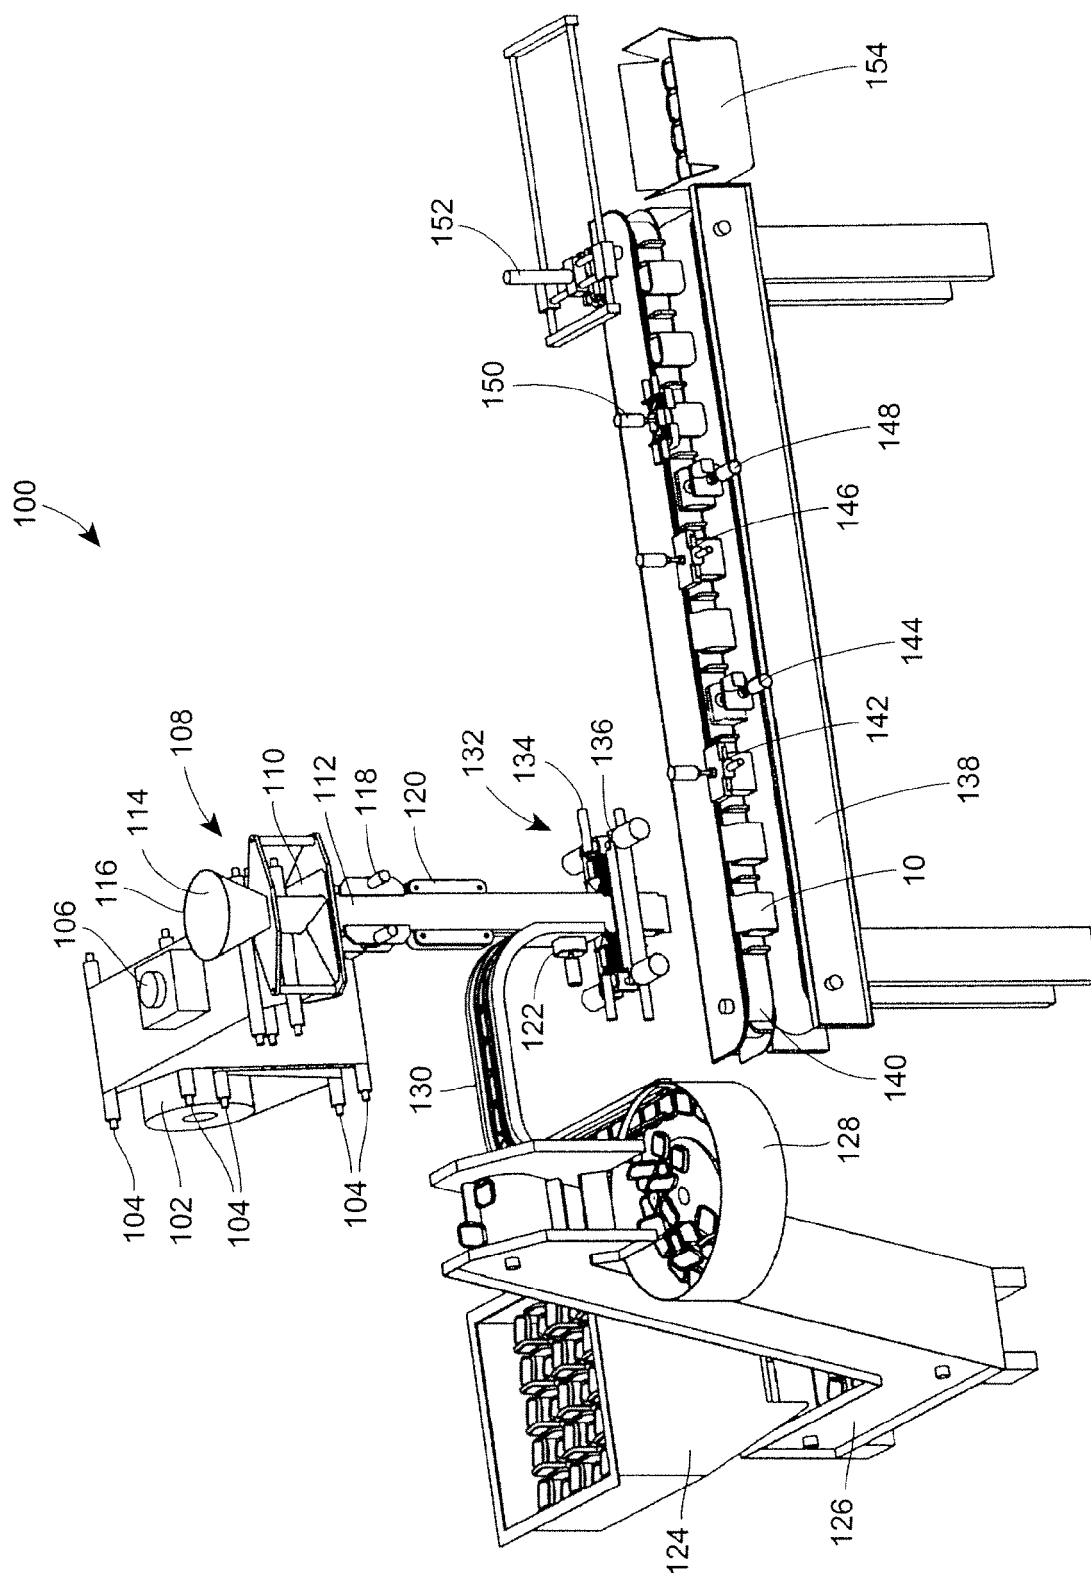


FIG. 9

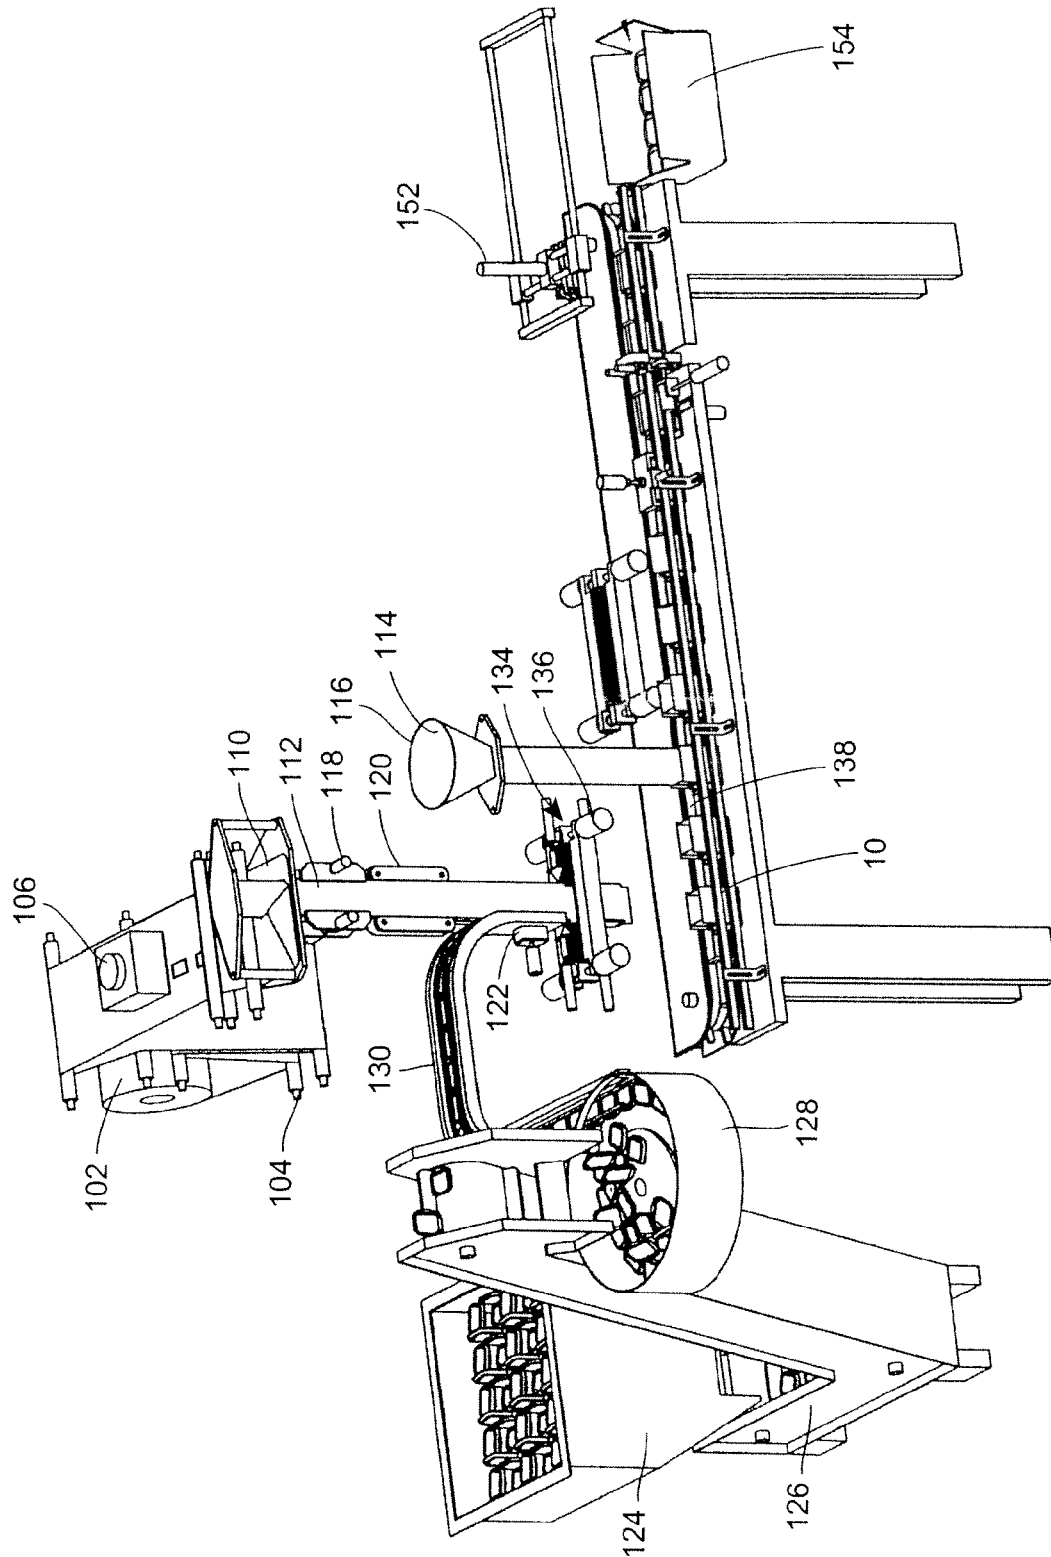


FIG. 10

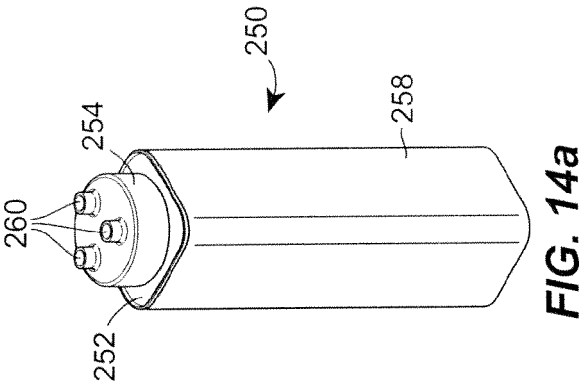


FIG. 14a




FIG. 14b

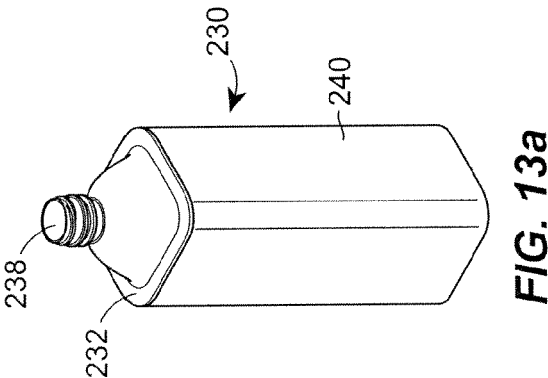


FIG. 13a

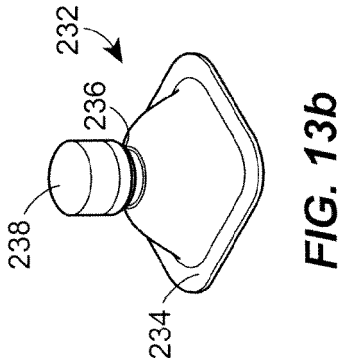


FIG. 13b

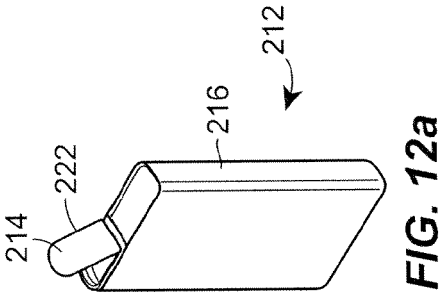


FIG. 12a




FIG. 12b

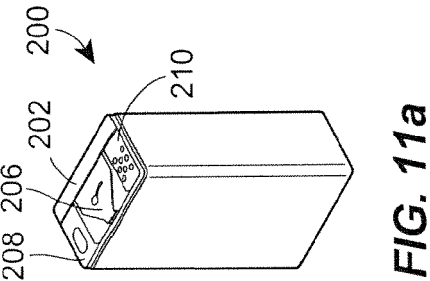


FIG. 11a







FIG. 11b

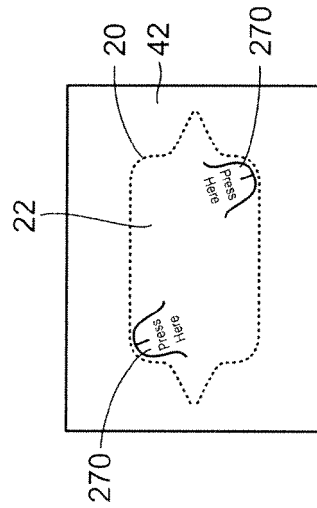


**FIG. 15a**

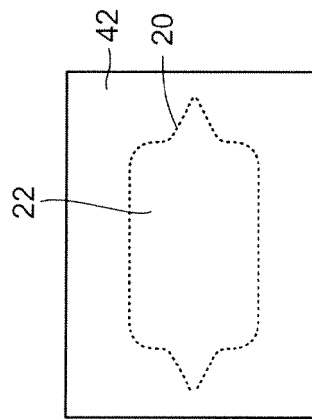


**FIG. 15b**

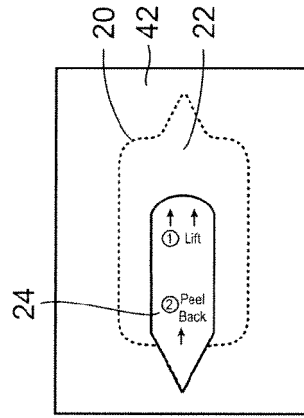




**FIG. 16a**



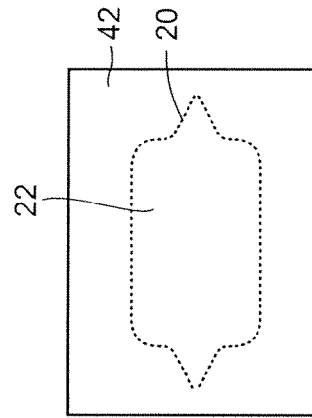



**FIG. 16b**

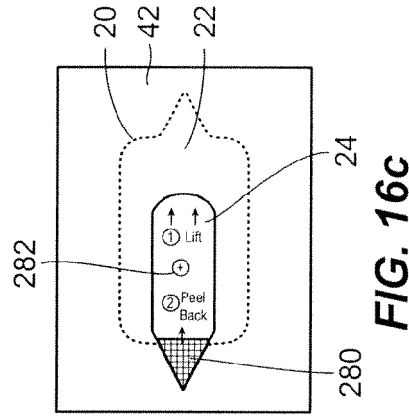


**FIG. 16c**

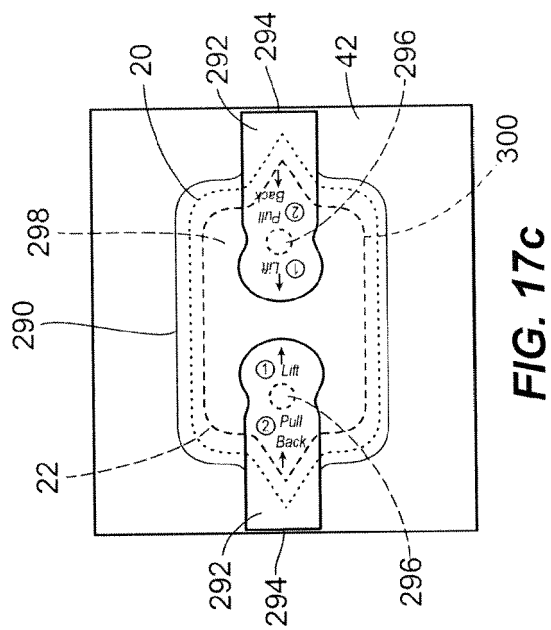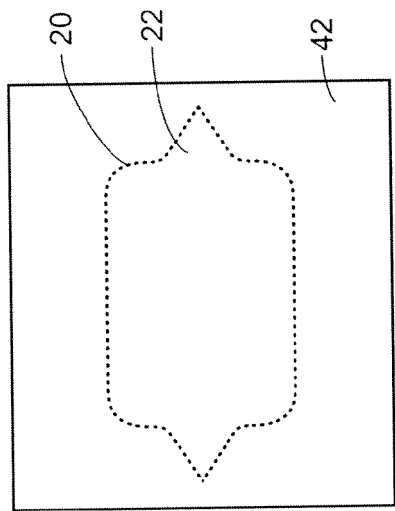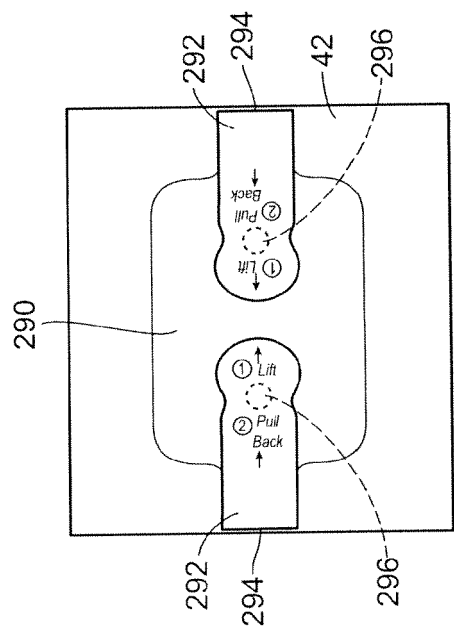

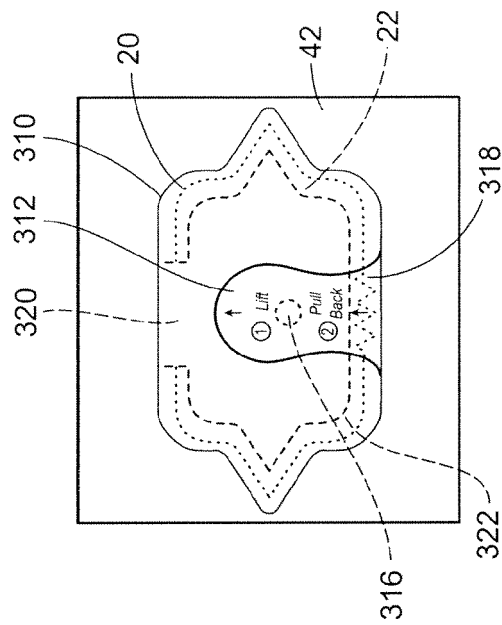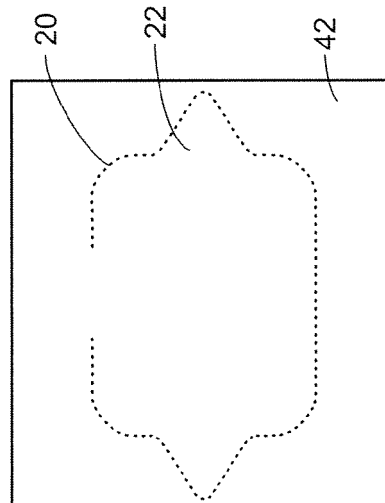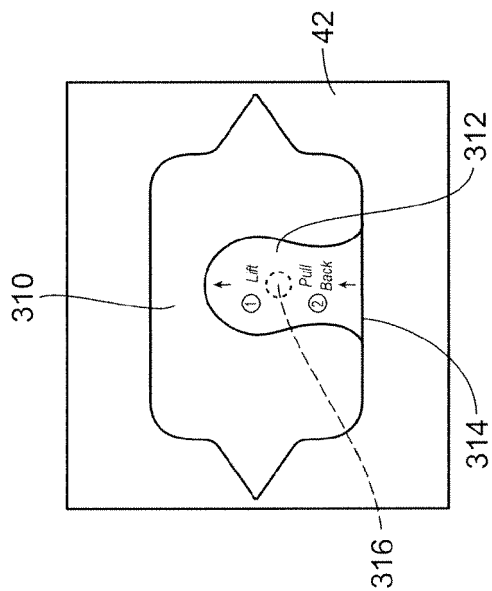


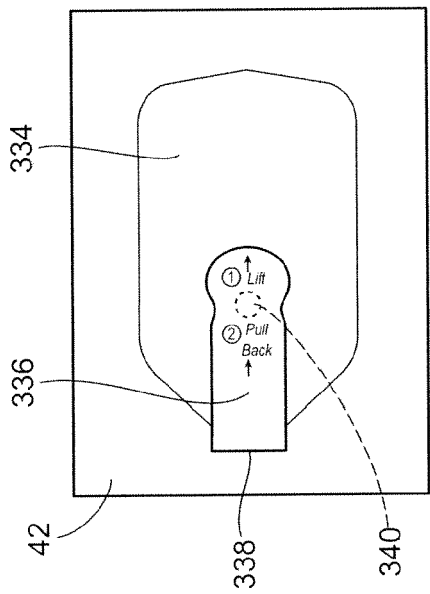

**FIG. 19a**

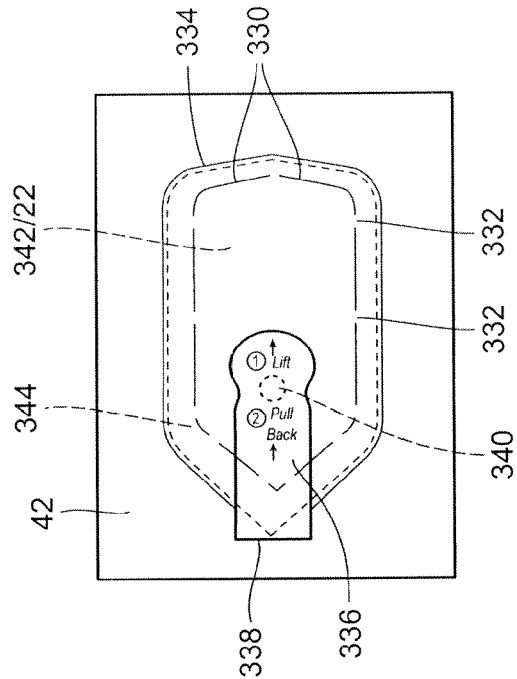

**FIG. 19c**

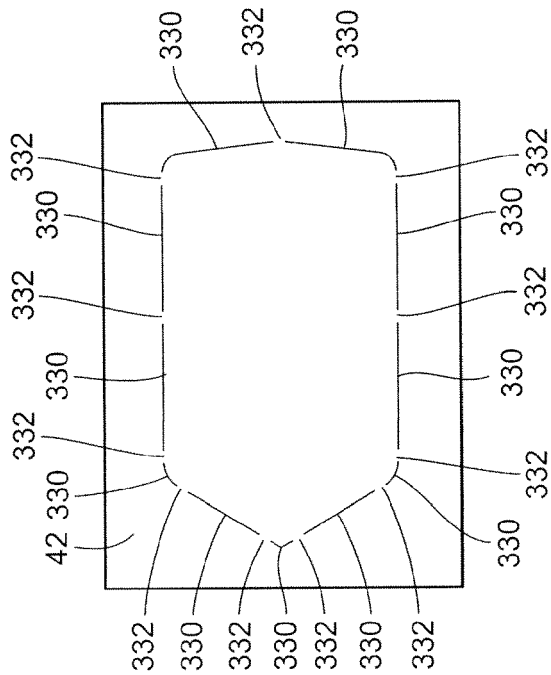

**FIG. 19b**

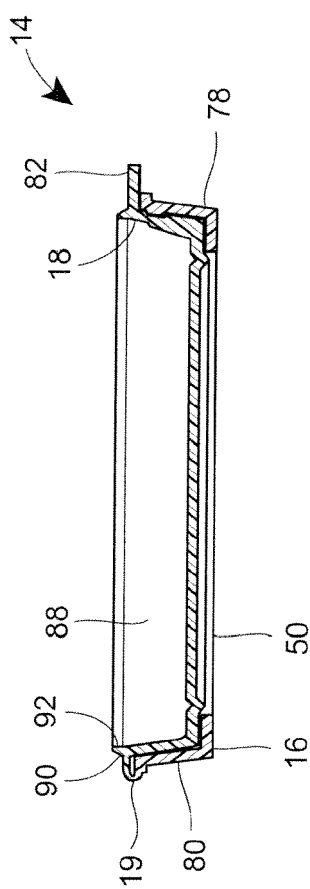


FIG. 20a

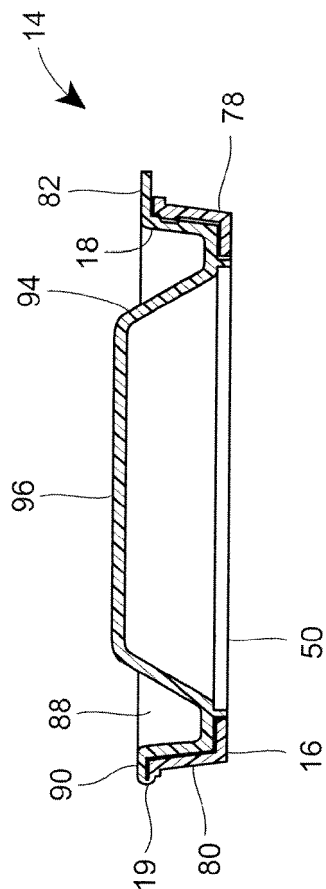


FIG. 20b



## EUROPEAN SEARCH REPORT

Application Number  
EP 16 17 7869

5

10

15

20

25

30

35

40

45

50

55

| DOCUMENTS CONSIDERED TO BE RELEVANT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                    |                                                            |                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|---------------------------------------------------------|
| Category                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Citation of document with indication, where appropriate, of relevant passages                                                      | Relevant to claim                                          | CLASSIFICATION OF THE APPLICATION (IPC)                 |
| Y                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | EP 1 106 508 A (ROVEMA GMBH [DE])<br>13 June 2001 (2001-06-13)<br><br>* the whole document *<br>-----                              | 1-5,7,<br>10,12,<br>15-17                                  | INV.<br>B65D75/00<br>B65D75/58<br>B65B9/20<br>B65B61/18 |
| Y                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | EP 1 508 531 A1 (CFS WEERT BV [NL])<br>23 February 2005 (2005-02-23)<br>* paragraph [0021]; figure 1 *<br>-----                    | 1-4,10,<br>16,17                                           |                                                         |
| Y                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | WO 2004/110885 A (AROMA SYSTEM SRL [IT];<br>VECCHIETTI SERGIO [IT])<br>23 December 2004 (2004-12-23)<br>* figures 4,7-9 *<br>----- | 5,7,12,<br>15                                              |                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                    |                                                            | TECHNICAL FIELDS<br>SEARCHED (IPC)                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                    |                                                            | B65D<br>B65B<br>B31B                                    |
| The present search report has been drawn up for all claims                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                    |                                                            |                                                         |
| Place of search<br><b>Munich</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                    | Date of completion of the search<br><b>17 October 2016</b> | Examiner<br><b>Balz, Oliver</b>                         |
| CATEGORY OF CITED DOCUMENTS<br>X : particularly relevant if taken alone<br>Y : particularly relevant if combined with another document of the same category<br>A : technological background<br>O : non-written disclosure<br>P : intermediate document<br>T : theory or principle underlying the invention<br>E : earlier patent document, but published on, or after the filing date<br>D : document cited in the application<br>L : document cited for other reasons<br>& : member of the same patent family, corresponding document |                                                                                                                                    |                                                            |                                                         |

 1  
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 17 7869

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-10-2016

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| EP 1106508 A                              | 13-06-2001          | AT 275499 T                | 15-09-2004          |
|                                           |                     | AT 298703 T                | 15-07-2005          |
|                                           |                     | AT 306420 T                | 15-10-2005          |
|                                           |                     | DE 19957891 A1             | 07-06-2001          |
|                                           |                     | EP 1106508 A1              | 13-06-2001          |
|                                           |                     | EP 1462364 A1              | 29-09-2004          |
|                                           |                     | EP 1464578 A1              | 06-10-2004          |
|                                           |                     | ES 2228384 T3              | 16-04-2005          |
|                                           |                     | ES 2242176 T3              | 01-11-2005          |
|                                           |                     | ES 2250945 T3              | 16-04-2006          |
|                                           |                     | US 2001005979 A1           | 05-07-2001          |
| EP 1508531 A1                             | 23-02-2005          | EP 1508531 A1              | 23-02-2005          |
|                                           |                     | US 2005084186 A1           | 21-04-2005          |
| WO 2004110885 A                           | 23-12-2004          | NONE                       |                     |