

(19)



(11)

EP 3 111 913 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:
04.01.2017 Bulletin 2017/01

(51) Int Cl.:
A61K 6/06 (2006.01) A61K 6/02 (2006.01)

(21) Application number: **15755391.8**

(86) International application number:
PCT/KR2015/001822

(22) Date of filing: **25.02.2015**

(87) International publication number:
WO 2015/130079 (03.09.2015 Gazette 2015/35)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

- **LIM, Ho Nam**
Seoul 138-796 (KR)
- **KIM, Eui Seong**
Seoul 135-506 (KR)
- **OH, Sei Jin**
Gunpo-si
Gyeonggi-do 435-704 (KR)

(30) Priority: **25.02.2014 KR 20140021907**
20.03.2014 KR 20140032686

(74) Representative: **Zardi, Marco**
M. Zardi & Co. SA
Via Pioda 6
6900 Lugano (CH)

(71) Applicant: **Maruchi**
Wonju-si, Gangwon-do 220-962 (KR)


(72) Inventors:
• **JANG, Sung Wook**
Seoul 142-733 (KR)

(54) **SINGLE PASTE TYPE DENTAL HYDRAULIC-SETTING FILLER COMPOSITION**

(57) According to one aspect of the present invention, there is provided a single paste type hydraulic dental filling composition, comprising: hydraulic cement;

non-aqueous liquid having hygroscopic properties; and a radiopaque material.

FIG. 1

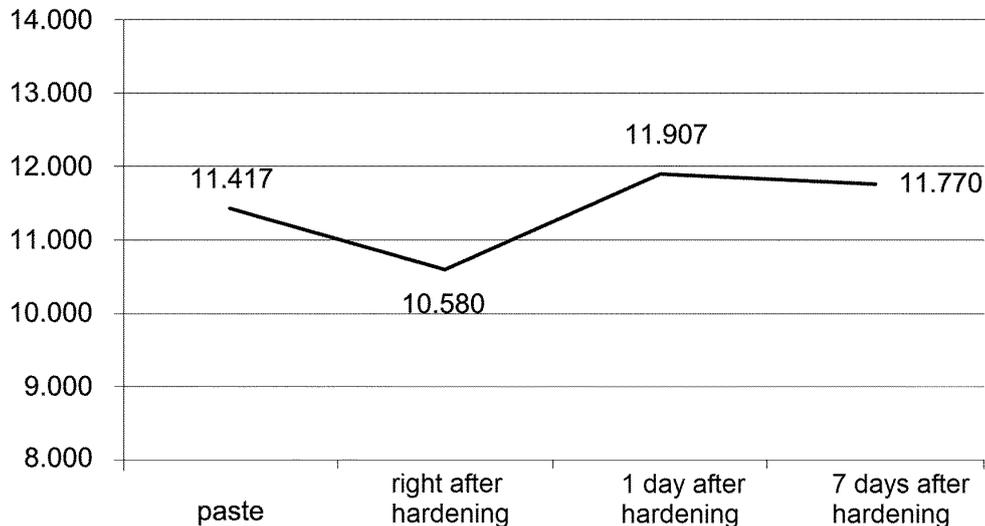

EP 3 111 913 A1

DescriptionFIELD OF THE INVENTION

5 **[0001]** The present invention relates to a single paste type hydraulic dental filling composition, and more particularly, to a single paste type hydraulic dental filling composition characterized by comprising hydraulic cement and non-aqueous liquid, and hardening quickly by absorbing moisture from ambient liquid or air.

BACKGROUND

10 **[0002]** Endodontics is a specific branch of dentistry related to pathological treatment of dental pulp or apical tissue.
[0003] The inner part of a tooth contains nerves and blood vessel tissues called dental pulp, which is covered by dentin, and the outermost part of the tooth contains enamel. Endodontic treatment is conducted mainly when the dental pulp is infected.

15 **[0004]** Endodontic treatment of a tooth having pulp tissue in which inflammation is in progress or necrosis has occurred is generally conducted by opening an inner space of the tooth called a pulp chamber through an access cavity formed in a crown of the tooth, and putting an endodontic instrument into a canal within a root of the tooth.

20 **[0005]** After the endodontic treatment is finished, the root canal is sealed using a root canal filler to prevent secondary infection. Preferably, an ideal dental root canal filler is excellent in properties such as biocompatibility, bactericidal properties, sealing properties, stability, workability, injectability and dispersibility, and radiopacity.

25 **[0006]** Examples of the root canal filler may include gutta percha and a sealer. Endodontic treatment employing gutta percha and a sealer may be considered as conservative treatment. This is commonly conducted by two techniques, i.e., lateral and vertical condensation techniques. In the lateral condensation technique, a gutta percha cone is put inside a root canal and laterally condensed using a spreader tool to fill the root canal, and then empty space between the filled gutta percha and the root canal is filled with a sealer. In the vertical condensation technique, gutta percha is inserted in a root canal and vertically condensed using a plugger tool to fill the root canal.

30 **[0007]** However, according to those conventional techniques, there is a risk that the root canal could be fractured or damaged in the process of applying pressure to the gutta percha. Further, a tooth has a root canal system having complicated and diverse shapes, thus requiring more secure sealing.

35 **[0008]** Meanwhile, when a general endodontic treatment process is unsuccessfully conducted or a non-surgical treatment cannot fully remove inflamed tissues due to the state or condition of the tooth, a surgical endodontic treatment is conducted to preserve the tooth. In this case, what is most frequently conducted is to cut off a root apex of the tooth (i.e., to conduct apicoectomy) and prepare a cavity for retrograde filling at the tip thereof so that an artificial material is filled. According to the above, tissues or germs existing within the infected root canal cannot be disseminated to tissues around the tooth root (i.e., tissues around the root apex) so that inflammation of the tissues around the root apex may be prevented and the tooth may be preserved for a long period.

40 **[0009]** Various materials have been employed for retrograde filling of a root apex, and biological/physical assessments thereof are being diversely conducted. The known materials that may be considered include gutta percha, polycarboxylate cement, amalgam, Super-EBA, Cavit, zinc oxide, eugenol, glass-ionomer cement, zinc phosphate cement, and the like. However, it has been reported that some of the above materials have low biocompatibility or have poor physical properties making them unsuitable for use in a surgical environment where blood or other moisture exists.

45 **[0010]** In contrast, MTA (mineral trioxide aggregate) cement is known as a material having excellent biocompatibility and sealing properties. It has become a typical dental material that may be extensively used for retrograde filling of a root apex and closing of perforation, and may be employed in procedures including pulp capping, pulpotomy, artificial apical barrier placement (apexification), revascularization and apexogenesis procedure, and the like. Therefore, since the MTA cement is hardened with water and thus has good sealing properties in a humid environment, diverse efforts are being made to employ it for root canal filling, and among those, researches on using the MTA cement made in the form of paste are being actively conducted. In this connection, one example thereof may be the technique disclosed in Korean Laid-open Patent Publication No. 10-2010-0037979.

50 **[0011]** However, although it is generally assumed that a root canal is under a humid environment, every root canal is not always in a humid state since many dentists are familiar with drying the root canal in an endodontic treatment process. Further, the existing MTA cement products have low usability since they should be mixed with liquid immediately before being injected into the root canal, and have relatively poor flowability and manipulability so that it takes a long time for them to be positioned deep inside the root canal.

55 **[0012]** Therefore, the inventor(s) present a single paste type MTA cement that absorbs ambient moisture even in a dried root canal to securely harden within an appropriate time.

SUMMARY OF THE INVENTION

[0013] One object of the present invention is to solve all the above-described problems.

[0014] Another object of the invention is to provide a single paste type dental filling composition that requires no additional mixing process and can be provided as contained in a syringe.

[0015] Yet another object of the invention is to provide a single paste type dental filling composition that has good biocompatibility and hardens quickly so that a root canal or a perforated region of a tooth may be easily sealed in three dimensions.

[0016] Still another object of the invention is to provide a single paste type dental filling composition that easily hardens by absorbing moisture from wet cotton or from tissue fluid or air within or around a root canal.

[0017] Still yet another object of the invention is to provide a single paste type dental filling composition that requires no application of heat and pressure, thereby enhancing safety.

[0018] According to one aspect of the invention to achieve the above objects, there is provided a single paste type hydraulic dental filling composition, comprising: hydraulic cement; non-aqueous liquid having hygroscopic properties; and a radiopaque material.

[0019] In addition, there may be further provided other compositions according to the technical idea of the invention.

[0020] According to the invention, there is provided a single paste type dental filling composition that requires no additional mixing process and can be provided as contained in a syringe.

[0021] According to the invention, there is provided a single paste type dental filling composition that has good biocompatibility and hardens quickly so that a root canal or a perforated region of a tooth may be easily sealed in three dimensions.

[0022] According to the invention, there is provided a single paste type dental filling composition that easily hardens by absorbing moisture from wet cotton or from tissue fluid or air within or around a root canal.

[0023] According to the invention, there is provided a single paste type dental filling composition that requires no application of heat and pressure, thereby enhancing safety.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] FIG. 1 is a graph according to Test Example 4 of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0025] In the following detailed description of the present invention, references are made to the accompanying drawings that show, by way of illustration, specific embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention. It is to be understood that the various embodiments of the invention, although different from each other, are not necessarily mutually exclusive. For example, specific shapes, structures and characteristics described herein may be implemented as modified from one embodiment to another without departing from the spirit and scope of the invention. Furthermore, it shall be understood that the locations or arrangements of individual elements within each of the embodiments may also be modified without departing from the spirit and scope of the invention. Therefore, the following detailed description is not to be taken in a limiting sense, and the scope of the invention is to be taken as encompassing the scope of the appended claims and all equivalents thereof. In the drawings, like reference numerals refer to the same or similar elements throughout the several views.

[0026] Hereinafter, various preferred embodiments of the present invention will be described in detail with reference to the accompanying drawings to enable those skilled in the art to easily implement the invention.

1) Hydraulic cement

[0027] The filling composition according to the invention may comprise hygroscopic hydraulic cement that hardens by absorbing moisture within or around a root canal, and has good biocompatibility and sealing properties.



[0028] The hydraulic cement may comprise calcium oxide or calcium hydroxide as an active component, and may preferably comprise Portland cement or Pozzolan cement. Particularly, it may preferably comprise Portland cement, which has physical properties and chemical composition similar to those of MTA and has good biocompatibility.

[0029] It may be preferable in terms of flowability and reactivity that the average grain size (D50) of the hydraulic cement is maintained not greater than 3 micron. The hydraulic cement may preferably be included at 15 to 55 wt% with respect to the entire composition.

[0030] Further, in the composition according to the invention, calcium chloride having hygroscopic and deliquescent properties may also be added to the hydraulic cement to enhance the hygroscopicity of the paste and enable fast and

secure hardening, while maintaining biocompatibility and enhancing sealing properties. In this case, the calcium chloride may preferably be included at 1.5 to 5.5 wt% with respect to the entire composition.

[0031] Furthermore, in the composition according to the invention, an active silica material may be included in Portland cement to employ Pozzolan cement, which uses water for crystallization in a hydration process as in the chemical formula below. (In connection with the composition of Pozzolan cement, reference may be made to Korean Registered Patent Publication No. 1000402, which is incorporated herein in its entirety.)



When Pozzolan cement is employed, the composition according to the invention may be obtained without the addition of calcium chloride, with the assistance of the crystallization water produced according to the above chemical formula.

2) Non-aqueous liquid

[0032] The composition according to the invention may comprise non-aqueous liquid having hygroscopic properties to convert the hydraulic cement into the form of paste.

[0033] Preferably, the non-aqueous liquid may include substantially no water, which would react with the hydraulic cement to produce a hydration reaction, or may include minimal moisture that does not cause hardening. In the non-aqueous liquid, water may preferably be included at 3 wt% or less with respect to the non-aqueous liquid. The non-aqueous liquid may be required to have properties such as biocompatibility, preservation stability, hygroscopicity, surface activity, water miscibility, and quick absorption into a human body.

[0034] The above non-aqueous liquid may comprise at least one selected from a group consisting of N-methyl-2-pyrrolidone (NMP), polyoxyethylene sorbitan monolaurate, dimethyl isosorbide, diethylene glycol dimethyl ether (diglyme) or diethylene glycol monoethyl ether (carbitol cellosolve), and butylene glycol, and may preferably comprise NMP.

[0035] The non-aqueous liquid may preferably be included at 15 to 35 wt% with respect to the entire composition. The content less than 15 wt% makes it difficult to ensure proper flowability, while the content greater than 35 wt% makes the flowability excessively high and hinders the hydration reaction.

3) Radiopaque material

[0036] The composition according to the invention may comprise a radiopaque material for easy reading, e.g., at least one selected from a group consisting of barium sulfate, zirconium oxide, bismuth oxide, tantalum oxide, and calcium tungstate, and may preferably employ bismuth oxide or zirconium oxide to ensure high radiopacity and biocompatibility.

[0037] The radiopaque material may preferably be included at 20 to 55 wt% with respect to the entire composition.

4) Hygroscopic clay

[0038] The combination of the hygroscopic cement and the non-aqueous hygroscopic liquid as described above may be somewhat inadequate to ensure that a hardening process is carried out even within an extremely dry root canal. Thus, it may be preferable that hygroscopic clay is additionally included to achieve higher hygroscopicity and satisfy other requirements of the root canal filler, e.g., sufficient flowability, manipulability, and ultrasonic transmissibility. (However, the hygroscopic clay may not be a component that should be necessarily included.)

[0039] The hygroscopic clay may comprise at least one selected from a group consisting of bentonite, smectite, and swelling synthetic clay minerals, and may preferably comprise bentonite.

[0040] Since Bentonite consists of various types of natural clay, it may achieve viscosity stability and structure formation over a wide temperature range, may enhance resistance to sagging or exfoliation, may act as a retarder to improve open time of Portland cement, and may have an antibacterial effect due to its resistance to bacteria or enzymes.

[0041] The hygroscopic clay may preferably be included at 1 to 10 wt% with respect to the entire composition.

5) Hygroscopic viscosity enhancing agent

[0042] In order to impart proper viscosity to the non-aqueous liquid, the composition according to the invention may further comprise at least one hygroscopic viscosity enhancing agent selected from a group consisting of hydroxyethyl cellulose, hydroxypropyl methylcellulose, carboxymethyl cellulose, polyvinyl alcohol, and polyvinylpyrrolidone.

[0043] The viscosity enhancing agent may prevent separation of the paste, may preserve moisture, may increase manipulability, may increase cohesion, may act as a surfactant to facilitate deep penetration of the root canal filling

material, and may enable the surface of the paste to be maintained smooth. Further, it has high resistance to bacterial molds and has excellent storage stability.

[0044] The viscosity enhancing agent may preferably be included at 0.1 to 1 wt% with respect to the entire composition.

[0045] Preparation examples of the invention will be described below in more detail.

5

Preparation Examples 1 to 3

[0046] 100 parts by weight of Portland cement, 20 parts by weight of bentonite, 10 parts by weight of calcium chloride, and 100 parts by weight of zirconium oxide were mixed to prepare powder, which was then mixed with NMP containing 2 wt% of methylcellulose, NMP containing 7 wt% of polyvinyl alcohol, and NMP containing 7 wt% of polyvinylpyrrolidone, respectively, to prepare single paste type hydraulic dental filling compositions.

10

[0047] Each of the pastes was stored in a syringe and cut off from air. When they were exposed out of the syringes for use thereof, all of them absorbed moisture from atmosphere with the humidity of 50% and hardened within two days.

[0048] As such, it was seen that the composition according to the invention securely hardens in a humid environment.

15

Preparation Examples 4 to 6

[0049] 200 parts by weight of EndocemZR (a product in which Pozzolan cement and zirconium oxide are mixed at a 1:1 ratio) and 20 parts by weight of bentonite were mixed to prepare powder, which was then mixed with NMP containing 2 wt% of methylcellulose, NMP containing 7 wt% of polyvinyl alcohol, and NMP containing 7 wt% of polyvinylpyrrolidone, respectively, to prepare single paste type hydraulic dental filling compositions.

20

[0050] Each of the pastes was stored in a syringe and cut off from air. When they were exposed out of the syringes for use thereof, all of them absorbed moisture from atmosphere with the humidity of 50% and hardened within two days.

[0051] As such, it was seen that the composition according to the invention securely hardens in a humid environment.

25

[0052] The filling composition prepared according to Preparation Example 2 among the above examples was employed in conducting the exemplary tests below.

Test Example 1: Solubility test

[0053] According to the test methods specified in Section 5.6 of ISO 6876:2012(E), the solubility of the filling composition according to the invention was measured as follows:

30

First, 2 g of the filling composition mixed with 0.02 ml of water was filled in a mold with the diameter of 20 ± 1 mm and the width of 1.5 ± 0.1 mm, and kept in an oven at 37 ± 1 °C for 150% or greater of hardening time. Then the sample was taken out from the mold and weighed. Two pieces of the sample were put in a dish and 50 ± 1 ml of distilled water was poured, and then the dish was kept in the oven at 37 ± 1 °C for 24 hours. After the dish was taken out, the distilled water was percolated with filter paper and then poured into a pre-weighed beaker. About 5 ml of distilled water was put in the dish that contained the sample to wash it, and then was percolated. The beaker was put in the oven at 110 ± 2 °C to evaporate the distilled water, and then cooled to room temperature and weighed. The difference between the weight of the beaker and that of the beaker from which the distilled water was evaporated was recorded and regarded as the amount of the dissolved sample, which was converted into a percentage and regarded as the solubility. The result is shown in TABLE 1.

35

40

45

TABLE 1

Weight of sample	1.0416 g	1.0786 g	1.0400 g	1.0741 g
Weight of beaker	60.5494 g		59.5955 g	
Weight of beaker from which solution was evaporated	60.5704 g		59.6112 g	
Weight of dissolved sample	0.0210 g		0.0157 g	
Solubility	1.0%		0.7%	
Average	0.85% (SD 0.21%, CV 24.96%)			

50

55

EP 3 111 913 A1

Test Example 2: Size change test

[0054] According to the test methods specified in Section 7.6 of ISO 6876:2001(E), the change in the size of the filling composition according to the invention was measured as follows:

First, 2 g of the filling composition mixed with 0.02 ml of water was filled in a mold with the inner diameter of 6 mm and the height of 12 mm, and the top and bottom thereof were covered with a film and a glass plate. The mold and the sample were kept in an oven at 37 ± 1 °C during hardening, and hardening time was measured. When the sample was hardened, the top and bottom thereof were abraded together with the mold to flatten them, and then the sample was removed from the mold. The length of the sample was measured and then the sample was kept in distilled water at 37 ± 1 °C for thirty days. Thereafter, the length of the sample, the rate of change (%) from the original length, and the average thereof were measured. The result is shown in TABLE 2.

TABLE 2

Hardening time	11.62 min	10.03 min	11.42 min
Average	11.023 min (SD 0.866 min, CV 7.86%)		
Length (Day 0)	11.98 mm	11.59 mm	11.19 mm
Length (Day 30)	12.49 mm	12.06 mm	11.62 mm
Difference	0.51 mm	0.47 mm	0.43 mm
Rate of change	4.26%	4.06%	3.84%
Average	4.053%		

Test Example 3: Film thickness test

[0055] According to the test methods specified in Section 5.5 of ISO 6876:2012(E), the film thickness of the filling composition according to the invention was measured as follows:

First, three pairs of glass plates were prepared, and the thickness of two glass plates was measured with 1 μm accuracy using electronic inside calipers. 0.05 ml of the composition was taken and put on the center of a glass plate. After three minutes, another glass plate was covered thereon and a weight of 150 N was applied. At this time, it was seen that the sample was completely filled between the glass plates. After ten minutes, the weight was removed and the thickness of the glass plates was measured. The difference in the measured thickness of the glass plates was calculated and regarded as the film thickness. The result is shown in TABLE 3.

TABLE 3

Thickness of glass plates	5,694 μm	5,553 μm	5,597 μm
Thickness of glass plates filled with sample	5,719 μm	5,568 μm	5,613 μm
Film thickness	25 μm	15 μm	16 μm
Average	18.7 μm (SD 5.5 μm , CV 29.50%)		

Test Example 4: pH test

[0056]

(1) pH measurement of original paste: After the weight of the composition was measured, the composition was immersed in distilled water weighing tenfold the weight, and then pH was measured.

(2) pH measurement right after hardening: 2 g of the composition mixed with 0.02 ml of distilled water was filled in a mold with the diameter of 15 ± 0.1 mm and the depth of 1.0 ± 0.1 mm, and was sufficiently hardened. Then, it was removed from the mold and pH was measured as in (1).

EP 3 111 913 A1

(3) pH measurement after one day from hardening: The test liquid of (2) was kept in a constant-temperature oven at 37 ± 1 °C, and then pH of the test liquid was measured after one day from the hardening.

(4) pH measurement after seven days from hardening:

After the measurement in (3) was finished, the test liquid of (2) was kept in the constant-temperature oven at 37 ± 1 °C, and then pH of the test liquid was measured after seven days from the hardening.

[0057] pHs of the three test liquids of (2) to (4) were averaged, and the result is shown in TABLE 4 and FIG. 1.

TABLE 4

		Test liquid (2)	Test liquid (3)	Test liquid (4)
Paste	pH	11.22	11.47	11.56
	Average	11.417 (SD 0.176, CV 1.54%)		
Right after hardening	pH	10.61	10.58	10.55
	Average	10.580 (SD 0.030, CV 0.28%)		
1 day after hardening	pH	11.94	11.88	11.90
	Average	11.907 (SD 0.031, CV 0.26%)		
7 days after hardening	pH	11.74	11.76	11.81
	Average	11.770 (SD 0.036, CV 0.31%)		

[0058] Although the present invention has been described in terms of specific items such as detailed elements as well as the limited embodiments and the drawings, they are only provided to help more general understanding of the invention, and the present invention is not limited to the above embodiments. It will be appreciated by those skilled in the art to which the present invention pertains that various modifications and changes may be made from the above description.

[0059] Therefore, the spirit of the present invention shall not be limited to the above-described embodiments, and the entire scope of the appended claims and their equivalents will fall within the scope and spirit of the invention.

Claims

1. A single paste type hydraulic dental filling composition, comprising:

hydraulic cement;
non-aqueous liquid having hygroscopic properties;
and
a radiopaque material.

2. A single paste type hydraulic dental filling composition as claimed in Claim 1, wherein the content of the hydraulic cement is 15 to 55 wt% with respect to the entire composition, the content of the non-aqueous liquid is 15 to 35 wt% with respect to the entire composition, and the content of the radiopaque material is 20 to 55 wt% with respect to the entire composition.

3. A single paste type hydraulic dental filling composition as claimed in Claim 1, wherein the average grain size (D50) of the hydraulic cement is 3 micron or less.

4. A single paste type hydraulic dental filling composition as claimed in Claim 1, wherein the hydraulic cement comprises calcium oxide or calcium hydroxide as an active component.

5. A single paste type hydraulic dental filling composition as claimed in Claim 1, wherein the hydraulic cement comprises Portland cement or Pozzolan cement.


6. A single paste type hydraulic dental filling composition as claimed in Claim 1, wherein the non-aqueous liquid

EP 3 111 913 A1

comprises at least one selected from a group consisting of N-methyl-2-pyrrolidone (NMP), polyoxyethylene sorbitan monolaurate, dimethyl isosorbide, diethylene glycol dimethyl ether (diglyme), diethylene glycol monoethyl ether (carbitol cellosolve), and butylene glycol.

- 5
7. A single paste type hydraulic dental filling composition as claimed in Claim 1, wherein the radiopaque material comprises at least one selected from a group consisting of barium sulfate, zirconium oxide, bismuth oxide, tantalum oxide, and calcium tungstate.
- 10
8. A single paste type hydraulic dental filling composition as claimed in Claim 1, further comprising hygroscopic clay.
9. A single paste type hydraulic dental filling composition as claimed in Claim 8, wherein the content of the hygroscopic clay is 1 to 10 wt% with respect to the entire composition.
- 15
10. A single paste type hydraulic dental filling composition as claimed in Claim 8, wherein the hygroscopic clay comprises at least one selected from a group consisting of bentonite, smectite, and swelling synthetic clay minerals.
11. A single paste type hydraulic dental filling composition as claimed in Claim 1, wherein the non-aqueous liquid comprises a hygroscopic viscosity enhancing agent.
- 20
12. A single paste type hydraulic dental filling composition as claimed in Claim 11, wherein the content of the hygroscopic viscosity enhancing agent is 0.1 to 1 wt% with respect to the entire composition.
- 25
13. A single paste type hydraulic dental filling composition as claimed in Claim 11, wherein the hygroscopic viscosity enhancing agent comprises at least one selected from a group consisting of hydroxyethyl cellulose, hydroxypropyl methylcellulose, carboxymethyl cellulose, polyvinyl alcohol, and polyvinylpyrrolidone.
14. A single paste type hydraulic dental filling composition as claimed in Claim 1, wherein calcium chloride having hygroscopic and deliquescent properties is added to the hydraulic cement.
- 30
15. A single paste type hydraulic dental filling composition as claimed in Claim 14, wherein the content of the calcium chloride is 1.5 to 5.5 wt% with respect to the entire composition.
- 35
- 40
- 45
- 50
- 55

FIG. 1

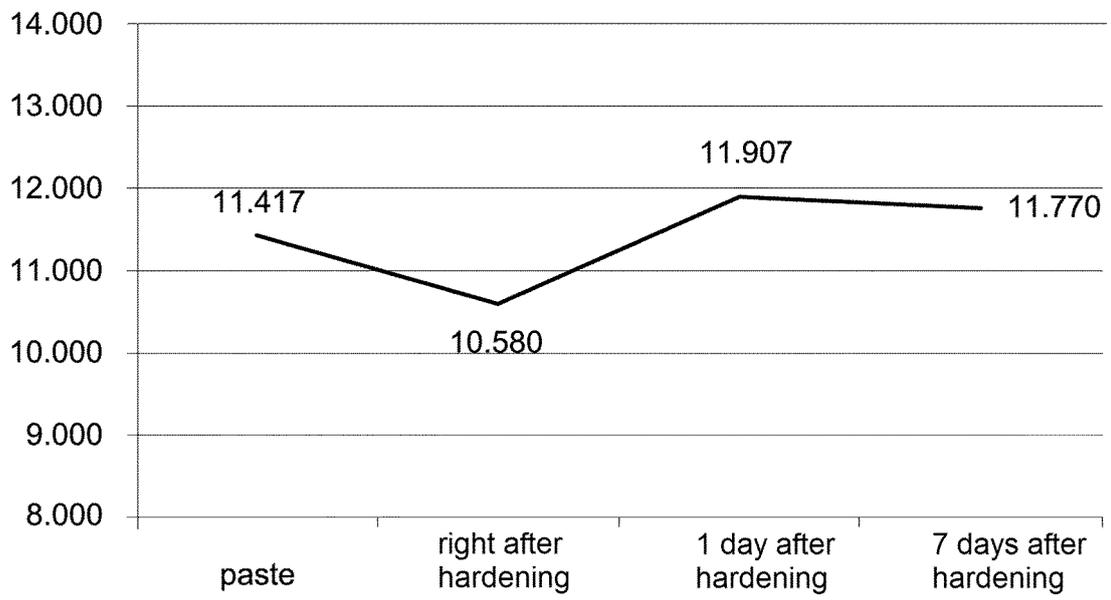

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR2015/001822

5

A. CLASSIFICATION OF SUBJECT MATTER
A61K 6/06(2006.01)i, A61K 6/02(2006.01)i
 According to International Patent Classification (IPC) or to both national classification and IPC

10

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 A61K 6/06; A61K 6/087; A61C 5/02; A61C 3/00; C09K 3/14; A61L 24/04; A61K 47/02; C08L 33/10; A61K 6/02

15

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
 Korean Utility models and applications for Utility models: IPC as above
 Japanese Utility models and applications for Utility models: IPC as above

20

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 eKOMPASS (KIPO internal) & Keywords: hydraulic cement, non-aqueous liquid, radiopaque substance, hygroscopicity clayey

C. DOCUMENTS CONSIDERED TO BE RELEVANT

25

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013-0023601 A1 (OGLIARI, F. A. et al.) 24 January 2013 See abstract, claims 3-9; and paragraph [0031].	1-10
Y		11-15
Y	US 2007-0009858 A1 (HATTON, J. F. et al.) 11 January 2007 See abstract, claims 3-6; and paragraph [0023].	11-15
A		1-10
A	JP 2000-351958 A (OROCHEMIE DUERR & PFLUG GMBH et al.) 19 December 2000 See the entire document.	1-15
A	KR 10-2009-0125141 A (SYNTHESES GMBH) 03 December 2009 See the entire document.	1-15
A	US 2012-0035296 A1 (NAKAMURA, T. et al.) 09 February 2012 See the entire document.	1-15

35

40

Further documents are listed in the continuation of Box C. See patent family annex.

45

* Special categories of cited documents:
 "A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier application or patent but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed
 "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
 "&" document member of the same patent family

50

Date of the actual completion of the international search 20 MAY 2015 (20.05.2015)	Date of mailing of the international search report 20 MAY 2015 (20.05.2015)
--	---

55

Name and mailing address of the ISA/KR  Korean Intellectual Property Office Government Complex-Daejeon, 189 Seonsa-ro, Daejeon 302-701, Republic of Korea Facsimile No. 82-42-472-7140	Authorized officer Telephone No.
---	---

EP 3 111 913 A1

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR2015/001822

5

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member	Publication date
US 2013-0023601 A1	24/01/2013	EP 2528578 A1	05/12/2012
		US 8835527 B2	16/09/2014
		WO 2011-088540 A1	28/07/2011
US 2007-0009858 A1	11/01/2007	US 2012-073469 A1	29/03/2012
		US 8436071 B2	07/05/2013
JP 2000-351958 A	19/12/2000	EP 1044671 A2	18/10/2000
		EP 1044671 A3	28/03/2001
		EP 1044671 B1	16/11/2005
		US 2003-0118518 A1	26/06/2003
KR 10-2009-0125141 A	03/12/2009	AU 2008-223503 A1	12/09/2008
		EP 2131877 A2	16/12/2009
		JP 05646180 B2	24/12/2014
		JP 2010-519959 A	10/06/2010
		JP 2013-146592 A	01/08/2013
		US 2010-0056654 A1	04/03/2010
		US 8618188 B2	31/12/2013
		WO 2008-109045 A2	12/09/2008
US 2012-0035296 A1	09/02/2012	WO 2008-109045 A3	09/07/2009
		EP 2402041 A1	04/01/2012
		JP 05602127 B2	08/10/2014
		KR 10-2011-0135944 A	20/12/2011
		US 8609746 B2	17/12/2013
		WO 2010-098305 A1	02/09/2010

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020100037979 [0010]
- KR 1000402 [0031]