



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
11.01.2017 Bulletin 2017/02

(51) Int Cl.:
C06B 21/00 (2006.01) C06B 45/10 (2006.01)

(21) Application number: **15275169.9**

(22) Date of filing: **07.07.2015**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA

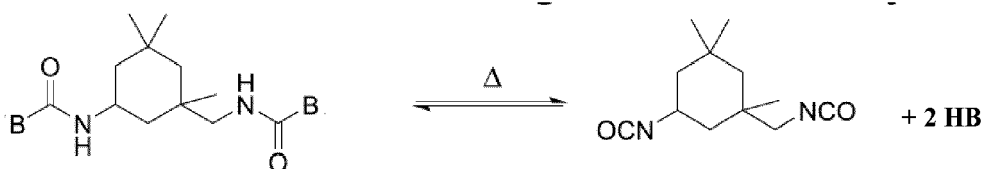
(72) Inventor: **The designation of the inventor has not yet been filed**

(74) Representative: **BAE SYSTEMS plc**
Group IP Department
Farnborough Aerospace Centre
Farnborough
Hampshire GU14 6YU (GB)

(71) Applicant: **BAE Systems PLC**
London SW1Y 5AD (GB)

(54) **PBX COMPOSITION**

(57) The invention relates to a cast explosive composition. There is provided a precure castable explosive composition comprising an explosive material, a polymerisable binder, said cross linking reagent comprising at least two reactive groups each of which is protected by a labile blocking group.



Description

[0001] This invention relates to polymer bonded explosive compositions, their preparation and use. In particular, the invention relates to polymer-bonded explosive compositions for munitions.

[0002] Explosive compositions are generally shaped, the shape required depending upon the purpose intended. Shaping can be by casting, pressing, extruding or moulding; casting and pressing being the most common shaping techniques. However, it is generally desirable to cast explosives compositions as casting offers greater design flexibility than pressing.

[0003] Polymer-bonded explosives (also known as plastic-bonded explosives and PBX) are typically explosive powders bound into a polymer matrix. The presence of the matrix modifies the physical and chemical properties of the explosive and often facilitates the casting and curing of high melting point explosives. Such explosives could otherwise only be cast using melt-casting techniques. Melt casting techniques can require high processing temperatures as they generally include a meltable binder. The higher the melting point of this binder, the greater the potential hazard. In addition, the matrix can be used to prepare polymer-bonded explosives which are less sensitive to friction, impact and heat; for instance, an elastomeric matrix could provide these properties.

[0004] The matrix also facilitates the fabrication of explosive charges which are less vulnerable in terms of their response to impact, shock, thermal and other hazardous stimuli. Alternatively, a rigid polymer matrix could allow the resulting polymer-bonded explosive to be shaped by machining, for instance using a lathe, allowing the production of explosive materials with complex configurations where necessary.

[0005] Conventional casting techniques require the polymerisation step to have commenced during the fill stage which often results in a solidified composition which retains air bubbles introduced during mixing of the material, non-homogenous crosslinking, and in certain cases solidification of the "pot" of explosive before all munitions or moulds have been filled.. The non-homogenous cross linking can reduce the performance of the composition as less explosive is present per unit volume. In addition, these defects may affect the shock sensitivity of the composition, making the composition less stable to impact or initiation from a shock wave.

[0006] The invention seeks to provide a cast explosive composition in which the stability of the composition is improved. Such a composition would not only offer improved stability, but also a reduced sensitivity to factors such as friction, impact and heat. Thus, the risk of inadvertent initiation of the explosive is diminished.

[0007] According to a first aspect of the invention there is provided a precure castable explosive composition comprising an explosive material, a polymerisable binder, a cross linking reagent which comprises at least two reactive groups each of which is protected by a labile blocking group.

[0008] Current processes used in the production of composite rubber materials involve mixing a hydroxy-terminated aliphatic polymer with a cross linking reagent. Upon addition, an immediate polymerisation reaction occurs, leading to the formation of a non-homogeneous cross linked rubber matrix. Formation of a non-homogenous matrix leads to material being rejected or the mixture fully polymerising before all munitions or moulds have been filled. This leads to the rejected material requiring disposal, a process that has both cost and hazard associated.

[0009] The use of a labile blocking group to protect the reactive groups of the cross linking reagent allows uniform distribution of the cross linking reagent within the precure composition, thereby allowing control of when the curing reaction may be initiated. Upon application of an external stimulus, the blocking group may be removed such that the reactive groups may be free, so as to allow the cross linking reaction to commence with the polymerisable binder, and permit the formation of a uniform PBX polymeric matrix, when desired.

[0010] The labile blocking group may on each of the at least two reactive groups on the cross linking reagent, may be the same group, or independently selected. The labile blocking groups may be independently selected so as to be removed at different deblocking temperature, or in response to different external stimuli.

[0011] The enhanced control of the start of the cross linking reactions allows the recovery of the precure composition in the event of process equipment failure. In a conventional cure process many tonnes of material would end up solidifying/curing in the reaction vessel, as once the reaction has started it cannot be readily stopped. Further, the delay of the cure reaction allows product quality to be confirmed, before the reaction is allowed to commence, thereby a poor quality composition, may be prevented from being filled into moulds or munitions. The use of labile blocking groups on the reactive groups of the cross linking reagent may reduce the exposure to operators of hazardous cross linking reagents.

[0012] In a further arrangement the polymerisable binder may be partially polymerised with the cross linking reagent, such that at least one of the at least two reactive groups on the cross linking reagent has formed a bond with the polymerisable binder, and at least one of the at least two reactive groups may be protected by a labile blocking group, such that on removal of the remaining labile blocking group(s) substantially complete polymerisation with the polymerisable binder may occur.

[0013] In a preferred arrangement the polymerisable binder and cross linking reagent are partially reacted together to provide a partially polymerised binder-cross linking reagent, wherein at least one of the at least two reactive groups of the cross linking reagent is protected by a labile blocking group.

[0014] Where the cross linking reagent has low or poor solubility in the polymerisable binder or explosive material,

the formation of a partially polymerised polymerisable binder/cross linking reagent may provide a means of increasing homogeneity of the binder in the explosive composition.

[0015] The partially polymerised polymerisable binder/cross linking reagent may be extracted and purified, to provide a reduced mass of removed labile protecting group in the final cured PBX.

[0016] The explosive component of the polymer-bonded explosive may, in certain embodiments, comprise one or more heteroalicyclic nitramine compounds. Nitramine compounds are those containing at least one N-NO₂ group. Heteroalicyclic nitramines bear a ring containing N-NO₂ groups. Such ring or rings may contain for example from two to ten carbon atoms and from two to ten ring nitrogen atoms. Examples of preferred heteroalicyclic nitramines are RDX (cyclo-1,2,3-trimethylene-2,4,6-trinitramine, Hexogen), HMX (cyclo-1,3,5,7-tetramethylene-2,4,6,8-tetranitramine, Octogen), and mixtures thereof. The explosive component may additionally or alternatively be selected from TATND (tetranitro-tetraminodecalin), HNS (hexanitrostilbene), TATB (triaminotrinitrobenzene), NTO (3-nitro-1,2,4-triazol-5-one), HNIW (2,4,6,8,10,12-hexanitrohexaazaisowurtzitane), GUDN (guanyldylurea dinitride), FOX-7 (1,1-diamino-2, 2-dinitro-ethene), and combinations thereof.

[0017] Other highly energetic materials may be used in place of or in addition to the compounds specified above. Examples of other suitable known highly energetic materials include picrite (nitroguanidine), aromatic nitramines such as tetryl, ethylene dinitramine, and nitrate esters such as nitroglycerine (glycerol trinitrate), butane triol trinitrate or pentaerythritol tetranitrate, DNAN (dinitroanisole), trinitrotoluene (TNT), inorganic oxidisers such as ammonium salts, for instance, ammonium nitrate, ammonium dinitramide (ADN) or ammonium perchlorate, and energetic alkali metal and alkaline earth metal salts.

[0018] Polymer-bonded explosives include a polymeric binder which forms a matrix bonding explosive particles within. The polymerisable binder thus may be selected from a wide range of polymers, depending upon the application in which the explosive will be used. However, in general at least a portion of the polymerisable binder will be selected, when cross linked to form polyurethanes, cellulosic materials such as cellulose acetate, polyesters, polybutadienes, polyethylenes, polyisobutylenes, PVA, chlorinated rubber, epoxy resins, two-pack polyurethane systems, alkyd/melanine, vinyl resins, alkyds, , thermoplastic elastomers such as butadiene-styrene block copolymers, and blends, copolymers and/or combinations thereof.

[0019] Energetic polymers may also be used either alone or in combination, these include polyNIMMO (poly(3-nitratomethyl-3-methyloxetane), polyGLYN (poly glycidyl nitrate) and GAP (glycidyl azide polymer). It is preferred that the polymerisable binder component be entirely selected from the list of polymerisable binders and/or energetic binders above either alone or in combination.

[0020] Polyurethanes are highly preferred polymerisable binders for PBX formation. In some embodiments the polymerisable binder will comprise at least partly polyurethane, often the binder will comprise 50 - 100 wt% polyurethane, in some instances, 80 - 100 wt%.

[0021] The cross linking reagents may be selected from a variety of commonly known, cross linking reagents, the selection of which depends on the functionality of the polymerisable binders.

[0022] The highly preferred polyurethanes may typically be prepared by reacting polyol-terminated monomers or polymers with polyisocyanates. In a preferred arrangement a monomer or polymer diol may be cross linked with a cross linking reagent such as a diisocyanate.

[0023] The diisocyanate may be such as, for example, MDI (methylene diphenyl diisocyanate) and TDI (toluene diisocyanate) and IPDI (isophorone diisocyanate). IPDI is generally preferred as it is a liquid and hence easy to dispense; it is relatively slow to react, providing a long pot-life and slower temperature changes during reaction; and it has a relatively low toxicity compared to most other isocyanates. It is also preferred that, where the polymerisable binder comprises polyurethane, the polyurethane polymerisable binder includes a hydroxyterminated polybutadiene.

[0024] The labile blocking group may be any reversible blocking group that may be furnished on the at least two reactive groups on the cross linking reagent, but which can be removed at a selected time by a stimulus, preferably an external stimulus.

[0025] The labile blocking group may be removed by a stimulus, such as, for example one or more of, heat, pressure, ultrasound, EM radiation, catalyst, or a shear force.

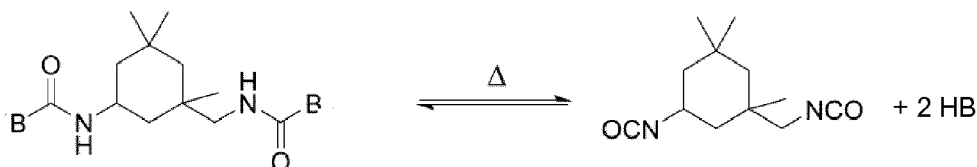
[0026] In a preferred arrangement the labile blocking group is a thermally labile blocking group, one that ruptures when subjected to elevated temperatures.

[0027] The blocking group may comprise at least one nitro group, preferably at least two nitro groups or at least one sterically hindered branched chain hydrocarbyl group.

[0028] The use of nitro, dinitro or trinitro groups on the aryl rings provides increased exothermic energy of the blocking group, and hence increased energy to the explosive composition.

[0029] In a highly preferred arrangement the cross linking reagent is a diisocyanate group, with two blocking groups B, one on each isocyanate reactive group.

5



[0030] The labile blocking group B may comprise at least one nitro group, preferably at least two nitro groups or at least one sterically hindered branched chain hydrocarbonyl group.

[0031] The use of nitro, dinitro or trinitro groups, such as for example on an aromatic ring, such as for example an aryl, phenyl or phenolic rings provides increased exothermic energy of the blocking group B, and hence increased energy to the explosive composition.

[0032] It has been found that for labile blocking group B, an increase in steric hindrance of the labile blocking group B, reduces the deblocking temperature, ie the reverse reaction to the free isocyanate.

[0033] In a highly preferred arrangement the diisocyanate blocking group B is selected from B is

I. NHR^2R^3 , wherein R^2 and R^3 are alkyl, alkenyl, branched-chain alkyl, C(O)R^{12} , aryl, phenyl, or together form a heterocycle.

R^{12} is alkyl, alkenyl, branched chain alkyl aryl, phenyl, or R^2 and R^3 together form a lactam.

II. OR^{15} , $\text{O-N=CR}^9\text{R}^{10}$

wherein R^{15} is aryl, phenyl, benzyl, provided that there are at least two nitro group on the ring;

wherein R^9 and R^{10} are independently selected from alkyl, alkenyl, branched chain alkyl, aryl, phenyl, provided that at least one of R^9 or R^{10} is a branched chain alkyl or aryl, or phenyl.

[0034] For PBX formulations it has been found that blocked diisocyanates may be selected to provide de-blocking temperatures in a range that occurs below the temperature of initiation of high explosive materials and above the temperatures that are generated during the mixing of the precure reagents. Thereby, there is a specific stimulus of heat which may be applied to the precure to cause the rupture of the microcapsule walls.

30

Blocking Group	Deblocking Temperature Range (°C)
Aromatic heterocycles	110 - 160
Amines	40 - 130
Phenols	75 - 180
Oximes	100 - 140
Amides	100 - 157

55

[0035] In a preferred arrangement

R^4 - R^8 may be selected from halo, nitro, lower chain C_{1-6} alkyl, In a preferred arrangement the substituted phenol comprises at least two nitro groups.

R^2 , R^3 , R^9 , and R^{10} may be selected from, nitro, aryl, phenyl, lower chain C_{1-6} alkyl, branched chain C_{1-8} alkyl, preferably isopropyl or tert-butyl.

[0036] It has been found that for blocking groups B an increase in steric hindrance of , R^2 , R^3 , R^9 , and R^{10} reduces the deblocking temperature, ie the reverse reaction to the free isocyanate.

[0037] In a highly preferred arrangement the thermal release of the blocking group may be in the range of from 50°C to 150°C, more preferably in the range of from 80°C to 120°C, such that the un-blocking occurs above current processing temperatures and well below the ignition temperature of the explosive.

[0038] According to a further aspect of the invention there is provided a batch process for filling a munition with a cross linked polymer bonded explosive composition comprising the steps of:

i) forming an admixture of precure castable explosive composition, comprising an explosive material, a polymerisable binder, and a cross linking reagent which comprises at least two reactive groups each of which is protected by a labile blocking group,,

ii) filling the munition,

iii) causing the removal of the blocking group to furnish said cross linking reagent; optionally

iv) comprising the step of causing the cure of said polymerisable binder to form a polymer bonded cast explosive composition.

[0039] Further reagents or further stimuli may be added to the composition to cause the curing reaction to commence, after the cross linking reagent has been de-blocked. In a highly preferred arrangement, the curing reaction will commence directly as a result of causing the removal of the blocking group to furnish said reactive group on the cross linking reagent.

[0040] The step of causing the removal of the blocking group to furnish the cross linking reagent, may be provided by applying at least one chemical stimulus and/or physical stimulus. The stimulus may be one or more of heat, pressure ,ultrasound, EM radiation (e-beam, UV, IR), catalyst, shear force, preferably heat.

[0041] According to a further aspect of the invention there is provided a cured explosive product comprising a polymer bonded explosive composition and a protonated blocking group; preferably the protonated blocking group comprises at least 1 nitro group, more preferably at least 2 nitro groups.

[0042] The explosive component of the polymer-bonded explosive may be in admixture with a metal powder which may function as a fuel or which may be included to achieve a specific terminal effect. The metal powder may be selected from a wide range of metals including aluminium, magnesium, tungsten, alloys of these metals and combinations thereof. Often the fuel will be aluminium or an alloy thereof; often the fuel will be aluminium powder.

[0043] In some embodiments, the polymer-bonded explosive comprises RDX. The polymer-bonded explosive may comprise RDX as the only explosive component, or in combination with a secondary explosive component, such as HMX. Preferably, RDX comprises 50 - 100 wt% of the explosive component.

[0044] In many cases the polymerisable binder will be present in the range about 5 - 20 wt% of the polymer-bonded explosive, often about 5 - 15 wt%, or about 8 - 12 wt%. The polymer-bonded explosive may comprise about 88 wt% RDX and about 12 wt% polyurethane binder. However, the relative levels of RDX to polyurethane binder may be in the range about 75 - 95 wt% RDX and 5 - 25 wt% polyurethane binder. Polymer-bonded explosives of this composition are commercially available, for example, Rowanex 1100™.

[0045] Many defoaming agents are known and in general any defoaming agent or combination thereof which does not chemically react with the explosive may be used. However, often the defoaming agent will be a polysiloxane. In many embodiments, the polysiloxane is selected from polyalkyl siloxanes, polyalkylaryl siloxanes, polyether siloxane co-polymers, and combinations thereof. It is often preferred that the polysiloxane be a polyalkylsiloxane; polydimethylsiloxane may typically be used. Alternatively, the defoaming agent may be a combination of silicone-free surface active polymers, or a combination of these with a polysiloxane. Such silicone-free polymers include alkoxyated alcohols, triisobutyl phosphate, and fumed silica. Commercially available products which may be used include, BYK 088, BYK A500, BYK 066N and BYK A535 each available from BYK Additives and Instruments, a subdivision of Altana; TEGO MR2132 available from Evonik; and BASF SD23 and SD40, both available from BASF. Of these, BYK A535 and TEGO MR2132 are often used as they are solventless products with good void reduction properties.

[0046] Often the defoaming agent is present in the range about 0.01 - 2 wt%, in some instances about 0.03 - 1.5 wt%, often about 0.05 - 1 wt%, in many cases about 0.25 or 0.5 - 1 wt%. At levels below this (i.e. below 0.01 wt%) there is often insufficient defoaming agent in the composition to significantly alter the properties of the polymer-bonded explosive,

whereas above this level (i.e. above 2 wt%) the viscosity of the cast solution may be so low that the composition becomes non-homogenous as a result of sedimentation and segregation processes occurring within the mixture.

[0047] The explosive composition may include a solvent, any solvent in which at least one of the components is soluble and which does not adversely affect the safety of the final product may be used, as would be understood by the person skilled in the art. However, it is preferred, for the reasons described above, that in some embodiments that solvent be absent.

[0048] Where present, the solvent may be added as a carrier for the components of the composition. The solvent will typically be removed from the explosive composition during the casting process, however some solvent residue may remain due to imperfections in the processing techniques or where it becomes uneconomical to remove the remaining solvent from the composition. Often the solvent will be selected from diisobutylketone, polypropylene glycol, isoparaffins, propylene glycol, cyclohexanone, butyl glycol, ethylhexanol, white spirit, isoparaffins, xylene, methoxypropylacetate, butylacetate, naphthenes, glycolic acid butyl ester, alkyl benzenes and combinations thereof. In some instances, the solvent is selected from diisobutylketone, polypropylene glycol, isoparaffins, propylene glycol, isoparaffins, and combinations thereof.

[0049] The composition may also contain minor amounts of other additives commonly used in explosives compositions. Examples of these include microcrystalline wax, energetic plasticisers, non-energetic plasticisers, antioxidants, catalysts, curing agents, metallic fuels, coupling agents, surfactants, dyes and combinations thereof. Energetic plasticisers may be selected from eutectic mixtures of alkylnitrobenzenes (such as dinitro- and trinitro-ethyl benzene), alkyl derivatives of linear nitramines (such as an N-alkyl nitrateethyl-nitramine, for instance butyl-NENA), and glycidyl azide polymers.

[0050] Casting the explosive composition offers a greater flexibility of process design than can be obtained with pressing techniques. This is because the casting of different shapes can be facilitated through the simple substitution of one casting mould for another. In other words, the casting process is backwards-compatible with earlier processing apparatus. Conversely, where a change of product shape is required using pressing techniques, it is typically necessary to redesign a substantial portion of the production apparatus for compatibility with the mould, or the munition to be filled, leading to time and costs penalties. Further, casting techniques are less limited by size than pressing techniques which depend upon the transmission of pressure through the moulding powder to cause compaction. This pressure falls off rapidly with distance, making homogeneous charges with large length to diameter ratios (such as many shell fillings) more difficult to manufacture.

[0051] In addition, the casting process of the invention offers a moulded product (the cast explosive compositions described) with a reliably uniform fill regardless of the shape required by the casting. This may be partly attributed to the use of a delayed curing technique. Casting can occur in situ with the housing (such as a munition) to be filled acting as the mould; or the composition can be moulded and transferred into a housing in the munition in a separate step. Often casting will occur in situ.

[0052] Further, compositions including polymer-bonded explosives and hydroxyterminated polybutadiene binders in particular, are more elastomeric when cast than when pressed. This makes them less prone to undergoing a deflagration-to-detonation transition when exposed to accidental stimuli. Instead, such systems burn without detonating, making them safer to use than pressed systems.

[0053] Additionally, the shapes that pressing processes can be reliably applied to are more limited. For instance, it is often a problem achieving a complete fill of a conical shape using pressing techniques as air is often trapped at or towards the tip of the cone. Casting processes, being intrinsically "fluid" processes, are not limited in this way.

[0054] In some instances the explosive component is desensitized with water prior to formation of the premix, a process known as wetting or phlegmatization. However, as retention of water within the precur is generally undesirable it will typically be removed from the premix prior to further processing, for instance by heating during the mixing of the explosive component and the plasticiser.

[0055] In some cases the plasticiser will be absent; however the plasticiser will typically be present in the range 0 - 10 wt% of the plasticiser and explosive premix, often in the range 0.01 - 8 wt%, on occasion 0.5 - 7 wt% or 4 - 6 wt%. The plasticiser will often be a non-energetic plasticiser, many are known in the art; however energetic plasticisers may also be used in some instances. The cast explosive composition of the invention has utility both as a main charge or a booster charge in an explosive product. Often the composition will be the main charge. The composition of the invention may be used in any "energetic" application such as, for example, uses include mortar bombs and artillery shells as discussed above. Additionally, the inventive composition may be used to prepare explosives for gun-launch applications, explosive filings for bombs and warheads, propellants, including composite propellants, base bleed compositions, gun propellants and gas generators.

[0056] Except in the examples, or where otherwise explicitly indicated, all numbers in this description indicating amounts of material or conditions of reaction, physical properties of materials and/or use are to be understood as modified by the word "about." All amounts are by weight of the final composition, unless otherwise specified. Further, the cast explosive composition may comprise, consist essentially of, or consist of any of the possible combinations of components described above and in the claims except for where otherwise specifically indicated.

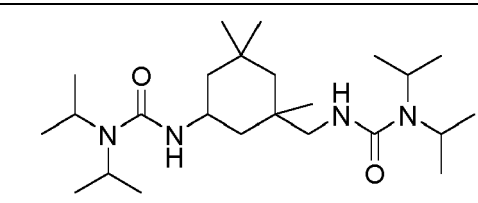

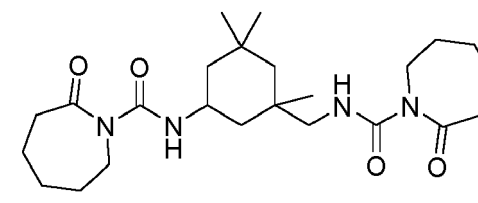

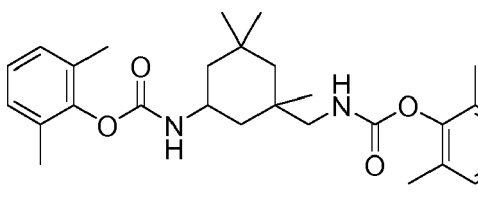

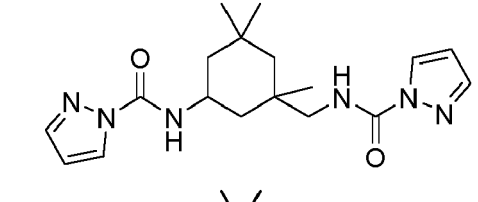

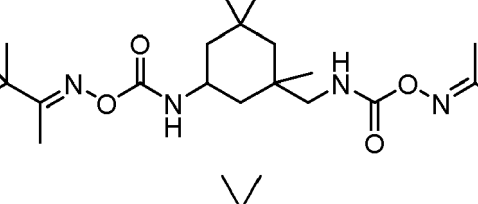

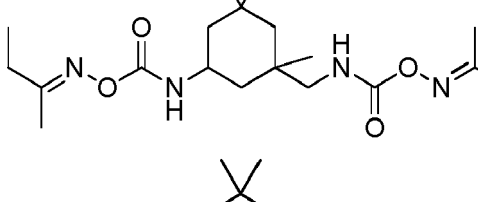

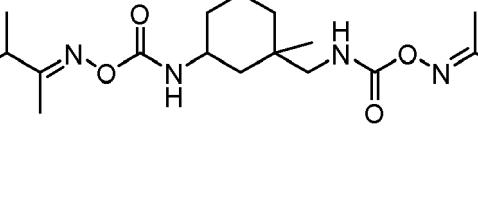

[0057] The following non-limiting examples illustrate the invention.

Examples

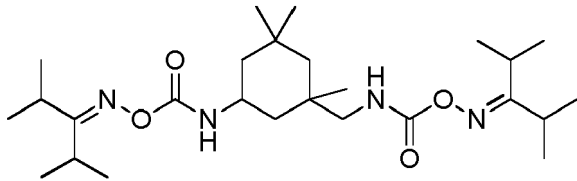



5 General synthesis of blocked IPDI

[0058] Blocking group B and isophorone diisocyanate were dissolved in THF or CHCl_3 and refluxed until reaction has reached completion. The solvent was removed *in vacuo* to leave the blocked IPDI as a white solid. The yields are given in Table 1 below.

Table 1. blocked di-isocyanates

Compound	Blocking group B	Ratio of blocking group to IPDI	Yield (%)
		2.1 : 1	93
		2.1 : 1	62
		2 : 1	54
		2 : 1	99
		2 : 1	99
		2 : 1	98
		2 : 1	96

(continued)

	Compound	Blocking group B	Ratio of blocking group to IPDI	Yield (%)
5			2 : 1	98
10			2 : 1	100
15			2 : 1	97
20				
25				

General deblocking method for compounds in Table 1.

[0059] Blocked IPDI (8.68 wt %) was evenly dispersed in a composition of hydroxyl-terminated polybutadiene (91.1 wt %) and dibutyltin dilaurate (0.22 wt %) at 60 °C over a period of 2 hours. The mixture was poured into a cast and cured between 90 - 120 °C over a period of several days to achieve a cross linked rubber. It was found for all examples there was no reaction between the blocked isocyanate and HTPB in the presence of the catalyst, at 55°C, even when left overnight.

[0060] This indicates that the blocking group was not removed until temperatures above 90°C were employed. Therefore general processing of the precure castable explosive composition may proceed to be mixed, even with slight heating to aid mixing, and that the deblocking only occurs when significant heat is employed to specifically activate and deblock the diisocyanate, such that the cross linking reaction may only proceed once the temperature is raised, to the deblocking temperature.

[0061] An embodiment of the invention will now be described by way of example only and with reference to the accompanying drawings of which:-

Figure 1 shows a schematic of the fill process

[0062] Turning to fig 1 there is a general scheme 1, for filling a munition 6. The premix formulation 2, is a mixture of the explosive, HTPB polymerisable binder and other processing aids, and optionally a catalyst. The premix formulation 2 is agitated such as by a stirrer 3. A blocked cross linking reagent 4, (either as a solid or dissolved in a minimal aliquot of solvent), is added to the premix to form the precure formulation 5. The blocked cross linking reagent 4 may be a diisocyanate such as IPDI. The resultant precure admixture 5 is thoroughly mixed and is transferred to a munition 6 or mould (not shown) for later insertion into a munition. The munition 6 when filled with the precure 5 may then be exposed to an external stimuli, such as heat, which removes the thermally labile blocking group on the blocked cross linking reagent 4, furnishing the cross linking reagent. The cross linking reagent and HTPB polymerisable binder may then polymerise and form a polymer bonded explosive 7.

[0063] It should be appreciated that the compositions of the invention are capable of being incorporated in the form of a variety of embodiments, only a few of which have been illustrated and described above.

Claims

1. A precure castable explosive composition comprising an explosive material, a polymerisable binder, and a cross linking reagent which comprises at least two reactive groups each of which is protected by a labile blocking group.
2. A composition according to claim 1 wherein the polymerisable binder is selected, such that it will from polyurethanes, cellulosic materials such as cellulose acetate, polyesters, polybutadienes, polyethylenes, polyisobutylenes, PVA, chlorinated rubber, epoxy resins, two-pack polyurethane systems, alkyd/melanine, vinyl resins, alkyds, , butadiene-styrene block copolymers, polyNIMMO, polyGLYN, GAP, and blends, copolymers and/or combinations thereof.
3. A composition according to claim 1 or claim 2, wherein the explosive material is selected from RDX, HMX, FOX-7, TATND, HNS, TATB, NTO, HNIW, GUDN, picrite, aromatic nitramines such as tetryl, ethylene dinitramine, nitroglycerine, butane triol trinitrate, pentaerythritol tetranitrate, DNAN trinitrotoluene, inorganic oxidisers such as ammonium nitrate, ADN, ammonium perchlorate, energetic alkali metal salts, energetic alkaline earth metal salts, and combinations thereof.
4. A composition according to any one of the preceding claims wherein the labile blocking group comprises at least two nitro groups or at least one sterically hindered branched chain hydrocarbyl group.
5. A composition according to any one of the preceding claims wherein the polymerisable binder and cross linking reagent are partially reacted together to provide a partially polymerised binder-cross linking reagent, wherein at least one of the at least two reactive groups of the cross linking reagent is protected by a labile blocking group.
6. A composition according to any one of the preceding claims wherein the polymerisable binder is selected, such that it will from polyurethane.
7. A composition according to any one of the preceding claims, wherein the cross linking reagent comprises a diisocyanate.
8. A composition according to claim 7 wherein the diisocyanate blocking group B is selected from
 - I. NHR^2R^3 , wherein R^2 and R^3 are alkyl, alkenyl, branched-chain alkyl, $\text{C}(\text{O})\text{R}^{12}$, aryl, phenyl, or together form a heterocycle.
 - R^{12} is alkyl, alkenyl, branched chain alkyl aryl, phenyl, or R^2 and R^3 together form a lactam.
 - II. OR^{15} , $\text{O-N}=\text{CR}^9\text{R}^{10}$
 - wherein R^{15} is aryl, phenyl, benzyl, provided that there are at least two nitro group on the ring;
 - wherein R^9 and R^{10} are independently selected from alkyl, alkenyl, branched chain alkyl, aryl, phenyl, provided that at least one of R^9 or R^{10} is a branched chain alkyl or aryl, or phenyl.
9. A composition according to any preceding claim, wherein a defoaming reagent is present in the range of from 0.01 - 2 wt%
10. A batch process for filling a munition with a cross linked polymer bonded explosive composition comprising the steps of:
 - i) forming an admixture of precure castable explosive composition, comprising an explosive material, a polymerisable binder, and a cross linking reagent which comprises at least two reactive groups each of which is protected by a labile blocking group,
 - ii) filling the munition
 - iii) causing the removal of the blocking group to furnish said cross linking reagent.
11. A process according to claim 10 comprising the further step iv) of causing the cure of said polymerisable binder to form a polymer bonded cast explosive composition.
12. A process according to claim 10 or 11, wherein the cross linking reagent comprises a diisocyanate.
13. A process according to claim 12 wherein the diisocyanate blocking group B is selected from

I. NHR^2R^3 , wherein R^2 and R^3 are alkyl, alkenyl, branched-chain alkyl, $\text{C}(\text{O})\text{R}^{12}$, aryl, phenyl, or together form a heterocycle.

R^{12} is alkyl, alkenyl, branched chain alkyl aryl, phenyl, or R^2 and R^3 together form a lactam.

II. OR^{15} , $\text{O-N}=\text{CR}^9\text{R}^{10}$

wherein R^{15} is aryl, phenyl, benzyl, provided that there are at least two nitro group on the ring;

wherein R^9 and R^{10} are independently selected from alkyl, alkenyl, branched chain alkyl, aryl, phenyl, provided that at least one of R^9 or R^{10} is a branched chain alkyl or aryl, or phenyl

14. A cured explosive product comprising a polymer bonded explosive composition and protonated blocking group.

15. A munition comprising a polymer bonded explosive composition and protonated blocking groups.

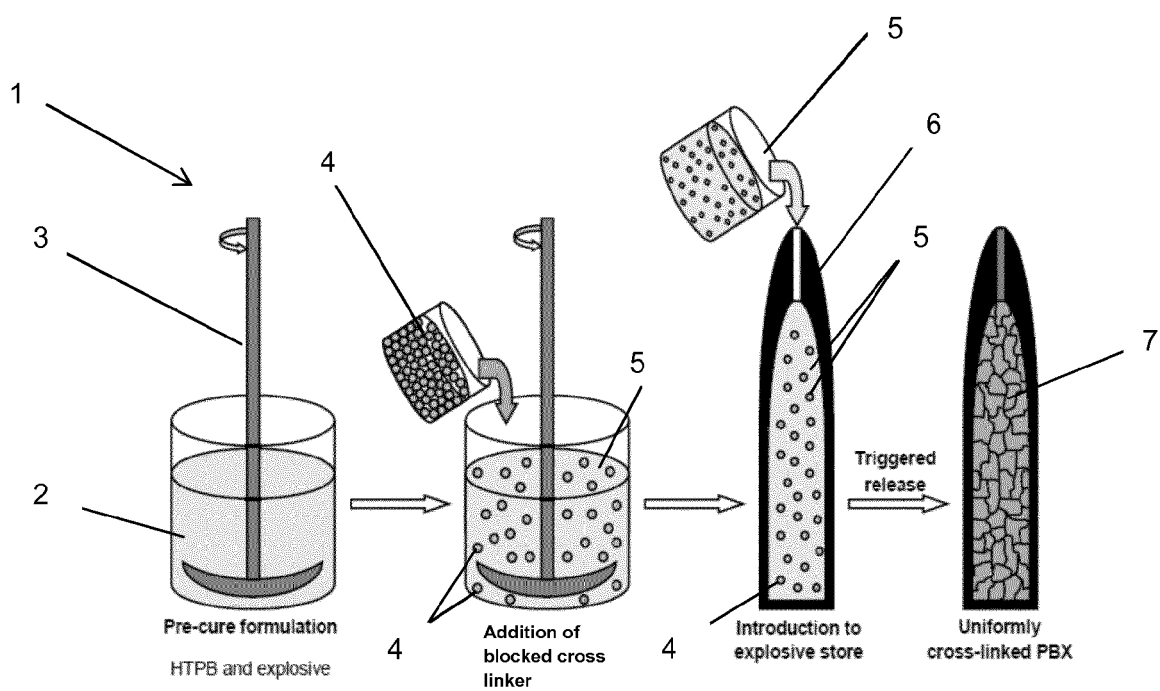


Fig 1



EUROPEAN SEARCH REPORT

Application Number
EP 15 27 5169

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 4 263 444 A (GRAHAM WILLIAM H ET AL) 21 April 1981 (1981-04-21)	1,10,14,15	INV. C06B21/00
Y	* column 4, line 10 - column 5, line 38; claims *	1-15	C06B45/10

X	US 3 798 090 A (ALLABASHI J) 19 March 1974 (1974-03-19)	1,10,14,15	
Y	* claims *	1-15	

Y	Douglas A Wicks ET AL: "Review Paper Blocked isocyanates III: Part A. Mechanisms and chemistry", 10 August 1999 (1999-08-10), pages 148-172, XP055178789, Retrieved from the Internet: URL:http://www.sciencedirect.com/science/a rticle/pii/S0300944099000429/pdf?md5=d40 75654eff3162baf62e3276687f01c&pid=1-s2.0-S 0300944099000429-main.pdf [retrieved on 2015-03-24]	1-15	
	* page 160 - page 172 *		

Y	WICKS Z W: "BLOCKED ISOCYANATES", PROGRESS IN ORGANIC COATINGS, ELSEVIER BV, NL, vol. 3, 1 January 1975 (1975-01-01), pages 73-99, XP009072025, ISSN: 0300-9440, DOI: 10.1016/0300-9440(75)80002-6 * page 80 - page 92 *	1-15	

A	US 5 747 603 A (HINSHAW JERALD C [US] ET AL) 5 May 1998 (1998-05-05) * claims *	1-15	

	-/--		
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 15 January 2016	Examiner Schut, Robert
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 15 27 5169

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 5 942 720 A (DOLL DANIEL W [US] ET AL) 24 August 1999 (1999-08-24) * claims *	1-15	
A	US 4 803 019 A (GRAHAM WILLIAM H [US] ET AL) 7 February 1989 (1989-02-07) * claims *	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 15 January 2016	Examiner Schut, Robert
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 15 27 5169

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-01-2016

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4263444	A	21-04-1981	NONE
US 3798090	A	19-03-1974	NONE
US 5747603	A	05-05-1998	NONE
US 5942720	A	24-08-1999	NONE
US 4803019	A	07-02-1989	NONE

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82