

(19)



(11)

EP 3 118 386 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
18.01.2017 Bulletin 2017/03

(51) Int Cl.:
E04C 5/12 (2006.01)

(21) Application number: **16179904.4**

(22) Date of filing: **18.07.2016**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Sorkin, Felix, L.**
Stafford, TX 77477 (US)

(72) Inventor: **Sorkin, Felix, L.**
Stafford, TX 77477 (US)

(74) Representative: **Bond, Christopher William
Forresters
Skygarden
Erika-Mann-Strasse 11
80636 München (DE)**

(30) Priority: **17.07.2015 US 201562193866 P
17.07.2015 US 201562193883 P
17.07.2015 US 201562193898 P
28.08.2015 US 201514838779
28.08.2015 PCT/US2015/047389**

(54) **WEDGE FOR POST TENSIONING TENDON**

(57) A wedge assembly for post tensioning concrete includes one or more wedges and a wedge ring. Each wedge includes an outer surface having a circumferential groove formed thereon. The wedge ring is adapted to fit into the groove of the wedges and retain the wedges to a strand. The wedge ring including a gap adapted to allow

the wedge ring to be installed from the side of the wedges. When installed to the strand, the wedges may form a clearance fit maintained by the wedge ring. At least one wedge may include a guide adapted to assist with the separation of the wedges when installed to the strand.

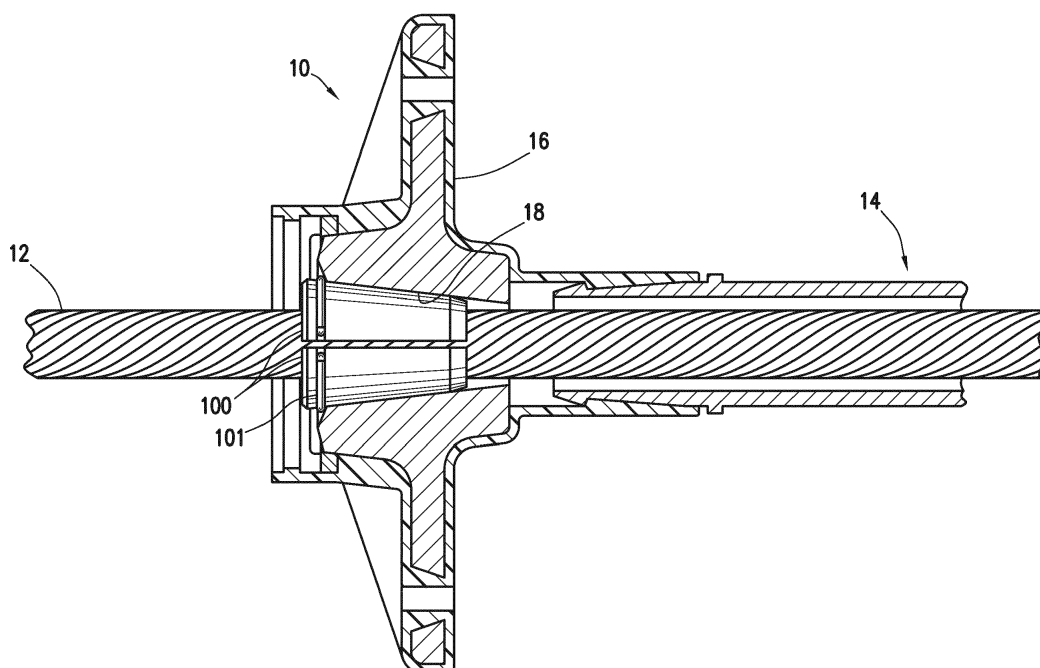


FIG. 1

EP 3 118 386 A1

Description

Cross-Reference to Related Applications

[0001] This application is a nonprovisional application which claims priority from U.S. provisional application number 62/193,866, filed July 17, 2015; U.S. provisional application number 62/193,883 filed July 17, 2015; U.S. provisional application number 62/193,898 filed July 17, 2015; US non-provisional application number 14/838,779 filed 28 August 2015; and PCT application number PCT/US15/47389, each of which is hereby incorporated by reference in its entirety.

Technical Field/Field of the Disclosure

[0002] The present disclosure relates generally to post-tensioned, pre-stressed concrete construction. The present disclosure relates specifically to wedges for anchors for use therein.

Background of the Disclosure

[0003] Many structures are built using concrete, including, for instance, buildings, parking structures, apartments, condominiums, hotels, mixed-use buildings, casinos, hospitals, medical buildings, government buildings, research/academic institutions, industrial buildings, malls, bridges, pavement, tanks, reservoirs, silos, foundations, sports courts, and other structures.

[0004] Pre-stressed concrete is structural concrete in which internal stresses are introduced to reduce potential tensile stresses in the concrete resulting from applied loads. This can be accomplished by two methods-post-tensioned pre-stressing and pre-tensioned pre-stressing. When post tensioning concrete, the pre-stressing assembly is tensioned after the concrete has attained a specified strength. The pre-stressing assembly, commonly known as a tendon, may include for example and without limitation, anchorages, one or more strands, and sheathes or ducts. The strand is tensioned between anchors which are embedded in the concrete once the concrete has hardened. The strand may be formed from a metal or composite or any suitable material exhibiting tensile strength which can be elongated, including, for example and without limitation, reinforcing steel, single wire cable, or multi-wire cable. The strand is typically fixedly coupled to a fixed anchorage positioned at one end of the tendon, the so-called "fixed end", and is adapted to be stressed at the other anchor, the "stressing end" of the tendon. The strand is generally held to each anchor by one or more wedges. Typically, anchors include a tapered recess which, when the strand is placed under tension, causes the wedges to further engage the strand. Wedges are typically made of metal. Typically, wedges must be assembled to or threaded onto the end of the strand once the strand is in position in the concrete member. In the case of a bridge or other elevated structure,

there is a risk of dropping wedges. Additionally, as strands may extend far from the end of the structure and bend due to gravity, the ability to thread the wedge onto the end of the strand is limited. Furthermore, misalignment between the wedges during installation may damage the strand or result in an insufficient anchor between strand and the anchor.

Summary

[0005] The present disclosure provides for a wedge assembly for an anchor of a tendon for post tensioning concrete. The wedge assembly may include at least one wedge adapted to fit on an outer surface of a strand of the tendon. The wedge may include an outer surface having a circumferential groove formed thereon positioned in a plane substantially perpendicular with the longitudinal axis of the strand. The wedge assembly may further include a wedge ring adapted to fit into the groove of the wedge and to retain the wedge to the strand. The wedge ring may include a gap adapted to allow the wedge ring to be installed into the groove in a direction perpendicular to the extent of the strand.

[0006] The present disclosure also provides for a method. The method may include providing an anchor for post tensioning concrete, threading a strand through the anchor, and positioning at least one wedge about the strand. The at least one wedge may include an outer surface having a circumferential groove formed thereon positioned in a plane substantially perpendicular with the longitudinal axis of the strand. The method may further include providing a wedge ring adapted to fit into the groove of the wedge and retain the wedge to the strand. The wedge ring may include a gap adapted to allow the wedge ring to be installed in a direction perpendicular to the extent of the strand. The method may further include installing the wedge ring to the wedge in a direction perpendicular to the extent of the strand by expanding the gap of the wedge ring such that the wedge passes through the gap of the wedge ring and retaining the wedge to the strand.

[0007] The present disclosure also provides for a wedge assembly for an anchor of a tendon for use in post tensioning concrete. The wedge assembly may include two or more wedges adapted to fit on an outer surface of a strand of the tendon. Each wedge may include an outer surface having a circumferential groove formed thereon. The groove may be positioned in a plane substantially perpendicular to the longitudinal axis of the strand. The wedge assembly may further include a wedge ring, the wedge ring adapted to fit into the grooves of the wedges and to retain the wedges to the strand while allowing a clearance fit between the wedges and the strand when the wedges are installed to the strand.

[0008] The present disclosure also provides for a method. The method may include providing an anchor for post tensioning concrete, threading a strand through the anchor, and providing a wedge assembly. The wedge as-

sembly may include two or more wedges adapted to fit on an outer surface of the strand. Each wedge may include an outer surface having a circumferential groove formed thereon. The groove may be positioned in a plane substantially perpendicular to the longitudinal axis of the strand. The wedge assembly may further include a wedge ring, the wedge ring adapted to fit into the grooves of the wedges and to retain the wedges to the strand while allowing a clearance fit between the wedges and the strand when the wedges are installed to the strand. The method may further include retaining the wedges to the strand with the wedge ring such that the clearance fit is maintained.

[0009] The present disclosure also provides for a wedge assembly for an anchor of a tendon for use in post tensioning concrete. The wedge assembly may include two or more wedges adapted to fit on an outer surface of a strand of the tendon. Each wedge may include an outer surface having a circumferential groove formed thereon. The groove may be positioned in a plane substantially perpendicular to the longitudinal axis of the strand. At least one wedge may include a guide formed therein. The guide may be adapted to assist in the separation of the wedges when the wedges are installed to the strand from the side of the strand. The wedge assembly may further include a wedge ring adapted to fit into the grooves of the wedges and to retain the wedges to the strand. The wedge ring may include a gap positioned proximate the guide such that the separation of the wedge rings substantially elastically expands the wedge ring.

[0010] The present disclosure also provides for a method. The method may include providing an anchor for post tensioning concrete, threading a strand through the anchor, and providing a wedge assembly. The wedge assembly may include two or more wedges adapted to fit on an outer surface of the strand. Each wedge may include an outer surface having a circumferential groove formed thereon. The groove may be positioned in a plane substantially perpendicular to the longitudinal axis of the strand. At least one wedge may include a guide formed therein. The guide may be adapted to assist in the separation of the wedges when the wedges are installed to the strand from the side of the strand. The wedge assembly may further include a wedge ring adapted to fit into the grooves of the wedges and to retain the wedges to the strand. The wedge ring may include a gap positioned proximate the guide such that the separation of the wedge rings substantially elastically expands the wedge ring. The method may further include aligning the wedge assembly with the guide such that the guide is aligned with the strand, pressing the guide of the wedge assembly against the strand such that the wedges are separated, expanding the gap, and retaining the wedges to the strand with the wedge ring.

Brief Description of the Drawings

[0011] The present disclosure is best understood from the following detailed description when read with the accompanying figures. It is emphasized that, in accordance with the standard practice in the industry, various features are not drawn to scale. In fact, the dimensions of the various features may be arbitrarily increased or reduced for clarity of discussion.

FIG. 1 depicts a cross section of an anchor having a wedge assembly consistent with at least one embodiment of the present disclosure.

FIG. 2 depicts a perspective view of a wedge assembly consistent with at least one embodiment of the present disclosure installed onto a strand.

FIG. 3 depicts a top view of the wedge ring assembly of FIG. 2.

FIGS. 4A, 4B depict a wedge assembly consistent with at least one embodiment of the present disclosure.

FIGS. 5A, 5B, 5C depict a wedge assembly consistent with at least one embodiment of the present disclosure.

FIGS. 5D, 5E depict the wedge ring of FIGS. 5A, 5B, 5C.

Detailed Description

[0012] It is to be understood that the following disclosure provides many different embodiments, or examples, for implementing different features of various embodiments. Specific examples of components and arrangements are described below to simplify the present disclosure. These are, of course, merely examples and are not intended to be limiting. In addition, the present disclosure may repeat reference numerals and/or letters in the various examples. This repetition is for the purpose of simplicity and clarity and does not in itself dictate a relationship between the various embodiments and/or configurations discussed.

[0013] FIG. 1 depicts anchor 10 for use in post tensioning concrete. Anchor 10 is adapted to receive and couple to strand 12 of tendon 14. Strand 12 may be, for example and without limitation, mono-wire cable, or multi-wire cable. For the purposes of this disclosure, the axis parallel with the length of strand 12 will be referred to as the longitudinal axis of strand 12. Anchor 10 may include anchor body 16 adapted to retain the position of anchor 10 when positioned in formed concrete.

[0014] Anchor 10 may couple to strand 12 by the use of one or more wedges 100. Wedges 100 may be substantially wedge shaped and adapted to fit into a tapered

recess 18 formed in anchor body 16. Tension on strand 12 may cause wedges 100 to move into tapered recess 18, applying a gripping force on strand 12.

[0015] In some embodiments, wedges 100 may be coupleable by wedge ring 101. As depicted in FIG. 2, each wedge 100 may include groove 103. Groove 103 may be formed in the outer surface 105 of wedges 100 and adapted to receive wedge ring 101. Groove 103 may be formed in a plane substantially perpendicular to the longitudinal axis of strand 12. As depicted in FIG. 3, wedge ring 101 may be substantially annular and may be formed from a material capable of elastic deformation. Wedge ring 101 may include gap 107. Gap 107 may allow wedge ring 101 to be slipped into groove 103 of wedges 100 when wedges are positioned about strand 12 as depicted in FIG. 1. Wedges 100 may thus be positioned about strand 12 before being coupled by wedge ring 101, allowing wedges 100 to be coupled to strand 12 without having to thread strand 12 through wedges 100. Once wedges 100 are positioned about strand 12, wedge ring 101 may be installed to gap 107 in a direction substantially perpendicular to the extent of the strand. Wedge ring 101 may retain wedges 100 to strand 12 before tensioning of strand 12 relative to anchor 10. In some embodiments, gap 107 may be a substantially 60° opening.

[0016] In some embodiments, wedge ring 101 may include expansion features 109. Expansion features 109 may be positioned at either end of gap 107 to, for example and without limitation, allow the ends of wedge ring 101 to more easily pass over wedges 100 to allow gap 107 to expand when wedge ring 101 is installed to grooves 103 of wedges 100. In some embodiments, as depicted in FIG. 3, the ends of wedge ring 101 may include a re-curve portion to facilitate expansion of wedge ring 101. In some embodiments, one or more loops or holes may be utilized to, for example and without limitation, allow a tool such as snap ring pliers to expand wedge ring 101 during installation.

[0017] Because wedge ring 101 is capable of being installed from beside wedges 100 when already installed on strand 12, wedge ring 101 does not need to be threaded onto the end of strand 12 before installation to wedges 100. Likewise, wedges 100 may be individually installed to strand 12 rather than being slipped on from the end of strand 12 as in a case where wedges 100 and wedge ring 101 were previously coupled.

[0018] In some embodiments, as depicted in FIGS. 4A, 4B, wedges 100 may be adapted be coupled together prior to installation to strand 12 (not shown) and may include guides 111 adapted to assist with coupling wedges 100 to strand 12. Guides 111 may be positioned to, for example and without limitation, assist in expanding gap 107 by forming a tapered surface against which strand 12 may push. A portion of the force between wedges 100 and strand 12 may thus act to separate wedges 100, allowing for strand 12 to more easily enter wedges 100. Guides 111 may be one or more features positioned on at least a portion of outer surface 105 of one or more

wedges 100. In some embodiments, guides 111 may, as depicted be chamfered surfaces positioned at an end of wedges 100. One having ordinary skill in the art with the benefit of this disclosure will understand that guides 111 may be any geometry known in the art including, for example and without limitation, one or more chamfers, ramps, curves, fillets, or combinations thereof. Additionally, guides 111 may be formed at locations on wedges 100 other than that shown in the present disclosure without deviating from the scope of the present disclosure.

[0019] In some embodiments, wedges 100 may be formed such that once positioned on strand 12 as depicted in FIGS. 5A, 5C, wedges 100 form a clearance fit around strand 12. The clearance fit is depicted as annular space 113 in FIG. 5A and is sufficiently small that although a clearance fit is maintained, wedge ring 101' may retain wedges 100 to strand 12. The clearance fit may allow wedges 100 to more easily slide along strand 12 during installation whether installed from the end of strand 12 or from the side. Once installed to tapered recess 18 as depicted in FIG. 5B, wedges 100 may grip strand 12 as annular space 113 is closed.

[0020] In some embodiments, as depicted in FIGS. 5A, 5D, 5E wedge ring 101' may include one or more hooks 115 adapted to maintain the clearance fit between wedges 100 and strand 12 by, for example and without limitation, maintaining separating tension on wedges 100 to maintain gap 107'. When installed to tapered recess 18 as depicted in FIG. 5B, the force applied on wedges 100 by tapered recess 18 may be sufficient to overcome the separating tension of wedge ring 101', allowing wedges 100 to grip strand 12.

[0021] The foregoing outlines features of several embodiments so that a person of ordinary skill in the art may better understand the aspects of the present disclosure. Such features may be replaced by any one of numerous equivalent alternatives, only some of which are disclosed herein. One of ordinary skill in the art should appreciate that they may readily use the present disclosure as a basis for designing or modifying other processes and structures for carrying out the same purposes and/or achieving the same advantages of the embodiments introduced herein. One of ordinary skill in the art should also realize that such equivalent constructions do not depart from the spirit and scope of the present disclosure and that they may make various changes, substitutions, and alterations herein without departing from the spirit and scope of the present disclosure.

[0022] The present invention will now be described with reference to the following clauses:

1. A wedge assembly for an anchor of a tendon for use in post tensioning concrete comprising:

at least one wedge adapted to fit on an outer surface of a strand of the tendon, the wedge including an outer surface having a circumferential groove formed thereon, the groove posi-

tioned in a plane substantially perpendicular to the longitudinal axis of the strand; and a wedge ring, the wedge ring adapted to fit into the groove of the wedge and to retain the wedge to the strand, the wedge ring including a gap adapted to allow the wedge ring to be installed into the groove when the at least one wedge is positioned on the strand.

2. The wedge assembly of clause 1, wherein the wedge ring is adapted to be coupled to the groove in a direction substantially perpendicular to the longitudinal axis of the strand.

3. The wedge assembly of clause 1 or clause 2 comprising two wedges, the wedges adapted to be positioned on the strand before being coupled by the wedge ring.

4. The wedge assembly of any one of clauses 1 to 3, wherein the wedge ring further comprises an expansion feature positioned at each end of the wedge ring, the expansion feature adapted to cause the gap to expand as the wedge ring is installed onto the wedge.

5. The wedge assembly of clause 4, wherein the expansion feature comprises a recurve portion.

6. The wedge assembly of clause 4 or clause 5, wherein the expansion feature comprises a hole adapted to operably couple to a snap ring plier.

7. A method comprising:

providing an anchor for post tensioning concrete;

threading a strand through the anchor;

positioning a wedge on the strand, the wedge including an outer surface having a circumferential groove formed thereon, the groove positioned in a plane substantially perpendicular with the longitudinal axis of the strand;

providing a wedge ring, the wedge ring adapted to fit into the groove of the wedge and to retain the wedge to a strand, the wedge ring including a gap adapted to allow the wedge ring to be installed into the groove of the wedge; and

installing the wedge ring into the groove of the wedge by expanding the gap of the wedge ring and positioning the wedge ring into the groove.

8. The method of clause 7, wherein the wedges are installed to the strand in a direction perpendicular to the longitudinal axis of the strand.

9. The method of clause 7 or clause 8, wherein the installing operation further comprises installing the wedge ring to the groove in a direction substantially perpendicular to the longitudinal axis of the strand.

10. The method of any one of clauses 7 to 9, further comprising positioning a second wedge on the strand, the second wedge being substantially the same as the first wedge and positioned such that the groove of the second wedge is aligned with the groove of the first wedge.

11. A wedge assembly for an anchor of a tendon for use in post tensioning concrete comprising:

two or more wedges adapted to fit on an outer surface of a strand of the tendon, each wedge including an outer surface having a circumferential groove formed thereon, the groove positioned in a plane substantially perpendicular to the longitudinal axis of the strand; and

a wedge ring, the wedge ring adapted to fit into the grooves of the wedges and to retain the wedges to the strand while allowing a clearance fit between the wedges and the strand when the wedges are installed to the strand.

12. The wedge assembly of clause 11, wherein the wedge ring is adapted to be coupled to the groove in a direction substantially perpendicular to the longitudinal axis of the strand.

13. The wedge assembly of clause 11 or clause 12, wherein the wedge ring further comprises one or more hooks adapted to elastically retain a radial space between the wedges and the strand to maintain the clearance fit.

14. The wedge assembly of clause 13, wherein, once installed to the anchor, the wedges couple to the outer surface of the strand.

15. The wedge assembly of any one of clauses 11 to 14, wherein the wedge ring further comprises a gap adapted to allow the wedges adjacent the gap to separate, allowing the wedges to be installed to the strand in a direction perpendicular to the longitudinal axis of the strand.

16. A method comprising:

providing an anchor for post tensioning concrete;

threading a strand through the anchor;

providing a wedge assembly, the wedge assembly including:

two or more wedges adapted to fit on an outer surface of a strand of the tendon, each wedge including an outer surface having a circumferential groove formed thereon, the groove positioned in a plane substantially perpendicular to the longitudinal axis of the strand; and

a wedge ring, the wedge ring adapted to fit

into the grooves of the wedges and to retain the wedges to the strand while allowing a clearance fit between the wedges and the strand when the wedges are installed to the strand;

5

retaining the wedges to the strand with the wedge ring such that the clearance fit is maintained.

10

17. The method of clause 16, wherein the wedge ring further comprises one or more hooks adapted to elastically retain a radial space between the wedges and the strand to maintain the clearance fit.

18. The method of clause 17, wherein, once installed to the anchor, the wedges couple to the outer surface of the strand.

15

19. The method of any one of clauses 16 to 18, wherein the wedge ring further comprises a gap adapted to allow the wedges adjacent the gap to separate, allowing the wedges to be installed to the strand in a direction perpendicular to the longitudinal axis of the strand.

20

20. A wedge assembly for an anchor of a tendon for use in post tensioning concrete comprising:

25

two or more wedges adapted to fit on an outer surface of a strand of the tendon, each wedge including an outer surface having a circumferential groove formed thereon, the groove positioned in a plane substantially perpendicular to the longitudinal axis of the strand, at least one wedge including a guide formed therein, the guide adapted to assist in the separation of the wedges when the wedges are installed to the strand from the side of the strand; and

30

a wedge ring, the wedge ring adapted to fit into the grooves of the wedges and to retain the wedges to the strand, the wedge ring including a gap positioned proximate the guide such that the separation of the wedge rings substantially elastically expands the wedge ring.

40

21. The wedge assembly of clause 20, wherein the wedge ring is adapted to be coupled to the groove in a direction substantially perpendicular to the longitudinal axis of the strand.

45

22. The wedge assembly of clause 20 or clause 21, wherein one wedge proximate the gap includes a guide.

50

23. The wedge assembly of any one of clauses 20 to 22, wherein both wedges proximate the gap include guides.

24. The wedge assembly of any one of clauses 20 to 23, wherein the guide comprises one or more chamfers, ramps, curves, fillets, or combinations thereof.

55

25. A method comprising:

providing an anchor for post tensioning concrete;

threading a strand through the anchor;

providing a wedge assembly, the wedge assembly including:

two or more wedges adapted to fit on an outer surface of the strand, each wedge including an outer surface having a circumferential groove formed thereon, the groove positioned in a plane substantially perpendicular to the longitudinal axis of the strand, at least one wedge including a guide formed therein, the guide adapted to assist in the separation of the wedges when the wedges are installed to the strand from the side of the strand; and

a wedge ring, the wedge ring adapted to fit into the grooves of the wedges and to retain the wedges to the strand, the wedge ring including a gap positioned proximate the guide such that the separation of the wedge rings substantially elastically expands the wedge ring;

aligning the wedge assembly with the guide such that the guide is aligned with the strand;

pressing the guide of the wedge assembly against the strand such that the wedges are separated;

expanding the gap; and

retaining the wedges to the strand with the wedge ring.

26. The method of clause 25, wherein one wedge proximate the gap includes a guide.

27. The method of clause 25 or clause 26, wherein both wedges proximate the gap include guides.

28. The method of any one of clauses 25 to 27, wherein the guide comprises one or more chamfers, ramps, curves, fillets, or combinations thereof.

Claims

1. A wedge assembly for an anchor of a tendon for use in post tensioning concrete comprising:

at least one wedge adapted to fit on an outer surface of a strand of the tendon, the wedge

- including an outer surface having a circumferential groove formed thereon, the groove positioned in a plane substantially perpendicular to the longitudinal axis of the strand; and a wedge ring, the wedge ring adapted to fit into the groove of the wedge and to retain the wedge to the strand, the wedge ring including a gap adapted to allow the wedge ring to be installed into the groove when the at least one wedge is positioned on the strand.
2. The wedge assembly of claim 1, wherein the wedge ring is adapted to be coupled to the groove in a direction substantially perpendicular to the longitudinal axis of the strand.
3. The wedge assembly of claim 1 or claim 2 comprising two wedges, the wedges adapted to be positioned on the strand before being coupled by the wedge ring.
4. The wedge assembly of any one of claims 1 to 3, wherein the wedge ring further comprises an expansion feature positioned at each end of the wedge ring, the expansion feature adapted to cause the gap to expand as the wedge ring is installed onto the wedge; optionally, wherein the expansion feature comprises:
- a recurve portion; and/or,
a hole adapted to operably couple to a snap ring plier.
5. A method comprising:
- providing an anchor for post tensioning concrete;
threading a strand through the anchor;
positioning a wedge on the strand, the wedge including an outer surface having a circumferential groove formed thereon, the groove positioned in a plane substantially perpendicular with the longitudinal axis of the strand;
providing a wedge ring, the wedge ring adapted to fit into the groove of the wedge and to retain the wedge to a strand, the wedge ring including a gap adapted to allow the wedge ring to be installed into the groove of the wedge; and
installing the wedge ring into the groove of the wedge by expanding the gap of the wedge ring and positioning the wedge ring into the groove.
6. The method of claim 5:
- wherein the wedges are installed to the strand in a direction perpendicular to the longitudinal axis of the strand; and/or,
wherein the installing operation further comprises installing the wedge ring to the groove in a direction substantially perpendicular to the longitudinal axis of the strand; and/or,
further comprising positioning a second wedge on the strand, the second wedge being substantially the same as the first wedge and positioned such that the groove of the second wedge is aligned with the groove of the first wedge.
7. A wedge assembly for an anchor of a tendon for use in post tensioning concrete comprising:
- two or more wedges adapted to fit on an outer surface of a strand of the tendon, each wedge including an outer surface having a circumferential groove formed thereon, the groove positioned in a plane substantially perpendicular to the longitudinal axis of the strand; and
a wedge ring, the wedge ring adapted to fit into the grooves of the wedges and to retain the wedges to the strand while allowing a clearance fit between the wedges and the strand when the wedges are installed to the strand.
8. The wedge assembly of claim 7, wherein the wedge ring:
- is adapted to be coupled to the groove in a direction substantially perpendicular to the longitudinal axis of the strand; and/or,
further comprises one or more hooks adapted to elastically retain a radial space between the wedges and the strand to maintain the clearance fit; optionally,
wherein, once installed to the anchor, the wedges couple to the outer surface of the strand; and/or
further comprises a gap adapted to allow the wedges adjacent the gap to separate, allowing the wedges to be installed to the strand in a direction perpendicular to the longitudinal axis of the strand.
9. A method comprising:
- providing an anchor for post tensioning concrete;
threading a strand through the anchor;
providing a wedge assembly, the wedge assembly including:
- two or more wedges adapted to fit on an outer surface of a strand of the tendon, each wedge including an outer surface having a circumferential groove formed thereon, the groove positioned in a plane substantially perpendicular to the longitudinal axis of the strand; and

a wedge ring, the wedge ring adapted to fit into the grooves of the wedges and to retain the wedges to the strand while allowing a clearance fit between the wedges and the strand when the wedges are installed to the strand;

retaining the wedges to the strand with the wedge ring such that the clearance fit is maintained.

10. The method of claim 9, wherein the wedge ring:

further comprises one or more hooks adapted to elastically retain a radial space between the wedges and the strand to maintain the clearance fit; optionally, wherein, once installed to the anchor, the wedges couple to the outer surface of the strand; and/or, further comprises a gap adapted to allow the wedges adjacent the gap to separate, allowing the wedges to be installed to the strand in a direction perpendicular to the longitudinal axis of the strand.

11. A wedge assembly for an anchor of a tendon for use in post tensioning concrete comprising:

two or more wedges adapted to fit on an outer surface of a strand of the tendon, each wedge including an outer surface having a circumferential groove formed thereon, the groove positioned in a plane substantially perpendicular to the longitudinal axis of the strand, at least one wedge including a guide formed therein, the guide adapted to assist in the separation of the wedges when the wedges are installed to the strand from the side of the strand; and a wedge ring, the wedge ring adapted to fit into the grooves of the wedges and to retain the wedges to the strand, the wedge ring including a gap positioned proximate the guide such that the separation of the wedge rings substantially elastically expands the wedge ring.

12. The wedge assembly of claim 11, wherein:

the wedge ring is adapted to be coupled to the groove in a direction substantially perpendicular to the longitudinal axis of the strand; and/or, one wedge proximate the gap includes a guide; and/or, both wedges proximate the gap include guides; and/or, the guide comprises one or more chamfers, ramps, curves, fillets, or combinations thereof.

13. A method comprising:

providing an anchor for post tensioning concrete;
threading a strand through the anchor;
providing a wedge assembly, the wedge assembly including:

two or more wedges adapted to fit on an outer surface of the strand, each wedge including an outer surface having a circumferential groove formed thereon, the groove positioned in a plane substantially perpendicular to the longitudinal axis of the strand, at least one wedge including a guide formed therein, the guide adapted to assist in the separation of the wedges when the wedges are installed to the strand from the side of the strand; and

a wedge ring, the wedge ring adapted to fit into the grooves of the wedges and to retain the wedges to the strand, the wedge ring including a gap positioned proximate the guide such that the separation of the wedge rings substantially elastically expands the wedge ring;

aligning the wedge assembly with the guide such that the guide is aligned with the strand;
pressing the guide of the wedge assembly against the strand such that the wedges are separated;
expanding the gap; and
retaining the wedges to the strand with the wedge ring.

14. The method of claim 13, wherein:

one wedge proximate the gap includes a guide; and/or, both wedges proximate the gap include guides; and/or, the guide comprises one or more chamfers, ramps, curves, fillets, or combinations thereof.

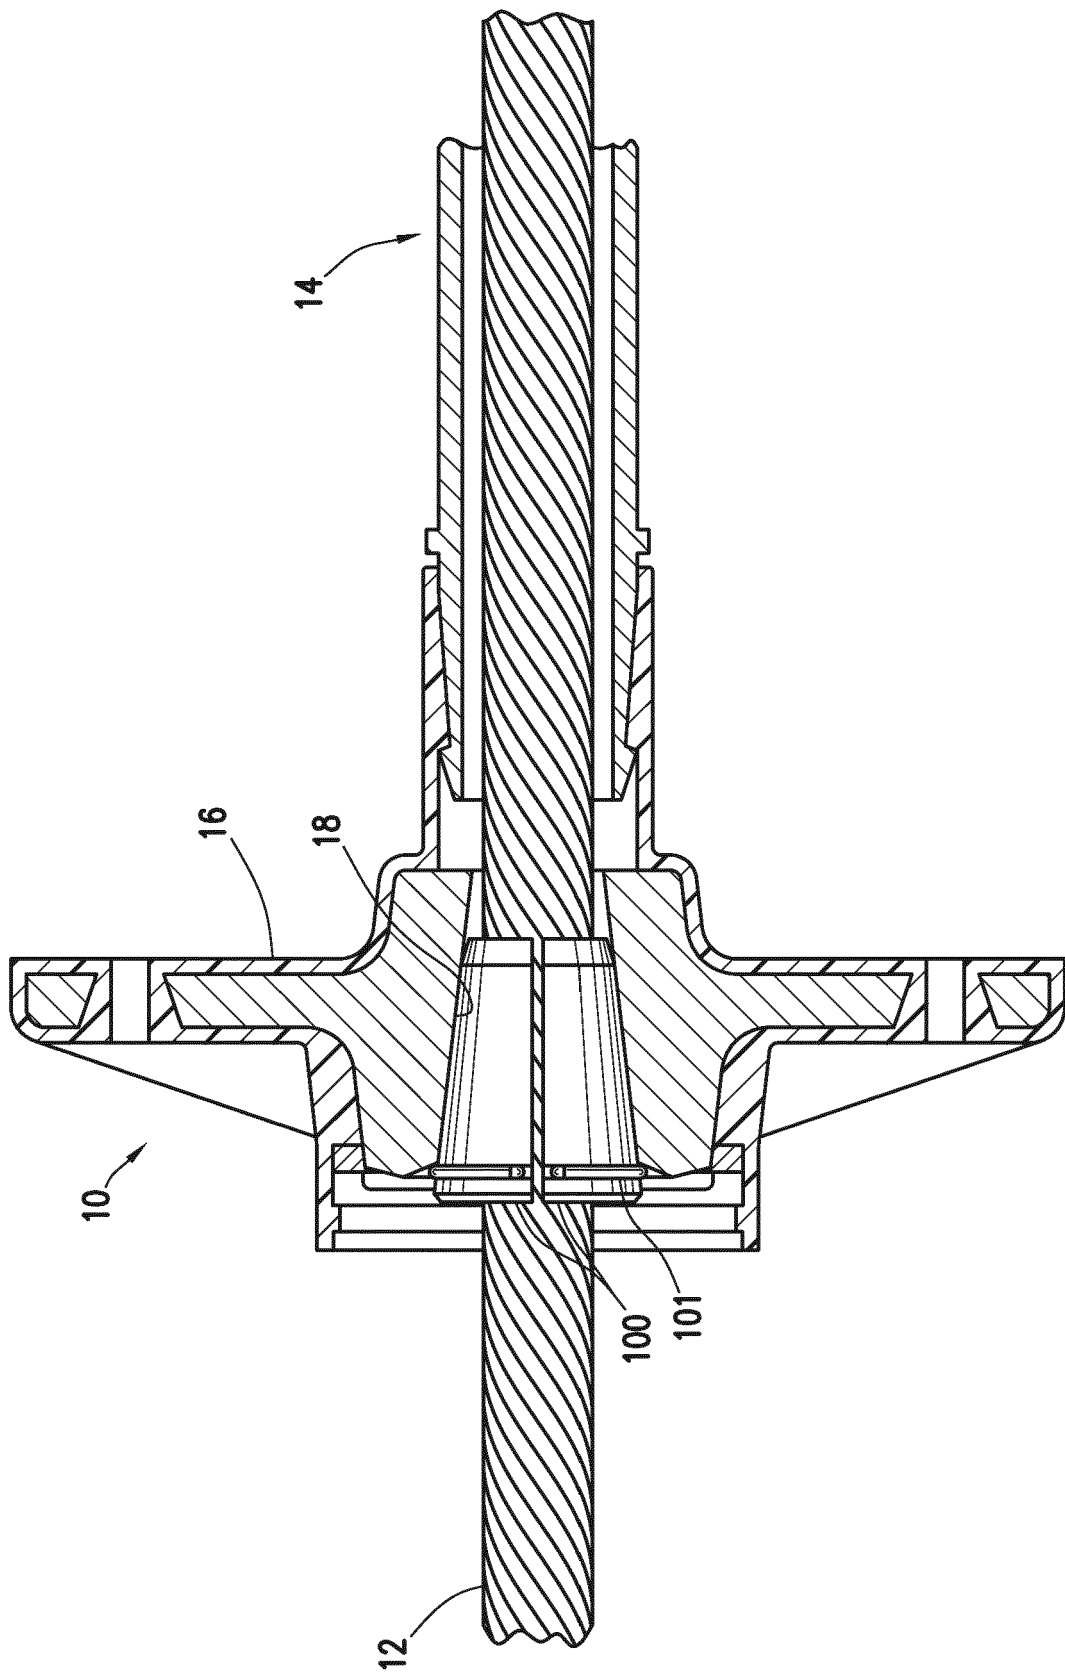


FIG. 1

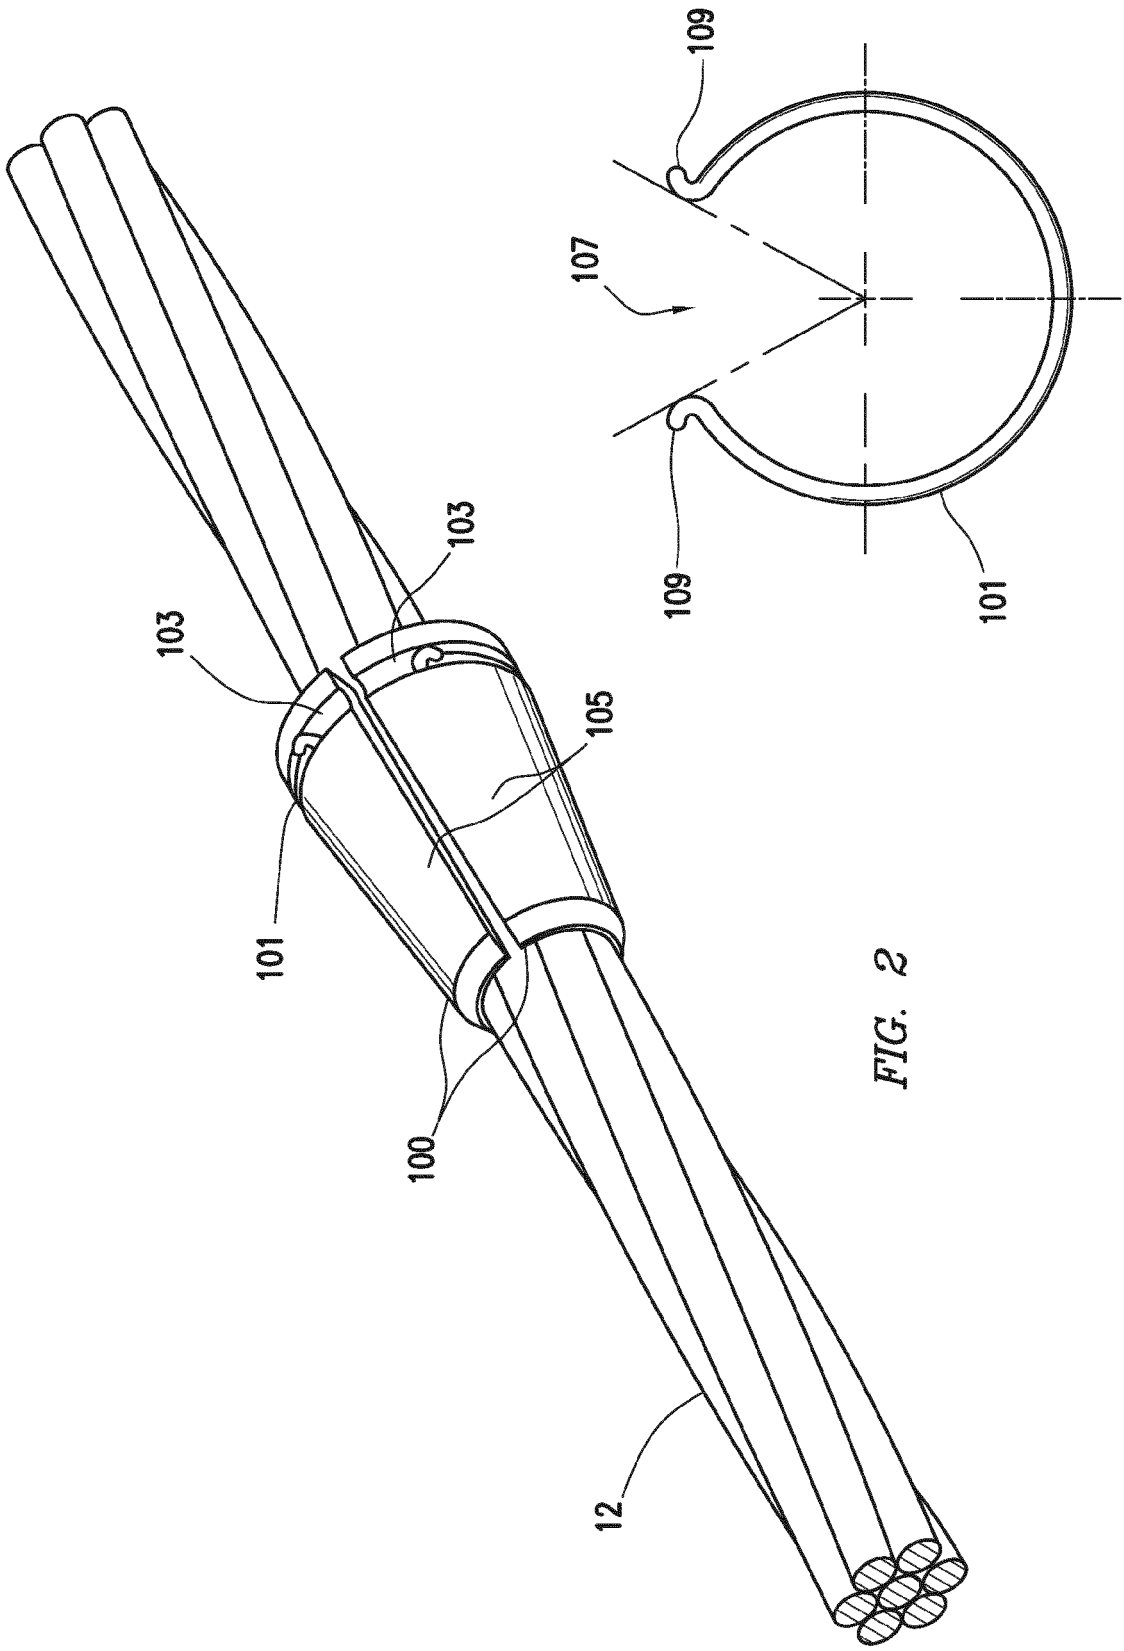


FIG. 3

FIG. 2

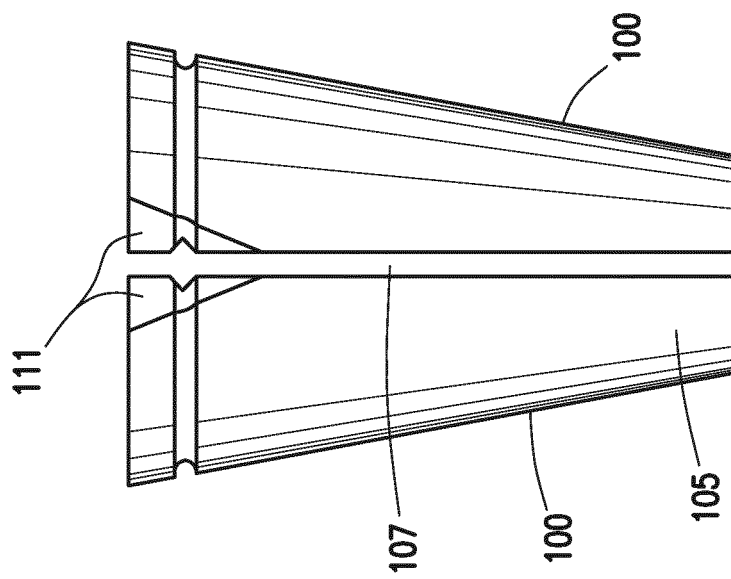


FIG. 4A

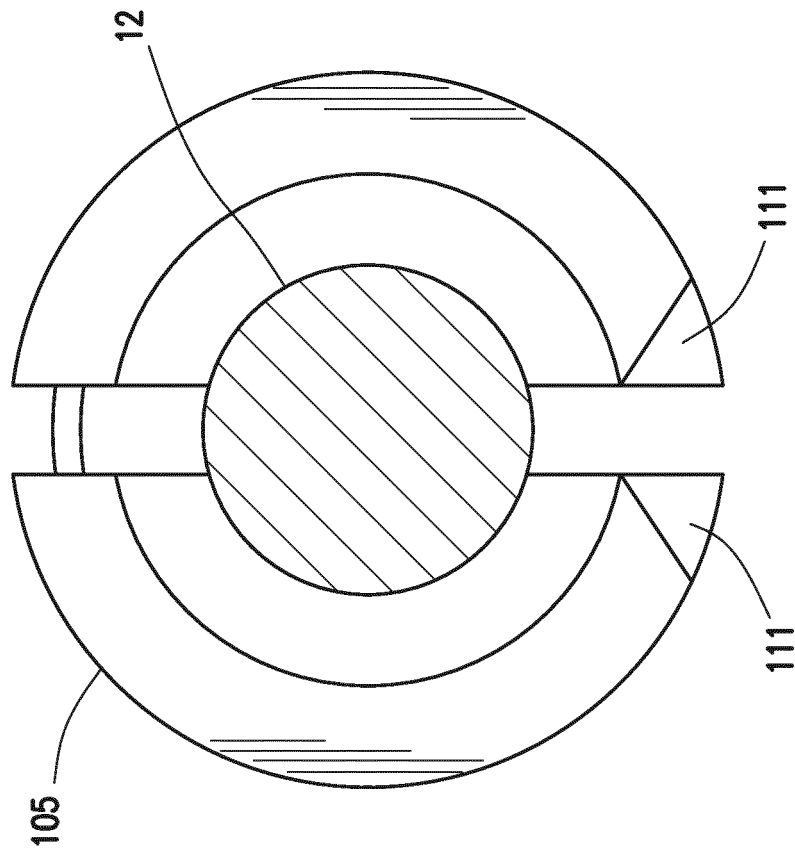


FIG. 4B

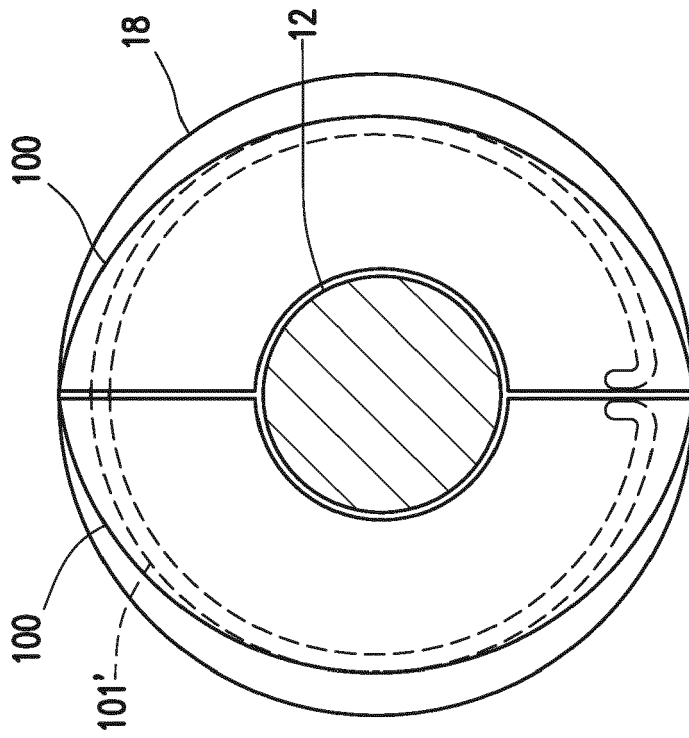


FIG. 5B

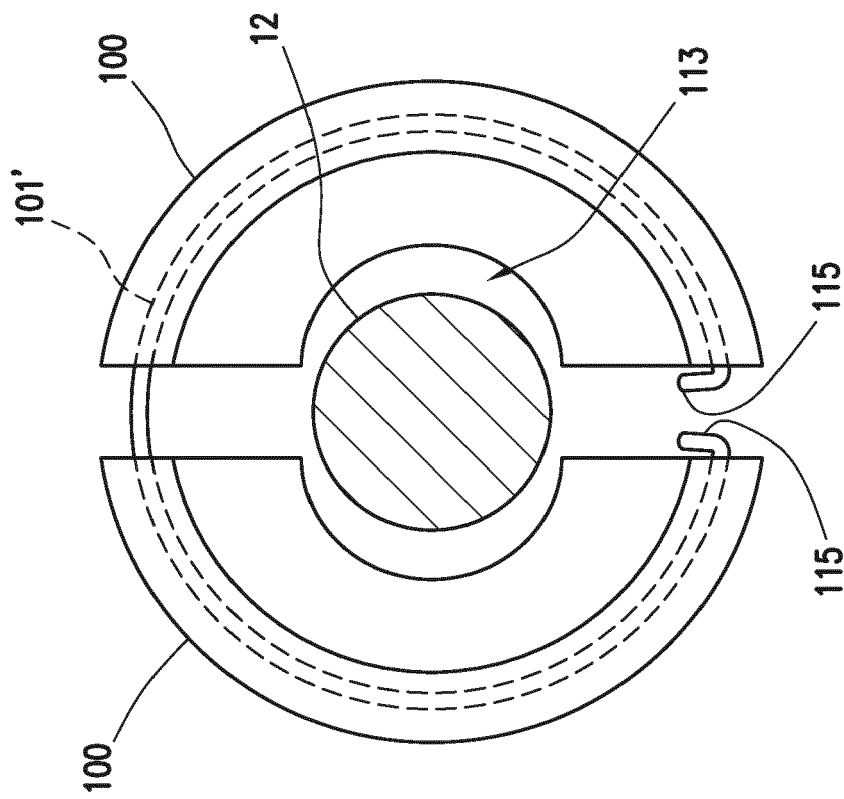


FIG. 5A

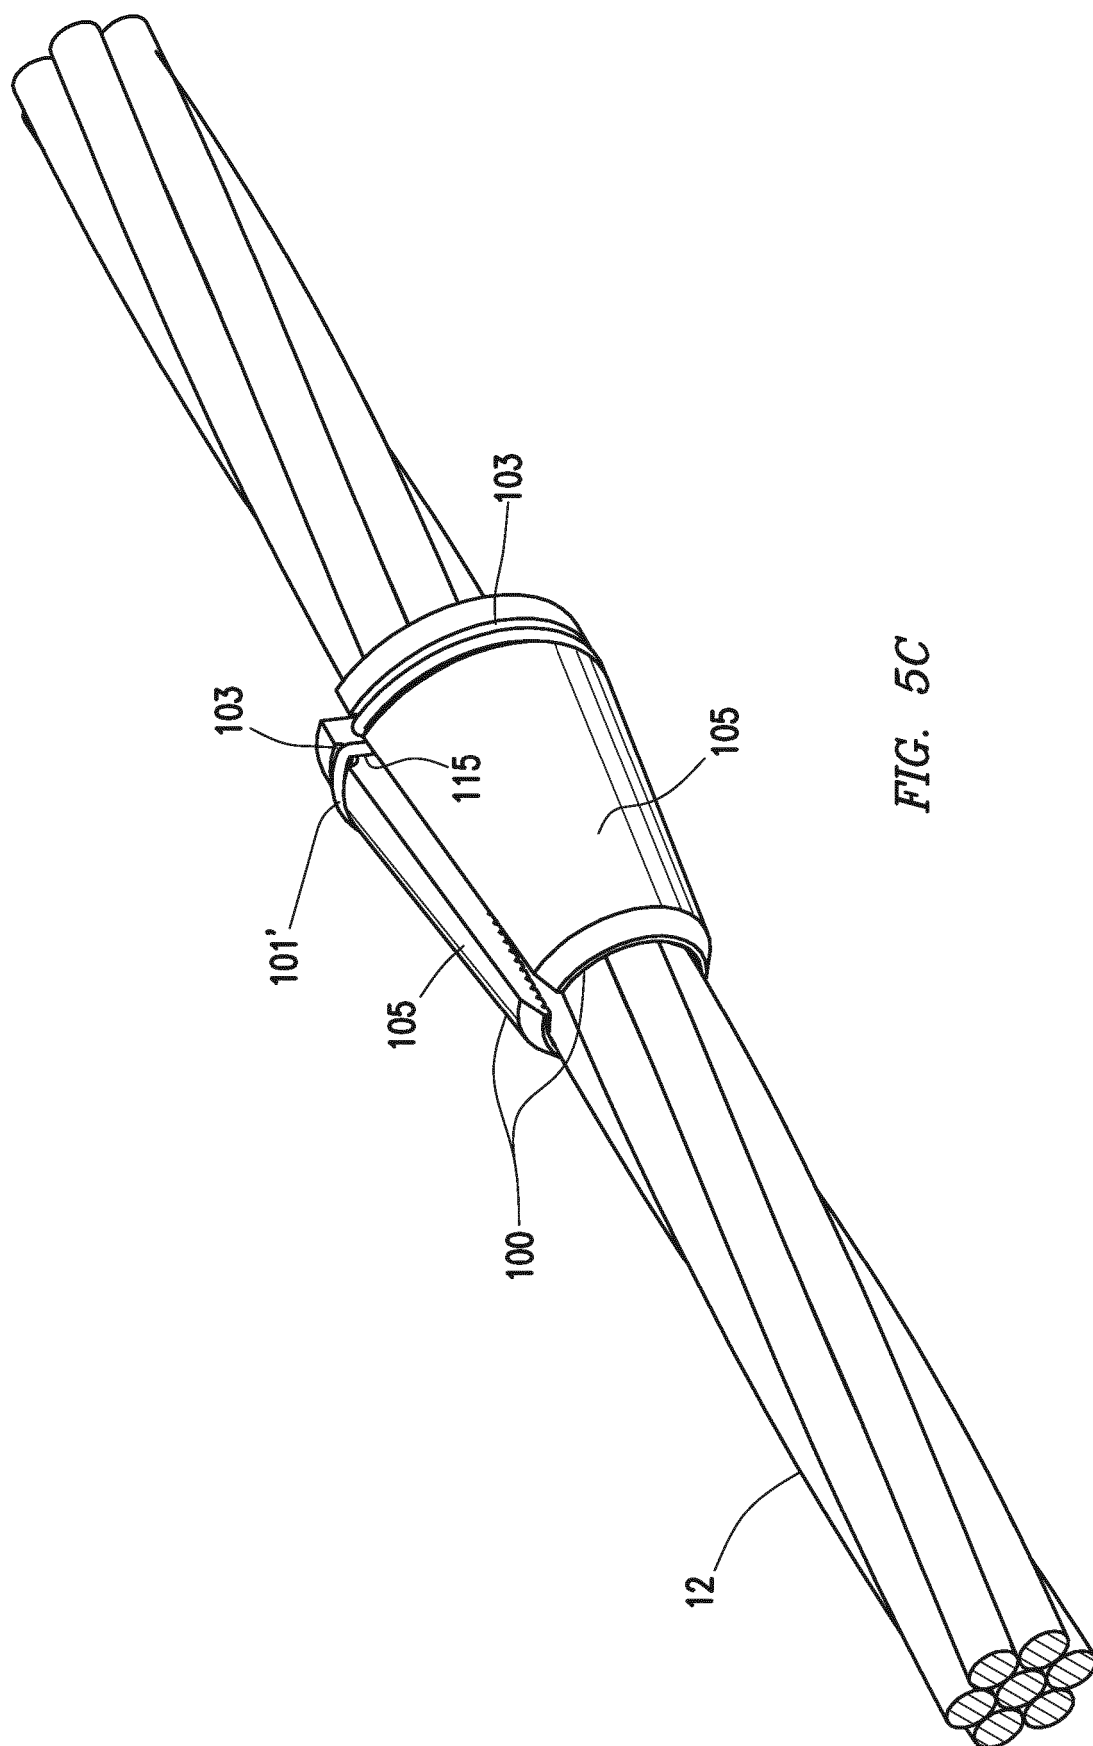


FIG. 5C

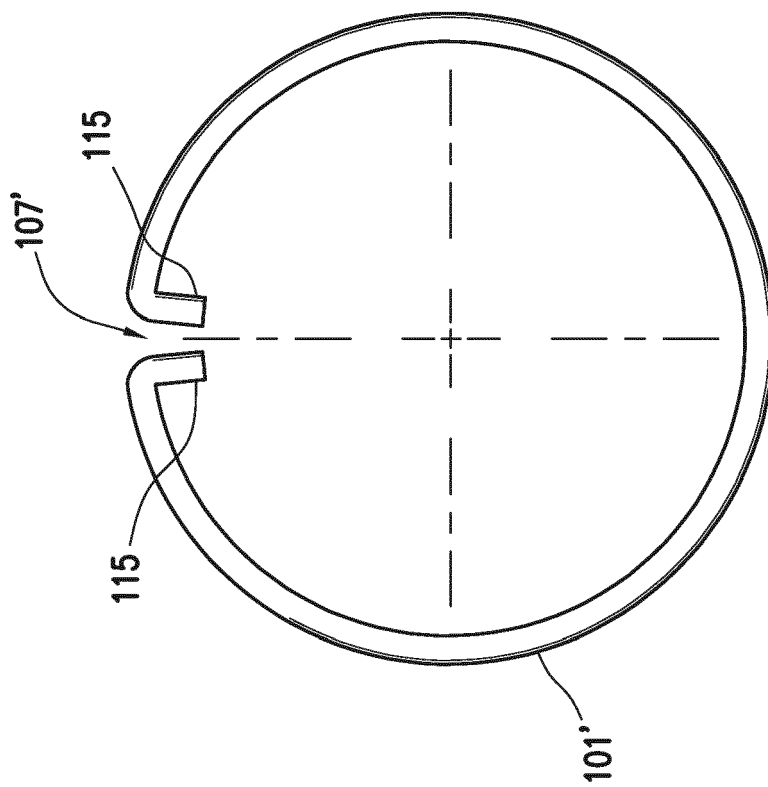


FIG. 5D

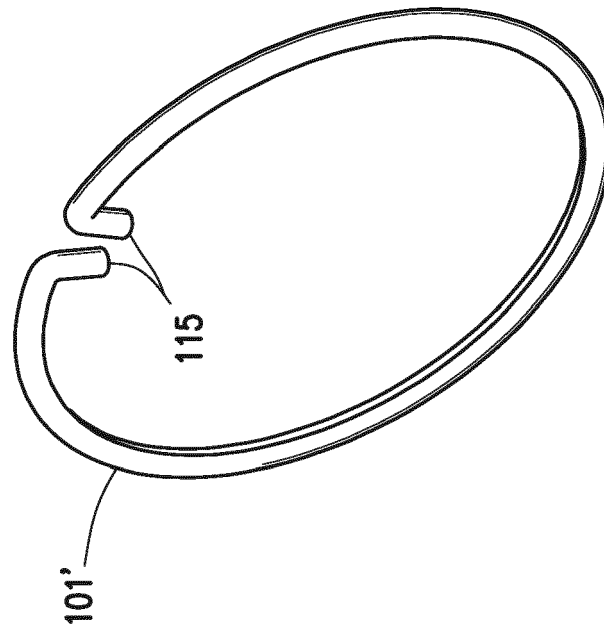


FIG. 5E



EUROPEAN SEARCH REPORT

Application Number
EP 16 17 9904

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 0 659 976 A2 (RSC MINING PROPRIETARY LIMITED [ZA]) 28 June 1995 (1995-06-28) * column 3, line 36 - column 4, line 21; figure 1 *	1-14	INV. E04C5/12
A	GB 804 530 A (STRESSTEEL CORP) 19 November 1958 (1958-11-19) * the whole document *	1-14	
			TECHNICAL FIELDS SEARCHED (IPC)
			E04C E04G
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 23 November 2016	Examiner Lopes, Claudia
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 17 9904

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-11-2016

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0659976	A2	28-06-1995	AU 687929 B2 05-03-1998
			AU 8169394 A 29-06-1995
			CA 2138940 A1 24-06-1995
			CN 1108331 A 13-09-1995
			EP 0659976 A2 28-06-1995
			US 5556233 A 17-09-1996

GB 804530	A	19-11-1958	NONE

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 62193866 A [0001]
- US 62193883 A [0001]
- US 62193898 A [0001]
- US 14838779 B [0001]
- US 1547389 W [0001]