



(11)

EP 3 124 645 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:

01.02.2017 Bulletin 2017/05

(21) Application number: **14887198.1**

(22) Date of filing: **17.12.2014**

(51) Int Cl.:

C23C 8/14 (2006.01)	C22C 19/05 (2006.01)
C22C 30/00 (2006.01)	C22C 38/00 (2006.01)
C22C 38/58 (2006.01)	C21D 6/00 (2006.01)
C22F 1/00 (2006.01)	C22F 1/10 (2006.01)

(86) International application number:

PCT/JP2014/083417

(87) International publication number:

WO 2015/145896 (01.10.2015 Gazette 2015/39)

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

Designated Extension States:

BA ME

(30) Priority: **28.03.2014 JP 2014067836**

(71) Applicant: **Kubota Corporation**
Osaka-shi, Osaka 556-8601 (JP)

(72) Inventors:

- **HASHIMOTO Kunihide**
Hirakata-shi
Osaka 573-8573 (JP)
- **URAMARU Shinichi**
Hirakata-shi
Osaka 573-8573 (JP)


(74) Representative: **Ter Meer Steinmeister & Partner**

Patentanwälte mbB
Nymphenburger Straße 4
80335 München (DE)

(54) **CASTING PRODUCT HAVING ALUMINA BARRIER LAYER**

(57) The present invention provides a cast product that can further enhance the stability of an alumina barrier layer and can exhibit further superior oxidation resistance, carburization resistance, nitriding resistance, corrosion resistance, and the like when used under a high-temperature atmosphere. The cast product according to the present invention is a cast product having an alumina barrier layer including an aluminum oxide on a surface of a matrix, and the aluminum oxide is $\text{Al}_{(1-x)}\text{M}_{(x)}\text{O}_3$, where M is at least one of Cr, Ni, Si, and Fe, and x satisfies a relationship $0 < x < 0.5$. Furthermore, the cast product according to the present invention is a cast product having an alumina barrier layer including an aluminum oxide on a surface of a matrix, and at least one of Cr, Ni, Si, and Fe forms a solid solution in the aluminum oxide, and at least one of Cr, Ni, Si, and Fe forming the solid solution with Al is contained so as to satisfy a relationship $\text{Al}/(\text{Cr}+\text{Ni}+\text{Si}+\text{Fe}) \geq 2.0$ in an atomic % ratio.

F I G . 4

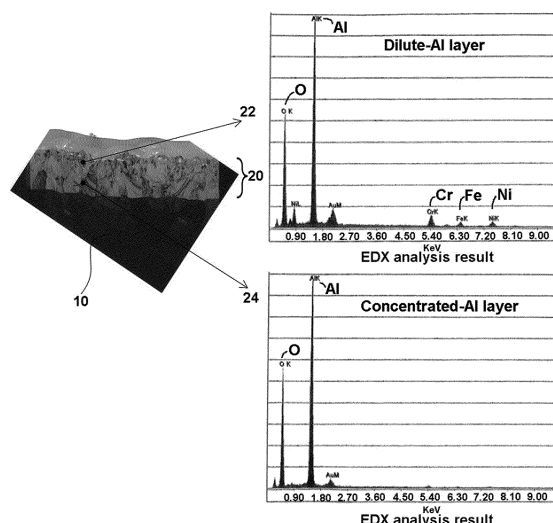

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a cast product having an alumina barrier layer, and more specifically, to a cast product having an alumina barrier layer with a stable structure.

Description of the Related Art

[0002] Heat-resistant steel castings such as reaction tubes and decomposition tubes for producing ethylene, and hearth rolls, radiant tubes and metal dusting-resistant materials for use in carburizing heat-treatment furnaces are exposed to a high-temperature atmosphere, and therefore are made of an austenite-based heat-resistant alloy having superior high-temperature strength.

[0003] A metal oxide layer is formed on the surface of this type of austenite-based heat-resistant alloy during use in a high-temperature atmosphere. This oxide layer serves as a barrier, and thus protects the base material under a high-temperature atmosphere.

[0004] On the other hand, when Cr-oxides (mainly constituted by Cr_2O_3) are formed as the metal oxide, the Cr-oxide layer has an insufficient function for preventing the entry of oxygen and carbon due to its low denseness, thus causing the internal oxidation under a high-temperature atmosphere and the thickening of the oxide film. Moreover, the Cr-oxide layer is likely to become detached during repeated cycles of heating and cooling. Even if the Cr-oxide layer do not become detached, the Cr-oxide layer has an insufficient function for preventing the entry of oxygen and carbon from an outside atmosphere, and therefore, there is a disadvantageous situation in which oxygen and carbon pass through the film and cause the internal oxidation or carburization of the base material.

[0005] To address this, it is proposed that an oxide layer including alumina (Al_2O_3) as a main component that has high denseness and makes it difficult for oxygen and carbon to pass therethrough is formed on the surface of the base material by increasing the content of Al compared with that in a common austenite-based heat-resistant alloy (see Patent Documents 1 and 2, for example).

[0006] However, Al is a ferrite-forming element, and therefore, when the content of Al is increased, the ductility of the materials is deteriorated and the high-temperature strength is reduced. This tendency of reduction of the ductility is observed particularly when the content of Al exceeds 5%.

[0007] For this reason, the austenite-based heat-resistant alloy of Patent Documents 1 and 2 can be expected to have an enhanced barrier function due to Al_2O_3 , but has the disadvantage of causing a reduction of the ductility of the base material.

[0008] Therefore, in order to provide a cast product that can secure the high-temperature stability of Al_2O_3 and can achieve a superior barrier function under a high-temperature atmosphere without reducing the ductility of the materials, Patent Document 3 proposes a cast product in which an alumina barrier layer including Al_2O_3 is formed on the inner surface of a cast body and Cr-based particles that contain Cr at a higher concentration than that of a matrix of the base material are dispersed at an interface between the alumina barrier layer and the cast body by performing heat treatment under an oxidizing atmosphere after processing the inner surface such that a surface roughness (Ra) of the cast body is 0.05 to 2.5 μm (see Patent Document 3, for example).

[0009] Due to the presence of a stable alumina barrier layer, superior oxidation resistance, carburization resistance, nitriding resistance, corrosion resistance, and the like of the cast product of Patent document 3 can be maintained for a long period of time of use under a high-temperature atmosphere.

PRIOR ART DOCUMENTS

PATENT DOCUMENTS

[0010]

Patent Document 1: JP S52-78612A

Patent Document 2: JP S57-39159A

Patent Document 3: WO 2010/113830

[0011] It is an object of the present invention to provide a cast product that can further enhance the stability of the alumina barrier layer and can exhibit further superior oxidation resistance, carburization resistance, nitriding resistance,

corrosion resistance, and the like when used under a high-temperature atmosphere.

SUMMARY OF THE INVENTION

[0012] The cast product according to the present invention is a cast product having an alumina barrier layer including an aluminum oxide on a surface of a matrix, wherein the aluminum oxide is $(Al_{(1-x)}M_{(x)})_2O_3$, where M is at least one of Cr, Ni, Si, and Fe, and x satisfies a relationship $0 < x < 0.5$.

[0013] Also, the cast product according to the present invention is a cast product having an alumina barrier layer including an aluminum oxide on a surface of a matrix, wherein at least one of Cr, Ni, Si, and Fe forms a solid solution in the aluminum oxide, and the at least one of Cr, Ni, Si, and Fe forming the solid solution with Al is contained so as to satisfy a relationship $Al/(Cr+Ni+Si+Fe) \geq 2.0$ in an atomic % ratio.

EFFECTS OF THE INVENTION

[0014] With the cast product of the present invention, at least one of Cr, Ni, Si, and Fe forms a solid solution in an alumina barrier layer formed on a surface of a matrix, thus enabling an aluminum oxide phase to have a stable structure. With the aluminum oxide, it is possible to suppress the coupling between the matrix and oxygen and the formation of oxides containing Cr, Ni, Si, Fe and the like as a main component on the surface of the matrix.

[0015] This makes it possible that the cast product of the present invention exhibits further superior oxidation resistance, carburization resistance, nitriding resistance, corrosion resistance, and the like when used under a high-temperature atmosphere.

[0016] Accordingly, when the cast product of the present invention is used for a reaction tube for producing ethylene, for example, it is possible to suppress the occurrence of coking, to prevent the yield from being reduced by the reduction of heat exchange rate and thermal conductivity due to the occurrence of coking, and to extend continuous operating time. In addition, since coking is unlikely to occur, it is possible to reduce the frequency and time period for coking-removing operation and to enhance operation efficiency.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017]

FIG. 1 is a cross-sectional view of a cast product before heat treatment.

FIG. 2 is a schematic cross-sectional view illustrating a state where a dilute-Al layer is formed by low-temperature heat treatment.

FIG. 3 is a schematic cross-sectional view illustrating a state where a concentrated-Al layer is formed between the dilute-Al layer and a matrix by high-temperature heat treatment.

FIG. 4 shows a TEM photograph of a film of Working Example 2 and graphs illustrating the results of an EDX analysis.

FIG. 5 shows a TEM photograph of a film of Working Example 7 and graphs illustrating the results of an EDX analysis.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0018] Hereinafter, embodiments of the present invention will be described in detail.

[0019] A cast product of the present invention has an alumina barrier layer including an aluminum oxide on the surface of a matrix.

[0020] The aluminum oxide in the alumina barrier layer is $(Al_{(1-x)}M_{(x)})_2O_3$, where M is at least one of Cr, Ni, Si, and Fe, and x is adjusted so as to satisfy the relationship $0 < x < 0.5$.

[0021] Also, at least one of Cr, Ni, Si, and Fe forms a solid solution in the aluminum oxide in the alumina barrier layer, and at least one of Cr, Ni, Si, and Fe forming a solid solution with Al is contained so as to satisfy the relationship $Al/(Cr+Ni+Si+Fe) \geq 2.0$ in an atomic % ratio.

Explanation of reasons for limiting components

[0022] As long as the cast product of the present invention is made of a heat-resistant alloy containing Cr in an amount of 15 mass% or more, Ni in an amount of 18 mass% or more, and Al in an amount of 1 to 5 mass%, it is possible to obtain the effects of the present invention. The cast product of the present invention is made of the following components, for example. It should be noted that in the following description, the term "%" refers to "mass%" unless otherwise stated.

C: 0.05 to 0.7%

[0023] C acts to improve castability and enhance a high-temperature creep rupture strength. Therefore, the content of C is set to at least 0.05%. However, if the content is too large, a primary carbide of Cr_7C_3 is likely to be extensively formed and the movement of Al for forming the alumina barrier layer is suppressed. As a result, Al is insufficiently supplied to the surface portion of a cast body and the alumina barrier layer is locally divided, and thus the continuity of the alumina barrier layer is impaired. Moreover, a secondary carbide excessively deposits to reduce ductility and toughness. Therefore, the upper limit is set to 0.7%. It should be noted that the content of C is more desirably 0.3 to 0.5%.

Si: more than 0% to 2.5% or less

[0024] Si is contained to serve as a deoxidizer for molten alloy and to enhance the fluidity of molten alloy. If the content is too large, a high-temperature creep rupture strength is reduced, and therefore, the upper limit is set to 2.5%. It should be noted that the content of Si is more desirably 2.0% or less.

Mn: more than 0% to 3.0% or less

[0025] Mn is contained to serve as a deoxidizer for molten alloy and to fix S in molten alloy. If the content is too large, high-temperature creep rupture strength is reduced, and therefore, the upper limit is set to 3.0%. It should be noted that the content of Mn is more desirably 1.6% or less.

Cr: 15.0 to 50.0%

[0026] Cr is contained in an amount of 15.0% or more in order to contribute to the enhancement of high-temperature strength and cyclic oxidation resistance. However, if the content is too large, high-temperature creep rupture strength is reduced, and therefore, the upper limit is set to 50.0%. It should be noted that the content of Cr is more desirably 23.0 to 35.0%.

Ni: 18.0 to 70.0%

[0027] Ni is an element that is necessary to secure cyclic oxidation resistance and the stability of a metal structure. If the content of Ni is small, the content of Fe relatively becomes large. As a result, a Cr-Fe-Mn oxide is likely to be formed on the surface of the cast body, and thus the formation of the alumina barrier layer is inhibited. Therefore, the content of Ni is set to at least 18.0%. Even if the content of Ni exceeds 70.0%, it is impossible to obtain the efficacy corresponding to the increasing amount, and therefore, the upper limit is set to 70.0%. It should be noted that the content of Ni is more desirably 28.0 to 45.0%.

Al: 1.0 to 5.0%

[0028] Al is an element that is effective for enhancing carburization resistance and coking resistance. Also, in the present invention, Al is an element that is essential for forming the alumina barrier layer on the surface of the cast body. Therefore, the content of Al is set to at least 1.0%. However, if the content of Al exceeds 5%, the ductility is deteriorated, and therefore, the upper limit is set to 5.0% in the present invention. It should be noted that the content of Al is more desirably 2.5 to 3.8%.

Rare earth elements: 0.005 to 0.4%

[0029] The term "rare earth elements" means 17 elements including 15 elements of the lanthanide series ranging from La to Lu in the periodic table, and Y and Sc. It is preferable that rare earth elements to be contained in the heat-resistant alloy of the present invention include at least one element selected from the group consisting of Ce, La and Nd. Rare earth elements contribute to the formation of the alumina barrier layer and the enhancement of stability thereof.

[0030] When the alumina barrier layer is formed by heat treatment under a high-temperature oxidizing atmosphere, rare earth elements that are contained in an amount of 0.005% or more effectively contribute to the formation of the alumina barrier layer.

[0031] On the other hand, if the content is too large, the ductility and toughness are deteriorated, and therefore, the upper limit is set to 0.4%.

W: 0.5 to 10.0% and/or Mo: 0.1 to 5.0%

[0032] W and Mo enhance creep rupture strength by forming a solid solution in a matrix and strengthening an austenite phase. At least one of W and Mo is contained in order to achieve this efficacy. The content of W is set to 0.5% or more, and the content of Mo is set to 0.1% or more.

[0033] However, if the contents of W and Mo are too large, ductility is reduced and carburization resistance is deteriorated. Moreover, as in the case where the content of C is large, a primary carbide of $(\text{Cr}, \text{W}, \text{Mo})_7\text{C}_3$ is likely to be extensively formed and the movement of Al for forming the alumina barrier layer is suppressed. As a result, Al is insufficiently supplied to the surface portion of the cast body and the alumina barrier layer is locally divided, and thus the continuity of the alumina barrier layer is likely to be impaired. Furthermore, since W and Mo have a large atomic radius, they suppress the movement of Al and Cr and inhibit the formation of the alumina barrier layer due to the formation of a solid solution in the matrix.

[0034] Therefore, the content of W is set to 10.0% or less, and the content of Mo is set to 5.0% or less. It should be noted that when both elements are contained, the total content is preferably set to 10.0% or less.

[0035] In addition, the following components can be contained.

[0036] At least one selected from the group consisting of Ti in an amount of 0.01 to 0.6%, Zr in an amount of 0.01 to 0.6%, and Nb in an amount of 0.1 to 1.8%

[0037] Ti, Zr and Nb are elements that are likely to form carbides, and form less solid solutions in the matrix than W and Mo. Therefore, Ti, Zr and Nb do not exhibit any particular action of forming the alumina barrier layer, but enhance creep rupture strength. At least one of Ti, Zr and Nb can be contained as needed. The content of Ti or Zr is set to 0.01% or more and the content of Nb is set to 0.1% or more.

[0038] However, if they are excessively added, ductility is reduced. Furthermore, Nb reduces the peeling resistance of the alumina barrier layer. Therefore, the upper limit of the content of Ti or Zr is set to 0.6%, and the upper limit of the content of Nb is set to 1.8%.

B: more than 0% to 0.1% or less

[0039] Since B exhibits an action of strengthening the particle boundaries of the cast body, B can be contained as needed. It should be noted that if the content of B is large, creep rupture strength is reduced, and therefore, the content of B is set to 0.1% or less even in the case where B is added.

[0040] The heat-resistant alloy making up the cast body of the present invention includes the above-described components and Fe as the balance. P, S, and other impurities that are inevitably mixed in the alloy when melting the alloy may be contained as long as such impurities are contained in an amount within a range that is usually allowable to this type of alloy material.

Cast product

[0041] Molten metal having a composition including the above-described components is produced and cast by centrifugal casting, static casting, or the like into the cast product of the present invention having the above composition.

[0042] The obtained cast product can be shaped depending on the intended application.

[0043] One example of the cast product is a tube, in particular, a reaction tube used under a high-temperature environment.

[0044] It is particularly preferable to produce the cast product of the present invention by centrifugal casting. This is because when using centrifugal casting, a fine metal structure grows in the radial direction with orientation due to the progress of cooling by a metal mold and thus an alloy structure in which Al easily moves can be obtained.

[0045] Heat treatment, which will be described later, is performed on the cast product. The alumina barrier layer having a stable phase structure is formed by the heat treatment.

Heat treatment

[0046] The heat treatment is performed on the cast product of the present invention under an oxidizing atmosphere. The heat treatment can be divided into low-temperature heat treatment and high-temperature heat treatment. It should be noted that the low-temperature heat treatment and the high-temperature heat treatment can be performed in separate steps or the high-temperature heat treatment may be performed subsequently to the low-temperature heat treatment.

Low-temperature heat treatment

[0047] The low-temperature heat treatment is treatment in which an aluminum oxide layer is formed on the surface of

the matrix under an oxidizing atmosphere. One example of a low temperature is a temperature of less than 1050°C. It is desirably 600 to 900°C. It is desirable to perform the low-temperature heat treatment for 5 to 15 hours.

[0048] By performing the low-temperature heat treatment, oxygen comes into contact with a matrix 10 as shown in FIG. 1 to oxidize Al, Cr, Ni, Si, and Fe that has diffused from the matrix 10 to the surface of the matrix, and an oxide layer 22 is formed as shown in FIG. 2. Since this heat treatment is performed at a low temperature, Al forms oxides prior to Cr, Ni, Si, and Fe. Accordingly, an aluminum oxide layer 22 that contains Al as a main component and in which at least one of Cr, Ni, Si, and Fe, which have similarly diffused from the matrix, forms a solid solution is the oxide layer.

[0049] In the aluminum oxide formed by the low-temperature heat treatment, at least one of Cr, Ni, Si, and Fe forming a solid solution with Al is contained so as to satisfy the relationship $Al/(Cr+Ni+Si+Fe) \geq 2.0$ in an atomic % ratio. In addition, it is desirable that the composition thereof is $(Al_{(1-x)}M_{(x)})_2O_3$, where M is at least one of Cr, Ni, Si, and Fe, and x satisfies the relationship $0 < x < 0.5$. Moreover, at least Cr forms a solid solution in the aluminum oxide, and Cr forming a solid solution with Al is more preferably contained so as to satisfy the relationship $Al/Cr \geq 10$ in atomic % ratio, and still more preferably the relationship $Al/Cr \geq 15$. Furthermore, at least one of Ni, Si, and Fe forms a solid solution, and it is more desirable that the total atomic % of at least one of Ni, Si, and Fe forming a solid solution with Al is 10 atm% or less.

[0050] The aluminum oxide formed by the above-described low-temperature heat treatment has a metastable γ or θ alumina structure, which is a porous structure. Accordingly, the strength is not enough.

High-temperature heat treatment

[0051] The high-temperature heat treatment is heat treatment that is performed after the low-temperature heat treatment, and in which, as described later, the phase of the aluminum oxide formed by the low-temperature heat treatment is transformed to an α alumina structure (corundum structure), and an aluminum oxide layer containing Al at a high concentration is formed between that aluminum oxide layer and the matrix.

[0052] The high-temperature heat treatment can be performed by heating the cast product on which the low-temperature heat treatment has been performed and the alumina barrier layer having a γ or θ alumina structure has been formed, at a high temperature under an oxidizing atmosphere. One example of a high temperature is a temperature of 1050°C or more. It is desirable to perform the high-temperature heat treatment for 3 to 15 hours.

[0053] By performing the high-temperature heat treatment, the phase of the aluminum oxide that was formed first and has a γ or θ alumina structure is transformed to a stable α alumina structure (corundum structure). In the present invention, at least one of Cr, Ni, Si, and Fe forms a solid solution in the aluminum oxide layer having a γ or θ alumina structure. This makes it possible to promote the phase transformation from a γ or θ alumina structure to an α alumina structure (corundum structure) compared with the case where the aluminum oxide layer contains Al in a high ratio.

[0054] Then, the high-temperature heat treatment is further continuously performed on the cast product having the aluminum oxide layer in which the phase has been transformed to an α alumina structure (corundum structure), and thus oxygen passes through the aluminum oxide layer 22 as shown in FIG. 3.

[0055] The oxygen that has passed through the aluminum oxide layer 22 oxidizes Al that diffuses from the matrix, and an aluminum oxide layer 24 that contains Al at a high concentration is formed.

[0056] Here, as shown in FIG. 3, the aluminum oxide layer that is formed by the low-temperature heat treatment and in which at least one of Cr, Ni, Si, and Fe forms a solid solution is referred to as "dilute-Al layer", and the aluminum oxide layer that is formed between the dilute-Al layer and the surface of the matrix and contains Al at a high concentration is referred to as "concentrated-Al layer". Specifically, in the concentrated-Al layer 24, $Al/(Cr+Ni+Si+Fe)$ is larger than that in the dilute-Al layer 22.

[0057] It is thought that the reason why in terms of the alumina barrier layer, the concentrated-Al layer formed between the matrix and the dilute-Al layer contains Al at a higher concentration than the dilute-Al layer at the surface is as follows.

[0058] The formed dilute-Al layer 22 allows a small amount of oxygen to pass therethrough under an oxidizing atmosphere.

[0059] Al, Cr, Ni, Si, and Fe diffuse from the matrix 10 side to the matrix surface side as shown in FIG. 3. However, since Al needs a smaller amount of energy for binding to oxygen than Cr, Ni, Si, and Fe, Al priorly binds to oxygen, and the aluminum oxide layer (concentrated-Al layer 24) containing aluminum oxide at a high concentration is formed between the matrix 10 and the dilute-Al layer 22.

[0060] The concentrated-Al layer 24 is formed by high-temperature heat treatment, and thus has a stable α alumina structure (corundum structure). It is desirable that 80 vol% or more of a crystal structure of each of the dilute-Al layer 22 and the concentrated-Al layer 24 is an α alumina structure (corundum structure).

[0061] Since the alumina barrier layer 20 is constituted by the dilute-Al layer 22 and the concentrated-Al layer 24 formed between the matrix 10 and the dilute-Al layer 22, both of which have stable α alumina structures (corundum structures), the alumina barrier layer 20 has high denseness, serves as a barrier for preventing oxygen, carbon and nitrogen from entering the base material from the outside during use under a high-temperature atmosphere in the cast product provided therewith, and can maintain superior oxidation resistance, carburization resistance, nitriding resistance,

EP 3 124 645 A1

corrosion resistance, and the like for a long period of time.

[0062] It should be noted that the concentrated-Al layer 24 is desirably formed so as to be thicker than the dilute-Al layer 22, and it is preferable to form the concentrated-Al layer 24 such that the thickness of the concentrated-Al layer 24 is one fifth or more of that of the alumina barrier layer 20.

[0063] It is more desirable that the dilute-Al layer 22 has a thickness of 0.04 to 8.0 μm and the concentrated-Al layer 24 has a thickness of 0.01 to 2.0 μm .

[0064] It is desirable to heat the cast product while rotating it in order to preferably form the aluminum oxide layer in the above-described low-temperature heat treatment and high-temperature heat treatment. This makes it possible to heat the cast product uniformly and bring the cast product into contact with oxygen in a good state. As a result, it is possible to reduce the surface roughness (Ra) of the formed alumina barrier layer 20.

Surface treatment

[0065] It is possible to perform surface treatment on the alumina barrier layer of the cast product as needed. One example of the surface treatment is polishing. For example, when the cast product is used for a reaction tube, Fe, Ni and the like of the cast product come into contact with a hydrocarbon as a raw material and coke (carbon) is likely to adhere to the inner surface of the tube due to the catalytic action of Fe and Ni, but it is possible to suppress the adhesion of coke by performing the surface treatment to reduce the surface roughness (Ra) of the alumina barrier layer.

[0066] It is desirable to perform the surface treatment such that the surface roughness (Ra) of the alumina barrier layer is 15 μm or less. The surface roughness (Ra) is more desirably 0.05 to 10 μm .

Example 1

[0067] Molten metal was produced by atmospheric melting in a highfrequency induction melting furnace and cast by metal mold centrifugal casting into tube bodies having alloy chemical compositions shown in Table 1 below. The tube body has an inner diameter of 80 mm, an outer diameter of 100 mm, and a length of 250 mm.

Table 1

No.	Alloy chemical composition (the balance includes Fe and inevitable im purities) (mass%)												
	C	Si	Mn	Cr	Ni	Al	REM	W	Mo	Ti	Zr	Nb	B
Work. Ex. 1	0.33	0.49	0.32	24.5	43.6	1.2	0.25	2.1		0.6		0.7	
Work. Ex. 2	0.45	0.49	0.9	24.3	34.6	1.0	0.16		1.5	0.13			
Work. Ex. 3	0.4	0.33	0.7	23.8	31.5	3.3	0.26		2.8				0.03
Work. Ex. 4	0.46	1.5	1.2	25.2	35.0	2.8	0.21	4.2		0.09	0.12		
Work. Ex. 5	0.26	0.41	0.5	23.5	34.6	3.1	0.07	0.9					0.07
Work. Ex. 6	0.31	0.4	0.2	18.3	67.1	4.7	0.01		0.4			1.6	
Work. Ex. 7	0.38	0.26	0.4	23.8	34.4	4.9	0.11	0.95				0.1	
Work. Ex. 8	0.67	1.5	1.1	23.9	40.1	4.9	0.19		2.9	0.03			
Comp. Ex. 1	0.33	1.78	0.17	25.0	33.4	0.0	0.11	0.83		0.12			
Comp. Ex. 2	0.40	1.3	0.9	25.4	15.0	0.9	0.29	2.9					
Comp. Ex. 3	0.27	1.02	0.2	23.8	33.6	1.1	0.19	11.7					
Comp. Ex. 4	0.34	0.6	0.2	25.0	45.4	2.9	0.09		1.5			1.3	
Comp. Ex. 5	0.45	1.43	1.3	22.9	34.7	3.2	0.24	3.15		0.23			
Comp. Ex. 6	0.45	0.54	0.7	23.8	29.7	5.1	0.15	1.5		0.21			

[0068] Two steps of heat treatment that differed in a heating temperature were performed on each of Working Examples 1 to 8, which were obtained examples of the present invention, and Comparative Examples 1 to 6 under an oxidizing atmosphere. First, the low-temperature heat treatment was performed, and the high-temperature heat treatment was subsequently performed. The low-temperature heat treatment was performed for 5 hours, and the high-temperature heat treatment was performed for 5 hours.

Table 2

No.	Low-temperature heat treatment temperature (°C)	High-temperature heat treatment temperature (°C)
Work. Ex. 1	700	1050
Work. Ex. 2	900	1100
Work. Ex. 3	800	1050
Work. Ex. 4	800	1100
Work. Ex. 5	900	1100
Work. Ex. 6	600	1050
Work. Ex. 7	700	1100
Work. Ex. 8	600	1150
Comp. Ex. 1	800	900
Comp. Ex. 2	1000	1250
Comp. Ex. 3	1200	1300
Comp. Ex. 4	500	1150
Comp. Ex. 5	900	1000
Comp. Ex. 6	600	800

[0069] The atomic percentages of elements (Al, Cr, Fe, Ni, Si, O) contained in the alumina barrier layer formed on the surface of a sample tube of each of Working Examples 1 to 8 and Comparative Examples 1 to 6 that had been subjected to the heat treatment were measured by an EDX analysis (energy dispersive X-ray spectrometry). Table 3 shows the results.

Table 3

No.	Al (atm%)	Cr (atm%)	Fe (atm%)	Ni (atm%)	Si (atm%)	O (atm%)	Cr+Fe +Ni+Si (atm%)	Al/(Cr+Fe +Ni+Si)	Al/Cr	Fe+Ni+Si (atm%)	Concentrated-Al layer thickness /Al barrier layer thickness
Work. Ex. 1	41.66	2.7	4.46	3.52		48.56	10.7	3.9	15.43	7.98	0.50
Work. Ex. 2	39.2	3.6	1.4	3.2		52.6	8.2	4.8	10.89	4.6	0.30
Work. Ex. 3	46.6	0.1	0.1			53.2	0.2	233.0	466.0	0.1	0.80
Work. Ex. 4	40.96	2.23	2.34	2.12		52.35	6.7	6.1	18.37	4.46	0.60
Work. Ex. 5	38.4	1.5	10.1	6.4	1.2	42.4	19.2	2.0	25.60	17.7	0.40
Work. Ex. 6	42.49	1.31	2.13	1.95		52.12	5.4	7.9	32.44	4.08	0.75
Work. Ex. 7	42.69	1.28				55.93	1.3	33.4	33.35	0	0.70
Work. Ex. 8	41.8	2.4	3.9	6.5		45.4	12.8	3.3	17.42	10.4	0.50
Comp. Ex. 1		4.61	10.25	7.09	31	47.05	53.0	0.0	0.00	48.34	0.00
Comp. Ex. 2	11.17	15.25	30.1	25.28	1.47	16.73	72.1	0.2	0.73	56.85	0.10
Comp. Ex. 3	6.7	35.46	1.65	1.8	1.64	52.75	40.6	0.2	0.19	5.09	0.05
Comp. Ex. 4	36.7	6.7	1.8	10.3		44.5	18.8	1.95	5.48	12.1	0.15
Comp. Ex. 5	9.77	21.54	11.34	9.51	1.02	46.82	43.4	0.2	0.45	21.87	0.10
Comp. Ex. 6	8.35	11	15.18	13.76		51.71	39.9	0.2	0.76	28.94	0.05

[0070] All of Working Examples 1 to 8, which are examples of the present invention, satisfy the relationship $Al/(Cr+Ni+Si+Fe) \geq 2.0$ in atomic % ratio. Furthermore, they satisfy the relationship $Al/Cr \geq 10$. On the other hand, Comparative Example 1 contains no Al in the matrix, and therefore, no aluminum oxide is formed and both $Al/(Cr+Ni+Si+Fe)$ and Al/Cr are zero.

[0071] Moreover, all of Comparative Examples 2 to 6 satisfy the relationships $Al/(Cr+Ni+Si+Fe) < 2.0$ and $Al/Cr < 10$.

[0072] Furthermore, Fe+Ni+Si is 10 atm% or less in Working Examples 1 to 4, and 6 and 7, and Comparative Example 3, and more than 10 atm% in other working examples and comparative examples.

[0073] The ratio of the thickness of the concentrated-Al layer with respect to the thickness of the formed alumina barrier layer was measured in each of obtained Working Examples 1 to 8 and Comparative Examples 1 to 6. Table 3 above shows the results.

[0074] Table 3 shows that the ratio of the thickness of the concentrated-Al layer with respect to the thickness of the alumina barrier layer is 0.3 or more, that is, one fifth or more in each working example, but it is 0.15 at most in the comparative examples. It should be noted that since Comparative Example 1 contains no Al, no alumina barrier layer is formed.

[0075] This shows that since the low-temperature heat treatment was performed on the working examples, which were examples of the present invention, at a temperature of less than 1050°C and the high-temperature heat treatment was performed thereon at a temperature of 1050°C or more, the dilute-Al layer was formed on the surface of the matrix by the low-temperature heat treatment and then the concentrated-Al layer could be formed between the dilute-Al layer and the matrix by the high-temperature heat treatment.

[0076] On the other hand, it is thought that the ratio of the thickness of the concentrated-Al layer with respect to the thickness of the alumina barrier layer was 0.15 at most in Comparative Examples 2 to 6 on which the alumina barrier layer was formed for the following reasons.

[0077] In Comparative Example 2, the cast body contained Al in a small amount of 0.9%, and Al for forming a film on the surface of the cast body was insufficient. In Comparative Example 3, since the low-temperature heat treatment was performed at a high temperature of 1200°C, oxides containing Cr, Ni, Si, Fe and the like as a main component were formed before the alumina barrier layer having a γ or θ alumina structure was formed. In Comparative Example 4, since the low-temperature heat treatment was performed at a low temperature of 500°C, no alumina barrier layer having a γ or θ alumina structure was formed. In Comparative Examples 5 and 6, the high-temperature heat treatment was performed at a low temperature of 1000°C. As a result, a small amount of oxygen passed through the dilute-Al layer in the high-temperature heat treatment after the dilute-Al layer was formed in the low-temperature heat treatment, and Al did not obtain sufficient energy for binding to the oxygen taken in because the temperature was low.

[0078] Next, a coking test was performed on the obtained sample tubes.

[0079] The coking test was performed by placing the sample tubes in an electric furnace, supplying a hydrocarbon (ethane) to the sample tubes, and then heating them at a high temperature (955°C) for a predetermined time (12 to 24 hours). After the test, the degrees of carburization of the inner surfaces of the sample tubes were compared, and the weight ratio of coke (carbon) adhering to the inner surface of each sample tube was measured. Table 4 shows the results.

Table 4

No.	Carburization resistance	Weight ratio of formed coke	Surface roughness (Ra)
Work. Ex. 1	Good	0.4	0.13
Work. Ex. 2	Fair	0.6	5.51
Work. Ex. 3	Good	0.8	7.63
Work. Ex. 4	Good	0.6	1.53
Work. Ex. 5	Fair	1.0	11.7
Work. Ex. 6	Good	0.6	1.54
Work. Ex. 7	Good	0.7	2.02
Work. Ex. 8	Good	1.1	13.8
Comp. Ex. 1	Poor	0.9	9.17
Comp. Ex. 2	Poor	0.7	4.5
Comp. Ex. 3	Poor	1.5	18.1
Comp. Ex. 4	Poor	0.7	8.32

(continued)

No.	Carburization resistance	Weight ratio of formed coke	Surface roughness (Ra)
Comp. Ex. 5	Poor	0.8	6.27
Comp. Ex. 6	Poor	1.4	16.47

[0080] Table 4 shows that all of Working Examples 1 to 8, which were examples of the present invention, had favorable carburization resistance. On the other hand, all of the comparative examples were carburized to the inside of the sample tube.

[0081] It is because the alumina barrier layer having a stable α alumina structure (corundum structure) that was constituted by the concentrated-Al layer and the dilute-Al layer was preferably formed on the surface of the matrix that Working Examples 1 to 8 had superior carburization resistance. In particular, Working Examples 1, 3, 4, and 6 to 8 had extremely superior carburization resistance compared with the other working examples. It is thought that this is because a smaller amount of the concentrated-Al layer was formed in Working Examples 2 and 5 than in the other working examples.

[0082] Furthermore, the surface roughness (Ra) of each sample tube was measured. Table 4 shows the results as well. Table 4 shows that the weight ratio of the formed coke and the surface roughness (Ra) were substantially in proportion to each other. Accordingly, the surface roughness (Ra) is preferably 15 μm or less, and more preferably 10 μm or less.

[0083] It is possible to adjust the surface roughness (Ra) by performing the heat treatment while rotating the cast product. It is thought that it is because the heat treatment for forming a film was not properly performed and the surface roughness was increased due to the peeling and restoration of the film that the surface roughness of Comparative Examples 3 and 6 exceeded 15 μm .

Example 2

[0084] The alumina barrier layers of Inventive Examples 2 and 7 are observed using a transmission electron microscope (TEM). Furthermore, the EDX analysis was performed on the dilute-Al layer and the concentrated-Al layer of each inventive example. FIG. 4 shows the results from Inventive Example 2, and FIG. 5 shows the results from Inventive Example 7.

[0085] FIG. 4 shows that in Inventive Example 2, small amounts of Cr, Fe, and Ni were detected in the dilute-Al layer 22 formed on the surface side, which contained Al oxides as a main component. On the other hand, no Cr, Fe, Ni, and the like were detected in the concentrated-Al layer 24 but Al. Accordingly, it is found that the concentrated-Al layer 24 was made of aluminum oxide having a very high purity.

[0086] FIG. 5 shows that in Inventive Example 7, a small amount of Cr was detected in the dilute-Al layer 22 formed on the surface side, which mainly included Al oxides. On the other hand, nothing but Al was detected in the concentrated-Al layer 24. Accordingly, it is found that the concentrated-Al layer 24 was made of aluminum oxide having a very high purity.

Claims

1. A cast product having an alumina barrier layer including an aluminum oxide on a surface of a matrix, wherein the aluminum oxide is $(\text{Al}_{(1-x)}\text{M}_{(x)})_2\text{O}_3$, where M is at least one of Cr, Ni, Si, and Fe, and x satisfies a relationship $0 < x < 0.5$.
2. A cast product having an alumina barrier layer including an aluminum oxide on a surface of a matrix, wherein at least one of Cr, Ni, Si, and Fe forms a solid solution in the aluminum oxide, and the at least one of Cr, Ni, Si, and Fe forming the solid solution with Al is contained so as to satisfy a relationship $\text{Al}/(\text{Cr}+\text{Ni}+\text{Si}+\text{Fe}) \geq 2.0$ in an atomic % ratio.
3. The cast product according to claim 1 or 2, wherein 80 vol% or more of a crystal structure of the aluminum oxide is a corundum structure.
4. The cast product according to any one of claims 1 to 3, wherein at least Cr forms a solid solution in the aluminum oxide, and the Cr forming the solid solution with Al is contained so as to satisfy a relationship $\text{Al}/\text{Cr} \geq 10$ in an atomic % ratio.

EP 3 124 645 A1

5. The cast product according to any one of claims 1 to 4,
wherein at least one of Ni, Si, and Fe forms a solid solution in the aluminum oxide, and a total atomic % of the at
least one of Ni, Si, and Fe forming the solid solution with Al is 10 atm% or less.
- 5 6. The cast product according to any one of claims 1 to 5,
wherein the aluminum oxide has a concentrated-Al layer in which the Al/(Cr+Ni+Si+Fe) on the matrix side is larger
than that on the surface side.
7. The cast product according to claim 6,
10 wherein a thickness of the concentrated-Al layer is one fifth or more of a thickness of the alumina barrier layer.
8. The cast product according to any one of claims 1 to 7,
wherein the alumina barrier layer has a surface roughness (Ra) of 15 μm or less.
- 15 9. The cast product according to any one of claims 1 to 8,
wherein the matrix includes C in an amount of 0.05 to 0.7 mass%, Si in an amount of more than 0 mass% to 2.5
mass% or less, Mn in an amount of more than 0 mass% to 3.0 mass% or less, Cr in an amount of 15.0 to 50.0
mass%, Ni in an amount of 18.0 to 70.0 mass%, Al in an amount of 1.0 to 5.0 mass%, rare earth elements in an
amount of 0.005 to 0.4 mass%, and W in an amount of 0.5 to 10.0 mass% and/or Mo in an amount of 0.1 to 5.0
20 mass%, and the balance includes Fe and inevitable impurities.
10. The cast product according to claim 9,
wherein the matrix further includes at least one selected from the group consisting of Ti in an amount of 0.01 to 0.6
mass%, Zr in an amount of 0.01 to 0.6 mass%, and Nb in an amount of 0.1 to 1.8 mass%.
- 25 11. The cast product according to claim 9 or 10,
wherein the matrix further includes B in an amount of more than 0 mass% to 0.1 mass% or less.
12. A reaction tube made of the cast product according to any one of claims 1 to 11,
30 the alumina barrier layer being formed on an inner surface of the tube through which hydrocarbon gas as a raw
material flows.

FIG. 1




FIG. 2

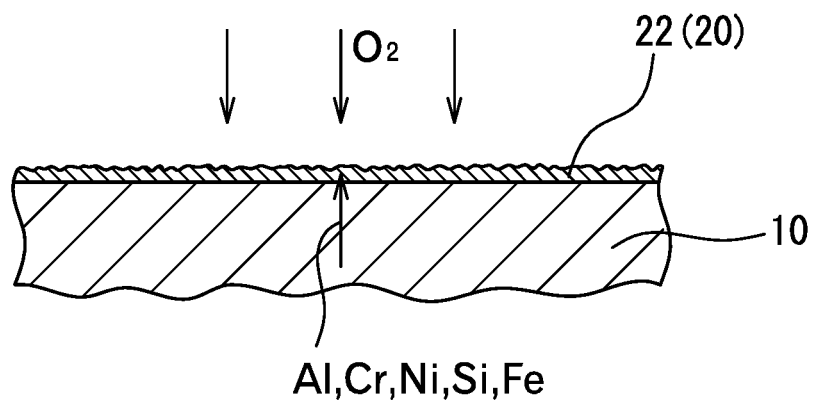


FIG. 3

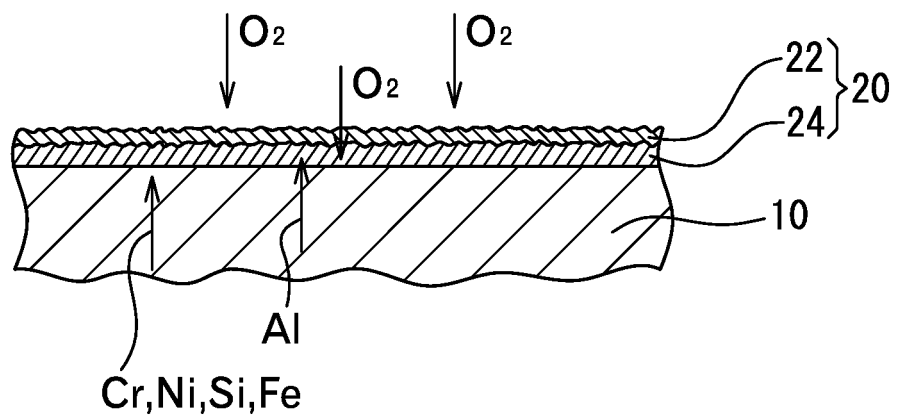


FIG. 4


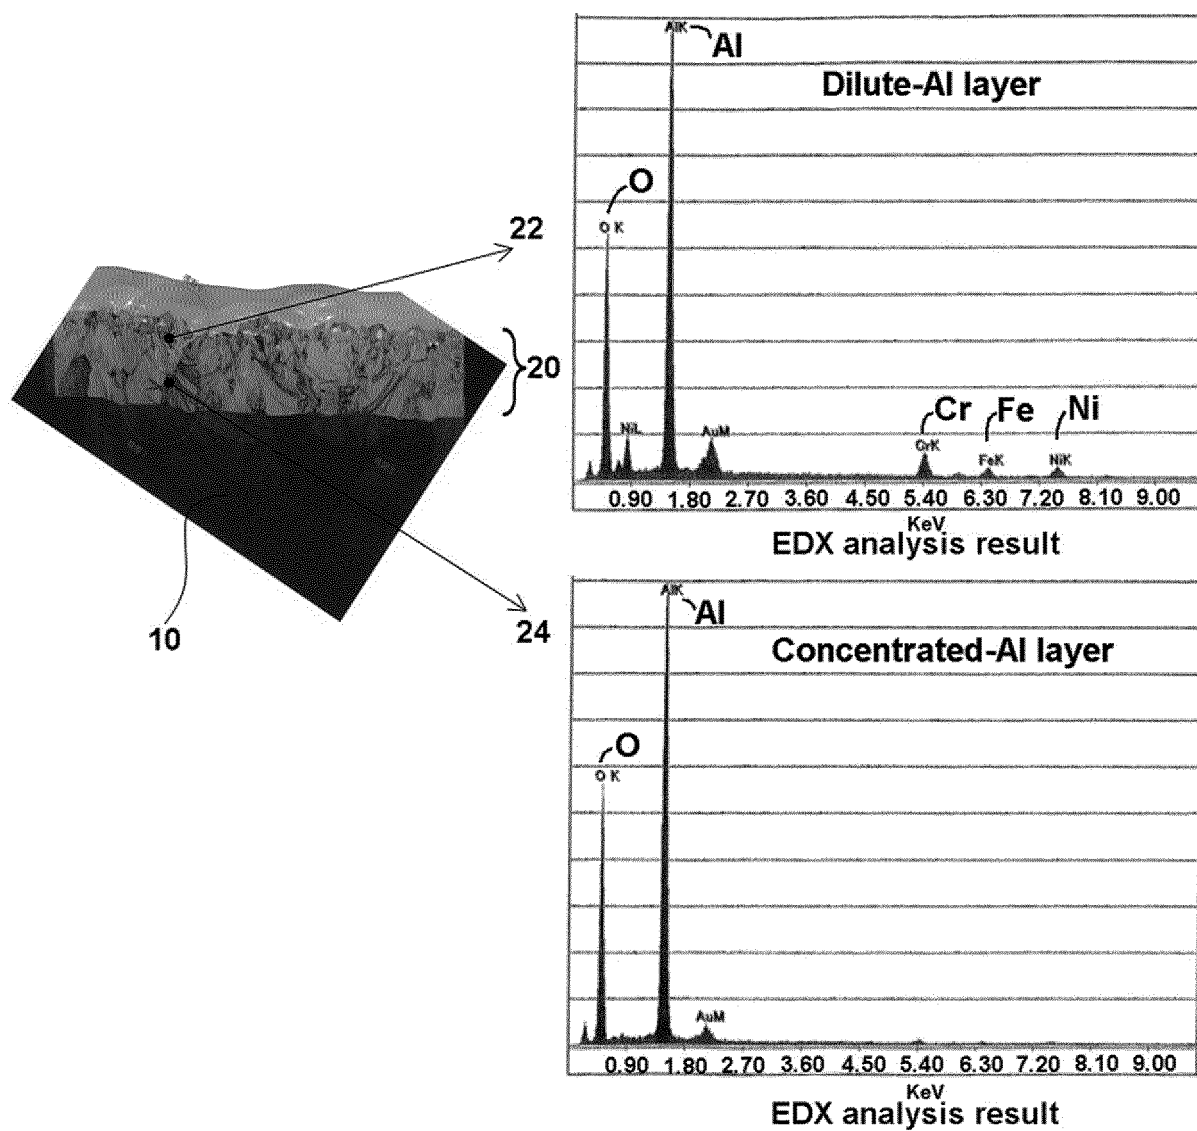


FIG. 5

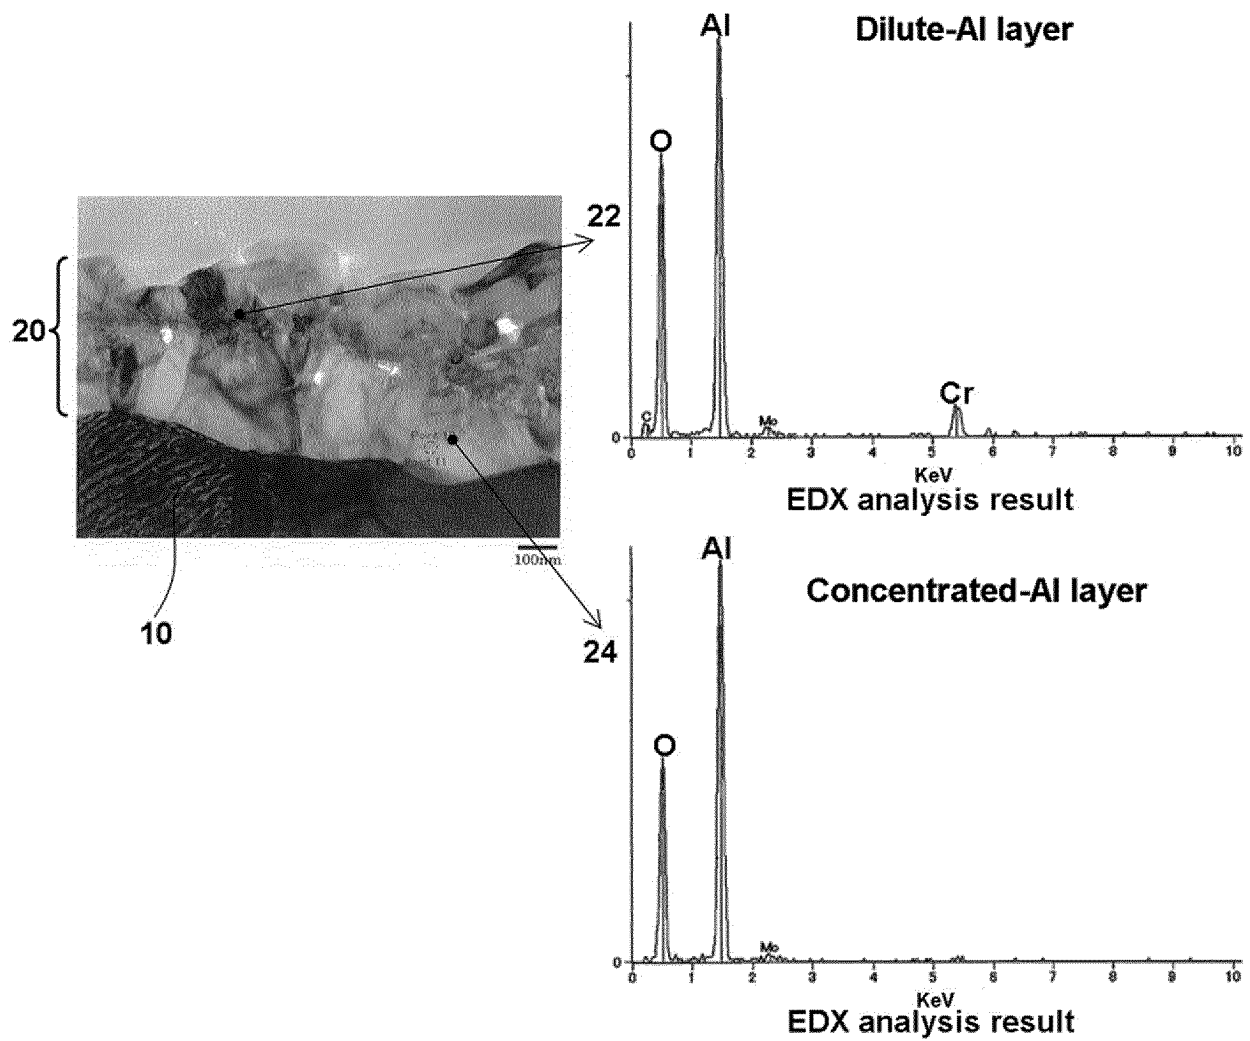

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2014/083417

A. CLASSIFICATION OF SUBJECT MATTER

C23C8/14(2006.01)i, C22C19/05(2006.01)i, C22C30/00(2006.01)i, C22C38/00(2006.01)i, C22C38/58(2006.01)i, C21D6/00(2006.01)n, C22F1/00(2006.01)n, C22F1/10(2006.01)n

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C23C8/14, C22C19/05, C22C30/00, C22C38/00, C22C38/58, C21D6/00, C22F1/00, C22F1/10

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2015
Kokai Jitsuyo Shinan Koho 1971-2015 Toroku Jitsuyo Shinan Koho 1994-2015

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

JSTPlus (JDreamIII)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	JP 2013-199672 A (Kubota Corp.), 03 October 2013 (03.10.2013), claims 9, 13 to 15; paragraph [0002]; examples & US 2014/0205802 A1 & WO 2013/141030 A1	1-5, 8-12 6, 7
Y A	JP 53-31517 A (Toyo Kogyo Co., Ltd.), 24 March 1978 (24.03.1978), page 7, upper right column, lines 6 to 15; fig. 1 (Family: none)	1-5, 8-12 6, 7
Y A	JP 54-125118 A (Acieries du Manoir Pompey), 28 September 1979 (28.09.1979), page 4, upper left column, lines 6 to 12; page 7, lower left column, lines 3 to 6 & US 4248629 A1 & GB 2017148 A & DE 2837122 A1 & FR 2420578 A1	1-5, 8-12 6, 7



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

21 January 2015 (21.01.15)

Date of mailing of the international search report

03 February 2015 (03.02.15)

Name and mailing address of the ISA/

Japan Patent Office
3-4-3, Kasumigaseki, Chiyoda-ku,
Tokyo 100-8915, Japan

Authorized officer

Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2014/083417

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	JP 5-195138 A (Kubota Corp.), 03 August 1993 (03.08.1993), paragraph [0006] (Family: none)	1-5, 8-12 6, 7
Y A	JP 2014-501620 A (Exxonmobil Research and Engineering Co.), 23 January 2014 (23.01.2014), paragraph [0049] & US 2012/0097581 A1 & US 2012/0211400 A1 & EP 2629903 A & EP 2766683 A & WO 2012/054377 A1 & WO 2013/055405 A1 & WO 2013/155367 A1 & CA 2815357 A1	8 6, 7
A	JP 2013-227655 A (Kubota Corp.), 07 November 2013 (07.11.2013), entire text & US 2014/0205802 A1 & WO 2013/141030 A1	1-12
A	Sadao OTA et al., "Effect of addition of Al, Zr, Y, Ce, La and Hf on the carburization resistance of high-Si-25Cr-35Ni alloy", Journal of the Iron & Steel Institute of Japan, vol.67, no.13, 10 September 1981 (10.09.1981), S1266	1-12

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP S5278612 A [0010]
- JP S5739159 A [0010]
- WO 2010113830 A [0010]