

(19)



(11)

EP 3 128 052 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.09.2017 Bulletin 2017/37

(51) Int Cl.:
D01G 19/22 (2006.01)

(21) Application number: **16181608.7**

(22) Date of filing: **28.07.2016**

(54) **COMBER**

KÄMMMASCHINE

PEIGNE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **04.08.2015 JP 2015154536**

(43) Date of publication of application:
08.02.2017 Bulletin 2017/06

(73) Proprietor: **KABUSHIKI KAISHA TOYOTA
JIDOSHOKKI
Kariya-shi, Aichi-ken, 448-8671 (JP)**

(72) Inventors:
• **KAWAI, Motohiro
Kariya-shi,, Aichi 448-8671 (JP)**
• **SHIMBARA, Masami
Kariya-shi,, Aichi 448-8671 (JP)**
• **SHINOZAKI, Yutaka
Kariya-shi,, Aichi 448-8671 (JP)**

(74) Representative: **TBK
Bavariaring 4-6
80336 München (DE)**

(56) References cited:
**DE-T2- 69 011 018 DE-T2- 69 804 233
US-A- 3 735 446**

EP 3 128 052 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a comber and, more particularly, a comber having characteristics in control of a brush for cleaning a comb of a combing cylinder.

[0002] A comber includes a nipper device, which grips a lap supplied from a supply source and a combing cylinder, which combs the distal end of the lap. The comber combs the lap, which is gripped by the nipper device, by means of the combing cylinder, to remove noil such as impurities and short fibers from the lap, thus producing fleece. A combing brush (hereinafter, referred to simply as a brush) brushes short fibers and the like from a comb of the combing cylinder. When the comber is in operation, the brush and the combing cylinder rotate in the same direction and the brush cleans waste cotton from the comb using the speed difference between the brush and the comb.

[0003] In a typical comber, a combing cylinder and a nipper device are driven by a main motor and a brush is driven by a motor for a brush. With reference to Fig. 4, the brush is driven at a constant speed, despite the fact that the rotation speed of the comb is changed in an acceleration period from when the comber is started to when a certain operating speed (a normal operating speed) is achieved and in a deceleration period from when the comber is operated at the certain operating speed to when the comber is stopped.

[0004] When the brush wears and the diameter of the brush decreases, the rotation speed of the brush is increased. For example, the brush is separated from the machine to measure the brush diameter. If the brush diameter is smaller than a predetermined value, the driving pulley is replaced by a pulley with a greater diameter to increase the rotation speed of the brush.

[0005] There may be a case in which a comb cleaning time is set for operation of the comber to decrease the operating speed of the comber (the rotation speed of the comb) without changing the rotation speed of the brush.

[0006] Japanese Laid-Open Patent Publication No. 3-146725 discloses a device for automatically compensating for wear of a circular brush, which is arranged in a rectilinear comber. The device has a variable speed electric motor and, by controlling the rotation speed of the circular brush using the electric motor, adjusts the rotation speed of the circular brush in correspondence with wear of the brush. In this manner, the circumferential speed of a peripheral section of the circular brush is maintained constant.

[0007] To ensure desirable cleaning of a comb using a brush, the circumferential speed of the brush must be higher than the circumferential speed of the comb. Therefore, simply to improve cleaning performance, it is preferable to increase the rotation speed of the brush. However, this correspondingly increases air flows accompanying rotation of the brush (hereinafter, referred to as

"brush-accompanying air flows"). When the comber is in normal operation, air flows accompanying rotation of the comb (hereinafter, referred to as "comb-accompanying air flows") restrain the brush-accompanying air flows. However, when the speed of the comb decreases, equilibrium is canceled and turbulence occurs in air flows in the peripheries of the brush and the comb, thus causing disarrangement of fleece. If the rotation speed of the brush is controlled to a constant speed corresponding to the cylinder speed in the normal operation of the comber, the circumferential speed of the brush becomes excessively higher than the circumferential speed of the comb in the acceleration period and the deceleration period of the combing cylinder. This causes disarrangement of fleece caused by the brush-accompanying air flows in, particularly, the deceleration period.

[0008] Japanese Laid-Open Patent Publication No. 3-146725 discloses controlling of the rotation speed of the circular brush using a variable speed electric motor to adjust the rotation speed of the circular brush in correspondence with wear of the brush. In this manner, the circumferential speed of the peripheral section of the circular brush is maintained constant. However, the technique described in this publication does not address issues regarding the acceleration period and the deceleration period of the combing cylinder.

SUMMARY OF THE INVENTION

[0009] Accordingly, it is an objective of the present invention to provide a comber capable of preventing disarrangement of fleece caused by air flows accompanying a brush in an acceleration period and a deceleration period of a combing cylinder.

[0010] To achieve the foregoing objective and in accordance with one aspect of the present invention, a comber is provided that includes a brush for cleaning a comb of a combing cylinder, a cylinder driving motor, which is configured to drive the combing cylinder, a variable speed driving motor, which is configured to drive the brush and is arranged independently from the cylinder driving motor, and a speed controller, which is configured to drive the variable speed driving motor. The speed controller is configured to control the variable speed driving motor such that a circumferential speed of a distal end of the brush is lower at least in an acceleration period and a deceleration period of the combing cylinder than in normal operation of the comber.

[0011] Other aspects and advantages of the present invention will become apparent from the following description, taken in conjunction with the accompanying drawings, illustrating by way of example the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The invention, together with objects and advantages thereof, may best be understood by reference to

the following description of the presently preferred embodiments together with the accompanying drawings in which:

Fig. 1 is a diagram representing a driving system of an embodiment of a comber;

Fig. 2 is a side view schematically showing a combing head;

Fig. 3 is a graph representing speed changes of a combing cylinder and a brush when the comber is in operation; and

Fig. 4 is a graph representing speed changes of a combing cylinder and a brush when a comber of a conventional technique is in operation.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0013] One embodiment of the present invention will now be described with reference to Figs. 1 to 3.

[0014] A comber includes an operating portion in which a plurality of combing heads 11 is arranged. Fig. 1 illustrates only one of the combing heads 11. As shown in Fig. 2, the combing head 11 includes a pair of lap rollers 12, a nipper device 14 including a feed roller 13, a combing cylinder 15, and two pairs of detaching rollers 16, which are arranged adjacently in the front-rear direction of the combing head 11. The nipper device 14 has a nipper frame 17, which is arranged in a manner reciprocally swingable in the front-rear direction at a position above the combing cylinder 15. The nipper frame 17 has a bottom nipper 18 in the bottom section of the nipper frame 17. A nipper arm 19 is pivotally arranged in the nipper frame 17 with a support shaft 17a. A top nipper 19a is fixed to the distal end of the nipper arm 19. The top nipper 19a selectively opens and closes at certain timings synchronously with swinging movement of the nipper frame 17, thus clamping a lap L between the top nipper 19a and the bottom nipper 18. A top comb 20 is attached to the nipper frame 17 at a position forward from the bottom nipper 18 to perform certain movement synchronously with the nipper frame 17.

[0015] A nipper shaft 21 is arranged rearward from the combing cylinder 15 and below the nipper frame 17 in a reciprocally pivotal manner. A first end of a nipper frame driving arm 22 is fixed to the nipper shaft 21 in an integrally pivotal manner. The rear end of the nipper frame 17 is pivotally supported by a second end of the nipper frame driving arm 22 with a support shaft 22a. The nipper frame 17 swings in the front-rear direction through reciprocal pivoting (swinging movement) of the nipper shaft 21 such that the distal end of the bottom nipper 18 selectively approaches and separates from the detaching rollers 16.

[0016] The combing cylinder 15 includes a comb 15a (a combing segment) and is supported by a cylinder shaft 23 in an integrally rotational manner. Through driving of the cylinder shaft 23, the distal end of the lap L, which is

gripped by the nipper device 14, is combed by the comb 15a. The amount of waste cotton removed by combing the lap L by means of the comb 15a changes depending on the timings at which the comb 15a combs the lap L, which is gripped by the nipper device 14.

[0017] A brush 24, which cleans the comb 15a of the combing cylinder 15, is arranged below the combing cylinder 15. A suction duct 25 is arranged below the brush 24. After having been removed from the lap L by the combing cylinder 15 and the top comb 20, short fibers and nep are drawn into the suction duct 25.

[0018] A pair of delivery rollers (pull-out rollers) 26 and a pair of calendar rollers 27 are arranged forward from the detaching rollers 16 (leftward as viewed in Fig. 2).

[0019] A driving mechanism of the combing heads 11 will hereafter be described with reference to Fig. 1. Although only one of the combing heads 11 is shown in Fig. 1, the multiple combing heads 11 are arranged in the longitudinal direction of the comber (the left-right direction as viewed in Fig. 1) and are driven by a common drive shaft (a main drive shaft 32, which will be described later) for all of the combing heads 11.

[0020] With reference to Fig. 1, the driving mechanism includes a main motor 30, a belt transmission device 31, and the main drive shaft 32, which is driven by the main motor 30 with the belt transmission device 31. Gears 33 are fixed to the main drive shaft 32 on opposite sides of the combing head 11 in an integrally rotational manner. Rotation of each of the gears 33 is transmitted to a middle shaft 34 through a corresponding gear 35. A conversion mechanism 36, which converts rotation of each of the middle shafts 34 in one direction into swinging movement (reciprocal pivoting) of the nipper shaft 21, is arranged between the middle shaft 34 and the nipper shaft 21. Each middle shaft 34 is coupled to the cylinder shaft 23 through a corresponding gear row 37. That is, the main motor 30 functions as a cylinder driving motor for driving the combing cylinder 15.

[0021] Referring to Fig. 1, corresponding two servomotors 39 are arranged on opposite sides of a detaching roller shaft 38 of each of the detaching rollers 16. A driving gear 40, which is meshed with a gear 38a fixed to either end of each of the detaching roller shafts 38, is fixed to an output shaft 39a of the corresponding one of the servomotors 39 in an integrally rotational manner. That is, each detaching roller shaft 38 is driven by the two corresponding servomotors 39 from the opposite sides.

[0022] Rotation of the main drive shaft 32 is transmitted to a rotary shaft 43 through a belt transmission device 44. The rotary shaft 43 transmits rotation to a delivery roller shaft 41 and a calendar roller shaft 42. The rotation of the rotary shaft 43 is transmitted to the delivery roller shaft 41 through a gear 43a and a gear 41a and to the calendar roller shaft 42 through the gear 43a and a gear 42a. The lap rollers 12 are driven by a lap roller motor 45 through a belt transmission device 46.

[0023] As illustrated in Fig. 1, the driving mechanism includes a brush motor 50, which drives a brush shaft

24a through a belt transmission device 51. A controller 52, which serves as a speed controller, is connected to the main motor 30 and the brush motor 50 through an inverter 53 and an inverter 54, respectively. The main motor 30 and the brush motor 50 are driven by the corresponding inverters 53, 54, which are controlled based on commands from the controller 52. That is, the variable speed driving motor (the brush motor 50) is arranged independently from the cylinder driving motor (the main motor 30), which drives the combing cylinder 15, and drives the brush 24 for cleaning the comb 15a of the combing cylinder 15. The controller 52 is connected to the servomotors 39 and the lap roller motor 45 through non-illustrated inverters and controls the servomotors 39 and the lap roller motor 45.

[0024] The controller 52 includes a CPU 55 and a memory 56. The memory 56 stores various types of control programs necessary for driving the main motor 30, the servomotors 39, the lap roller motor 45, and the brush motor 50 and various types of data, maps, and relational expressions necessary for executing the programs. The memory 56 stores data such as relational expressions, diagrams, and tables representing the proper speed of the brush 24 with respect to the rotation speed of the combing cylinder 15 (the operating speed of the comb), which ensures a predetermined speed ratio A of the circumferential speed of the distal end of the brush 24 with respect to the circumferential speed of the distal end of the comb 15a. When the comb is in normal operation, the controller 52 drives and controls the brush motor 50, using the data stored in the memory 56, to achieve the proper speed corresponding to the rotation speed of the combing cylinder 15 (the operating speed of the comb). The speed ratio A is set in the range of 1.5 to 2.

[0025] The controller 52 controls the brush motor 50 such that, at least in an acceleration period and a deceleration period of the combing cylinder 15, the circumferential speed of the distal end of the brush 24 is lower than the circumferential speed in the normal operation. In the present embodiment, the controller 52 controls the brush motor 50 using the average rotation speed per rotation of the combing cylinder 15 as the rotation speed of the combing cylinder 15. The controller 52 controls such that the speed ratio of the circumferential speed of the distal end of the brush 24 with respect to the circumferential speed of the distal end of the comb 15a in the acceleration period and the deceleration period of the combing cylinder 15 becomes equal to the speed ratio A in the normal operation of the comb.

[0026] A sensor 57 detects the diameter of the brush 24 and functions as a brush diameter detector. The controller 52 receives a detection signal from the sensor 57. The sensor 57 automatically detects the brush diameter and outputs a detection signal to the controller 52. The controller 52 controls the brush motor 50 based on the detection signal input from the sensor 57, which is, in other words, the brush diameter. That is, the brush diameter detected by the sensor 57 is fed back to control

of the brush motor 50 by the controller 52.

[0027] The controller 52 also controls the servomotors 39 and the lap roller motor 45.

[0028] Operation of the comb, which is configured in the above-described manner, will hereafter be described.

[0029] When the comb operates, the controller 52 drives the main motor 30 through the inverter 53 to cause swinging movement (reciprocal pivoting) of the nipper shaft 21. Such swing of the nipper shaft 21 causes front-rear swing of the bottom nipper 18 together with the nipper frame 17 and up-down swing of the top nipper 19a. In this manner, the lap L is gripped and released alternately by the top nipper 19a and the distal end of the bottom nipper 18. Also, the distal end of the lap L, which is gripped by the nipper device 14, is combed by the comb 15a of the combing cylinder 15 (is subjected to combing). Short fibers and the like adhering to needles of the comb 15a due to such combing of the lap L by the comb 15a are then brushed from the comb 15a through rotation of the brush 24. Afterwards, the short fibers are drawn into the suction duct 25 by suction force and collected by a noil collecting portion.

[0030] With reference to Fig. 3, in the acceleration period and the deceleration period of the combing cylinder 15 (in other words, in starting operation and stopping operation of the comb), the brush motor 50, which drives the brush 24, is driven and controlled by the controller 52 such that the circumferential speed of the distal end of the brush 24 becomes lower than the corresponding speed in the normal operation of the comb. As a result, in the acceleration period and the deceleration period of the combing cylinder 15, the circumferential speed of the distal end of the brush 24 is prevented from becoming excessively higher than the circumferential speed of the distal end of the comb 15a.

[0031] When the brush 24 rotates at a high speed, accompanying air flows are generated in the vicinity of the brush 24. If the combing cylinder 15 also rotates at a high speed as in the normal operation of the comb, the air flows accompanying the comb 15a restrain the air flows accompanying the brush 24. This prevents disarrangement of fleece caused by the air flows accompanying the brush 24.

[0032] If the brush motor 50 is driven such that, even in the starting period and the stopping period of the comb, the rotation speed of the brush 24 becomes as high as in the normal operation of the comb like the conventional technique represented in Fig. 4, the air flows accompanying the comb 15a cannot restrain the air flows accompanying the brush 24. The air flows accompanying the brush 24 thus cause disarrangement of fleece.

[0033] However, referring to Fig. 3, the brush motor 50 is driven and controlled by the controller 52 such that, in the starting period or the stopping period of the comb, the circumferential speed of the distal end of the brush 24 becomes lower than in the normal operation of the comb. The circumferential speed of the distal end of the brush 24 is thus prevented from becoming exces-

sively higher than the circumferential speed of the distal end of the comb 15a in the acceleration period and the deceleration period of the combing cylinder, 15. As a result, disarrangement of fleece caused by the air flows accompanying the brush 24 is prevented.

[0034] In response to input of a signal representing the brush diameter detected by the sensor 57 to the controller 52, the controller 52 feeds back the input signal, which is the detected brush diameter, to control of the brush motor 50. That is, when the brush diameter is decreased by wear of the brush 24 and the circumferential speed of the distal end of the brush 24 becomes insufficient if the rotation speed is constant, the controller 52 controls the brush motor 50 at a rotation speed determined with the wear of the brush 24 taken into consideration such that the circumferential speed of the distal end of the brush 24 becomes equal to the circumferential speed of the distal end of the brush 24 before the wear.

[0035] The present embodiment has the advantages described below.

(1) The comb 15 includes the brush 24 for cleaning the comb 15a of the combing cylinder 15, the main motor 30 (the cylinder driving motor) for driving the combing cylinder 15, the variable speed driving motor (the brush motor 50), which is arranged independently from the main motor 30 and drives the brush 24, and the controller 52 (the speed controller) for driving the brush motor 50. The controller 52 controls the brush motor 50 such that, at least in the acceleration period and the deceleration period of the combing cylinder 15, the circumferential speed of the distal end of the brush 24 becomes lower than the corresponding circumferential speed in the normal operation of the comb. This configuration prevents the circumferential speed of the distal end of the brush 24 from becoming excessively higher than the circumferential speed of the distal end of the comb 15a in the acceleration period and the deceleration period of the combing cylinder 15. Disarrangement of fleece caused by the air flows accompanying the brush 24 is thus prevented. As a result, disarrangement of fleece caused by the air flows accompanying the brush 24 is prevented in the acceleration period and the deceleration period of the combing cylinder. Also, the embodiment ensures the relative circumferential speeds of the comb 15a and the brush 24 corresponding to the rotation speed of the comb 15a to improve the quality of the sliver spun by the comb.

(2) The controller 52 controls the brush motor 50 such that the speed ratio of the circumferential speed of the distal end of the brush 24 with respect to the circumferential speed of the distal end of the comb 15a in the acceleration period and the deceleration period of the combing cylinder 15 becomes equal to the speed ratio A in the normal operation of the comb. It is thus unnecessary to set speed ratios sepa-

rately for the acceleration and deceleration periods and the normal operation. Control is thus facilitated.

(3) The controller 52 includes the brush diameter detector (the sensor 57) for detecting the diameter of the brush 24 and controls the brush motor 50 based on the brush diameter, which is detected by the sensor 57. Conventionally, the brush diameter is detected after the brush 24 is separated from the machine, which complicates detection of the brush diameter. However, the sensor 57 simplifies the detection of the brush diameter. Also, the detected brush diameter is fed back to control of the brush motor 50. The rotation speed of the brush 24 is thus controlled to be an appropriate rotation speed in correspondence with the state of wear of the brush 24.

(4) As the brush diameter detector, the sensor 57, which is capable of automatically detecting the brush diameter, is arranged. A detection result of the sensor 57 is input directly to the controller 52. Therefore, the operator does not need to input the brush diameter detected by the brush diameter detector to the controller 52.

[0036] The embodiment is not restricted to the illustrated form but may be embodied in the forms described below.

[0037] The brush diameter detector is not restricted to the configuration in which the sensor 57 detects the outer diameter of the brush 24. For example, the brush 24 may be fixed to a certain attachment portion of the comb through a non-illustrated bracket in a manner allowing adjustment of the distance between the rotation axis of the brush 24 and the rotation axis of the combing cylinder 15. That is, the bracket, which supports the brush 24, is fixed in a manner allowing position changes of the bracket with respect to the attachment portion of the comb. In this case, a scale representing the fixing positions of the bracket, which supports the brush 24, may be arranged. The operator reads the value on the scale, subtracts the amount of wear of the brush 24 from the read value of the brush diameter, and inputs the determined value to the controller 52. Measurement of the brush diameter, which is reading of the scale, may be performed at, for example, regular inspections of the machine. In this case, the scale configures the brush diameter detector.

[0038] The controller 52 may control the brush motor 50 such that the rotation speed of the brush motor 50 is constantly synchronized with the rotation speed of the combing cylinder 15. The combing cylinder 15 is controlled by the controller 52 such that, in one cycle of rotation, the rotation speed of the combing cylinder 15 is changed to be different between a state in which the comb 15a combs the lap L (a state in which the comb 15a is engaged with the lap L) and a state in which the comb 15a is disengaged from the lap L. Therefore, cleaning performance is improved by changing the rotation speed of the brush 24 in correspondence with the speed change of the combing cylinder 15 in one cycle of rotation, instead of

changing the rotation speed of the brush 24 in correspondence with the average speed of the combing cylinder 15 per rotation.

[0039] Depending on the fiber length or fineness (the diameter) of the fiber configuring the lap L, the speed ratio of the circumferential speed of the distal end of the brush 24 with respect to the circumferential speed of the distal end of the comb 15a may be changed. Fine fiber tends to be easily influenced by air flows and long and fine fiber tends to be further easily influenced by air flows. Therefore, for fine fiber, it is desirable to decrease the aforementioned speed ratio.

[0040] Various shafts arranged in the combing head 11 may be either two-side or one-side drive shafts.

[0041] The lap roller 12 and the detaching roller 16 may be driven by the main drive shaft 32 through a belt transmission device or a gear row.

[0042] The speed ratio of the circumferential speed of the distal end of the brush 24 with respect to the circumferential speed of the distal end of the comb 15a may be lower in the acceleration period and the deceleration period than in the normal operation. However, to maintain the cleaning performance, it is desirable that the speed ratio be greater than 1. Also, if the circumferential speed of the distal end of the brush 24 is lower in the acceleration period and the deceleration period than in the normal operation, the speed ratio of the circumferential speed of the distal end of the brush 24 with respect to the circumferential speed of the distal end of the comb 15a may be higher in the acceleration period and the deceleration period than in the normal operation.

[0043] A combler includes a brush for cleaning a comb of a combing cylinder, a cylinder driving motor, which is configured to drive the combing cylinder, a variable speed driving motor, which is configured to drive the brush and is arranged independently from the cylinder driving motor, and a speed controller, which is configured to drive the variable speed driving motor. The speed controller is configured to control the variable speed driving motor such that a circumferential speed of a distal end of the brush is lower at least in an acceleration period and a deceleration period of the combing cylinder than in normal operation of the combler.

Claims

1. A combler comprising:

a brush (24) for cleaning a comb (15a) of a combing cylinder (15); a cylinder driving motor (30), which is configured to drive the combing cylinder (15); a variable speed driving motor (50), which is configured to drive the brush (24) and is arranged independently from the cylinder driving motor (30), and
a speed controller (52), which is configured to drive the variable speed driving motor (50), the

comber being **characterized in that** the speed controller (52) is configured to control the variable speed driving motor (50) such that a circumferential speed of a distal end of the brush (24) is lower at least in an acceleration period and a deceleration period of the combing cylinder (15) than in normal operation of the combler.

2. The combler according to claim 1, wherein the speed controller (52) controls the variable speed driving motor (50) such that a speed ratio of the circumferential speed of the distal end of the brush (24) and a circumferential speed of a distal end of the comb (15a) in the acceleration and deceleration periods of the combing cylinder (15) is equal to that in the normal operation of the combler.
3. The combler according to claim 1 or 2, further comprising a brush diameter detector (57), which is configured to detect a diameter of the brush (24), wherein the speed controller (52) is configured to control the variable speed driving motor (50) based on a brush diameter detected by the brush diameter detector (57).
4. The combler according to claim 3, further comprising a support bracket, which supports the brush (24), wherein the support bracket is fixed to the combler such that the position of the support bracket is changeable so that a distance between a rotation axis of the brush (24) and a rotation axis of the combing cylinder (15) is changeable, and the brush diameter detector (57) is a scale, which represents positions at which the support bracket is fixed to the combler.
5. The combler according to claim 1 or 2, wherein the combing cylinder (15) is driven such that the rotation speed of the combing cylinder (15) changes in one turn of rotation, and the speed controller (52) controls the variable speed driving motor (50) such that the rotation speed of the brush (24) changes synchronously with a speed change of the combing cylinder (15) in one turn of rotation.

Patentansprüche

1. Kämmmaschine mit:

einer Bürste (24) zum Reinigen eines Kamms (15a) eines Kämmszylinders (15);
einem Zylinderantriebsmotor (30), der gestaltet ist, um den Kämmszylinder (15) anzutreiben;
einem Antriebsmotor (50) mit veränderlicher Drehzahl, der gestaltet ist, um die Bürste (24) anzutreiben, und von dem Zylinderantriebsmo-

tor (3) unabhängig angeordnet ist, und einer Drehzahlsteuerung (52), die gestaltet ist, um den Antriebsmotor (50) mit veränderlicher Drehzahl anzutreiben, wobei die Kämmmaschine **dadurch gekennzeichnet ist, dass** die Drehzahlsteuerung (52) gestaltet ist, um den Antriebsmotor (50) mit veränderlicher Drehzahl derart zu steuern, dass eine Umfangsgeschwindigkeit eines distalen Endes der Bürste (24) mindestens in einer Beschleunigungszeitspanne und einer Verzögerungszeitspanne des Kämmzylinders (15) niedriger als in einem normalen Betrieb der Kämmmaschine ist.

2. Kämmmaschine gemäß Anspruch 1, wobei die Drehzahlsteuerung (52) den Antriebsmotor (50) mit veränderlicher Drehzahl derart steuert, dass ein Geschwindigkeitsverhältnis der Umfangsgeschwindigkeit des distalen Endes der Bürste (24) und einer Umfangsgeschwindigkeit eines distalen Endes des Kamms (15a) in den Beschleunigungs- und Verzögerungszeitspannen des Kämmzylinders (15) gleich dem in einem normalen Betrieb der Kämmmaschine ist.

3. Kämmmaschine gemäß Anspruch 1 oder 2, des Weiteren mit einer Bürstendurchmessererfassungseinheit (57), die gestaltet ist, um einen Durchmesser der Bürste (24) zu erfassen, wobei die Drehzahlsteuerung (52) gestaltet ist, um den Antriebsmotor (50) mit veränderlicher Drehzahl basierend auf einen durch die Bürstendurchmessererfassungseinheit (57) erfassten Bürstendurchmesser zu steuern.

4. Kämmmaschine gemäß Anspruch 3, des Weiteren mit einer Stützhalterung, die die Bürste (24) stützt, wobei

die Stützhalterung an der Kämmmaschine derart fixiert ist, dass die Position der Stützhalterung veränderbar ist, sodass eine Entfernung zwischen einer Rotationsachse der Bürste (24) und einer Rotationsachse des Kämmzylinders (15) veränderbar ist, und die Bürstendurchmessererfassungseinheit (57) eine Skala ist, die Positionen darstellt, an denen die Stützhalterung an der Kämmmaschine fixiert ist.

5. Kämmmaschine gemäß Anspruch 1 oder 2, wobei

der Kämmzylinder (15) derart angetrieben wird, dass sich die Drehzahl des Kämmzylinders (15) in einer Rotationsumdrehung ändert, und die Drehzahlsteuerung (52) den Antriebsmotor (50) mit veränderlicher Drehzahl derart steuert,

dass sich die Drehzahl der Bürste (24) mit einer Geschwindigkeitsänderung des Kämmzylinders (15) in einer Rotationsumdrehung gleichzeitig verändert.

Revendications

1. Peigneuse comprenant :

une brosse (24) pour nettoyer un peigne (15a) d'un tambour peigneur (15) ;
un moteur d'entraînement de tambour (30) qui est configuré pour entraîner le tambour peigneur (15) ;

un moteur d'entraînement à vitesse variable (50), qui est configuré pour entraîner la brosse (24) et est agencé indépendamment du moteur d'entraînement de tambour (30), et un organe de commande de vitesse (52) qui est configuré pour entraîner le moteur d'entraînement à vitesse variable (50),

la peigneuse étant **caractérisée en ce que** l'organe de commande de vitesse (52) est configuré pour commander le moteur d'entraînement à vitesse variable (50) de sorte qu'une vitesse circonférentielle d'une extrémité distale de la brosse (24) est moins importante au moins dans une période d'accélération et une période de décélération du tambour peigneur (15), que lors du fonctionnement normal de la peigneuse.

2. Peigneuse selon la revendication 1, dans laquelle l'organe de commande de vitesse (52) commande le moteur d'entraînement à vitesse variable (50) de sorte qu'un rapport de vitesse de la vitesse circonférentielle de l'extrémité distale de la brosse (24) et d'une vitesse circonférentielle d'une extrémité distale du peigne (15a) dans les périodes d'accélération et de décélération du tambour peigneur (15) est égal à celui du fonctionnement normal de la peigneuse.

3. Peigneuse selon la revendication 1 ou 2, comprenant en outre un détecteur de diamètre de brosse (57) qui est configuré pour détecter un diamètre de la brosse (24), dans laquelle l'organe de commande de vitesse (52) est configuré pour commander le moteur d'entraînement à vitesse variable (50) en fonction d'un diamètre de brosse détecté par le détecteur de diamètre de brosse (57).

4. Peigneuse selon la revendication 3, comprenant en outre une console de support qui supporte la brosse (24), dans laquelle :

la console de support est fixée sur la peigneuse, de sorte que la position de la console de support

peut être modifiée de sorte qu'une distance entre un axe de rotation de la brosse (24) et un axe de rotation du tambour peigneur (15) peut être modifiée, et

le détecteur de diamètre de brosse (57) est une échelle, qui représente les positions auxquelles la console de support est fixée sur la peigneuse. 5

5. Peigneuse selon la revendication 1 ou 2, dans laquelle : 10

le tambour peigneur (15) est entraîné de sorte que la vitesse de rotation du tambour peigneur (15) change sur un tour de rotation, et l'organe de commande de vitesse (52) commande le moteur d'entraînement à vitesse variable (50) de sorte que la vitesse de rotation de la brosse (24) change de manière synchrone avec un changement de vitesse du tambour peigneur (15) en un tour de rotation. 15 20

25

30

35

40

45

50

55

Fig.1

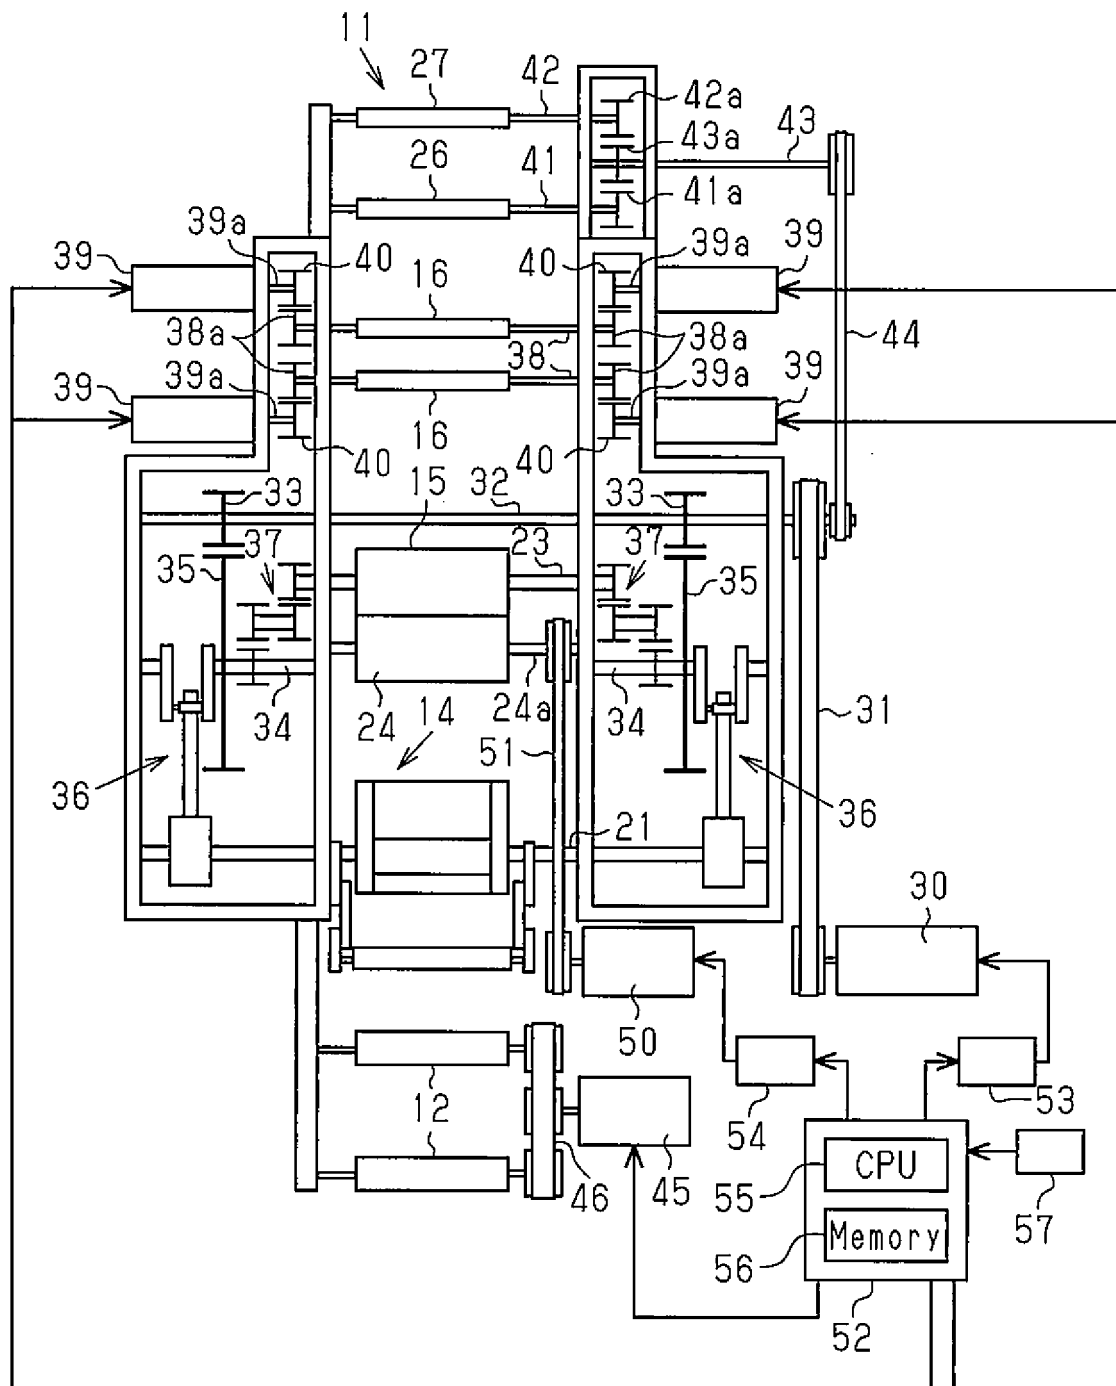


Fig.2

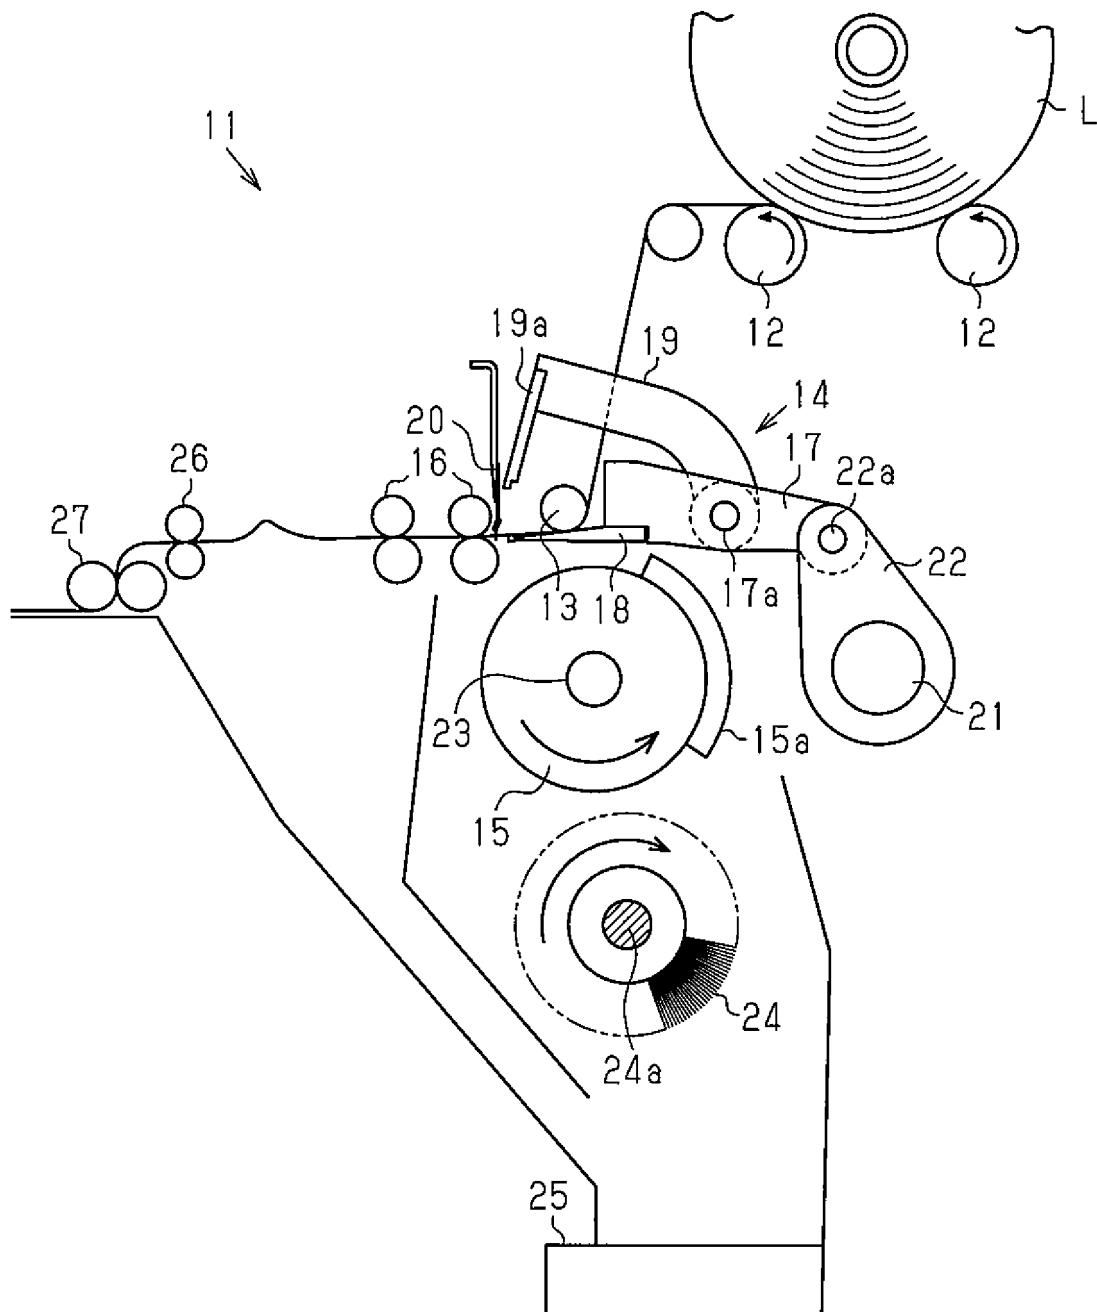


Fig.3


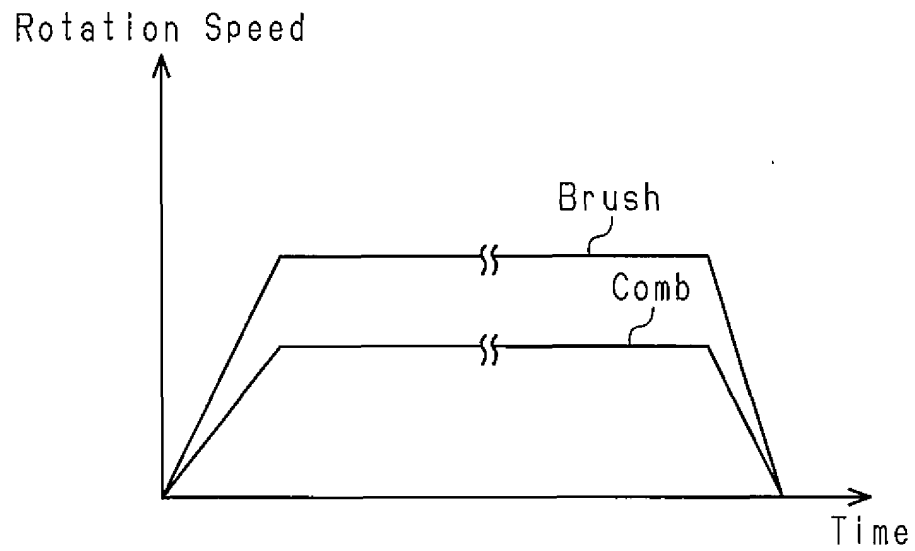


Fig.4

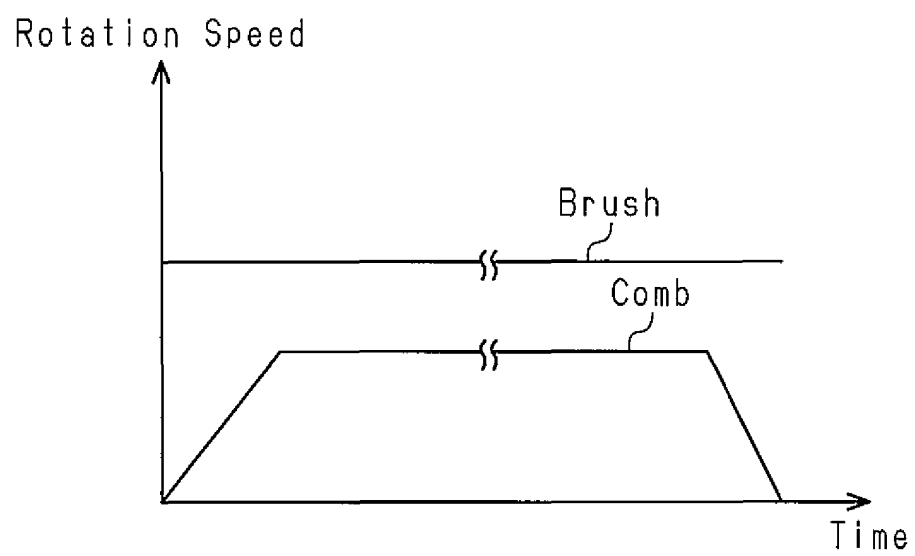

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 3146725 A [0006] [0008]