



(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 71

(51) Int Cl.:
G02B 5/30 ^(2006.01) **C08G 63/64** ^(2006.01)
C08J 5/18 ^(2006.01) **G02F 1/1335** ^(2006.01)
G02F 1/13363 ^(2006.01) **H01L 51/50** ^(2006.01)
H05B 33/02 ^(2006.01)

(48) Corrigendum issued on:
12.04.2017 Bulletin 2017/15

(86) International application number:
PCT/JP2015/061642

(43) Date of publication:
22.02.2017 Bulletin 2017/08

(87) International publication number:
WO 2015/159928 (22.10.2015 Gazette 2015/42)

(21) Application number: **15779658.2**

(22) Date of filing: **15.04.2015**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA

- **HIRAMI Yuuichi**
Kitakyushu-shi, Fukuoka 806-0004 (JP)
- **UEHARA Hisatoshi**
Yokohama-shi, Kanagawa 227-8502 (JP)
- **HAYASHI Hiroyuki**
Yokohama-shi, Kanagawa 227-8502 (JP)
- **SHIMIZU Takashi**
Ibaraki-shi, Osaka 567-8680 (JP)
- **SUMIMURA Hiroshi**
Ibaraki-shi, Osaka 567-8680 (JP)
- **MURAKAMI Nao**
Ibaraki-shi, Osaka 567-8680 (JP)

(30) Priority: **16.04.2014 JP 2014084695**


(71) Applicants:
• **NITTO DENKO CORPORATION**
Ibaraki-shi,
Osaka 567-8680 (JP)
• **MITSUBISHI CHEMICAL CORPORATION**
Tokyo 100-8251 (JP)

(74) Representative: **Hoffmann Eitle**
Patent- und Rechtsanwälte PartmbB
Arabellastraße 30
81925 München (DE)


(72) Inventors:
• **NAMIKI Shingo**
Kitakyushu-shi, Fukuoka 806-0004 (JP)

(54) **RETARDATION FILM, CIRCULARLY-POLARIZING PLATE, AND IMAGE-DISPLAYING DEVICE**

(57) The retardation film of the present invention contains a resin having positive refractive index anisotropy and containing at least one bonding group of a carbonate bond and an ester bond and one or more structural units selected from the group consisting of a structural unit represented by the general formula (1) and a structural unit represented by the general formula (2), in which the value of wavelength dispersion (R450/R550) as a ratio of retardation R450 at a wavelength of 450 nm to retardation R550 at a wavelength of 550 nm is more than 0.5 and less than 1.0:

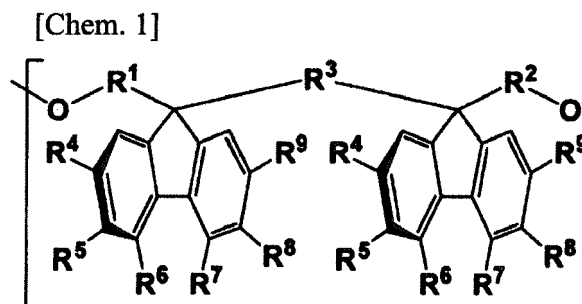

[Chem. 2]

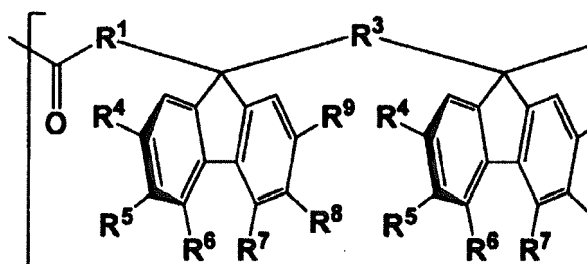

(in formula (1) and formula (2), definitions of R¹ to R⁹ are the same as in the description).