

(19)



(11)

EP 3 135 383 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
01.03.2017 Bulletin 2017/09

(51) Int Cl.:
B05B 1/16 (2006.01) *B05B 12/00 (2006.01)*
E03C 1/04 (2006.01) *E03C 1/084 (2006.01)*
B05B 1/18 (2006.01) *B05B 1/30 (2006.01)*

(21) Application number: **16182473.5**

(22) Date of filing: **02.08.2016**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
 GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
 PL PT RO RS SE SI SK SM TR**
 Designated Extension States:
BA ME
 Designated Validation States:
MA MD

(71) Applicant: **Xiamen Runner Industrial Corporation
Xiamen 361021 (CN)**

(72) Inventor: **LEI, Zheng-Zhen
Jimei, Xiamen 361021 (CN)**

(74) Representative: **Cabinet Chaillot
16/20, avenue de l'Agent Sarre
B.P. 74
92703 Colombes Cedex (FR)**

(30) Priority: **31.08.2015 CN 201520661026 U**

(54) **SINGLE PUSHBUTTON DEVICE FOR SWITCHING TO OUTPUT WATER WITH MULTIPLE SPRAY PATTERNS**

(57) A single pushbutton device includes a housing (1), a bushing (3), a water channel assembly (15), and a rotary assembly (16). The bushing (3) and the rotary assembly (16) are mounted inside of the housing (1), the water channel assembly (15) is mounted around of the rotary assembly (16), and a button (8) is through a hole (1-1) of the housing (1). When push down the button (8), a rotary sleeve (9) of the rotary assembly (16) is rotated, a bump (14) of the rotary sleeve (9) is rotated along mul-

tle noses (4-1) of the multiple abutting inserts (4) of the water channel assembly (15) to sequentially press down the abutting inserts (4), further open different waterways, and output water with different spray or bubbling forms. Given the foregoing structure, the single pushbutton device is compact, facilitates quick and convenient operation, and requires less force exerted thereon for operation.

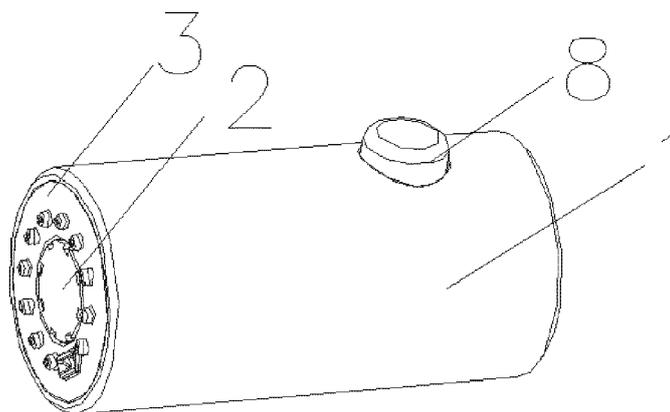


Fig 1

EP 3 135 383 A1

DescriptionBACKGROUND OF THE INVENTIONField of the Invention

[0001] The present invention relates to a single button device and, more particularly, to a single pushbutton device for switching to output water with multiple spray patterns.

Description of The Related Art

[0002] Currently, water output devices may adopt a single pushbutton device with a single water output and a multi-functional pushbutton device with multiple water outputs. However, the multi-functional pushbutton device is disadvantageous in complicated structure, high force exertion in operation, and poor operational stability and thus fails to provide convenient and comfortable experience in the use thereof.

SUMMARY OF THE INVENTION

[0003] In view of the problems and drawbacks of the prior art, the objective of the present invention is to provide a single pushbutton device for switching to output water with multiple spray forms being compact in size and facilitating convenient and quick operation with less force required upon operation.

[0004] To achieve the foregoing objective, a single pushbutton device for switching to output water with multiple spray patterns includes a housing, a bushing, a water channel assembly, a rotary assembly and a button.

[0005] The housing is tubular and has a front end, a rear end and a hole formed through a peripheral wall of the housing.

[0006] The bushing is mounted inside the top end of the housing with a bubbler mounted inside the bushing.

[0007] The water channel assembly includes a water tube, multiple abutting inserts and multiple first springs.

[0008] The water tube has a front portion, a rear portion and multiple recesses.

[0009] The front portion is connected with the bushing.

[0010] The multiple recesses are formed in the water tube and are located around the water tube.

[0011] The multiple abutting insert are mounted and are movable in the recesses of the water tube. Each abutting insert has a nose formed on a top thereof.

[0012] Each first spring is mounted between the a corresponding abutting insert and the water tube.

[0013] The rotary assembly is mounted around the water channel assembly and has a rotary sleeve, a ratchet and a pressing frame.

[0014] The rotary sleeve has a front end, a rear end, and a bump. The bump is formed on an inner wall of the rotary sleeve.

[0015] The ratchet is mounted on the rear end of the

rotary sleeve. The rear portion of the water tube is connected with the ratchet.

[0016] The pressing frame is mounted through the ratchet, is mounted inside the housing, and has a projected portion formed on a top portion of the pressing frame.

[0017] The button is mounted through the hole of the housing and is mounted on the projected portion of the pressing frame.

[0018] When push down the button, the rotary sleeve of the rotary assembly is rotated, the bump of the rotary sleeve is rotated along multiple noses of the multiple abutting inserts of the water channel assembly to sequentially press down the abutting inserts, further open different waterways, and output water with different spray. The single pushbutton device ensures to be compact, facilitates quick and convenient operation, and requires less force exerted thereon for operation

[0019] When compared to conventional techniques, the present invention has the following advantages, small size, simple structure, convenient operation, and have multiple water output functions.

BRIFE DESCRIPTION OF THE DRAWINGS

[0020] The detailed description of the drawings particularly refers to the accompanying figures in which:

Fig. 1 is a perspective view of a single pushbutton device for switching to output water with multiple spray patterns in accordance with the present invention;

Fig. 2 is an exploded perspective view of the single pushbutton device in Fig.1;

Fig. 3 is a cross-sectional view of the single pushbutton device in Fig.1;

Fig. 4 is an operational cross-sectional view of the single pushbutton device in Fig.1;

Fig. 5 is a cross-sectional view of the single pushbutton device in Fig.1 showing one water channel of the single pushbutton device;

Fig. 6 is a cross-sectional view of the single pushbutton device in Fig.1 showing another water channel of the single pushbutton device;

Fig. 7 is a cross-sectional view of a stop pawl of the single pushbutton device in Fig.1;

Fig. 8 is a cross-sectional view of the single pushbutton device in Fig.1 when the single pushbutton device is not operated;

Fig. 9 is a cross-sectional view of the single pushbutton device in Fig.1 when the single pushbutton device is pressed down; and

Fig. 10 is a cross-sectional view of the single pushbutton device in Fig.1 when the single pushbutton device is restoring without force exerted thereon.

DETAILED DESCRIPTION OF THE INVENTION

[0021] The purpose, construction, features, functions and advantages of the present invention can be appreciated and understood more thoroughly through the following detailed description with reference to the attached drawings.

[0022] With reference to Figs. 1 and 6, a single push-button device for outputting water with multiple spray patterns in accordance with present invention includes a housing 1, a bubbler 2, a bushing 3, a water channel assembly 15, a rotary assembly 16, and a button 8.

[0023] The housing 1 is tubular and has a front end, a rear end and a hole 1-1. The hole 1-1 is formed through a peripheral wall of the housing 1. The button 8 is mounted through the hole 1-1 of the housing 1 and protrudes beyond the hole 1-1. The button 8 controls the rotary assembly 16 to rotate to adjust the water channel assembly 15.

[0024] The bushing 3 is mounted inside the front end of the housing 1, and the bubbler 2 is centrally mounted inside of the bushing 3. The bushing 3 has multiple waterways formed through the bushing 3 and outputting water with multiple spray forms.

[0025] The water channel assembly 15 includes multiple abutting inserts 4, multiple first spring 5 and a water tube 6. The water tube 6 has a front portion 6-1, a rear portion 6-2 and multiple recesses 6-3. The front portion 6-1 of the water tube 6 is connected with the bushing 3. The recesses are formed in the water tube 6, are located around the water tube 6, and communicate with corresponding waterways of the bushing 3. The water channel assembly 15 is collaborated with the bushing 3 to output water with multiple spray patterns through the corresponding waterways of the bushing 3. The abutting inserts 4 are mounted and are movable in the respective recesses of the water tube 6. Each first spring 5 is mounted between a corresponding abutting insert 4 and the water tube 6. Each abutting insert 4 has a nose 4-1 formed on a top of the abutting insert.

[0026] The rotary assembly 16 is mounted around the water tube 6 and includes a pressing frame 7, a rotary sleeve 9, a ratchet 10, a driving pawl 11 and a stop pawl 12. The rotary sleeve 9 has a front end and a rear end, and the ratchet 10 is mounted on the rear end of the rotary sleeve 9. The water channel assembly 15 is mounted inside of the rotary sleeve 9, and the rear portion 6-2 of the water tube 6 is connected with the ratchet 10. The rotary sleeve 9 has a bump 14 formed on an inner wall of the rotary sleeve 9 and selectively connected with the noses 4-1 of the abutting inserts 4. The pressing frame 7 is mounted around the ratchet 10, is mounted inside the housing 1, and has a projected portion 7-1 formed on a top portion of the pressing frame 7. The driving pawl 11 is mounted between the pressing frame 7 and the ratchet 10. Multiple second springs 13 are mounted between the pressing frame 7 and the housing 1. The stop pawl 12 is mounted between the ratchet 10 and the hous-

ing 1.

[0027] The button 8 is mounted through the hole 1-1 of the housing 1 and is mounted on the projected portion 7-1.

[0028] With reference to Figs. 7 to 10, before the button 8 is pressed, the stop pawl 12 engages an initial tooth of the ratchet 10. When the button 8 is pushed down, the button 8 presses down the pressing frame 7, the pressing frame 7 further presses the second spring 13 and drives the driving pawl 11, the driving pawl 11 then drives the ratchet 10 to rotate, such that the stop pawl 12 engages a tooth of the ratchet 10 next to the initial tooth. When the button 8 is released, the restoring elastic force of the second spring 13 pushes the driving pawl 11 back to its original position.

[0029] As the pressing frame 7 is reciprocally moved inside of the housing 1 by the force exerted on the pressing frame 7 and the restoring elastic force of the second spring 13, when the ratchet 10 is moved and the stop pawl 12 engages a next tooth of the ratchet 10, the forces exerted on the pressing frame 7 can be balanced by the restoring elastic force in return, thereby causing no discomfort to user's hand upon pressing the button 8 because of unilateral force application.

[0030] After the button 8 is pushed down, the rotary sleeve 9 is rotated. Thus, the bump 14 is rotated with the rotary sleeve 9 and the bump 14 is rotated along the noses 4-1 of the abutting inserts 4. Only one of the abutting inserts 4 is pressed down by the bump 14 at a time for water to flow into a corresponding recess of the water tube 6 uncovered by the abutting insert 4 and flow out through different waterways of the bushing 3 to provide multiple water outputs and bubbling functions.

Claims

1. A single pushbutton device for switching to output water with multiple spray patterns comprising:

a housing being tubular and having a front end, a rear end and a hole formed through a peripheral wall of the housing;

a bushing mounted inside the top end of the housing with a bubbler mounted inside the bushing;

a water channel assembly including:

a water tube having:

a front portion connected with the bushing;

a rear portion; and

multiple recesses formed in the water tube and located around the water tube;

multiple abutting insert respectively mount-

ed and being movable in the recesses of the water tube, each abutting insert having a nose formed on a top thereof; and multiple first spring, each first spring mounted between the a corresponding abutting insert and the water tube;

5

a rotary assembly mounted around the water channel assembly and having:

10

a rotary sleeve having a front end, a rear end, and a bump formed on an inner wall of the rotary sleeve;

a ratchet mounted on the rear end of the rotary sleeve, wherein the rear portion of the water tube is connected with the ratchet; and

15

a pressing frame mounted through the ratchet, mounted inside the housing, and

20

having a projected portion formed on a top portion of the pressing frame; and a button mounted through the hole of the housing and mounted on the projected portion of the pressing frame.

25

2. The single pushbutton device as claimed in claim 1, wherein the rotary assembly has:

a driving pawl mounted between the pressing frame and the ratchet; and a stop pawl mounted between the ratchet and the housing.

30

3. The single pushbutton device as claimed in claim 2, wherein, when the rotary sleeve is rotated, the bump of the rotary sleeve is selectively connected with the noses of the abutting inserts.

35

4. The single pushbutton device as claimed in claim 1, wherein multiple second springs are mounted between the pressing frame and the housing.

40

5. The single pushbutton device as claimed in claim 1, wherein the bushing has multiple waterways formed through the bushing and communicating with corresponding recesses of the water tube to output water with multiple spray patterns through the waterways of the bushing.

45

50

55

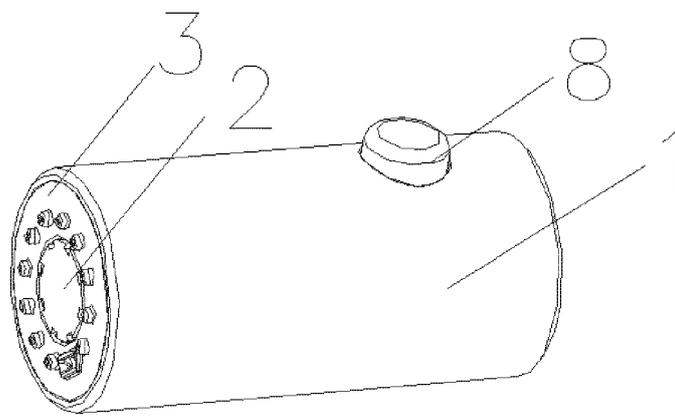


Fig 1

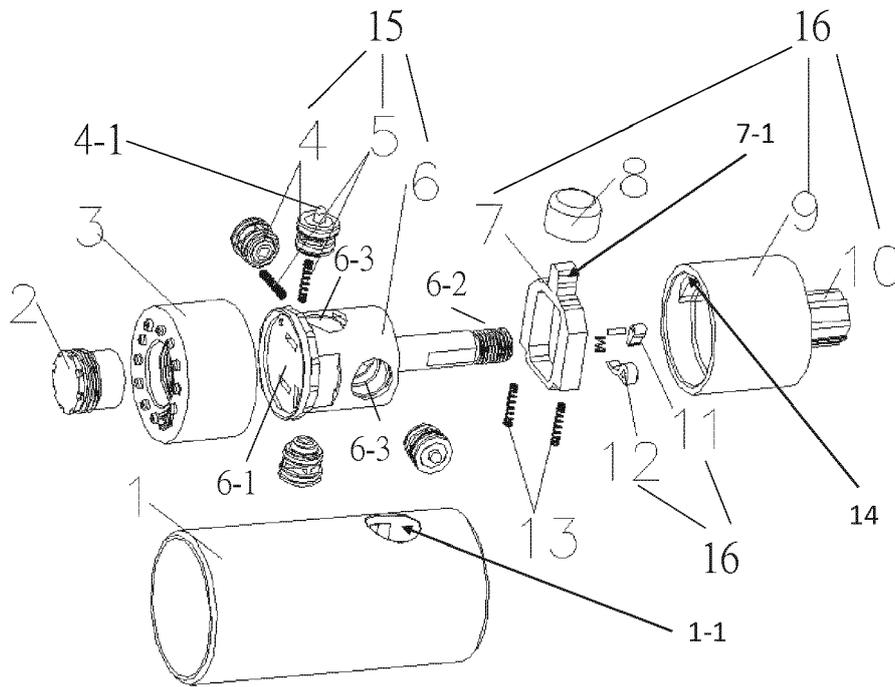


Fig 2

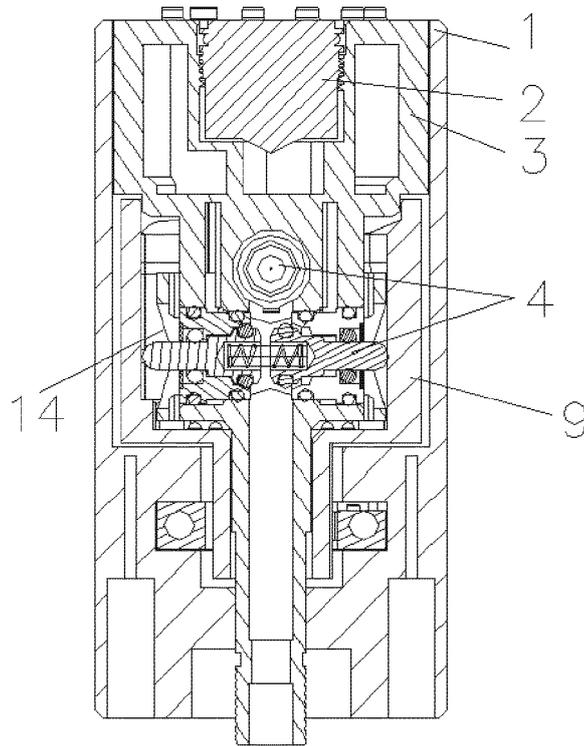


Fig 3

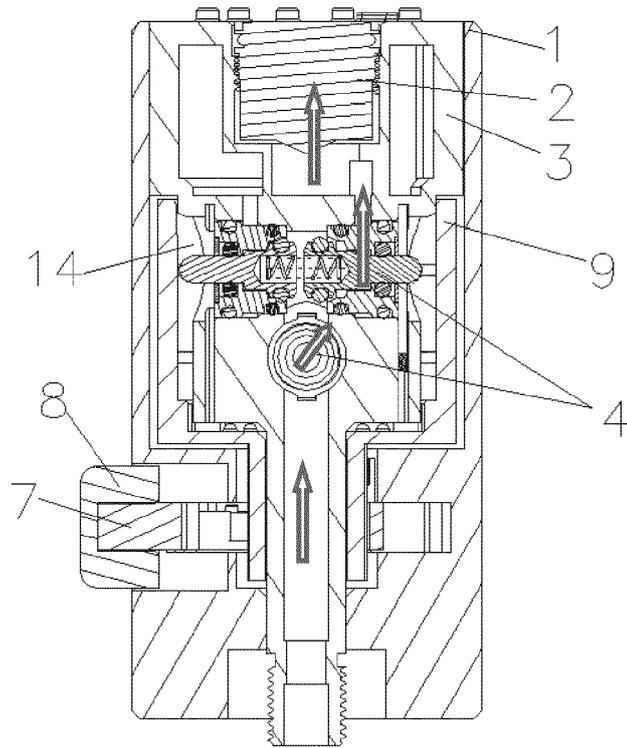


Fig 4

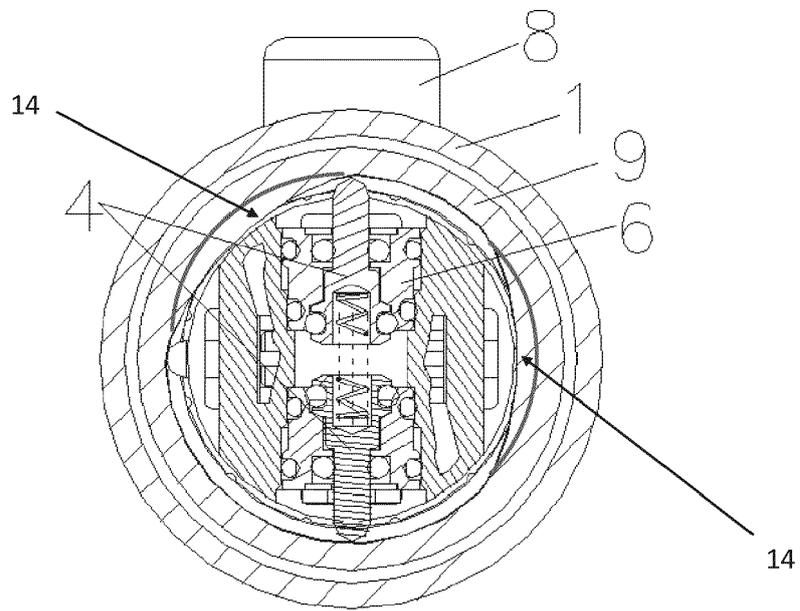


Fig 5

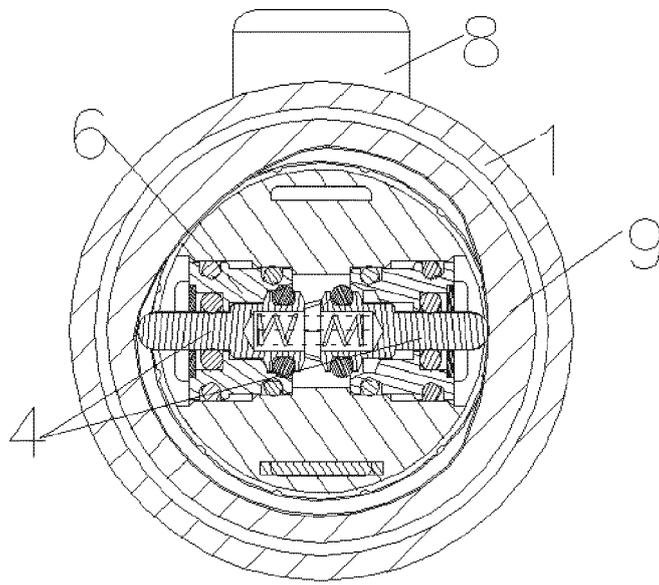


Fig 6

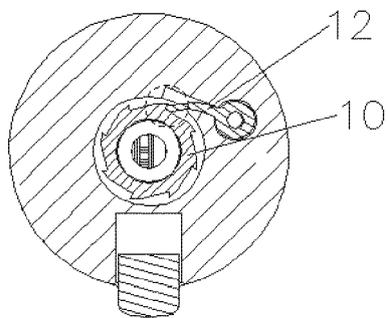


Fig 7

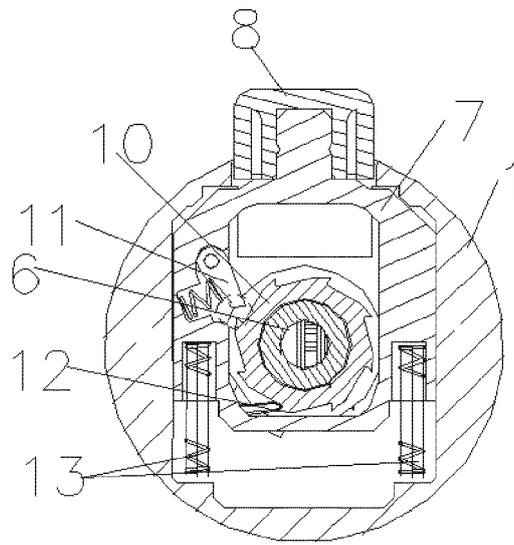


Fig 8

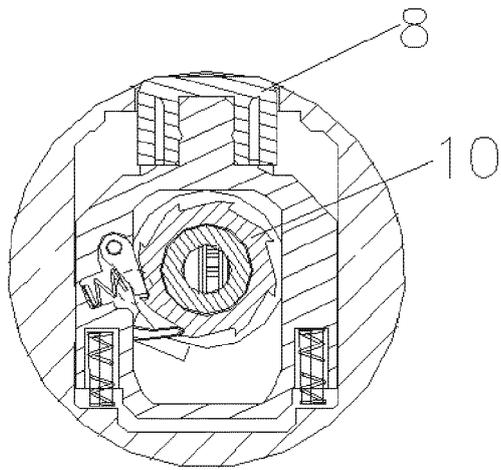


Fig 9

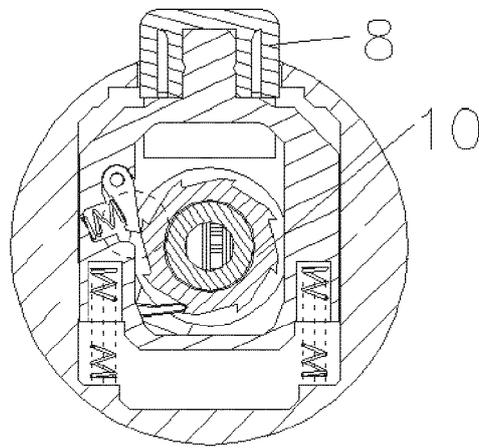


Fig 10



EUROPEAN SEARCH REPORT

Application Number
EP 16 18 2473

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	CN 204 083 300 U (LEI Z) 7 January 2015 (2015-01-07) * abstract; figures 1-8 * -----	1-5	INV. B05B1/16 B05B12/00 E03C1/04
A	US 2012/305116 A1 (ZHOU HUASONG [CN] ET AL) 6 December 2012 (2012-12-06) * abstract; figures 1-11 * -----	1-5	E03C1/084 B05B1/18 B05B1/30
A	US 2013/284823 A1 (ZHOU HUASONG [CN] ET AL) 31 October 2013 (2013-10-31) * abstract; figures 1-12 * -----	1-5	
A	US 2014/263756 A1 (MEEHAN STEVEN KYLE [US] ET AL) 18 September 2014 (2014-09-18) * abstract; figures 1-37 * -----	1-5	
			TECHNICAL FIELDS SEARCHED (IPC)
			B05B E03C F16K
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 17 January 2017	Examiner Frego, Maria Chiara
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04/C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 16 18 2473

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-01-2017

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN 204083300 U	07-01-2015	CN 204083300 U US 2016024764 A1	07-01-2015 28-01-2016
US 2012305116 A1	06-12-2012	US 2012305116 A1 WO 2011085634 A1	06-12-2012 21-07-2011
US 2013284823 A1	31-10-2013	CN 102101077 A US 2013284823 A1 WO 2012089150 A1	22-06-2011 31-10-2013 05-07-2012
US 2014263756 A1	18-09-2014	CA 2846125 A1 US 2014263756 A1	15-09-2014 18-09-2014

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82