



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
29.03.2017 Bulletin 2017/13

(51) Int Cl.:
H04R 25/00 (2006.01)

(21) Application number: **16189013.2**

(22) Date of filing: **15.09.2016**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

- **van Gilst, Koen**
2132 LS Hoofddorp (NL)
- **de Ruijter, Laurens**
2132 LS Hoofddorp (NL)
- **Stoffels, Nicolaas Maria Jozef**
2132 LS Hoofddorp (NL)
- **Geskus, Mike**
2132 LS Hoofddorp (NL)
- **Voss, Rasmus**
2132 LS Hoofddorp (NL)

(30) Priority: **18.09.2015 EP 15185813**

(71) Applicant: **Sonion Nederland B.V.**
2132 LS Hoofddorp (NL)

(74) Representative: **Inspicos P/S**
Kogle Allé 2
2970 Hørsholm (DK)

(72) Inventors:
• **Tiefenau, Andreas**
2132 LS Hoofddorp (NL)

(54) **ACOUSTICAL MODULE WITH ACOUSTICAL FILTER**

(57) The present invention relates to an acoustical module comprising a receiver unit for generating audio sound, a plurality of microphone units for receiving acoustical pressure signals, a plurality of acoustical pressure pick-up points, each of said acoustical pressure pick-up points being acoustically connected to a micro-

phone unit, and an acoustical filter for attenuating acoustical pressure signals from a first acoustical pressure pick-up point relative to a second acoustical pressure pick-up point. The invention further relates to a hearing device comprising an acoustical module.

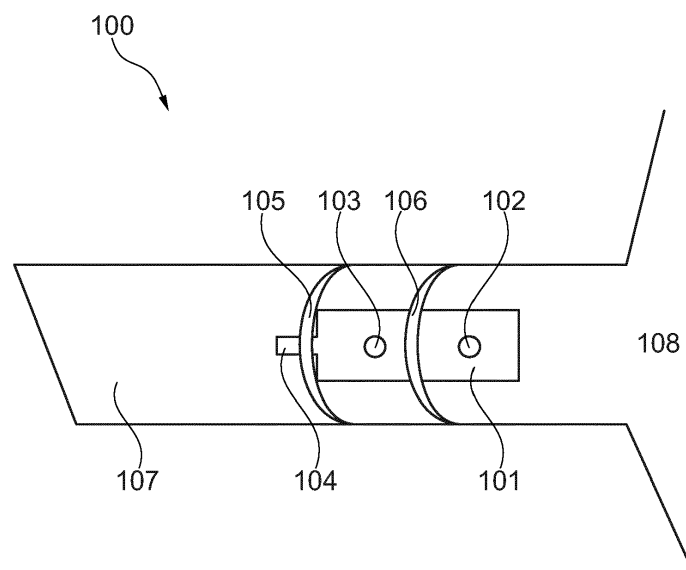


Fig. 1

Description

FIELD OF THE INVENTION

[0001] The present invention relates to an acoustical module configured to separate sound pressure signals from external sources. In particular, the present invention relates to an acoustical module where the influence of self-generated signals is attenuated.

BACKGROUND OF THE INVENTION

[0002] Various arrangements involving two sound detectors have been suggested over the years.

[0003] An example is US 8,259,976 where an assembly comprising a sound emitter and at least two sound detectors fixed to each other is disclosed. Each detector has a sound receiving opening. The sound receiving openings of at least two of the detectors point in opposite directions. However, there is in US 8,259,976 no disclosure of a feedback suppression algorithm for reducing the influence of self-generated signals, such as acoustic signals and vibration signals.

[0004] It may be seen as an object of embodiments of the present invention to provide an acoustical module where the influence of self-generated signals is attenuated. Such self-generated signals may involve acoustical signals and vibration signals.

DESCRIPTION OF THE INVENTION

[0005] The above-mentioned object is complied with by providing, in a first aspect, an acoustical module comprising

- a receiver unit for generating audio sound,
- a plurality of microphone units for receiving acoustical pressure signals,
- a plurality of acoustical pressure pick-up points, each of said acoustical pressure pick-up points being acoustically connected to a microphone unit, and
- an acoustical filter for attenuating an acoustical pressure signal arriving at a first acoustical pressure pick-up point relative to a second acoustical pressure pick-up point.

[0006] The acoustical module of the present invention is thus adapted to receive incoming acoustical pressure signals via a plurality of microphone units and regenerate the received signal via the receiver unit. The acoustical module of the present invention may be applicable in relation to hearing devices, such as various types of hearing aids.

[0007] In the present content pressure pick-up points are to be understood as openings and/or holes through which incoming acoustical pressure signals are allowed to enter the acoustical module. In order to convert the incoming acoustical pressure signals to electrical signals at least one microphone unit may be acoustically connected to each of the pressure pick-up points.

[0008] In the present content acoustical pressure signals are to be understood as acoustical sound/audio signals representing for example speech, music etc.

[0009] The receiver unit may comprise a single receiver or a plurality of receivers. In case of a single receiver a single acoustical signal and a signal vibration signal is generated. A plurality of receivers may collectively generate both acoustical signals and vibration signals. The contribution of all receivers may be combined into a total acoustic signal and a total vibration signal.

[0010] The acoustical filter may advantageously be positioned between the first and the second acoustical pressure pick-up points. In this manner an incoming acoustical signal may be attenuated upon passing the acoustical filter so that the acoustical pressure pick-up points receive an incoming acoustical signal with different strengths.

[0011] In view of the remarks set forth above a first microphone unit may be acoustically connected to the first acoustical pressure pick-up point, and a second microphone unit may be acoustically connected to the second acoustical pressure pick-up point.

[0012] The acoustical filter may form a dome shaped structure or at least a part of a dome shaped structure. Alternatively, it may be attached to a dome shaped structure. Dome shaped structures may exhibit additional properties in relation to the acoustical module. Such additional properties may include proper fixation of the acoustical module in an ear channel. Along this line the acoustical filter may form part of, or being attached to, an element which is adapted to support fixation of the acoustical module in an ear channel.

[0013] The acoustical module may further comprise one or more additional domes or elements for additional support

of the fixation of the acoustical module in the ear channel.

[0014] The acoustical module may further comprise an additional acoustical filter and a third acoustical pressure pick-up point being acoustically connected to a microphone unit. In this embodiment the additional acoustical filter may either be positioned between the second and the third acoustical pressure pick-up points or between the first and second pressure pick-up points. Additionally, acoustical filters can be placed between all off the pressure pick-up points. By applying more than two acoustical pressure pick-up points the suppression of the unwanted signals can be further improved. In addition, the reconstruction of the head-related transfer function (HRTF) could be at least partly achieved which is otherwise lost due to the fact that the microphone units are not at the exact position of the ear drum. Finally, additional acoustical pressure pick-up points may also be used to generate another desired directionality of the acoustical module. The additional acoustical filter may form part of a dome shaped structure or it may be attached to a dome shaped structure being shaped in a manner so that it supports fixation of the acoustical module in an ear channel.

[0015] The plurality of microphone units may comprise omni-directional microphone units and/or directional microphone units.

[0016] A sleeve may be provided to ease fixation of a dome to the exterior of the acoustical module. As already stated the dome may either comprise or have an acoustical filter attached thereto. The sleeve may be manufactured using an injection mouldable material, such as a polymer material. Preferably, the sleeve and the dome form a one-piece component.

[0017] The plurality of acoustical pressure pick-up points may act as one or more venting holes for the receiver unit. Thus, in case the acoustical module comprises for example two acoustical pressure pick-up points a single or both of these pressure pick-up points may be used for venting the receiver unit. In case the acoustical module comprises for example three acoustical pressure pick-up points one, two or three pressure pick-up points may be used for venting the receiver unit. Alternatively or in combination therewith, a plurality of dedicated venting holes may act as one or more venting holes for the receiver unit may be provided.

[0018] The acoustical module may further comprise a protection arrangement for preventing dust or other impurities to enter the plurality of acoustical pressure pick-up points. The protection arrangement may comprise a number of barrier structures being either secured to or forming part of the sleeve.

[0019] In a second aspect the present invention relates to a hearing device comprising an acoustical module according to the first aspect. The hearing device may comprise a hearing aid of any type, including in-the-channel (ITC) type hearing aids.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The present invention will now be described in further details with reference to the accompanying figures, wherein

Fig. 1 shows a first embodiment of an acoustical module having two acoustical pressure pick-up points and an acoustical filter realized by means of a dome positioned therebetween,

Fig. 2 shows an acoustical module having three acoustical pressure pick-up points and two acoustical filters by means of domes positioned therebetween,

Fig. 3 shows a second embodiment of an acoustical module having two acoustical pressure pick-up points and an acoustical filter by means of a dome positioned therebetween,

Fig. 4 shows an acoustical module having two acoustical pressure pick-up points and an acoustical dome positioned therebetween, the acoustical filter by means of a dome being secured to a sleeve of a first type,

Fig. 5 shows an acoustical module having two acoustical pressure pick-up points and an acoustical filter by means of a dome positioned therebetween, the dome being secured to a sleeve of a second type,

Fig. 6 shows an acoustical module having two protected acoustical pressure pick-up points and an acoustical filter by means of a dome positioned therebetween, the dome being secured to a sleeve of a second type, and

Fig. 7 shows an acoustical module having two acoustical pressure pick-up points, an acoustical filter by means of a dome positioned therebetween, the dome being secured to a sleeve of a first type, and a locking mechanism.

[0021] While the invention is susceptible to various modifications and alternative forms specific embodiments have been shown by way of examples in the drawings and will be described in details herein. It should be understood, however, that the invention is not intended to be limited to the particular forms disclosed. Rather, the invention is to cover all

modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION OF THE INVENTION

[0022] In its most general aspect the present invention relates to an acoustical module being capable of suppressing self-generated acoustical signal and self-generated vibrations. In its most simple implementation the acoustical module comprises a sound generating receiver and two acoustical pressure pick-up points where acoustical sound is allowed to enter the module. One or more acoustical filters are provided between the acoustical pressure pick-up points.

[0023] Each of the two acoustical pressure pick-up points picks up the following signals:

- 1) external sound, i.e. the signal to be detected
- 2) self-generated acoustical sound
- 3) self-generated vibration signal

[0024] The acoustical module of the present invention is adapted to be positioned inside the ear channel. In this position the two acoustical pressure pick-up points form an outer pick-up point, A, and an inner pick-up point, B.

[0025] As stated above each of the two acoustical pressure pick-up points will pick up a self-generated acoustical receiver signal, $S_{Rec,acc}$, a self-generated vibration receiver signal, $S_{Rec,vib}$, and the external acoustical sound, S_{Ext} . This may be expressed as follows:

$$S_{MicA} = S_{Rec,acc}^A + S_{Rec,vib}^A + S_{Ext}^A \quad (1)$$

$$S_{MicB} = S_{Rec,acc}^B + S_{Rec,vib}^B + S_{Ext}^B \quad (2)$$

where S_{MicA} and S_{MicB} are microphone signals being acoustically connected to the acoustical pressure pick-up points A and B, respectively.

[0026] Since the two contributions of the receiver ($S_{Rec,acc}$ and $S_{Rec,vib}$) are generated by the same source they are highly correlated, and may therefore be combined into one source (eq. (3) and (4))

$$S_{Rec}^A = S_{Rec,acc}^A + S_{Rec,vib}^A \quad (3)$$

$$S_{Rec}^B = S_{Rec,acc}^B + S_{Rec,vib}^B \quad (4)$$

which when substituted into eq. (1) and (2) yields

$$S_{MicA} = S_{Rec}^A + S_{Ext}^A \quad (5)$$

$$S_{MicB} = S_{Rec}^B + S_{Ext}^B \quad (6)$$

[0027] The ratio between the total contributions from the receivers

$$\delta_{Rec}^{A-B} = \frac{S_{Rec}^A}{S_{Rec}^B} \quad (7)$$

can be assumed as being frequency dependent, but constant over time. Moreover, the influence of the external acoustic scenery is minimized by the fact, that the acoustical module is placed inside the ear channel.

[0028] By knowing the ratio δ_{Rec}^{A-B} for the acoustical module in a given wearing position, an artificial microphone signal can be calculated from two acoustical pressure pick-up points, which does not contain a self-generated component originating from the receiver.

$$S_{Mic}^{art} = S_A - \delta_{Rec}^{A-B} \cdot S_B \quad (8)$$

[0029] By applying eq. (5), this can be rewritten as:

$$S_{Mic}^{art} = S_{Ext}^A - \delta_{Rec}^{A-B} S_{Ext}^B \quad (9)$$

[0030] Similarly, by knowing the ratio $\delta_{ext}^{B-A} = \frac{S_{Ext}^B}{S_{Ext}^A}$ in which external sound is picked up by the module in a given wearing position, the sensitivity of the artificial microphone signal S_{Mic}^{art} can be compared to the external sound sources of a single microphone.

$$S_{Mic}^{art} = S_{Ext}^A (1 - \delta_{Rec}^{A-B} \delta_{Ext}^{B-A}) \quad (10)$$

[0031] Since the noise of the microphones can be assumed as being non-correlated, the total noise of the artificial microphone can be assumed as:

$$N_{Mic}^{art} = \sqrt{(N_{MicA})^2 + (\delta_{Rec}^{A-B} \cdot N_{MicB})^2} \quad (11)$$

[0032] Under the assumption that two identical microphones are used in relation to acoustical pressure pick-up points A and B, the total noise can be assumed as:

$$N_{Mic}^{art} = N_{Mic} \sqrt{1 + (\delta_{Rec}^{A-B})^2} \quad (12)$$

[0033] The signal-to-noise ratio (SNR) of a single microphone being acoustically connected to pressure pick-up point A, without considering the acoustical and vibration feedback signals of the receiver, would be:

$$SNR_{Mic}^A = \frac{S_{Ext}^A}{N_{Mic}} \quad (13)$$

[0034] The SNR of the artificial microphone would be:

$$SNR_{Mic}^{art} = \frac{S_{Ext}^A}{N_{Mic}} \cdot \frac{(1 - \delta_{Rec}^{A-B} \delta_{Ext}^{B-A})}{\sqrt{1 + (\delta_{Rec}^{A-B})^2}} \quad (14)$$

[0035] The SNR of the acoustical module can be optimized by adding a filtering element, which reduces the external sound signal in pressure pick-up point B relative to pressure pick-up point A, whereby minimizing the term δ_{Ext}^{B-A} as well as the SNR of the artificial microphone.

[0036] Moreover, by applying more than two acoustical pressure pick-up points the robustness of the suppression of the receiver signals ($S_{Rec,acc}$ and $S_{Rec,vib}$) can be further improved. In addition, the reconstruction of the HRTF could be at least partly achieved, which is partially lost due to the fact that the microphones are not at the exact position of the ear drum. Additional acoustical pressure pick-up points could also be used to generate another desired directionality of the acoustical module.

[0037] As stated above the SNR of the acoustical module can be improved by adding a damping and/or a filtering element between the acoustical pressure pick-up points A and B in order to reduce the external sound signal in pressure pick-up point B relative to pressure pick-up point A.

[0038] A suitable filtering element may be implemented as a dome as already used in today's receiver-in-channel (RIC) hearing aids to hold the receiver in place. Alternatively, any other acoustic sealing/filtering element or another support element to hold the acoustic module in a certain position relative to the ear canal may be applied as a filter. This

type of dome may be seen as a passive acoustic element. The dome provides an acoustic resistance, a mass and a compliance which is mainly defined by the leakage around the dome and through-going openings/holes in the dome. The openings/holes can be designed in such a way, that a wanted combined resistance/mass/compliance is achieved. The created effective acoustic filter is defined by these values and the surrounding acoustic environment.

[0039] By adding an acoustic filtering element, such as a dome, between two acoustical pick-up points a beneficial change in signal attenuation between the two pick-up points can be achieved. Moreover, the influence of self-generated acoustic and vibration feedback signals can be suppressed by proper signal processing.

[0040] In the following various embodiments of the present invention will be disclosed.

[0041] Referring now to Fig. 1 an embodiment 100 of the present invention is depicted. As seen the acoustical module 101 comprises two acoustical pressure pick-up points 102, 103 for receiving incoming sound from the outer ear 108. The acoustical module is positioned in the ear channel 107 with a sound generating receiver 104 facing the eardrum (not shown). A pair of dome shaped acoustical filters 105, 106 improve the wearing comfort of the acoustical module while being positioned in the ear channel 107. The dome 106 forms an acoustical filter between acoustical pressure pick-up points 102, 103 so that acoustical sound arriving from the outer ear 108 is attenuated before arriving at pressure pick-up point 103. Thus, the acoustical sound signal reaching pressure pick-up point 103 is attenuated relative to the acoustical sound pressure reaching pressure pick-up point 102. By applying the above-mentioned signal processing algorithm the influence of self-generated acoustical signals as well as self-generated vibration signals can be attenuated.

[0042] The acoustical module depicted further comprises an arrangement of microphone units (not shown) being acoustically connected to the acoustical pressure pick-up points 102, 103. The microphone units applied may be omni-directional and/or directional microphones in suitable combinations. Also, microphone modules comprising for example two microphone units and a common back volume are applicable as well.

[0043] The acoustical pressure pick-up points 102, 103 may optionally be used as one or more venting holes for the sound generating receiver 104. Alternatively or in combination therewith one or more dedicated venting holes (not shown) may be provided. A dedicated venting hole is to be understood as a venting hole not serving any other purpose than being a venting hole for the receiver.

[0044] Several advantages are associated with the arrangement depicted in Fig. 1. Firstly, the wearing comfort and/or the retention force of the acoustical module are both improved. The reason for this being that two domes leads to an increase of the surface touching the ear channel. This increased surface area can either be used to reduce the local contact pressure while keeping the retention force at the same level as with a single dome, or to increase the retention force without increasing the contact pressure. Secondly, the stable positioning of the acoustical pressure pick-up points relative to the ear channel prevents blockage of the pick-up points.

[0045] Referring now to Fig. 2 another embodiment 200 of the present invention is depicted. As seen the acoustical module 201 comprises three acoustical pressure pick-up points 202, 203, 204 for receiving incoming sound from the outer ear 210. The acoustical module is positioned in the ear channel 209 with a sound generating receiver 205 facing the eardrum (not shown). Three dome shaped acoustical filters 206, 207, 208 improve the wearing comfort of the acoustical module while being positioned in the ear channel 209. The domes 207, 208 form acoustical filters between acoustical pressure pick-up points 203, 204 and 202, 203, respectively. This ensures that acoustical sound arriving from the outer ear 210 is attenuated before arriving at pressure pick-up points 203, 204. By applying the above-mentioned signal processing algorithm the influence of self-generated acoustical signals as well as self-generated vibration signals can be attenuated. Moreover, by applying a third acoustical pressure pick-up point the robustness of the suppression of the receiver signals ($S_{Rec,acc}$ and $S_{Rec,vib}$) can be further improved, cf. the above algorithm. In addition, the reconstruction of the HRTF could be at least partly achieved.

[0046] Similar to Fig. 1 the acoustical module depicted in Fig. 2 further comprises an arrangement of microphone units (not shown) being acoustically connected to the acoustical pressure pick-up points 202, 203, 204. As already addressed the microphone units applied may be omni-directional and/or directional microphones in suitable combinations. Also, microphone modules comprising for example two microphone units and a common back volume are applicable as well. The acoustical pressure pick-up points 202, 203, 204 may optionally be used as one or more venting holes for the sound generating receiver 205. Alternatively or in combination therewith one or more dedicated venting holes (not shown) may be provided. A dedicated venting hole is to be understood as a venting hole not serving any other purpose than being a venting hole for the receiver.

[0047] Fig. 3 shows a simple embodiment 300 of the present invention. As seen the acoustical module 301 comprises two acoustical pressure pick-up points 302, 303 for receiving incoming sound from the outer ear 307. The acoustical module is positioned in the ear channel 306 with a sound generating receiver 304 facing the eardrum (not shown). A dome shaped acoustical filter 305 is positioned between acoustical pressure pick-up points 302, 303 so that acoustical sound arriving from the outer ear 307 is attenuated before arriving at pressure pick-up point 303. Thus, the acoustical sound signal reaching pressure pick-up point 303 is attenuated relative to the acoustical sound pressure reaching pressure pick-up point 302. The acoustical pressure pick-up points 302, 303 may optionally be used as one or more venting holes for the sound generating receiver 304. Alternatively or in combination therewith one or more dedicated

venting holes (not shown) may be provided. A dedicated venting hole is to be understood as a venting hole not serving any other purpose than being a venting hole for the receiver.

[0048] Referring now to Fig. 4 an embodiment 400 of the present invention is depicted. As seen the acoustical module 401 comprises two acoustical pressure pick-up points 402, 403 for receiving incoming sound from the outer ear 408. The acoustical module is positioned in the ear channel 407 with a sound generating receiver 404 facing the eardrum (not shown). A pair of dome shaped acoustical filters 405, 406 improve the wearing comfort of the acoustical module while being positioned in the ear channel 407. The dome 406 forms an acoustical filter between acoustical pressure pick-up points 402, 403 so that acoustical sound arriving from the outer ear 408 is attenuated before arriving at pressure pick-up point 403. By applying the above-mentioned signal processing algorithm the influence of self-generated acoustical signals as well as self-generated vibration signals can be attenuated. The acoustical pressure pick-up points 402, 403 may optionally be used as one or more venting holes for the sound generating receiver 404. Alternatively or in combination therewith one or more dedicated venting holes (not shown) may be provided. A dedicated venting hole is to be understood as a venting hole not serving any other purpose than being a venting hole for the receiver.

[0049] The dome 406 is attached to or integrated with the sleeve 409 which is dimensioned to match the outer dimension of the acoustical module 401. The sleeve 409 makes it easier to mount the dome 406 to the acoustical module 401. Preferably, the sleeve 409 is manufactured by a flexible/elastic material so that it may be kept in position relative to the acoustical module 401 by contractive forces. Also, the dome 406 and the sleeve 409 are preferable made as an integrated component, i.e. a one-piece component.

[0050] In the embodiment 500 depicted in Fig. 5 the length of the sleeve 509 has been increased so that it now surrounds the two acoustical pressure pick-up points 502, 503 of the acoustical module 501. Similar to the previous figures the acoustical module of Fig. 5 is positioned in an ear channel 507 with a sound generating receiver 504 facing the eardrum (not shown). Again, a pair of dome shaped acoustical filters 505, 506 improve the wearing comfort of the acoustical module while being positioned in the ear channel 507. The dome 506 forms an acoustical filter between acoustical pressure pick-up points 502, 503 so that acoustical sound arriving from the outer ear 508 is attenuated before arriving at pressure pick-up point 503. As previously stated, by applying the above-mentioned signal processing algorithm the influence of self-generated acoustical signals as well as self-generated vibration signals can be attenuated. The acoustical pressure pick-up points 502, 503 may optionally be used as one or more venting holes for the sound generating receiver 504. Alternatively or in combination therewith one or more dedicated venting holes (not shown) may be provided. A dedicated venting hole is to be understood as a venting hole not serving any other purpose than being a venting hole for the receiver.

[0051] In Fig. 6 protection grids have been arranged in front of the two acoustical pressure pick-up points 602, 603. The protection grids may be separate grids or they may form an integral part of the sleeve 609. Otherwise the embodiment 600 of Fig. 6 is similar to that of Fig. 5 thus comprising an acoustical module 601 having domes 605, 606 attached thereto - the latter via the sleeve 609. A sound generating receiver 604 faces the eardrum of the ear channel 607 which terminates at the outer ear 608. Again, the acoustical pressure pick-up points 602, 603 may optionally be used as one or more venting holes for the sound generating receiver 604. Alternatively or in combination therewith one or more dedicated venting holes (not shown) may be provided. A dedicated venting hole is to be understood as a venting hole not serving any other purpose than being a venting hole for the receiver.

[0052] The embodiment 700 shown in Fig. 7 has an integrated sports lock 710. Otherwise it is similar to the embodiment shown in Fig. 4 thus comprising an acoustical module 701 comprising two acoustical pressure pick-up points 702, 703 for receiving incoming sound from the outer ear 708. The acoustical module is positioned in the ear channel 707 with a sound generating receiver 704 facing the eardrum (not shown). The two dome shaped acoustical filters 705, 706 improve the wearing comfort while being positioned in the ear channel 707. The dome 706 forms an acoustical filter between acoustical pressure pick-up point 702 and 703. By applying the above-mentioned signal processing algorithm the influence of self-generated acoustical signals as well as self-generated vibration signals can be attenuated. As disclosed in relation to the previous embodiments the acoustical pressure pick-up points 702 and 703 may optionally be used as one or more venting holes for the sound generating receiver 704. Alternatively or in combination therewith one or more dedicated venting holes (not shown) may be provided. A dedicated venting hole is to be understood as a venting hole not serving any other purpose than being a venting hole for the receiver.

[0053] The implementation of the dome 706/sleeve 709 is disclosed in detail in relation to the embodiment shown in Fig. 4.

[0054] In the above embodiment the domes 105, 206, 405, 505, 605 and 705 have been disclosed as acoustical filters. However, this may necessarily not be the case in that these domes have the primary purpose of supporting the acoustical module.

Claims

1. An acoustical module comprising

- a receiver unit for generating audio sound,
- a plurality of microphone units for receiving acoustical pressure signals,
- a plurality of acoustical pressure pick-up points, each of said acoustical pressure pick-up points being acoustically connected to a microphone unit, and
- an acoustical filter for attenuating an acoustical pressure signal arriving at a first acoustical pressure pick-up point relative to a second acoustical pressure pick-up point.

2. An acoustical module according to claim 1, wherein the acoustical filter is positioned between the first and the second acoustical pressure pick-up points.

3. An acoustical module according to claim 1 or 2, wherein a first microphone unit is acoustically connected to the first acoustical pressure pick-up point, and wherein a second microphone unit is acoustically connected to the second acoustical pressure pick-up point.

4. An acoustical module according to any of claims 1-3, wherein the acoustical filter forms part of a dome shaped structure or is attached to a dome shaped structure.

5. An acoustical module according to any of claims 1-3, wherein the acoustical filter forms part of an element which is adapted to support fixation of the acoustical module in an ear channel.

6. An acoustical module according to claim 4 or 5, further comprising one or more additional dome shaped structures or elements for additional support of the fixation of the acoustical module in the ear channel.

7. An acoustical module according to any of the preceding claims, further comprising an additional acoustical filter and/or a third acoustical pressure pick-up point being acoustically connected to a microphone unit.

8. An acoustical module according to claim 7, wherein the additional acoustical filter is positioned between the second and the third acoustical pressure pick-up points.

9. An acoustical module according to claim 8, wherein the additional acoustical filter forms part of a dome shaped structure or is attached to a dome shaped structure, the dome shaped structure being shaped in a manner so that it supports fixation of the acoustical module in an ear channel.

10. An acoustical module according to any of the preceding claims, wherein the plurality of microphone units comprise omni-directional microphone units and/or directional microphone units.

11. An acoustical module according to any of the preceding claims, further comprising a sleeve arranged on the exterior of the acoustical module, wherein the sleeve and the acoustical filter forms a one-piece component.

12. An acoustical module according to any of the preceding claims, wherein the plurality of acoustical pressure pick-up points act as one or more venting holes for the receiver unit.

13. An acoustical module according to claim 11 or 12, further comprising a protection arrangement for preventing dust or other impurities to enter the plurality of acoustical pressure pick-up points.

14. An acoustical module according to claim 13, wherein the protection arrangement comprises a number of barrier structures being secured to or forming part of the sleeve.

15. A hearing device comprising an acoustical module according to any of the preceding claims.

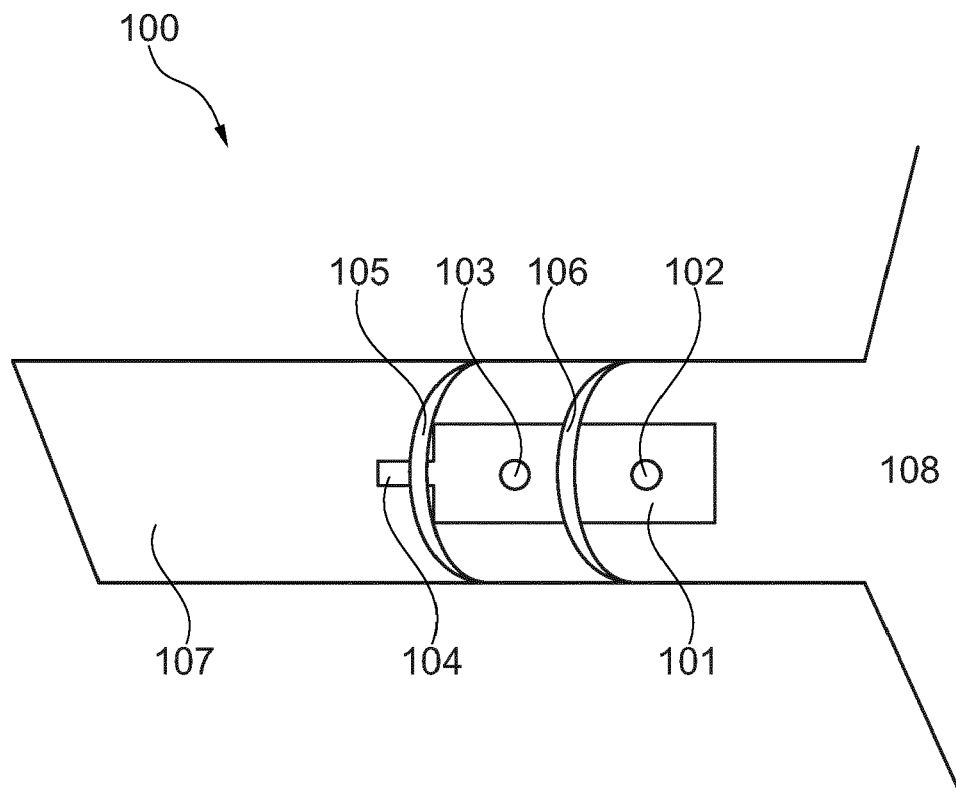


Fig. 1

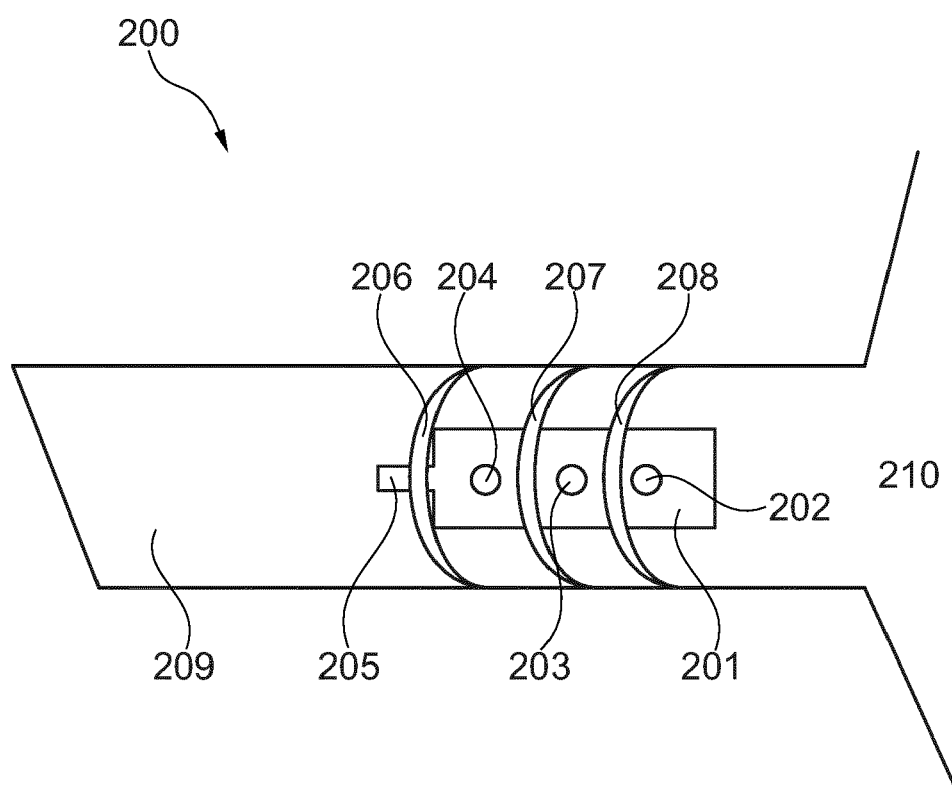


Fig. 2

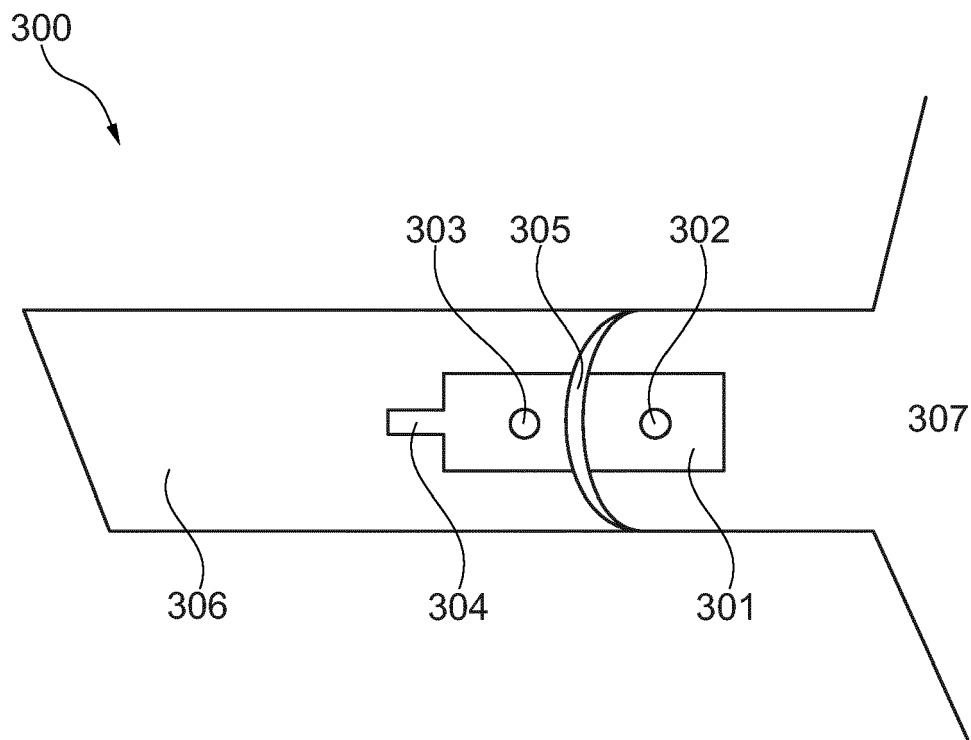


Fig. 3

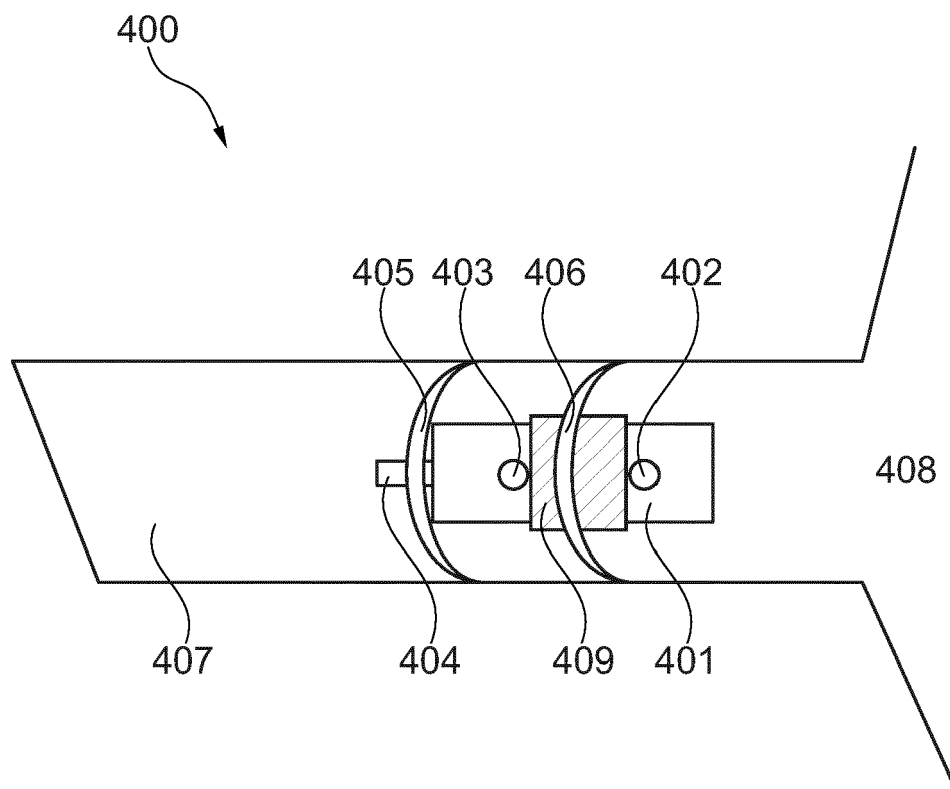


Fig. 4

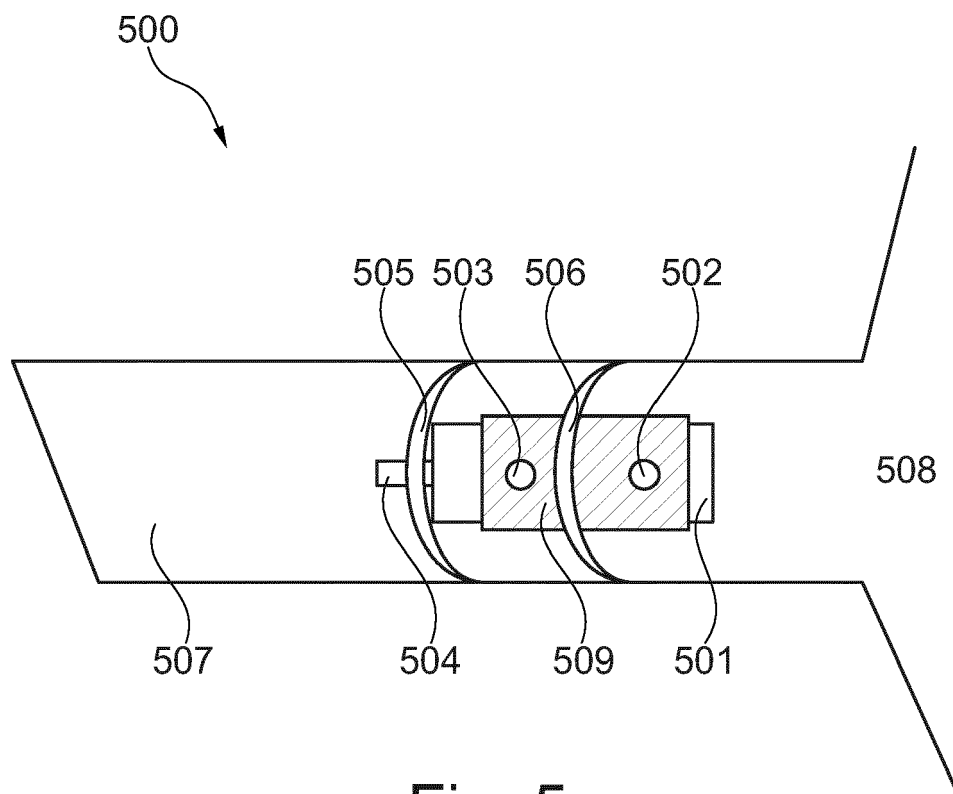


Fig. 5

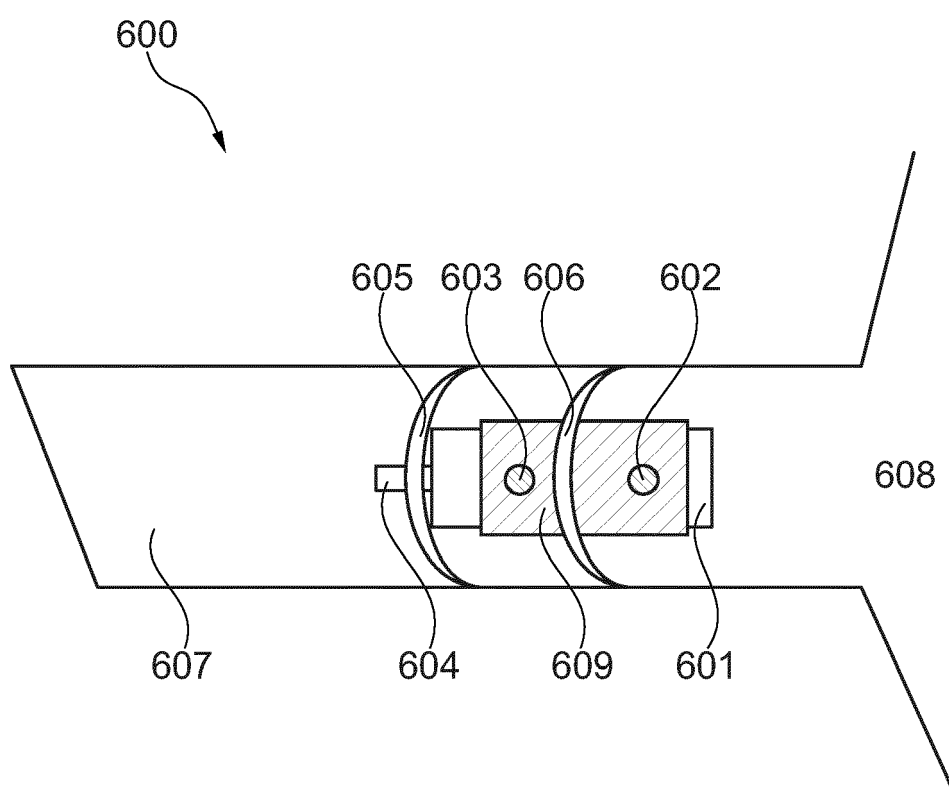


Fig. 6

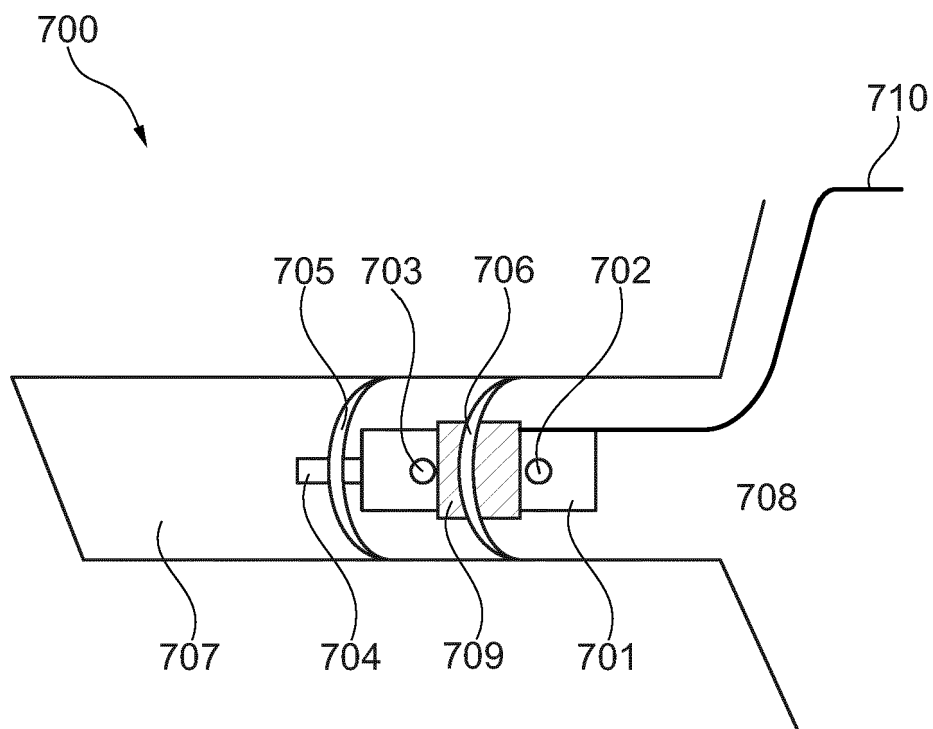


Fig. 7



EUROPEAN SEARCH REPORT

Application Number
EP 16 18 9013

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 2 843 971 A1 (OTICON AS [DK]) 4 March 2015 (2015-03-04) * the whole document *	1-15	INV. H04R25/00
X	GB 1 383 473 A (BOMMER AG) 12 February 1974 (1974-02-12) * page 2, line 40 - page 4, line 10 *	1	
X	WO 01/01732 A1 (TOEPHOLM & WESTERMANN [DK]; BAEKGAARD LARS [DK]) 4 January 2001 (2001-01-04) * page 5, line 1 - page 12, line 3 *	1	
X	US 2001/008559 A1 (ROO DION IVO DE [NL]) 19 July 2001 (2001-07-19) * the whole document *	1	
A	US 6 724 902 B1 (SHENNIB ADNAN [US] ET AL) 20 April 2004 (2004-04-20) * the whole document *	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
			H04R
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 3 February 2017	Examiner Coda, Ruggero
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

 3
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 18 9013

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-02-2017

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2843971 A1	04-03-2015	CN 104427454 A	18-03-2015
		EP 2843971 A1	04-03-2015
		US 2015063612 A1	05-03-2015
GB 1383473 A	12-02-1974	AT 324459 B	10-09-1975
		AU 5101773 A	11-07-1974
		CH 533408 A	31-01-1973
		DE 2259290 A1	09-08-1973
		ES 410250 A1	01-12-1975
		GB 1383473 A	12-02-1974
		IT 971692 B	10-05-1974
		JP S4888803 A	21-11-1973
		NL 7301138 A	06-08-1973
		US 3875349 A	01-04-1975
WO 0101732 A1	04-01-2001	AT 248496 T	15-09-2003
		AU 766876 B2	23-10-2003
		AU 4776999 A	31-01-2001
		CA 2385812 A1	04-01-2001
		CA 2479675 A1	04-01-2001
		DE 60004863 D1	02-10-2003
		DE 60004863 T2	06-05-2004
		DK 1203508 T3	22-09-2003
		JP 3914768 B2	16-05-2007
		JP 2003503924 A	28-01-2003
		WO 0101731 A1	04-01-2001
		WO 0101732 A1	04-01-2001
US 2001008559 A1	19-07-2001	AU 3042301 A	31-07-2001
		EP 1275267 A2	15-01-2003
		US 2001008559 A1	19-07-2001
		WO 0154451 A2	26-07-2001
US 6724902 B1	20-04-2004	US 6724902 B1	20-04-2004
		US 2004165742 A1	26-08-2004

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 8259976 B [0003]