



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
19.04.2017 Bulletin 2017/16

(51) Int Cl.:
H01F 27/24 ^(2006.01) **H01F 1/153** ^(2006.01)
H01F 41/02 ^(2006.01)

(21) Application number: **15807434.4**

(86) International application number:
PCT/JP2015/066758

(22) Date of filing: **10.06.2015**

(87) International publication number:
WO 2015/190528 (17.12.2015 Gazette 2015/50)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA

(71) Applicant: **Hitachi Metals, Ltd.**
Tokyo 1088224 (JP)

(72) Inventor: **MORITSUGU, Nakao**
Tottori 689-1121 (JP)

(74) Representative: **Fleuchaus, Michael A. et al**
Fleuchaus & Gallo Partnerschaft mbB
Patent- und Rechtsanwälte
Steinerstrasse 15/A
81369 München (DE)


(30) Priority: **10.06.2014 JP 2014119178**

(54) **Fe-BASED NANOCRYSTALLINE ALLOY CORE AND METHOD FOR PRODUCING Fe-BASED NANOCRYSTALLINE ALLOY CORE**

(57) A core is obtained by winding an Fe-based nanocrystalline alloy ribbon, the core having an impedance relative permeability μ_r of 90,000 or more at a frequency of 10 kHz, 40,000 or more at a frequency of 100 kHz, and 8,500 or more at a frequency of 1 MHz. The Fe-based nanocrystalline alloy core is produced through a heat treatment step which includes a magnetic field application step of applying a magnetic field in a height direction

of the core for not less than 10 minutes and not more than 60 minutes, within only a temperature range in a period of temperature elevation spanning from a temperature which is 25°C higher than a crystallization onset temperature by differential scanning calorimeter to a temperature which is 60°C higher than the crystallization onset temperature.

FIG. 1

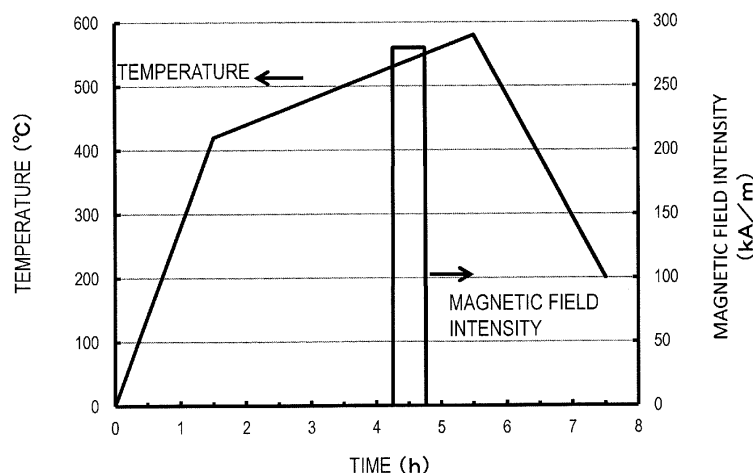

Description**TECHNICAL FIELD**

5 [0001] The present invention relates to an Fe-based nanocrystalline alloy core composed of a wound Fe-based nanocrystalline alloy, and a production method of an Fe-based nanocrystalline alloy core.

BACKGROUND ART

10 [0002] Fe-based nanocrystalline alloys have excellent soft magnetic characteristics that reconcile both high saturation flux density B_s and high relative permeability μ_r , and therefore are used as the cores in common mode choke coils, high-frequency transformers, and the like.

[0003] Representative compositions of Fe-based nanocrystalline alloys are the Fe-Cu-M'-Si-B type compositions (where M' is at least one element selected from the group consisting of Nb, W, Ta, Zr, Hf, Ti and Mo), as described in
15 Patent Document 1.

[0004] An Fe-based nanocrystalline alloy is obtained by, for an alloy in liquid phase which has been heated to the melting point or a higher temperature, rapidly solidifying the alloy to obtain an amorphous alloy, and then applying a heat treatment to the amorphous alloy in order to effect fine-crystallization (nanocrystallization) thereof. As a method of rapidly solidifying a liquid phase, for example, a single-roll method may be adopted, which provides good producibility.
20 An alloy that is obtained through rapid solidification is in a thin strip or ribbon shape.

[0005] Depending on the temperature profile during heat treatment, or with application of a magnetic field in a specific direction during heat treatment, an Fe-based nanocrystalline alloy may acquire different magnetic characteristics, with respect to the relative permeability μ , squareness ratio, and so on.

[0006] For example, Patent Document 2 proposes performing a heat treatment while applying a magnetic field in the width direction (i.e., the height direction of the core) of an alloy ribbon, in order to obtain an Fe-based nanocrystalline alloy having an initial relative permeability μ_i of 70,000 or more and a squareness ratio of 30% or less. While various profiles are proposed in Patent Document 2 as specific examples of the heat treatment, they can be generally classified into: profiles which keep a state under magnetic field application in a maximum reachable temperature region of the heat treatment; profiles which keep a state under magnetic field application during temperature elevation, through a
25 maximum reachable temperature region, and over into a cooling process; and profiles which keep a state under magnetic field application from a maximum reachable temperature region and into a cooling process.
30

CITATION LIST**PATENT LITERATURE****[0007]**

[Patent Document 1] Japanese Patent Publication for Opposition No. 4-4393

40 [Patent Document 2] Japanese Laid-Open Patent Publication No. 7-278764

SUMMARY OF INVENTION**TECHNICAL PROBLEM**

45 [0008] The heat treatment method which is disclosed in Patent Document 2 above is considered effective as a means for lowering the squareness ratio.

[0009] As one application, an ability to cope with lower frequencies to higher frequencies, specifically from the 10 kHz band to the 1 MHz band, this being a frequency band for use in a common mode choke, is being desired.

50 [0010] A characteristic index which is often used of a common mode choke is the impedance relative permeability μ_{rz} . The impedance relative permeability μ_{rz} is described in, for example, C2531 of the JIS standards (revised 1999). As indicated by the expression below, an impedance relative permeability μ_{rz} can be considered equal to an absolute value of complex relative permeability $(\mu_r' - j\mu_r'')$ (see, for example, "Know-hows on Magnetic Material Selection", November 10, 1989, editor: Keizo OHTA):
55

$$\mu_{rz} = (\mu_r'^2 + \mu_r''^2)^{1/2}.$$

[0011] In the above expression, the real part μ_r' of complex relative permeability represents a magnetic flux density component without a phase lag relative to the magnetic field, and generally corresponds to the magnitude of impedance relative permeability μ_rz in a low frequency region. On the other hand, the imaginary part μ_r'' represents a magnetic flux density component including a phase lag relative to the magnetic field, and is equivalent to a loss in magnetic energy. In a high frequency region (e.g., 50 kHz or above), the effect of noise suppression is greater as the imaginary part μ_r'' becomes higher.

[0012] The impedance relative permeability μ_rz that is represented by the above expression is used as an index for assessing the effect of noise suppression for a wide frequency band. The impedance relative permeability μ_rz having a high value across a wide frequency band means a good ability to absorb or remove common mode noise.

[0013] The inventor has conducted a study in order to enhance the aforementioned impedance relative permeability μ_rz in a wide band across frequencies from 10 kHz to 1 MHz. As a result, they have realized that it is difficult to obtain a high impedance relative permeability μ_rz across a wide frequency band with the heat treatment profiles described in Patent Document 1 and Patent Document 2.

[0014] The present invention, which has been made in view of the above, aims to provide an Fe-based nanocrystalline alloy core having a high impedance relative permeability μ_rz in a wide frequency band across frequencies from 10 kHz to 1 MHz, and a method of producing the Fe-based nanocrystalline alloy core.

SOLUTION TO PROBLEM

[0015] The inventor has found that, in effecting fine-crystallization (nanocrystallization) of an Fe-based amorphous alloy through a heat treatment, applying a magnetic field within only a specific temperature range in a period of temperature elevation produces an Fe-based nanocrystalline alloy core which has a high impedance relative permeability μ_rz in a wide band across frequencies from 10 kHz to 1 MHz, thus arriving at the present invention.

<1> Fe-based nanocrystalline alloy core

[0016] A core according to an embodiment of the present invention is a core which is produced, after winding an Fe-based amorphous alloy ribbon that is capable of nanocrystallization, through a heat treatment step of heating the Fe-based amorphous alloy ribbon up to a crystallization temperature region and cooling the Fe-based amorphous alloy ribbon, wherein the core has an impedance relative permeability μ_rz of

90,000 or more at a frequency of 10 kHz,
40,000 or more at a frequency of 100 kHz, and
8,500 or more at a frequency of 1 MHz.

[0017] In one embodiment of the present invention, it is preferable that the core has an impedance relative permeability μ_rz of

105,000 or more at a frequency of 10 kHz,
45,000 or more at a frequency of 100 kHz, and
9,000 or more at a frequency of 1 MHz.

[0018] In one embodiment of the present invention, it is preferable that the Fe-based nanocrystalline alloy ribbon has a thickness of not less than 9 μm and not more than 20 μm .

<2> Production method for Fe-based nanocrystalline alloy core

[0019] A production method for a core according to an embodiment of the present invention comprises, after winding an Fe-based amorphous alloy ribbon that is capable of nanocrystallization, a heat treatment step of heating the Fe-based amorphous alloy ribbon up to a crystallization temperature region and cooling the Fe-based amorphous alloy ribbon, wherein the heat treatment step comprises a magnetic field application step of applying a magnetic field in a height direction of the core for not less than 10 minutes and not more than 60 minutes, within only a temperature range in a period of temperature elevation spanning from a temperature which is 25°C higher than a crystallization onset temperature by differential scanning calorimeter to a temperature which is 60°C higher than the crystallization onset temperature.

[0020] In a production method according to an embodiment of the present invention, it is preferable that the heat treatment step comprises a magnetic field application step of applying a magnetic field in the height direction of the core

for not less than 15 minutes and not more than 40 minutes, within only a temperature range in the period of temperature elevation from a temperature which is 30°C higher than a crystallization onset temperature by differential scanning calorimeter to a temperature which is 50°C higher than the crystallization onset temperature.

[0021] In a production method according to an embodiment of the present invention, it is preferable that, in the magnetic field application step, a magnetic field with a magnetic field intensity of not less than 50 kA/m and not more than 300 kA/m is applied in the height direction of the core.

[0022] In a production method according to an embodiment of the present invention, an Fe-based nanocrystalline alloy ribbon having a thickness of not less than 9 μm and not more than 20 μm is preferably used.

[0023] In an embodiment of the present invention, a production method for an Fe-based nanocrystalline alloy ribbon comprises: a step of providing an Fe-based amorphous alloy ribbon that is capable of nanocrystallization; a step of winding the Fe-based amorphous alloy ribbon to form a wound body; a heat treatment step of heating the wound body up to a crystallization temperature region and cooling the wound body; and a step of, during the heat treatment step, applying a magnetic field to the wound body, wherein, in a period of temperature elevation during the heat treatment step, within at least a partial period in a temperature range from a temperature which is 25°C higher than a crystallization onset temperature as indicated by a differential scanning calorimeter to a temperature which is 60°C higher than the crystallization onset temperature, the step of applying a magnetic field applies a magnetic field of a predetermined intensity (e.g., 50 kA/m) or greater in a height direction of the wound body (i.e., a width direction of the alloy ribbon), but does not apply a magnetic field of the predetermined intensity or greater to the wound body within a partial period in the period of temperature elevation. More specifically, a magnetic field is applied within only a temperature range from a temperature which is 25°C higher than the crystallization onset temperature to a temperature which is 60°C higher than the crystallization onset temperature, for a period of time which is not less than 10 minutes and not more than 60 minutes, whereas no magnetic field application is performed in temperature regions other than the aforementioned temperature range in the period of temperature elevation. In this step, a magnetic field of the predetermined intensity or greater is not applied in a period of temperature elevation at the crystallization onset temperature or below, or when at the highest temperature of the heat treatment step (i.e., a temperature which is more than 60°C higher than the crystallization onset temperature).

ADVANTAGEOUS EFFECTS OF INVENTION

[0024] According to an embodiment of the present invention, an Fe-based nanocrystalline alloy core which has a high impedance relative permeability $\mu_r z$ in a wide frequency band across frequencies from 10 kHz to 1 MHz can be obtained. Moreover, it is possible to fabricate such an Fe-based nanocrystalline alloy core. Therefore, it finds optimum use in a common mode choke or the like where characteristics in a wide frequency band across frequencies from 10 kHz to 1 MHz are important.

BRIEF DESCRIPTION OF DRAWINGS

[0025]

[FIG. 1] A diagram describing a profile of heat treatment and magnetic field application according to Example 1 of the present invention.

[FIG. 2] A diagram describing a profile of heat treatment and magnetic field application according to Example 2 of the present invention.

[FIG. 3] A diagram describing a profile of heat treatment and magnetic field application (no magnetic field) according to Comparative Example 1.

[FIG. 4] A diagram describing a profile of heat treatment and magnetic field application according to Comparative Example 2.

[FIG. 5] A diagram showing results of measurement for an Fe-based amorphous alloy ribbon according to Example 1 by a differential scanning calorimeter (DSC).

[FIG. 6] A graph showing how impedance relative permeability $\mu_r z$ may change in frequency characteristics, between different manners of magnetic field application during a heat treatment.

DESCRIPTION OF EMBODIMENTS

[0026] Hereinafter, with reference to the drawings, embodiments of the present invention will be specifically described.

[0027] In an embodiment of the present invention, when applying a magnetic field in the width direction of the wound ribbon (i.e., the height direction of the core) to obtain an Fe-based nanocrystalline alloy, a heat treatment step is conducted while applying a magnetic field within only a specific temperature range in a period of temperature elevation.

[0028] Specifically, in a heat treatment step according to an embodiment of the present invention, within only a temperature range in a period of temperature elevation from a temperature which is 25°C higher than a crystallization onset temperature by differential scanning calorimeter to a temperature which is 60°C higher than the crystallization onset temperature, a magnetic field application step of applying a magnetic field in the height direction of the core for a period of time which is not less than 10 minutes and not more than 60 minutes is performed.

[0029] Thus, core fabrication according to an embodiment of the present invention involves applying a magnetic field within only a specific period in a period of temperature elevation, while not applying any magnetic field when at the highest temperature of heat treatment or in a period through the highest temperature into the cooling process. In an embodiment of the present invention, the highest temperature of heat treatment is typically a temperature that is higher than a temperature which is 60°C higher than the crystallization onset temperature.

[0030] In the present specification, a "period of temperature elevation" means a period before reaching the maximum reachable temperature, and may encompass any state of warming, cooling, or retaining a constant temperature that may exist before the maximum reachable temperature is reached. For example, as performed within a temperature range in a period of temperature elevation from a temperature which is 25°C higher than the aforementioned crystallization onset temperature to a temperature which is 60°C higher than the crystallization onset temperature, the heat treatment may take place in a manner of retaining a certain temperature within the aforementioned temperature range for a certain period of time. Moreover, the temperature may be increased monotonically with a constant temperature elevation rate, or the temperature elevation rate may be changed along the way.

[0031] Now, the reasoning as to how the inventor has arrived at the aforementioned idea of applying a magnetic field within only a specific temperature range in a period of temperature elevation during the heat treatment step will be described.

[0032] FIG. 6 is a graph showing frequency characteristics of impedance relative permeability as ascertained through an experiment by the inventor, illustrating the frequency characteristics of impedance relative permeability of a core (core **C1**) which was not subjected to magnetic field application during heat treatment, and the frequency characteristics of impedance relative permeability of a core (core **C2**) which was subjected to magnetic field application throughout the entire heat treatment period.

[0033] As can be seen from FIG. 6, in a low frequency region of e.g. 100 kHz or less, the impedance relative permeability μ_{rz} of the core **C1** (i.e., no magnetic field application) is considerably greater than the impedance permeability μ_{rz} of the core **C2** (i.e., always under magnetic field application). On the other hand, in a high frequency region above 1 MHz, the impedance permeability μ_{rz} of the core **C2** is observed to be higher than the impedance permeability μ_{rz} of the core **C1**. From this, it was confirmed that applying a magnetic field during heat treatment in order to confer magnetic anisotropy to the core tends to lower the impedance relative permeability μ_{rz} (especially the real part μ_r' of complex relative permeability according to the experiment by the inventor) in the low frequency region, but tends to improve the impedance relative permeability μ_{rz} in the high frequency region.

[0034] Thus, the inventor saw a tradeoff between an improvement in impedance relative permeability μ_{rz} on the low frequency side and an improvement in impedance relative permeability μ_{rz} on the high frequency side. However, while going through various experiments related to heat treatment in a magnetic field, the inventor came to realize that, in a heat treatment at a low temperature and over a short period of time, conditions may exist which would induce little decrease in impedance relative permeability on the low frequency side, upon which they conducted further studies.

[0035] Consequently, it was found that: in a heat treatment step, a magnetic field in the height direction of the core may be applied within only a temperature range in a period of temperature elevation spanning from a temperature which is 25°C higher than a crystallization onset temperature by differential scanning calorimeter to a temperature which is 60°C higher than the crystallization onset temperature, for a period of time which is not less than 10 minutes and not more than 60 minutes, whereby impedance relative permeability μ_{rz} in the high frequency region can be improved while reducing a decrease in impedance relative permeability μ_{rz} in the low frequency region. In particular, it was found that applying a magnetic field within the aforementioned temperature range and for only the aforementioned period of time not only reduces a decrease in impedance permeability μ_{rz} in the low frequency region, but also may possibly provide an improvement over the case of applying no magnetic field. As a result of this, a core having a high impedance relative permeability μ_{rz} in a wide frequency band across frequencies from 10 kHz to 1 MHz was obtained.

[0036] As described above, with the heat treatment method which applies a magnetic field within only a specific temperature range in a period of temperature elevation for only a certain period of time, it is possible to obtain a core with a μ_{rz} of 90,000 to 115,000 at a frequency of 10 kHz, a μ_{rz} of 40,000 to 49,000 at a frequency of 100 kHz, and a μ_{rz} of 8,500 to 15,000 at a frequency of 1 MHz.

[0037] It is estimated that the aforementioned magnetic field application within only a certain temperature range in a period of temperature elevation has enabled maximization of the impedance relative permeability μ_{rz} in a wide frequency band across frequencies from 10 kHz to 1 MHz. However, the mechanism as how to magnetic field application within only a certain temperature range in a period of temperature elevation contribute to each of μ_r' and μ_r'' is yet undiscovered.

[0038] Note also that the aforementioned crystallization onset temperature is defined with a differential scanning

calorimeter. It is difficult to accurately measure the true crystallization onset temperature, and it would be effective to identify it with a differential scanning calorimeter (DSC: Differential Scanning Calorimetry). A temperature at which an exothermic reaction that is due to nanocrystallization being begun during ascending temperature is detected is defined as the crystallization onset temperature (see FIG. 5). In the present specification, a crystallization onset temperature means what is determined by using a differential scanning calorimeter under a measurement condition such that the temperature elevation rate is 10°C/minute.

[0039] Control of the heat treatment temperature is preferably performed so that the temperature distribution within the actual heat treatment furnace is within $\pm 5^\circ\text{C}$, while taking into account the capacity of the heat treatment furnace and a calorific value associated with crystallization of the amorphous alloy ribbon to be heat-treated. As a result, magnetic characteristics of the heat-treated alloy can be stabilized.

[0040] The intensity of the magnetic field to be applied is preferably not less than 50 kA/m and not more than 300 kA/m. If the applied magnetic field is too weak, it will be difficult to confer an induced magnetic anisotropy under practical operation conditions; if it is too high, too much induced magnetic anisotropy tends to be conferred. A more preferable range is from 60 kA/m to 280 kA/m.

[0041] It has been confirmed by the inventor that, when the applied magnetic field is a relatively weak magnetic field which is less than 50 kA/m, the impedance relative permeability is hardly affected even if it is applied in any period during the heat treatment step. Therefore, in an embodiment of the present invention, application of a weak magnetic field of less than 50 kA/m may well be regarded as no magnetic field being applied at all.

[0042] As an Fe-based amorphous alloy that is capable of nanocrystallization, for example, an alloy of a composition expressed by the general formula: $(\text{Fe}_{1-a}\text{M}_a)_{100-x-y-z-\alpha-\beta-\gamma}\text{Cu}_x\text{Si}_y\text{B}_z\text{M}'^{\alpha}\text{M}''^{\beta}\text{X}^{\gamma}$ (at%) (where M is Co and/or Ni; M' is at least one element selected from the group consisting of Nb, Mo, Ta, Ti, Zr, Hf, V, Cr, Mn and W; M'' is at least one element selected from the group consisting of Al, platinum group elements, Sc, rare-earth elements, Zn, Sn and Re; X is at least one element selected from the group consisting of C, Ge, P, Ga, Sb, In, Be and As; a, x, y, z, α , β and γ respectively satisfy $0 \leq a \leq 0.5$, $0.1 \leq x \leq 3$, $0 \leq y \leq 30$, $0 \leq z \leq 25$, $5 \leq y+z \leq 30$, $0 \leq \alpha \leq 20$, $0 \leq \beta \leq 20$ and $0 \leq \gamma \leq 20$) can be used.

[0043] By allowing an alloy of the above composition to be melted to its melting point or above, and rapidly solidified by the single-roll method, a long length of amorphous alloy ribbon (thin strip) can be obtained.

[0044] The thickness of the amorphous alloy ribbon is preferably not less than 9 μm and not more than 30 μm . If it is less than 9 μm , the ribbon has insufficient mechanical strength so that it is likely to break during handling. If it is above 30 μm , an amorphous state cannot be stably obtained. When the amorphous alloy ribbon after nanocrystallization is used as a core for a high frequency application, an eddy current will occur in the ribbon; the loss due to the eddy current will be greater as the ribbon becomes thicker. Therefore, a more preferable thickness is 9 μm to 20 μm , and a thickness of 15 μm or less is still more preferable.

[0045] For a practical core shape, the width of the amorphous alloy ribbon is preferably 10 mm or more. While a wide width is preferable because slitting (i.e., cutting up) a wide-width alloy ribbon permits low cost, a width of 250 mm or less is preferable for stable fabrication of an alloy ribbon. In order to attain more stable fabrication, a width of 70 mm or less is more preferable.

[0046] The heat treatment for nanocrystallization is preferably performed in an inert gas such as nitrogen, and the maximum reachable temperature is preferably greater than 560°C but not more than 600°C. That of 560°C or less, or above 600°C is unpreferable because of resulting in large magnetostriction. No particular time of retention at the maximum reachable temperature may be set, i.e., 0 minutes (that is, no time of retention), and nanocrystallization is still possible. Retention for 3 hours or less may be observed in order to account for the heat capacity of the total amount of alloy to be heat-treated and the stability of characteristics.

[0047] As a temperature profile of heat treatment, relatively rapid warming with a temperature elevation rate of e.g. 3 to 5°C/minute may be effected from room temperature to near a temperature at which nanocrystallization begins (typically, to a temperature which is 20°C lower than the crystallization onset temperature); and thereafter, warming may be effected with a gentle temperature elevation rate with an average of 0.2 to 1.0°C/minute from near the aforementioned nanocrystallization onset temperature to a temperature which is 60°C higher than the nanocrystallization onset temperature (or alternatively to the maximum reachable temperature), whereby stable nanocrystallization can take place. Note that, from the maximum reachable temperature to 200°C, it is preferable to perform cooling at a cooling rate of 2 to 5°C/minute. Usually at 100°C or less, the alloy can be taken out into the atmospheric air.

[0048] For use as a magnetic part, an Fe-based amorphous alloy ribbon that is capable of nanocrystallization may be wound into a toroidal body, and subjected to a heat treatment step which involves heating up to the crystallization temperature region and then cooling. By ensuring that application of a magnetic field at this time is in the height direction of the aforementioned toroidal body (core), whereby a predetermined induced magnetic anisotropy can be conferred.

[Examples]

(Example 1)

[0049] An alloy melt composed of Cu: 1%, Nb:3%, Si:15.5% and B:6.5%, all by at%, with a balance of Fe and inevitable impurities, was quenched by single-roll method, thereby obtaining an Fe-based amorphous alloy ribbon having a width of 50 mm and a thickness of 13 μm . After this Fe-based amorphous alloy ribbon was slit (cut up) in a width of 15 mm, it was wound so as to have an outer diameter of 31 mm and an inner diameter of 21 mm, thereby producing a toroidal core (height: 15 mm). As shown in FIG. 5, a measurement with a differential scanning calorimeter (DSC) indicated the crystallization onset temperature of this alloy to be 500°C.

[0050] The produced core was subjected to a heat treatment and magnetic field application according to the profile of temperature-and-magnetic field application as shown in FIG. 1. The magnetic field application was performed in a temperature range from 530 to 550°C (a temperature range from a temperature which is 30°C higher than the crystallization onset temperature to a temperature which is 50°C higher than the crystallization onset temperature) for 30 minutes. The direction of magnetic field application was the width direction of the alloy ribbon, i.e., the height direction of the core. The magnetic field intensity was 280 kA/m. Note that the maximum reachable temperature during the heat treatment was 580°C.

[0051] An impedance relative permeability μ_r of the heat-treated core was measured at 10 kHz, 100 kHz and 1 MHz. The results are shown in Table 1.

[0052] Measurements of the impedance relative permeability μ_r were taken by using HP4194A, manufactured by Agilent Technologies, under conditions with an oscillation level of 0.5 V and an average of 16. Insulation coated leads were passed through the central portion of the toroidal core, so as to be connected to input/output terminals, whereby the measurements were taken.

[0053] In Example 1, the impedance relative permeability μ_r was 98,000 at 10 kHz, 42,000 at 100 kHz, and 8,600 at 1 MHz.

[Table 1]

Frequency	Example	Example	Example	Example	Comparative Example 1	Comparative Example 2	Reference Example
10 kHz	98,000	109,000	91,000	90,000	88,000	18,000	52,000
100 kHz	42,000	47,000	46,000	46,000	41,000	17,500	37,000
1 MHz	8,600	9,500	9,300	10,000	7,200	6,900	9,500

(Example 2)

[0054] By using the Fe-based amorphous alloy described in Example 1, a toroidal core was similarly produced. The produced core was subjected to a heat treatment and magnetic field application according to the profile of temperature-and-magnetic field application as shown in FIG. 2. Only the temperature range and the magnetic field intensity of magnetic field application were different from those in Example 1 (FIG. 1), while the other conditions were similar to those in Example 1.

[0055] The magnetic field application was performed for 15 minutes in a temperature range from 540 to 550°C (a temperature range from a temperature which is 40°C higher than the crystallization onset temperature to a temperature which is 50°C higher than the crystallization onset temperature). The magnetic field intensity was 160 kA/m. Measurement results of the impedance relative permeability μ_r of the heat-treated core, at 10 kHz, 100 kHz and 1 MHz, are shown in Table 1.

[0056] In Example 2, the impedance relative permeability μ_r was 109,000 at 10 kHz, 47,000 at 100 kHz, and 9,500 at 1 MHz. In other words, a higher impedance relative permeability μ_r than that of Example 1 was attained at each of the frequencies of 10 kHz, 100 kHz and 1 MHz.

(Example 3)

[0057] An alloy melt composed of Cu:1%, Nb:3%, Si:15.5% and B:6.5%, all by at%, with a balance of Fe and inevitable impurities (similar to Example 1), was quenched by single-roll method, thereby obtaining an Fe-based amorphous alloy ribbon having a width of 50 mm and a thickness of 10 μm . By using this Fe-based amorphous alloy ribbon having a thickness of 10 μm (which was 13 μm in Example 1), a toroidal core was similarly produced. Similarly to Example 2,

the produced core was subjected to a heat treatment and magnetic field application according to the profile of temperature-and-magnetic field application as shown in FIG. 2. Measurement results of the impedance relative permeability $\mu_r z$ of the heat-treated core at 10 kHz, 100 kHz and 1 MHz are shown in Table 1.

[0058] In Example 3, the impedance relative permeability $\mu_r z$ was 91,000 at 10 kHz, 46,000 at 100 kHz, and 9,300 at 1 MHz.

(Example 4)

[0059] By using the Fe-based amorphous alloy ribbon having a thickness of 13 μm described in Example 1, a toroidal core was similarly produced. To the produced core, a magnetic field was applied for 15 minutes in a heat treatment temperature range from 530°C to 540°C and with an intensity of 160 kA/m. Measurement results of the impedance relative permeability $\mu_r z$ of the heat-treated core at 10 kHz, 100 kHz and 1 MHz are shown in Table 1.

[0060] In Example 4, the impedance permeability $\mu_r z$ was 90,000 at 10 kHz, 46,000 at 100 kHz, and 10,000 at 1 MHz.

(Comparative Example 1)

[0061] By using the Fe-based amorphous alloy described in Example 1, a toroidal core was similarly produced. According to the profile of temperature-and-magnetic field application as shown in FIG. 3, the produced core was subjected to a heat treatment without any magnetic field application (i.e., under no magnetic field). As can be seen from FIG. 3, the temperature profile in Comparative Example 1 was similar to that in Example 1.

[0062] Measurement results of the impedance relative permeability $\mu_r z$ of the heat-treated core at 10 kHz, 100 kHz and 1 MHz are shown in Table 1.

[0063] A comparison between Comparative Example 1 under no magnetic field application and Examples 1 and 2 indicates that, at each frequency, the value of impedance relative permeability $\mu_r z$ in Comparative Example 1 is smaller than the values in Examples 1 and 2.

(Comparative Example 2)

[0064] By using the Fe-based amorphous alloy described in Example 1, a toroidal core was similarly produced. The produced core was subjected to a heat treatment and magnetic field application, according to a profile of temperature-and-magnetic field application which is shown in FIG. 4. As can be seen from FIG. 4, the temperature profile in Comparative Example 2 was similar to that in Example 1.

[0065] In Comparative Example 2, although the magnetic field intensity during magnetic field application is similar to that in Example 1 (FIG. 1), the temperature range of magnetic field application spans from the beginning of the heat treatment, through the maximum reachable temperature of 580°C, over into the cooling. This temperature range of magnetic field application lies outside the range according to the present invention.

[0066] Measurement results of the impedance relative permeability $\mu_r z$ of the heat-treated core at 10 kHz, 100 kHz and 1 MHz are shown in Table 1.

[0067] A comparison between Comparative Example 2 and Examples 1 and 2 indicates that, at each frequency, the value of impedance relative permeability $\mu_r z$ in Comparative Example 2 is smaller than the values in Examples 1 and 2.

(Reference Example)

[0068] As Reference Example, a magnetic field was applied to a toroidal core which was similar in composition and shape to Example 2, in a lower temperature region and for a longer time in a period of temperature elevation during the heat treatment step, and the resultant impedance relative permeability thereof will now be described.

[0069] In this Reference Example, the magnetic field application was performed continuously for about 60 minutes in a temperature range from 480 to 520°C (a temperature range from a temperature which is 20°C lower than the crystallization onset temperature to a temperature which is 20°C higher than the crystallization onset temperature). The direction of magnetic field application was the width direction of the alloy ribbon, i.e., the height direction of the core, and the magnetic field intensity was 120 kA/m.

[0070] Measurement results of the impedance relative permeability $\mu_r z$ of the heat-treated core at 10 kHz, 100 kHz and 1 MHz are shown in Table 1.

[0071] FIG. 6 shows frequency characteristics of impedance relative permeability $\mu_r z$ of a core (core **E1**) according to an embodiment of the present invention (similar to Example 2) and a core (core **R1**) according to Reference Example above. FIG. 6 also shows a core (core **C1**) under no magnetic field being applied, corresponding to Comparative Example 1, and a core (core **C2**) under continuous magnetic field application, corresponding to Comparative Example 2 above.

[0072] FIG. 6 would indicate that, as in the core **R1**, if a magnetic field is applied for about 60 minutes in a temperature

region near the crystallization onset temperature that is lower than a temperature which is 25°C higher than the crystallization onset temperature, the impedance relative permeability μ_{rz} in the low frequency region may become lower than that under no magnetic field application (core **C1**). However, in a high frequency region above 100 kHz, the impedance relative permeability tends to be higher for the core **R1** than for the core **C1**.

[0073] On the other hand, as in an embodiment of the present invention (core **E1**), if a magnetic field is applied only for a relatively short period of time above or at 25°C from and below or at 60°C from the crystallization onset temperature (such that typically no magnetic field is applied when at the highest temperature), improvements in the impedance relative permeability μ_{rz} were confirmed not only in the high frequency region but also in the low frequency region. Thus, among those modes of magnetic field application which apply a magnetic field in a specific period before the maximum reachable temperature, an embodiment of the present invention exhibits an outstanding effect of improving the impedance relative permeability μ_{rz} in the low frequency region.

INDUSTRIAL APPLICABILITY

[0074] According to an embodiment of the present invention, there is provided a core which exhibits a high impedance relative permeability μ_{rz} in a manner of supporting a wide frequency band, which is suitably used for a common mode choke coil, a high-frequency transformer, or the like.

Claims

1. An Fe-based nanocrystalline alloy core composed of a wound Fe-based nanocrystalline alloy ribbon, wherein the core has an impedance relative permeability μ_{rz} of
 - 90,000 or more at a frequency of 10 kHz,
 - 40,000 or more at a frequency of 100 kHz, and
 - 8,500 or more at a frequency of 1 MHz.
2. The Fe-based nanocrystalline alloy core of 1, wherein the core has an impedance relative permeability μ_{rz} of
 - 105,000 or more at a frequency of 10 kHz,
 - 45,000 or more at a frequency of 100 kHz, and
 - 9,000 or more at a frequency of 1 MHz.
3. The Fe-based nanocrystalline alloy core of claim 1 or 2, wherein the Fe-based nanocrystalline alloy ribbon has a thickness of not less than 9 μm and not more than 20 μm .
4. A production method for an Fe-based nanocrystalline alloy core composed of a wound Fe-based nanocrystalline alloy ribbon, the method comprising, after winding an Fe-based amorphous alloy ribbon that is capable of nanocrystallization, a heat treatment step of heating the Fe-based amorphous alloy ribbon up to a crystallization temperature region and cooling the Fe-based amorphous alloy ribbon, wherein the heat treatment step comprises
 - a magnetic field application step of applying a magnetic field in a height direction of the core for not less than 10 minutes and not more than 60 minutes, within only a temperature range in a period of temperature elevation spanning from a temperature which is 25°C higher than a crystallization onset temperature by differential scanning calorimeter to a temperature which is 60°C higher than the crystallization onset temperature.
5. The production method for an Fe-based nanocrystalline alloy core of claim 4, wherein the heat treatment step comprises
 - a magnetic field application step of applying a magnetic field in the height direction of the core for not less than 15 minutes and not more than 40 minutes, within only a temperature range in the period of temperature elevation spanning from a temperature which is 30°C higher than a crystallization onset temperature by differential scanning calorimeter to a temperature which is 50°C higher than the crystallization onset temperature.
6. The production method for an Fe-based nanocrystalline alloy core of claim 4 or 5, wherein a magnetic field with a magnetic field intensity of not less than 50 kA/m and not more than 300 kA/m is applied in the height direction of the core.

EP 3 157 021 A1

7. The production method for an Fe-based nanocrystalline alloy core of any of claims 4 to 6, wherein the Fe-based nanocrystalline alloy ribbon has a thickness of not less than 9 μm and not more than 20 μm .
8. The production method for an Fe-based nanocrystalline alloy core of any of claims 4 to 7, wherein the produced core has an impedance relative permeability μ_r of

90,000 or more at a frequency of 10 kHz,
40,000 or more at a frequency of 100 kHz, and
8,500 or more at a frequency of 1 MHz.

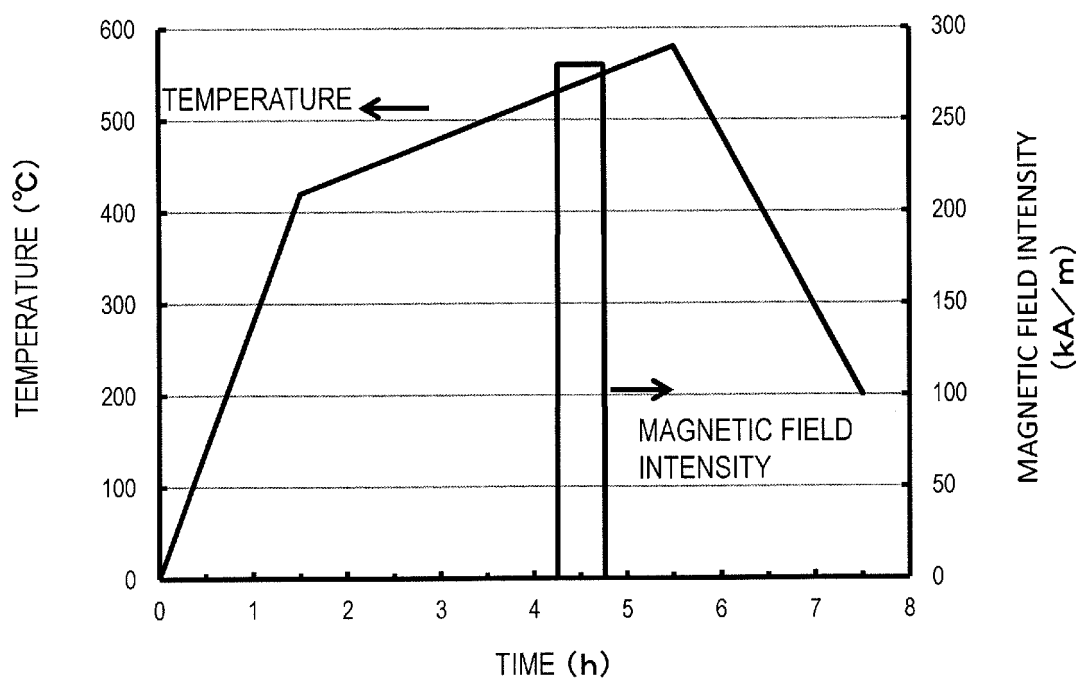
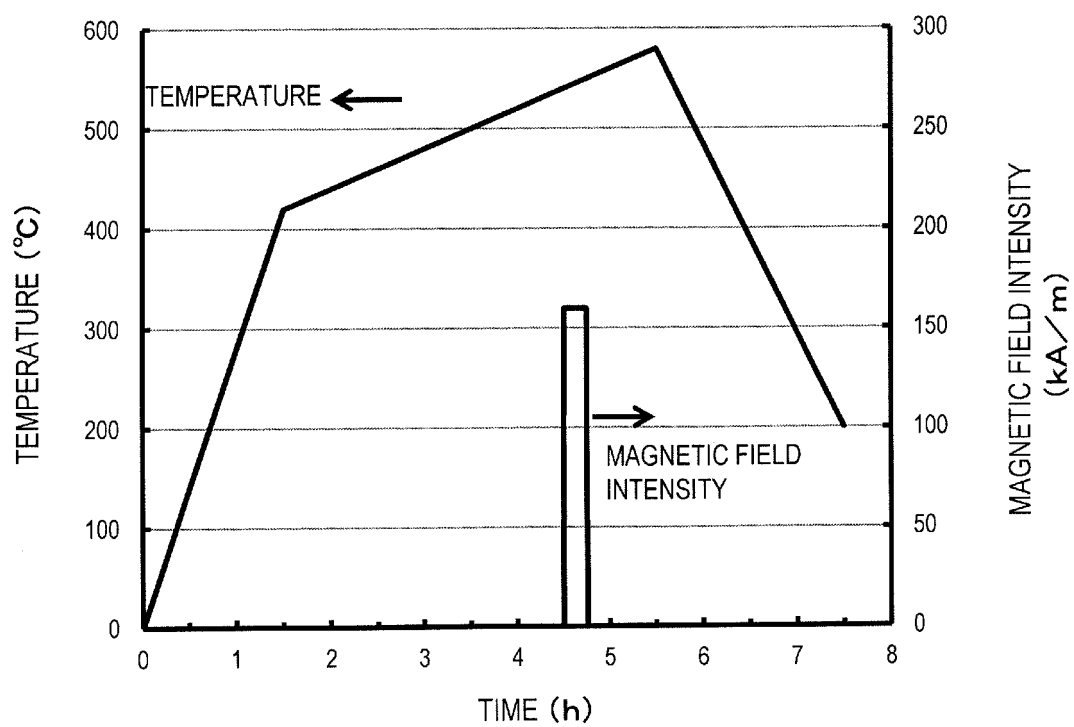
FIG. 1*FIG. 2*

FIG. 3

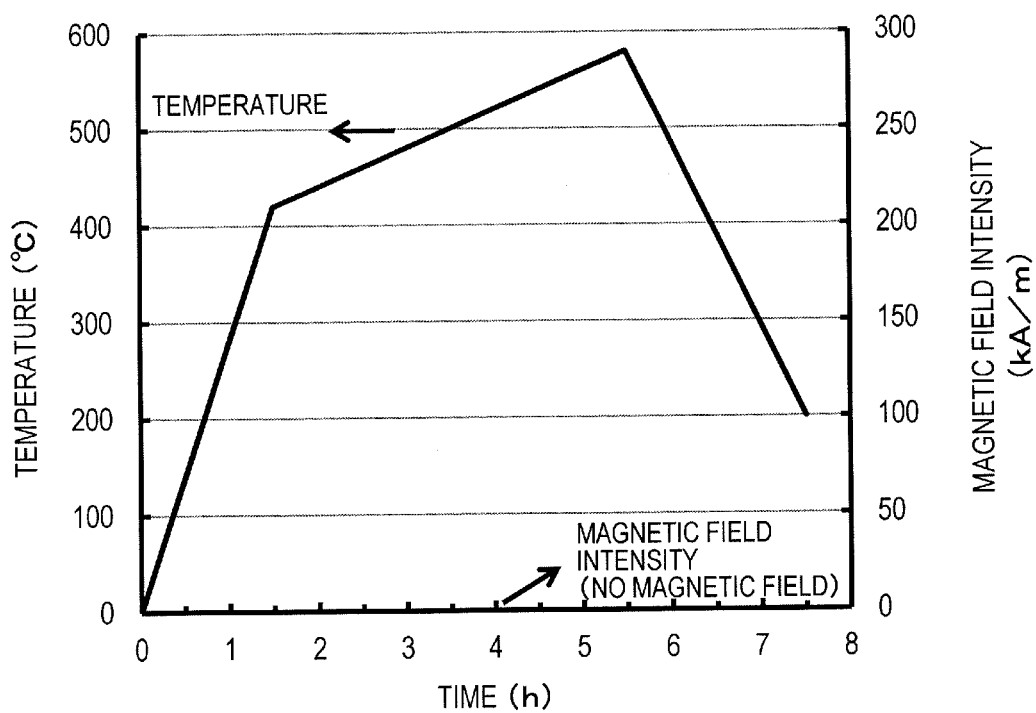


FIG. 4

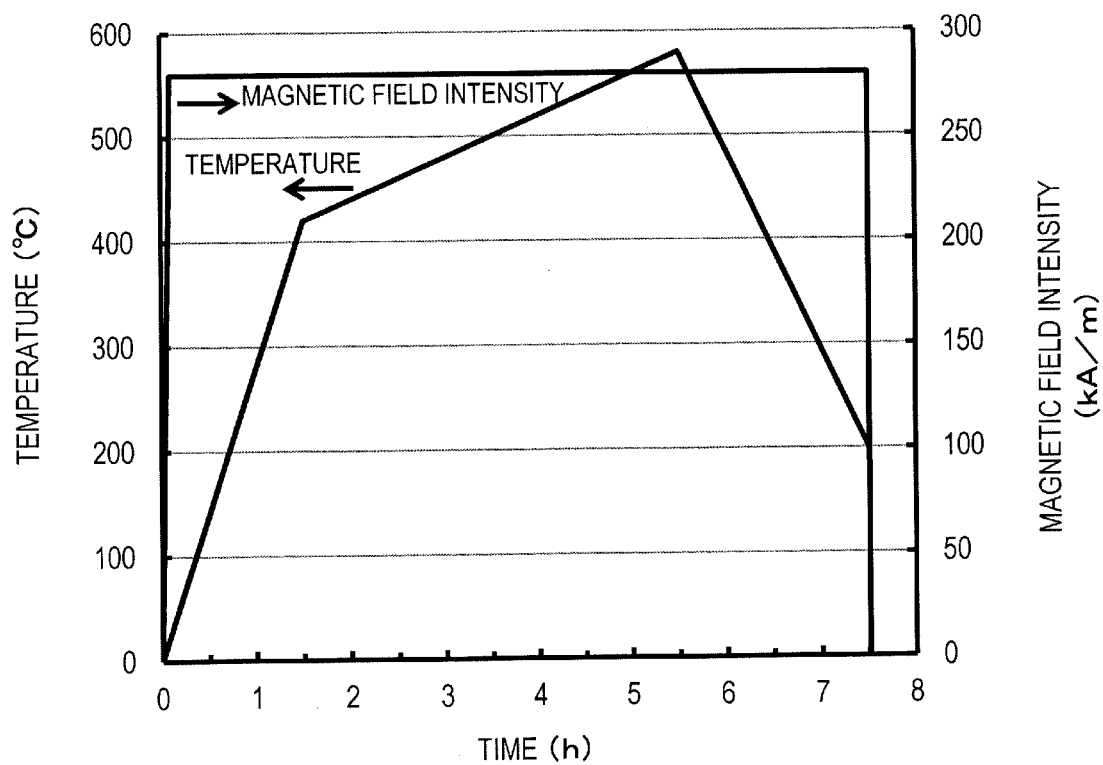
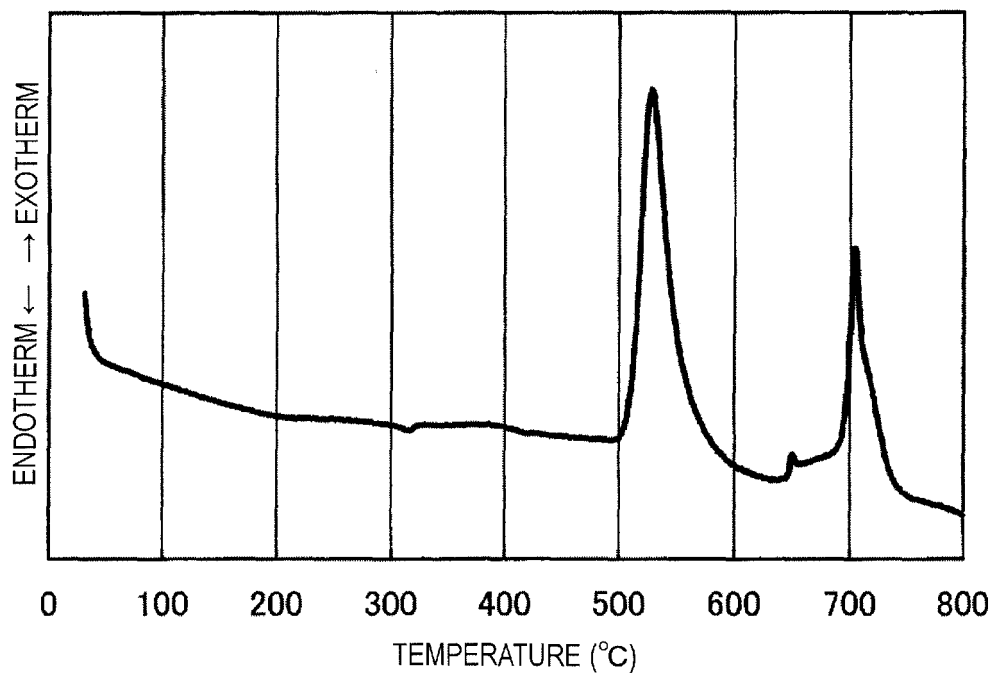
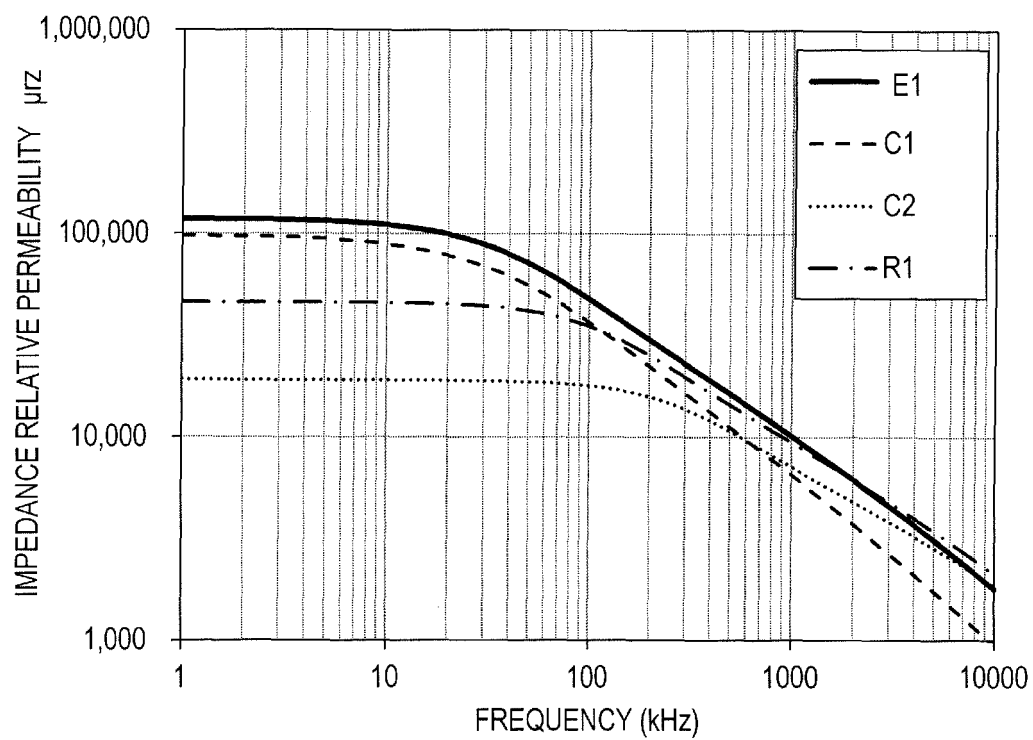


FIG.5*FIG.6*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2015/066758

A. CLASSIFICATION OF SUBJECT MATTER

H01F27/24(2006.01)i, H01F1/153(2006.01)i, H01F41/02(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01F27/24, H01F1/153, H01F41/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2015

Kokai Jitsuyo Shinan Koho 1971-2015 Toroku Jitsuyo Shinan Koho 1994-2015

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	WO 2015/046140 A1 (Hitachi Metals, Ltd.), 02 April 2015 (02.04.2015), paragraphs [0057] to [0086]; fig. 2 to 4 (Family: none)	1-8
A	JP 59-6360 A (Sony Corp.), 13 January 1984 (13.01.1984), entire text; all drawings (Family: none)	1-8
A	JP 2-96306 A (Nippon Telegraph and Telephone Corp.), 09 April 1990 (09.04.1990), entire text; all drawings (Family: none)	1-8

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
18 August 2015 (18.08.15)Date of mailing of the international search report
01 September 2015 (01.09.15)Name and mailing address of the ISA/
Japan Patent Office
3-4-3, Kasumigaseki, Chiyoda-ku,
Tokyo 100-8915, Japan

Authorized officer

Telephone No.

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2015/066758

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 5-267031 A (Ken MASUMOTO, Sumitomo Special Metals Co., Ltd.), 15 October 1993 (15.10.1993), entire text; all drawings (Family: none)	1-8
A	JP 2000-328206 A (Hitachi Metals, Ltd.), 28 November 2000 (28.11.2000), entire text; all drawings (Family: none)	1-8
A	JP 2001-316724 A (Alps Electric Co., Ltd.), 16 November 2001 (16.11.2001), entire text; all drawings (Family: none)	1-8

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 4004393 A [0007]
- JP 7278764 A [0007]