

(19)



(11)

EP 3 175 730 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
07.06.2017 Bulletin 2017/23

(51) Int Cl.:
A43B 5/04 (2006.01) **A43C 11/16** (2006.01)
A43C 11/14 (2006.01)

(21) Application number: **16202088.7**

(22) Date of filing: **03.12.2016**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Calzaturificio S.C.A.R.P.A. S.p.A.**
31011 Asolo (IT)

(72) Inventor: **PARISOTTO, Davide**
31010 Casella D'Asolo (IT)

(74) Representative: **Bellemo, Matteo et al**
Studio Torta S.p.A.
Via Viotti, 9
10121 Torino (IT)

(30) Priority: **04.12.2015 IT UB20156243**

(54) **SKI BOOT**

(57) A ski boot (1) comprising a rigid shell (2) which is shaped so as to accommodate the foot of the user, and has a lower part structured to couple with a ski binding device; a rigid cuff (3) which is shaped so as to surround the ankle of the user, and is pivotally jointed to the shell (2) so as to be able to pivot about a rotation axis

(A) substantially perpendicular to the midplane of the boot; and a manually operated cuff closing and locking mechanism (14) which is selectively able to rigidly lock the cuff (3) to the shell (2), so as to prevent any pivoting movement of the cuff (3) on the shell (2) and at the same time to tighten the cuff (3) on the leg of the user.

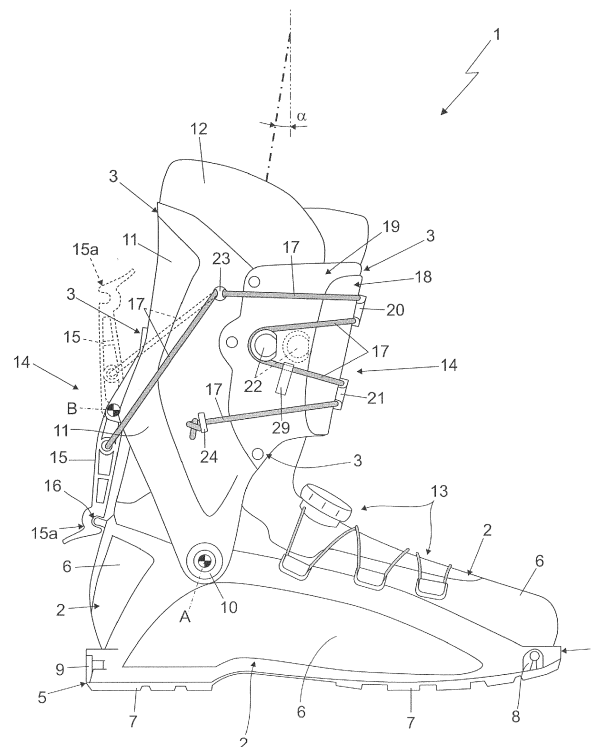


Fig. 1

EP 3 175 730 A1

Description

[0001] The present invention relates to a ski boot.

[0002] More specifically, the present invention relates to a ski mountaineering boot, use to which the following description will make explicit reference without however losing generality.

[0003] As is known, the ski mountaineering boots currently on the market basically comprise: a rigid shell made of plastic or composite material, which is shaped so as to accommodate the foot of the user and has a lower part specifically structured to be fastened to the back of a downhill ski or the like by means of a suitable ski mountaineering binding device; and a rigid cuff made of plastic or composite material, which is shaped so as to embrace the lower part of the leg of the user from behind, and is hinged to the upper part of the shell so as to be able to rotate about a transversal reference axis, which is substantially perpendicular to the midplane of the boot and is also locally substantially coincident with the articulation axis of the ankle.

[0004] In addition, the above-mentioned ski mountaineering boots also include: an innerboot made of soft and heat-insulating material, which is inserted in the shell and the cuff and is shaped so as to accommodate and protect both the foot and the lower part of the leg of the user; and a set of manually operated locking members which are located both on the shell and the cuff, and are structured so as to be able to selectively close/tighten the shell and the cuff to firmly immobilize the leg of the user inside the innerboot.

[0005] Finally, the above-mentioned ski mountaineering boots are provided with a manually-operated cuff-locking device which is traditionally located in the area above the heel of the boot, and is structured so as to be able to selectively and alternately lock the cuff to the shell in a rigid manner for preventing any pivoting movement of the cuff on the shell, and completely release the cuff from the shell for allowing the cuff to freely pivot on the shell.

[0006] In most of the ski mountaineering boots, the cuff locking device is made up of a coupling arm which is but-hinged to the cuff above the heel, so as to be able to move on the midplane of the boot between a lowered position in which the arm firmly couples to the shell so as to prevent any pivoting movement of the cuff on the shell, and a raised position in which the arm does not couple to the shell and therefore allows the cuff to freely pivot on the shell.

[0007] More specifically, in the lowered position the coupling arm generally extends downwards skimming the heel of the ski boot, so that the distal end of the arm can firmly couple at a specific point of the shell thus to lock the cuff to the shell in a predetermined position.

[0008] In the raised position, instead, the coupling arm usually extends upwards skimming the cuff, so that the distal end of the arm cannot reach the shell.

[0009] In competition ski mountaineering boots, in ad-

dition, the coupling arm is also connected to a closing cable that is looped around the cuff at calf height, so that the movement of the coupling arm into the lowered position can tighten the closing cable to such an extent as to tighten the cuff firmly against the leg of the user.

[0010] While allowing the user to tighten and lock the cuff to the shell with a single movement, the above-described mechanism for closing and simultaneously locking the cuff offers a very limited adjustment capability.

[0011] The user can, in fact, vary the grip exerted by the closing cable on the cuff only by manually adjusting the length of the cable. This operation is particularly long and laborious and proves to be impractical during competitions, with all the problems that this entails.

[0012] A aim of the present invention is to provide a mechanism for closing and simultaneously locking the cuff providing greater adjustment capabilities and is also easier to operate.

[0013] In compliance with the above aims, according to the present invention there is provided a ski boot as defined in claim 1 and preferably, though not necessarily, in any one of the claims dependent thereon.

[0014] The present invention will now be described with reference to the accompanying drawings, which illustrate a non-limiting embodiment thereof, in which:

- Figure 1 is a side view of a ski mountaineering boot made according to the teachings of the present invention;
- Figure 2 is a front view of the upper part of the ski mountaineering boot shown in Figure 1, in a first operating configuration;
- Figure 3 is a front view of the upper part of the ski mountaineering boot shown in Figure 1, in a second operating configuration; whereas
- Figure 4 is a side view of the upper part of the ski mountaineering boot shown in Figure 1.

[0015] With reference to Figures 1, 2, 3, and 4, number 1 denotes as a whole a ski boot, and in particular a ski boot specially structured for practising ski mountaineering.

[0016] The ski boot 1 basically comprises: a rigid shell 2, which is shaped so as to accommodate the foot of the user, and has a lower part specifically structured/shaped to couple/fasten in a rigid and stable, though easily releasable manner, to a ski binding device (not shown) of a known type, which in turn is adapted to be fixed in a rigid manner to the back of a generic downhill ski or the like; and a substantially tubular, rigid cuff 3 which is shaped so as to embrace the leg of the user in the area of the ankle, and is hinged to the upper part of the shell 2 so as to be able to freely pivot about a transversal rotation axis A, which is locally substantially perpendicular to the midplane of the boot (i.e. perpendicular to the plane of the sheet in Figure 1), and is also locally substantially coincident with the articulation axis of the ankle of the user.

[0017] More specifically, the lower part of the shell 2 is provided with a front tip 4 and a rear heel 5. The front tip 4 is preferably structured so as to be able to couple/fasten in a stable though easily releasable manner, to the toe piece (not shown) of a ski binding device which, in turn, is firmly fixed to the back of a generic downhill ski or the like. Instead, the rear heel 5 is preferably structured so as to be able to couple/hasten in a stable though easily releasable manner, to the heel piece (not shown) of a ski binding device which, in turn, is firmly fixed to the back of a generic downhill ski or the like.

[0018] Preferably, the lower part of the shell 2 also has a threaded profile so as to allow the user to walk on snow and ice.

[0019] In the example shown, in particular, the shell 2 is preferably consists of a rigid casing 6 made of plastic or composite material and which is substantially basin-shaped so as to be able to accommodate inside the foot of the user; and of a bottom sole 7 which is preferably made of vulcanized rubber or other elastomeric material with high friction coefficient, and is firmly fixed to the bottom wall of the rigid casing 6, preferably by gluing.

[0020] Preferably, the shell 2 additionally comprises a first insert 8 made of metallic material and which is incorporated into the rigid casing 6 at the tip 4 of the shell 2 and structured so as to be able to couple/fasten in a known manner to the toe piece (not shown) of a ski binding device; and optionally also a second insert 9 made of metallic material and which, instead, is incorporated in the rigid casing 6, at rear heel 5, and structured so as to be able to couple/fasten in a known manner to the heel piece (not shown) of a ski binding device.

[0021] More specifically, in the example shown, the front insert 8 is preferably embedded within the bottom wall of the rigid casing 6, at the tip 4 of the shell 2, and extends inside the casing 6 perpendicular to the midplane of the boot so that the two opposite ends of the insert 8 can emerge/surface outside the casing 6 in the area of the two lateral sides of the tip 4.

[0022] Preferably, the two ends of the front insert 8 are also shaped/structured so as to be able to be coupled in a known manner to the jaw of the toe piece of a ski mountaineering binding device.

[0023] Instead, the rear insert 9 is preferably recessed within a hollow seat specially formed on the rigid casing 6 at sidewall of the rear heel 5 of shell 2, substantially astride the midplane of the boot, and it is preferably structured so as to be engaged in a known manner by the locking pins of the heel piece of a ski mountaineering binding device.

[0024] With reference to Figure 1, instead cuff 3 is fixed in freely rotatable manner to the shell 2, or rather to the rigid casing 6, by means of two connecting side hinges 10 which are located on the inner and outer lateral sides of shell 2 and cuff 3, aligned along the axis A, so as to allow the cuff 3 to freely pivot on shell 2 both forwards and backwards, while remaining on a reference plane orthogonal to the axis A and substantially coincident with

the midplane of the boot.

[0025] Preferably, cuff 3 moreover basically consists of a rigid casing 11 made of plastic or composite material, which is substantially C-bent so as to cover the back of the leg of the user at calf height, and is provided with two oblong lateral flaps which extend forwards on opposite sides of the midplane of the boot, so as to overlap to one another at the front of the leg thus forming a tubular structure that embraces the leg of the user roughly from the ankle to the calf and is hinged at the bottom on the shell 2.

[0026] Furthermore, with reference to Figures 1, 2, 3 and 4, the ski boot 1 preferably additionally comprises: an innerboot 12 with a soft and heat-proof structure, optionally also of the thermoformable type, which is inserted into shell 2 and optionally also into cuff 3 preferably, though not necessarily, in a removable manner, and is shaped so as to accommodate and protect the foot and optionally also the lower part of the leg of the user; and a manually-operated, shell closing mechanism 13 which is structured so as to be able to selectively close/tighten the shell 2 on the foot of the user, for immobilizing the foot of the user inside the boot, or rather inside the innerboot 12.

[0027] In the example shown, in particular, the shell closing mechanism 13 preferably consists of a manually-operated winch fastening device, as those currently marketed by the US company BOA TECHNOLOGY INC, which is located on the shell 2, preferably in the area above the instep, and is overall structured so as to be able to selectively close/ tighten the shell 2 on the foot of the user, thus to firmly immobilize the foot of the user inside the shell 2, or rather inside the innerboot 12.

[0028] In a different embodiment, however, the shell closing mechanism 13 may comprise one or more lever closing buckles of known type.

[0029] With reference to Figures 1, 2, 3 and 4, the ski boot 1 is finally provided with a manually-operated cuff closing and locking mechanism 14 which is structured so as to be able to selectively and alternately,

- lock the cuff 3 in rigid manner to the shell 2 so as to prevent any pivoting movement of the cuff 3 on the shell 2; or
- fully unlock/release the cuff 3 from the shell 2 so as to allow the cuff 3 to freely pivot back and forth on the shell 2 about the axis A, while remaining on the midplane of the boot.

[0030] More specifically, the cuff closing and locking mechanism 14 is preferably structured so as to be able to lock the cuff 3 in rigid manner to the shell 2 in a pre-determined downhill position in which the cuff 3 is tilted forward with respect to the vertical by a given angle α preferably ranging between 3° and 30°, while preventing any pivoting movement of cuff 3 on shell 2.

[0031] In addition, the cuff closing and locking mechanism 14 is additionally structured so as to be able, when locking the cuff 3 to the shell 2 in rigid manner, to

close/tighten the cuff 3 on the leg of the user, preferably roughly at calf height, so as to be able to selectively and alternately,

- immobilize the leg of the user inside the cuff 3, or rather inside the innerboot 12, so as to prevent any movement of the leg inside the ski boot 1; or
- hold the leg of the user inside the cuff 3, or rather inside the innerboot 12, allowing the leg a limited movement/pivoting capability inside the same cuff 3, or rather inside the innerboot 12.

[0032] More specifically, with reference to Figures 1, 2, 3 and 4, the cuff closing and locking mechanism 14 is at least partially located on the cuff 3, and first of all it comprises an oblong-shaped coupling arm 15 which is hinged on the cuff 3 in the area above the heel of the boot, so as to be able to rotate on the cuff 3 while remaining substantially on the midplane of the boot, and is movable to and from a locking position in which the coupling arm 15 extends downwards roughly skimming the heel of the ski boot so as to straddle the shell 2 and the cuff 3, and in addition it firmly couples to the shell 2 so as to prevent any pivoting movement of the cuff 3 about the axis A.

[0033] With reference to Figure 1, in the example shown, in particular, the coupling arm 15 is preferably made of metallic material and is preferably butt-hinged to the cuff 3 in proximity of the lower edge of the cuff 3, above the heel of the boot, so as to be able to rotate freely about a transversal axis B which is substantially parallel to axis A and perpendicular to the midplane of the boot.

[0034] The distal end 15b of coupling arm 15 is moreover suitably structured/shaped so as to be able to couple/ fasten in a rigid and stable, though easily releasable manner, to the shell 2 at a specific coupling point 16 which is located on the rear part of the shell 2, astride the midplane of the boot and at a given distance from the lower edge of the cuff 3.

[0035] More specifically, in the example shown the distal end 15b of coupling arm 15 is preferably structured/shaped so as to be able to engage in a rigid and stable, though easily removable manner, with a protruding appendage 16 which extends in cantilever manner from the rear part of shell 2, astride the midplane of the boot.

[0036] With reference to Figure 1, preferably the coupling arm 15 is additionally movable to and from an unlocking position in which the coupling arm 15 extends upwards roughly skimming the cuff 3, so as not to couple to the shell 2 and thus allow the cuff 3 to freely pivot on the shell 2 about axis A.

[0037] In other words, the coupling arm 15 is preferably hinged on cuff 3 in the area above the heel of the boot, so as to be able to rotate, on the midplane of the boot, between a lowered or locking position in which the coupling arm 15 locks the cuff 3 in rigid manner to the shell

2, and a raised or unlocking position in which the coupling arm 15 allows the cuff 3 to freely pivot on shell 2 about axis A.

[0038] With reference to Figures 1, 2, 3 and 4, in addition the cuff closing and locking mechanism 14 also comprises a tightening cable 17 which is arranged on the cuff 3 so as to be able to pull, one towards the other, the two opposite lateral flaps 18 and 19 of cuff 3 that extend in cantilever manner from the inner and outer lateral sides of the cuff 3, on opposite sides of the midplane of the boot, and overlap to one another roughly at the front of the leg of the user, so as to form the tubular portion of cuff 3. This tightening cable 17 is also connected to the coupling arm 15 so as to be tightened when coupling arm 15 is in the locking position, so as to close/tighten the cuff 3 on the leg of the user when the coupling arm 15 is in the locking position.

[0039] More specifically, the cuff closing and locking mechanism 14 comprises: a tightening cable 17 which has its two ends firmly fastened on the cuff 3 and in addition engages in pass-through and freely sliding manner the body of coupling arm 15 in eccentric position, i.e. at a given distance from rotation axis B of arm 15; and a set of cable-guiding members which are engaged, in sequence and in freely sliding manner, by the tightening cable 17 and are alternately located on the two opposite lateral flaps 18 and 19 of cuff 3, so as to guide the tightening cable 17 along a zigzag path that passes alternately from one lateral flap 18, 19 of the cuff 3 to the other.

[0040] In addition, at least one of the cable-guiding members is additionally structured so as to be engaged in manually removable manner by the tightening cable 17, so as to allow the user to change at his/her discretion the zigzag path followed by the tightening cable 17.

[0041] With reference to Figures 1, 2 and 3, in particular, the cuff closing and locking mechanism 14 comprises at least two end cable-guiding members 20 and 21 which are engaged in free sliding manner by the tightening cable 17, are located on the lateral flap 18 of cuff 3 spaced one beside the another and form, respectively, the start and end of the zigzag path; and at least one intermediate cable-guiding member 22 which is located on the lateral flap 19 of cuff 3, is engaged in free sliding manner and also in removable manner by the section of the tightening cable 17 delimited by the two end cable-guiding members 20 and 21, and is adapted to substantially elbow-like bend the tightening cable 17 so as to form an/the intermediate vertex of said zigzag path.

[0042] More specifically, the two end cable-guiding members 20 and 21 are fixed in rigid manner to the lateral flap 18 of cuff 3, preferably vertically staggered with respect to each other, and are also preferably shaped/structured so as to be able to substantially elbow-like bend the tightening cable 17. Preferably, though not necessarily, the two end cable-guiding members 20 and 21 are additionally shaped/ structured so as to be engageable by the tightening cable 17 in manually removable manner.

[0043] The intermediate cable-guiding member 22, instead, is fixed in rigid manner to the second lateral flap 19 of cuff 3, preferably horizontally misaligned with respect to both end cable-guiding members 20 and 21.

[0044] With reference to Figures 1, 2 and 3, preferably the cuff closing and locking mechanism 14 additionally also comprises an auxiliary cable-through member 23, which is attached to the lateral side of the cuff 3 in proximity of the intermediate cable-guiding member 22, i.e. close to the lateral flap 19 of cuff 3, preferably roughly horizontally aligned with any one of the two end cable-guiding members 20 and 21, and is engaged in pass-through and free sliding manner by the section of tightening cable 17 that connects the coupling arm 15 to the end cable-guiding member 20 located on the lateral flap 18 of cuff 3.

[0045] In the example shown, in particular, the tightening cable 17 is preferably a rope made of synthetic material.

[0046] With reference to Figures 1 and 4, in addition the two ends of tightening cable 17 are preferably firmly fastened on the cuff 3 by means of two fastening members 24 and 25 that are located, respectively, on the inner side and the outer side of cuff 3, preferably substantially vertically aligned with the hinges 10.

[0047] Preferably, the fastening member 24 is also located on the lateral side of cuff 3, substantially vertically aligned with the cable-through member 23.

[0048] In other words, one end of the tightening cable 17 is preferably firmly fastened to the lateral side of cuff 3 at a point substantially vertically aligned with the cable-through member 23.

[0049] Preferably, fastening member 24 is moreover located on the lateral side of cuff 3, so as to be substantially horizontally aligned to the cable-guiding member 21, i.e. horizontally aligned to the cable-guiding member located on the lateral flap 18 of cuff 3, close to the shell 2.

[0050] More specifically, in the example shown the fastening member 24 preferably consists of a staple which is located on the outer side of cuff 3, close to the lateral flap 19 of cuff 3, and is dimensioned to be engaged in pass-through manner by the tightening cable 17, but not by any knot formed at the end of the tightening cable 17.

[0051] Preferably, the staple 24 is also made in one piece with the cuff 3, or rather with the plastic- or composite-material rigid casing 11.

[0052] With reference to Figure 4, the fastening member 25 is instead rigidly attached to the inner side of cuff 3, close to the lateral flap 18 of cuff 3, and preferably comprises an automatic-closing and manual-opening gripping device 27 with a clamp structure.

[0053] More specifically, the gripping device 27 comprises two jaws structured so as to be able to grip and stably hold any section of the tightening cable 17, and a counteracting spring (not shown in the figures) which is capable of bringing and keeping, in elastic manner, the two jaws in a clenched position, so that the same jaws can stably hold the tightening cable 17.

[0054] With reference to Figures 1, 2 and 3, the cable-through member 23, instead, preferably consists of a second staple which is dimensioned so as to be engaged in pass-through and free sliding manner by the tightening cable 17, and is located on the outer side of cuff 3, roughly vertically aligned to fastening member 24 and roughly horizontally aligned to the cable-guiding member 20 located on the lateral flap 18 of cuff 3, close to the upper mouth of the cuff 3.

[0055] Similar to staple 24, preferably also staple 23 is made in one piece with cuff 3, or rather with the plastic- or composite- material, rigid casing 11.

[0056] With reference to Figures 1, 2, 3 and 4, each cable-guiding member 20, 21, 22, instead, preferably consists of a substantially semicircular plate-shaped block, which is located in abutment on the outer surface of the lateral flap 18 of cuff 3 and is provided, on the curved lateral sidewall, with a long peripheral groove or slot 28 adapted to be engaged in free sliding manner by the tightening cable 17.

[0057] With reference to Figures 1, 2 and 3, preferably the cuff closing and locking mechanism 14 finally also comprises a manually-operated, cable-removing device 29 that allows the user to quickly remove the tightening cable 17 from the intermediate cable-guiding member(s) 22.

[0058] In the example shown, in particular, the cable-removing device 29 is preferably located on the section of the tightening cable 17 that extends between the two end cable-guiding members 20, and preferably consists of a preferably ribbon-like, oblong body which has a pass-through hole at one end and is therein engaged in pass-through and free sliding manner by the tightening cable 17.

[0059] More specifically, the cable-removing device 29 preferably consists of a ribbon which is U-folded back on itself, and is sewn at the middle segment so as to form a loop.

[0060] Operation of ski boot 1 is easily infereable from the above description and requires no further explanation.

[0061] As regards on the other hand the cuff closing and locking mechanism 14, the cable-guiding members 20, 21 and 22 operate as pulleys and thus allow to multiply the tensile force with which the tightening cable 17 pulls the two opposite lateral flaps 18 and 19 of cuff 3 one towards the other.

[0062] In use, furthermore, just before moving the coupling arm 15 into the locking position, the user can choose to couple, or not, the tightening cable 17 also to the intermediate cable-guiding member 22, consequently varying the grip exerted by the tightening cable 17 on the tubular portion of the cuff 3.

[0063] More specifically, if the user wants to firmly immobilize the lower part of the leg inside the cuff 3, he/she must wind/couple the tightening cable 17 onto the intermediate cable-guiding member 22 before lowering the coupling arm 15 into the locking position.

[0064] If, instead, the user wants to keep the lower part of the leg inside the cuff 3 allowing, at same time, a limited movement/pivoting of the leg inside the cuff 3, he/she must not wind/couple the tightening cable 17 around the intermediate cable-guiding member 22 before lowering the coupling arm 15 into the locking position.

[0065] The advantages resulting from the particular structure of the cuff closing and locking mechanism 14 are remarkable.

[0066] First of all, the cuff closing and locking mechanism 14 allows the grip exerted by the tightening cable 17 on the upper part of the cuff 3 to be varied extremely rapidly, and therefore can also be used in competitions.

[0067] Furthermore, the presence of the fastening member 27 with clamp structure allows to also rapidly vary the overall useful length of the tightening cable 17.

[0068] Last, but not least, the cuff closing and locking mechanism 14 has particularly low production costs, with all the benefits that this entails.

[0069] Finally, changes and variations may be clearly made to the ski boot 1 described above without, however, departing from the scope of the present invention.

[0070] For example, with reference to Figure 1, in a more sophisticated embodiment, the cuff closing and locking mechanism 14 can comprise a plurality of intermediate cable-guiding members 22 which are attached in rigid manner onto the lateral flap 19 of cuff 3, preferably horizontally aligned one beside the another.

[0071] In a less sophisticated embodiment, in addition, the cuff closing and locking mechanism 14 can be devoid of the fastening member 25, and the end of the tightening cable 17 is fixed directly onto the body of coupling arm 15 in an eccentric position with respect to the rotation axis B of arm 15.

[0072] In other words, the tightening cable 17 has a first end integral with the coupling arm 15, and a second end firmly fastened to the body of cuff 3, preferably by means of staple 24.

Claims

1. A ski boot (1) comprising a rigid shell (2), which is shaped so as to accommodate the foot of the user, and has a lower part structured to couple to a ski binding device; a rigid cuff (3) which is shaped so as to surround the ankle of the user, and is pivotally jointed to the shell (2) so as to be able to pivot about a rotation axis (A) substantially perpendicular to the midplane of the boot; and cuff closing and locking means (14) comprising a coupling arm (15) which is hinged on the cuff (3) in the area above the heel of the boot, so as to be able to rotate on the cuff (3) while remaining substantially on the midplane of the boot, and is movable to and from a locking position in which the coupling arm (15) extends downwards, straddling the shell (2) and the cuff (3), and firmly couples to the shell (2) to prevent the pivoting move-

ment of the cuff (3);

the rigid cuff (3) being provided with two lateral flaps (18, 19) that overlap to one another approximately at the front of the leg of the user; the cuff closing and locking means (14) additionally comprising a tightening cable (17) which is capable of pulling the two lateral flaps (18, 19) of the cuff (3) towards each other so as to tighten the cuff (3) on the leg of the user, and is connected to the coupling arm (15) so as to be tightened when the coupling arm (15) is in the locking position;

the ski boot (1) being **characterised in that** the cuff closing and locking means (14) additionally comprise a series of cable-guiding members (20, 21, 22) which are engaged in sequence and in freely sliding manner by the tightening cable (17), and are located alternately on the two lateral flaps (18, 19) of the cuff (3) so as to guide the tightening cable (17) along a zigzag path that passes alternately from one lateral flap (18) of the cuff (3) to the other (19); at least one (22) of said cable-guiding members (20, 21, 22) being additionally engaged in manually removable manner by the tightening cable (17).

2. A ski boot according to claim 1, **characterised in that** said series of cable-guiding members comprises at least two end cable-guiding members (20, 21) that form the beginning and the end of the zigzag path respectively, and are located on a first lateral flap (18) of the cuff (3) spaced side by side to one another; and at least one intermediate cable-guiding member (22) which is located on the second lateral flap (19) of the cuff (3), is engaged in freely sliding and removable manner by the section of the tightening cable (17) delimited by said end cable-guiding members (20, 21), and is able to substantially elbow-like bend the tightening cable (17) to form an intermediate vertex of said zigzag path.

3. A ski boot according to claim 2, **characterised in that** said end cable-guiding members (20, 21) are located on the first lateral flap (18) of the cuff (3) vertically staggered to one another.

4. A ski boot according to claim 2 or 3, **characterised in that** said end cable-guiding members (20, 21) are shaped/structured so as to be able to substantially elbow-like bend the tightening cable (17).

5. A ski boot according to claim 2, 3 or 4, **characterised in that** said end cable-guiding members (20, 21) are shaped/structured to be engaged in a manually removable manner by the tightening cable (17).

6. A ski boot according to claim 2, 3, 4 or 5, **characterised in that** said at least one intermediate cable-guiding member (22) is located on the second lateral flap (19) of the cuff (3) horizontally misaligned with

respect to both end cable-guiding members (20, 21).

7. A ski boot according to any one of the preceding claims, **characterised in that** said cuff closing and locking means (14) additionally comprise an auxiliary cable-through member (23) which is located on the lateral side of the cuff (3) close to the second lateral flap (19) of the cuff (3), and is engaged in pass-through and freely sliding manner by the section of the tightening cable (17) that connects the coupling arm (15) to one (20) of the two end cable-guiding members (20, 21). 5 10
8. A ski boot according to claim 7, **characterised in that** said auxiliary cable-through member (23) is substantially horizontally aligned with one (20) of the two end cable-guiding members (20, 21). 15
9. A ski boot according to claim 7 or 8, **characterised in that** one end of the tightening cable (17) is fixed on the lateral side of the cuff (3) at a point substantially vertically aligned with said auxiliary cable-through member (23). 20
10. A ski boot according to any one of the preceding claims, **characterised in that** the cuff closing and locking means (14) additionally comprise a manually-operated cable-removing device (29), which is adapted to rapidly remove the tightening cable (17) from said at least one intermediate cable-guiding member (22). 25 30
11. A ski boot according to claim 10, **characterised in that** the cable-removing device (29) is located on the section of the tightening cable (17) that extends between the two end cable-guiding members (20, 21), and consists of an oblong element having a pass-through hole at an end and is therein engaged by the tightening cable (17) in pass-through and freely sliding manner. 35 40
12. A ski boot according to any one of the preceding claims, **characterised in that** the tightening cable (17) has the two ends firmly fixed to the cuff (3) and engages the body of the coupling arm (15) in a pass-through and freely sliding manner, in eccentric position with respect to the rotation axis (B) of the arm. 45
13. A ski boot according to claim 12, **characterised in that** the two ends of the tightening cable (17) are fixed to the cuff (3) by means of two fastening members (24, 25) that are respectively located on the inner side and on the outer side of the cuff (3). 50
14. A ski boot according to claim 13, **characterised in that** one of the two fastening members (24, 25) comprises an automatic-closing and manual-opening gripping device (27). 55
15. A ski boot according to claim 14, **characterised in that** the gripping device (27) comprises two jaws structured so as to be able to grip and stably hold any section of the tightening cable (17), and a counteracting spring capable of bringing and keeping the two jaws in a clenched position.

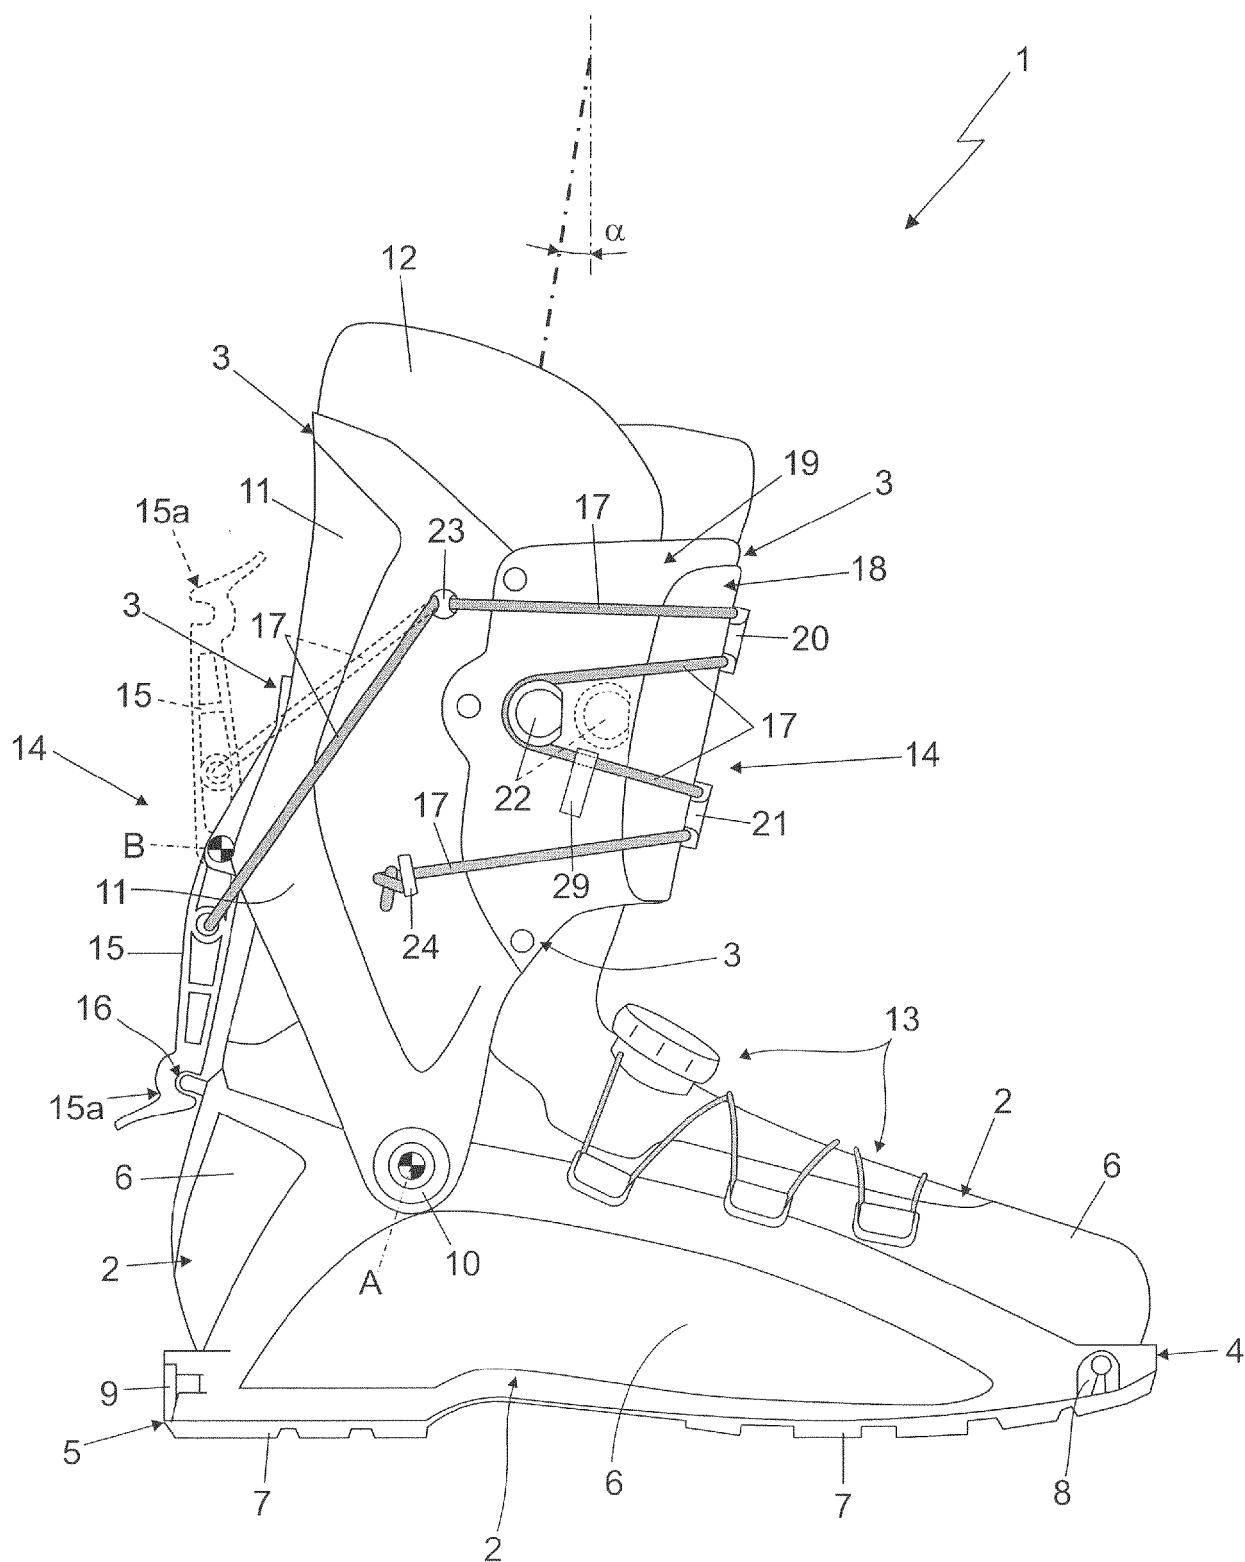
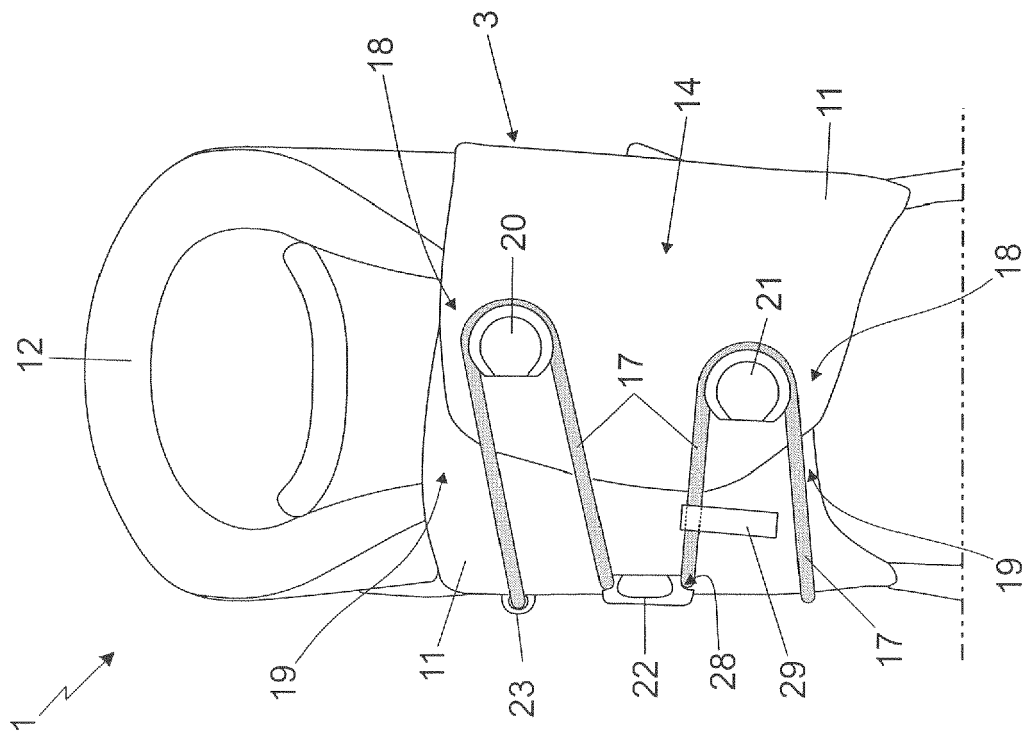
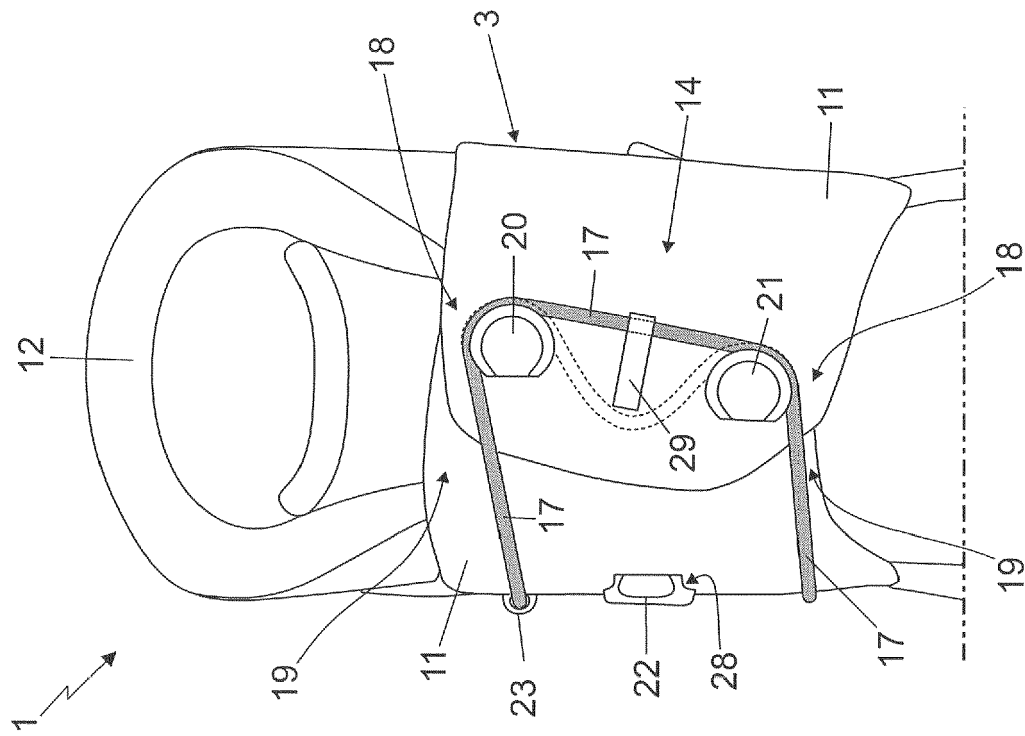


Fig. 1



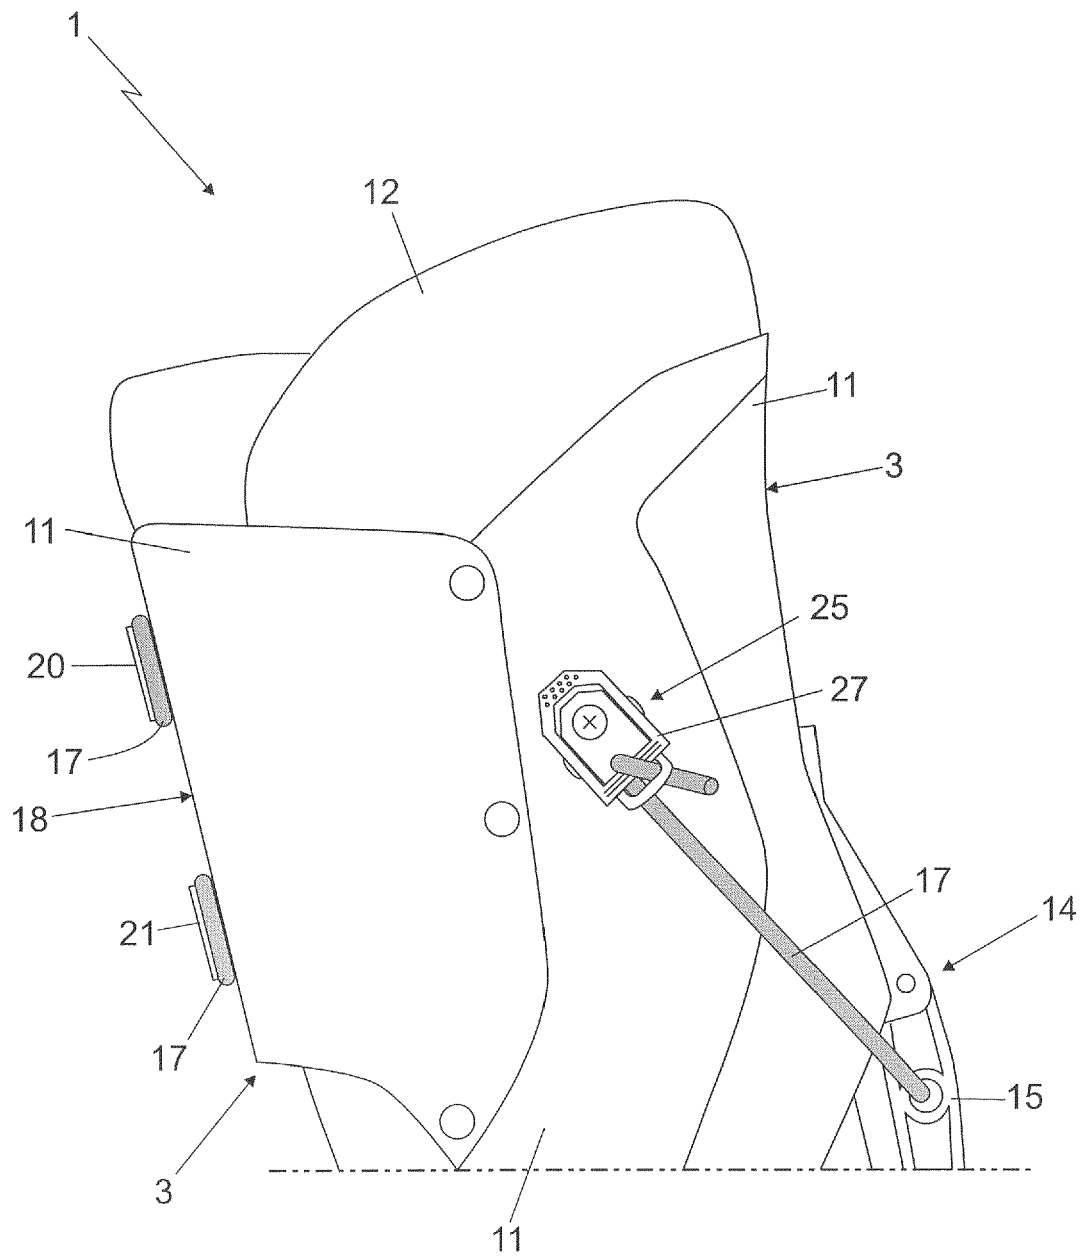


Fig. 4



EUROPEAN SEARCH REPORT

Application Number
EP 16 20 2088

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 2010/229425 A1 (PARISOTTO) 16 September 2010 (2010-09-16) * paragraphs [0017] - [0056]; figures 1,2 *	1	INV. A43B5/04 A43C11/16
A	US 4 937 952 A (OLIVIERI) 3 July 1990 (1990-07-03) * column 2, lines 3-56; figures 1,2 *	1-8	ADD. A43C11/14
A	EP 0 598 680 A1 (LANGE INT SA) 25 May 1994 (1994-05-25) * the whole document *	1	
A	EP 2 591 696 A1 (DAL BELLO SPORT SRL) 15 May 2013 (2013-05-15) * paragraphs [0023] - [0033]; figures 1-5 *	1-6	
A	EP 0 588 757 A1 (LANGE INT SA) 23 March 1994 (1994-03-23) * column 6, lines 31-53; figure 16 *	1	
A	US 2011/232132 A1 (REAGAN ET AL.) 29 September 2011 (2011-09-29) * paragraphs [0030] - [0063]; figures 1-5 *	1-11	
			TECHNICAL FIELDS SEARCHED (IPC)
			A43B A43C
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 24 February 2017	Examiner Williams, Mark
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 20 2088

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-02-2017

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010229425 A1	16-09-2010	AT 555677 T CA 2696650 A1 EP 2227974 A1 US 2010229425 A1	15-05-2012 10-09-2010 15-09-2010 16-09-2010
US 4937952 A	03-07-1990	AT 395803 B DE 3919661 A1 IT 213808 Z2 US 4937952 A	25-03-1993 28-12-1989 01-03-1990 03-07-1990
EP 0598680 A1	25-05-1994	AT 141760 T CH 688072 A5 DE 69304290 D1 EP 0598680 A1	15-09-1996 15-05-1997 02-10-1996 25-05-1994
EP 2591696 A1	15-05-2013	NONE	
EP 0588757 A1	23-03-1994	AT 132333 T CH 688071 A5 DE 69301215 D1 DE 69301215 T2 EP 0588757 A1	15-01-1996 15-05-1997 15-02-1996 14-08-1996 23-03-1994
US 2011232132 A1	29-09-2011	AT 355771 T AT 529011 T DE 202004019082 U1 DE 602004005134 T2 EP 1541049 A2 EP 1787541 A1 EP 2258230 A1 JP 3115694 U JP 3115773 U US 2005126043 A1 US 2006070261 A1 US 2006075659 A1 US 2006075660 A1 US 2008235995 A1 US 2009019734 A1 US 2010101114 A1 US 2011232132 A1	15-03-2007 15-11-2011 14-04-2005 20-12-2007 15-06-2005 23-05-2007 08-12-2010 10-11-2005 17-11-2005 16-06-2005 06-04-2006 13-04-2006 13-04-2006 02-10-2008 22-01-2009 29-04-2010 29-09-2011

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82