

(19)



(11)

EP 3 178 332 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.05.2020 Bulletin 2020/20

(51) Int Cl.:
A24D 3/02 (2006.01)

(21) Application number: **16202066.3**

(22) Date of filing: **02.12.2016**

(54) **FILTER MANUFACTURING MACHINE**

FILTERHERSTELLUNGSMASCHINE

MACHINE DE FABRICATION DE FILTRE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **03.12.2015 IT UB20156245**

(43) Date of publication of application:
14.06.2017 Bulletin 2017/24

(73) Proprietor: **G.D SOCIETA' PER AZIONI
40133 Bologna (IT)**

(72) Inventors:
• **SGRIGNUOLI, Vittorio
40127 BOLOGNA (IT)**

• **SARTONI, Massimo
40139 BOLOGNA (IT)**

(74) Representative: **Mangini, Simone et al
Studio Torta S.p.A.
Via Viotti, 9
10121 Torino (IT)**

(56) References cited:
**EP-A1- 1 847 187 EP-A1- 2 633 769
EP-A2- 1 726 223 EP-A2- 2 591 686
DE-A1-102007 057 396**

EP 3 178 332 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a machine for manufacturing filters of the tobacco processing industry. In particular, the present invention relates to a machine for manufacturing filters for smoking articles (cigarettes).

[0002] In the field of tobacco processing industry (Figure 14), it is known to produce filters by using a continuous tow A of filtering material, normally cellulose acetate, which is fed with a continuous motion through a operating station B, in the area of which the tow A is stretched so as to widen and possibly is impregnated with a hardening substance (e.g. triacetin), to a forming station C, in the area of which a substantially cylindrical shaped filter rod usually wrapped by a strip of paper is obtained.

[0003] In some cases (Figure 15), a treatment device D is arranged between the operating station B, and the forming station C to further treat the filtering material before the manufacturing of the filter rod. This further treatment can comprise, according to some examples, the inclusion of carbon particles or of a longitudinal flavored strand.

[0004] The known machines for manufacturing filters are relatively rigid and do not allow, in the majority of cases, to manufacture filters of a different type. An example of cigarette filter manufacturing machine of the prior art is disclosed in EP 2633769 A1.

[0005] The object of the present invention is to provide a machine which allows to overcome, at least partially, the drawbacks of the known art and is, at the same time, easy and inexpensive to implement.

[0006] According to the present invention, a machine, as claimed in the independent claims below, and, preferably, in any one of the claims depending directly or indirectly on the aforementioned independent claims is provided.

[0007] The present invention will now be described with reference to the accompanying drawings, which illustrate examples of nonlimiting embodiments, wherein:

- Figure 1 is a schematic side view of a machine made according to the present invention;
- Figures from 2 to 7 are schematic and perspective views of machines made according to the present invention;
- Figures from 8 to 11 are schematic and perspective views of filters obtainable by means of machines according to the present invention;
- Figures 12 and 13 illustrate filters, partly disassembled, obtainable by means of machines according to the present invention;
- Figures 14 and 15 are perspective and schematic views of machines of the prior art.

[0008] In Figure 1, 1 denotes as a whole a machine A for manufacturing filters of the tobacco processing industry 2 (Figures 8-13). In particular, the machine 1 is de-

signed to produce filters 2 for cigarettes.

[0009] The machine 1 (Figure 1) comprises a feeding assembly 3 to feed a tow 4 of filtering material along a given path P1 through an operating station 5 and a treatment station 6 to a forming station 7. The treatment station 6 is arranged downstream of the operating station 5 (in particular, between the operating station 5 and the forming station 7).

[0010] According to some embodiments, the treatment station 6 is (at least) partially overlapping the forming station 7.

[0011] The machine 1 comprises an operating assembly 8, which is arranged in the area of the operating station 5 and is designed to stretch the tow 4 so that the tow 4 itself expands and generates a larger tow 4; and a forming assembly 9, which is arranged in the area of the forming station 7 and is designed to form a filter rod 10.

[0012] In particular, the operating assembly 8 is also designed to apply a hardening substance (typically, triacetin) to the larger tow 4.

[0013] The machine 1 further comprises a treatment module 11, which is arranged in the area of the processing station 5 and is designed to carry out a first treatment on the tow 3.

[0014] According to the embodiment illustrated in Figure 2, the treatment module 11 is designed to harden the tow 4 so as to be able to obtain a paperless filter (NWA - non-wrapped acetate). Typically, in this case, the treatment module 11 is designed to supply heat (in particular, steam) to the hardening substance (typically, triacetin) contained in the tow 4 of filtering material and (then) activate said hardening substance. The treatment module 11 can be, for example, made according to what is described in EP 263632B1.

[0015] Figure 11 illustrates a filter 2 obtainable when the treatment module 11 is designed to harden the tow 4.

[0016] According to the embodiment illustrated in Figure 3, the treatment module 11 is designed to insert particles 12 in the tow 4, in particular in powder or granular form. The particles 12, in some cases, contain (consist of) carbon (activated) particles and/or silica. In particular, the particles contain (consist of) carbon (activated) particles. The treatment module 11 can be, for example, formed according to what is described in one more of the following patent documents: GB1585761, US3128680, WO2005/087026, US6913784.

[0017] Figure 8 illustrates a filter 2 obtainable when the treatment module 11 is designed to insert particles 12 into the tow 4.

[0018] According to the embodiment illustrated in Figure 4, the treatment module 11 is designed to insert, into the tow 4, a strand 13 (in particular colored and/or flavored), which extends longitudinally along the tow 4 itself. The treatment module 11 can be, for example, made according to what is described in US2014/0100099.

[0019] Figure 10 illustrates a 2 filter obtainable when the treatment module 11 is designed to insert a strand 13 into the tow 4.

[0020] According to the embodiment illustrated in Figure 5, the treatment module 11 is designed to wrap the tow 4 with a strip of corrugated material 14 so as to obtain double wrapped filters (corrugated filters). The treatment module 11 can be, for example, made according to what is described in JP2007000019. Figure 13 illustrates a filter 2 obtainable when the treatment module 11 is designed to wrap the tow 1 with a strip of corrugated material 14.

[0021] According to the embodiment illustrated in Figure 6, the treatment module 11 is designed to insert capsules 15 into the tow 4. The treatment module 11 may be, for example, formed according to what is described in GB1585761. Figure 12 illustrates a filter 2 obtainable when the treatment module 11 is designed to insert capsules 15 into the tow 4.

[0022] In particular, the treatment module 11 can be replaced with a second treatment module 11 designed to carry out a second treatment (different from the first treatment) to the tow 4 of filtering material.

[0023] In accordance with what has been mentioned above, it is for example possible to replace the treatment module 11, designed to harden the tow 3, with the treatment module 11, designed to insert the particles 12 or the strand 13 into the tow 3.

[0024] Preferably, the treatment module 11 is structured so that it is possible to connect a third treatment module 11, which is designed to carry out a third treatment (different from the first and from the second treatment) on the tow 4 of filtering material, so that the third treatment module 11 is arranged in the area of the treatment station. In this way it is possible to carry out two treatments, both the third treatment and the first (or the second) treatment on the tow 4. For example, it is possible to wrap the tow 4 with a strip of corrugated material 14 and to insert capsules 15 into the tow 4 itself or to insert both particles 12 and a strand 13 into the tow 4 (in order to obtain the filter illustrated in figure 9).

[0025] In particular, the treatment module 11 comprises a first connection unit, which connects (in a releasable manner) the treatment module 11 to the operating assembly 8 and/or to the forming assembly 9 so that the treatment module 11 functions in a coordinated manner (in other words, in step) relative to the operating assembly 8 and/or to the forming assembly 9. Advantageously, the treatment module 11 also comprises a second connection unit to connect (in a releasable manner) the connection module to a third connection unit 11 of the third treatment module.

[0026] The connection units (not illustrated) are of a known type and can be of a mechanic and/or electric (electronic) type. For example, the connection units can comprise the mechanic joints and/or a system of connectors/gates.

[0027] With particular reference to Figure 7, according to some embodiments (and according to a particular aspect of the present invention), the machine comprises the treatment module 11 (as defined above) and the third

treatment module 11 (as defined above), which is arranged in the area of the treatment station, is designed to carry out the third treatment on the tow 4 of filtering material. Advantageously, the third treatment module 11 can be replaced with a fourth treatment module 11 which is designed to carry out a fourth treatment on the tow 4 of filtering material, which is different from the third treatment.

[0028] For example the third treatment can be the insertion of the strand 13 and, the fourth treatment, the insertion of the particles 12.

[0029] More generally, advantageously, the first, the second and the third (and the fourth) treatment are selected in the group consisting of: insertion of the particles 12 (in particular, as defined above), insertion of the longitudinal strand 13, insertion of capsules 15, hardening treatment and wrapping with a strip of paper (more precisely, with the strip of corrugated material 14 - in particular, as referred to as a preference above).

[0030] Advantageously, the first and the third treatment are different from one another. In particular, the first, the second and the third treatment are mutually different. More precisely, the first, the second, the third and fourth treatment are different from one another.

[0031] According to preferred embodiments, the treatment module 11 occupies the space available between the forming assembly 9 and the operating assembly 8. The third treatment module 11 is mounted on the treatment module 11.

[0032] For example, in Figure 7 the machine 1 comprises the treatment module 11 for the insertion of capsules 15 into the tow 4 and the treatment module 11 for the insertion of the strand 13 into the tow 4.

[0033] In some cases, the machine 1 comprises a fifth treatment module (not illustrated and similar to the previously described treatment modules), which is arranged in the area of the processing station 6, is designed to carry out a fifth treatment on the tow of filtering material 4 and is removable and replaceable. In particular, the further fifth treatment is different from the first and from the third treatment. Advantageously, the further fifth treatment is (also) different from the second and from the fourth treatment.

[0034] In particular, the fifth treatment is selected in the group consisting of: insertion of the particles 12 (in particular, as defined above), insertion of the longitudinal strand 13, insertion of capsules 15, hardening treatment and wrapping with a strip of paper (more precisely, with the strip of corrugated material 14 - in particular, as referred to as a preference above).

[0035] More generally, the fifth treatment is different from the first, the second, the third and the fourth treatment. According to some embodiments, the fifth treatment module is mounted on the treatment module 11 and/or on the third treatment module 11.

[0036] Note that, advantageously, the fifth treatment module can be further mounted on the second and/or on the fourth treatment module 11.

[0037] In some embodiments (such as that illustrated in Figure 7), the treatment module 11 comprises a first and a second connection unit (as defined above) and the third treatment module comprises a third connection unit (as defined above) to connect the treatment module 11 and the third treatment module 11 so that the third treatment module 11 functions in a coordinated manner (in other words, in step) relative to the first operating assembly 8 (and to the forming assembly 9). In particular, the second and the third connection units are coupled to one another.

[0038] According to some embodiments, the second treatment module 11 comprises a fourth connection unit to connect the second treatment module 11 to the third treatment module 11 by coupling (in a releasable manner) to the third connection unit 11. The fourth treatment module 11 comprises a fifth connection unit to connect the fourth treatment module 11 to the first or to the second treatment module 11 by coupling (in a releasable manner) to the first or to the fourth connection unit, respectively.

[0039] Alternatively or in addition, the second treatment module 11 comprises a sixth connection unit to connect (in a releasable manner) the second treatment module 11 to the operating assembly 8 and/or to the forming assembly 9 so that the second treatment module 11 functions in a coordinated manner (in other words, in step) relative to the operating assembly 8 and/or to the forming assembly 9.

[0040] According to some embodiments, the fifth treatment module comprises a seventh connection unit to connect (the fifth treatment module 11 to one of the other treatment modules 11 (in a releasable manner) through the respective further connection unit).

[0041] Advantageously, the connection units comprise respective electric and/or mechanic motion transfer means (for example, a shaft and/or a wheel).

[0042] For example, the connection unit may comprise mechanic joints and/or a system of connectors/gates.

[0043] Comparing what has been described above with the machine illustrated in Figure 15, it is important to note that the treatment device D is not replaceable and cannot be combined with other treatment devices in order to carry out more treatments on the tow A.

[0044] The object of the present invention allows to carry out more treatments on the tow 4 and to modify said treatments and, therefore, to manufacture, with a single machine 1, different types of cigarettes with ease.

[0045] Unless it is explicitly stated to the contrary, the content of the references (articles, texts, patent applications etc.) cited in this text is herein fully recalled for completeness of description.

Claims

1. A machine for manufacturing filters (2) of the tobacco processing industry, in particular filters for cigarettes;

the machine (1) comprises a feeding assembly (3) to feed a tow (4) of filtering material along a given path (PI), through an operating station (5) to a forming station (7); the machine (1) comprising, an operating assembly (8), which is arranged in the area of the operating station (5) and is designed to stretch the tow (4) so that the tow (4) itself expands and generates a larger tow (4), and a forming assembly (9), which is arranged in the area of the forming station (7) and is designed to form a filter rod (10); the machine (1) being **characterized in that** the given path (PI) extends through a treatment station (6), which is arranged between the operating station (5) and the forming station (7); the machine (1) comprising a first treatment module (11), which is arranged in the area of the treatment station (6), is designed to carry out a first treatment on the tow (4) of filtering material and can be replaced with a second treatment module (11), which is designed to carry out a second treatment on the tow (4) of filtering material, which is different from the first treatment; and a third treatment module (11), which is arranged in the area of the treatment station (6), is designed to carry out a third treatment on the tow (4) of filtering material, which is different from the first and second treatment, and, in particular, can be replaced with a fourth treatment module (11), which is designed to carry out a fourth treatment on the tow (4) of filtering material, which is different from the third treatment.

2. The machine according to claim 1, wherein the operating assembly (8) is designed to apply a hardening substance (in particular, triacetin) to said larger tow (4); the first, the second, the third and the fourth treatment (11) being selected in the group consisting of: insertion of particles (12) (in particular, of activated carbon), insertion of a longitudinal strand (13), insertion of capsules (15), hardening treatment, wrapping with a strip of paper (14).
3. The machine according to claim 1 or 2, wherein the third treatment module (11) can be replaced with the fourth treatment module (11); the fourth treatment being different from the first and the second treatment; in particular, the first, the second, the third and the fourth treatment are different from one another.
4. The machine according to claim 1 or 2, wherein the first treatment module (11) occupies the space available between the forming assembly (7) and the operating assembly (8); the third treatment module (11) being mounted on the first treatment module (11).
5. The machine according to any of the preceding claims, and comprising a fifth treatment module (11), which is arranged in the area of the treatment station (6), is designed to carry out a fifth treatment on the tow (4) of filtering material and can be removed and

replaced; the fifth treatment being different from the first and the third treatment.

6. The machine according to claim 5, wherein the fifth treatment module (11) is mounted on the first and/or the third treatment module (11); the fifth treatment being different from the second and the fourth treatment.
7. The machine according to claim 5 or 6, wherein the fifth treatment is selected in the group consisting of: insertion of particles (12) (in particular, of activated carbon), insertion of a longitudinal strand (13), insertion of capsules (15), hardening treatment, wrapping with a strip of paper (14).
8. The machine according to any of the preceding claims, wherein the first treatment module (11) comprises a first connection unit and a second connection unit; the first connection unit connects (in a releasable manner) the first treatment module (11) to the operating assembly (8) and/or to the forming assembly (9) so that the first treatment module (11) works in a coordinated manner relative to the operating assembly (8) and/or to the forming assembly (9); the third treatment module (11) comprises a third connection unit, which is coupled (in a releasable manner) to the second connection unit to connect the first and the third treatment module (11), so that the third treatment module (11) works in a coordinated manner relative to the first treatment module (11).
9. The machine according to claim 8, wherein the first, the second and the third connection unit comprise respective electric and/or mechanic motion transfer means (for example, a shaft and/or a wheel).
10. The machine according to claim 8 or 9, wherein the second treatment module (11) comprises a fourth connection unit to connect the second treatment module (11) to the third treatment module (11) by being coupled (in a releasable manner) to the third connection unit; the fourth treatment module (11) comprises a fifth connection unit to connect the fourth treatment module (11) to the first or the second treatment module (11) by being coupled (in a releasable manner) to the first or the fourth connection unit, respectively.

Patentansprüche

1. Maschine zum Herstellen von Filtern (2) der tabakverarbeitenden Industrie, insbesondere von Filtern für Zigaretten; wobei die Maschine (1) eine Zuführanordnung (3), um einen Strang (4) eines Filtermaterials entlang eines gegebenen Wegs (P1) durch eine Arbeitsstation (5) einer Formungsstation (7) zuzu-

führen, umfasst; wobei die Maschine (1) eine Arbeitsanordnung (8), die im Bereich der Arbeitsstation (5) angeordnet ist und ausgelegt ist, den Strang (4) zu strecken, derart, dass sich der Strang (4) selbst ausdehnt und einen größeren Strang (4) erzeugt, und eine Formungsanordnung (9), die im Bereich der Formungsstation (7) angeordnet ist und ausgelegt ist, eine Filterstange (10) zu formen, umfasst; wobei die Maschine (1) **dadurch gekennzeichnet ist, dass** sich der gegebene Weg (P1) durch eine Behandlungsstation (6) erstreckt, die zwischen der Arbeitsstation (5) und der Formungsstation (7) angeordnet ist; wobei die Maschine (1) ein erstes Behandlungsmodul (11), das im Bereich der Behandlungsstation (6) angeordnet ist, ausgelegt ist, eine erste Behandlung an dem Strang (4) des Filtermaterials auszuführen und durch ein zweites Behandlungsmodul (11) ersetzt werden kann, das ausgelegt ist, eine zweite Behandlung an dem Strang (4) des Filtermaterials auszuführen, die von der ersten Behandlung verschieden ist; und ein drittes Behandlungsmodul (11), das im Bereich der Behandlungsstation (6) angeordnet ist, ausgelegt ist, eine dritte Behandlung an dem Strang (4) des Filtermaterials auszuführen, die von der ersten und der zweiten Behandlung verschieden ist, und insbesondere durch ein viertes Behandlungsmodul (11) ersetzt werden kann, das ausgelegt ist, eine vierte Behandlung an dem Strang (4) des Filtermaterials auszuführen, die von der dritten Behandlung verschieden ist, umfasst.

2. Maschine nach Anspruch 1, wobei die Arbeitsanordnung (8) ausgelegt ist, eine härtende Substanz (insbesondere Triacetin) auf den größeren Strang (4) aufzubringen; wobei die erste, die zweite, die dritte und die vierte Behandlung (11) aus der Gruppe ausgewählt sind, bestehend aus: Einführung von Partikeln (12) (insbesondere von Aktivkohle), Einführung eines Längsstrangs (13), Einführung von Kapseln (15), eine härtende Behandlung, Umwickeln mit einem Papierstreifen (14).
3. Maschine nach Anspruch 1 oder 2, wobei das dritte Behandlungsmodul (11) durch das vierte Behandlungsmodul (11) ersetzt werden kann; wobei die vierte Behandlung von der ersten und der zweiten Behandlung verschieden ist; wobei insbesondere die erste, die zweite, die dritte und die vierte Behandlung voneinander verschieden sind.
4. Maschine nach Anspruch 1 oder 2, wobei das erste Behandlungsmodul (11) den Raum einnimmt, der zwischen der Formungsanordnung (7) und der Arbeitsanordnung (8) verfügbar ist; wobei das dritte Behandlungsmodul (11) auf dem ersten Behandlungsmodul (11) angebracht ist.
5. Maschine nach einem der vorhergehenden Ansprü-

che und umfassend ein fünftes Behandlungsmodul (11), das im Bereich der Behandlungsstation (6) angeordnet ist, ausgelegt ist, eine fünfte Behandlung an dem Strang (4) des Filtermaterials auszuführen, und entfernt und ausgetauscht werden kann; wobei die fünfte Behandlung von der ersten und der dritten Behandlung verschieden ist.

6. Maschine nach Anspruch 5, wobei das fünfte Behandlungsmodul (11) an dem ersten und/oder dem dritten Behandlungsmodul (11) angebracht ist; wobei die fünfte Behandlung von der zweiten und der vierten Behandlung verschieden ist.
7. Maschine nach Anspruch 5 oder 6, wobei die fünfte Behandlung aus der Gruppe ausgewählt ist, bestehend aus: Einführung von Partikeln (12) (insbesondere von Aktivkohle), Einführung eines Längsstrangs (13), Einführung von Kapseln (15), härtende Behandlung, Umwickeln mit einem Papierstreifen (14).
8. Maschine nach einem der vorhergehenden Ansprüche, wobei das erste Behandlungsmodul (11) eine erste Verbindungseinheit und eine zweite Verbindungseinheit umfasst; wobei die erste Verbindungseinheit das erste Behandlungsmodul (11) (auf eine lösbare Weise) mit der Arbeitsanordnung (8) und/oder mit der Formungsanordnung (9) verbindet, derart, dass das erste Behandlungsmodul (11) in Bezug auf die Arbeitsanordnung (8) und/oder die Formungsanordnung (9) auf eine koordinierte Weise arbeitet; wobei das dritte Behandlungsmodul (11) eine dritte Verbindungseinheit umfasst, die (auf eine lösbare Weise) mit der zweiten Verbindungseinheit gekoppelt ist, um das erste und das dritte Behandlungsmodul (11) zu verbinden, derart, dass das dritte Behandlungsmodul (11) in Bezug auf das erste Behandlungsmodul (11) auf eine koordinierte Weise arbeitet.
9. Maschine nach Anspruch 8, wobei die erste, die zweite und die dritte Verbindungseinheit jeweilige elektrische und/oder mechanische Bewegungsübertragungsmittel (z. B. eine Welle und/oder ein Rad) umfassen.
10. Maschine nach Anspruch 8 oder 9, wobei das zweite Behandlungsmodul (11) eine vierte Verbindungseinheit umfasst, um das zweite Behandlungsmodul (11) mit dem dritten Behandlungsmodul (11) zu verbinden, um (auf eine lösbare Weise) mit der dritten Verbindungseinheit gekoppelt zu sein; wobei das vierte Behandlungsmodul (11) eine fünfte Verbindungseinheit umfasst, um das vierte Behandlungsmodul (11) mit dem ersten oder dem zweiten Behandlungsmodul (11) zu verbinden, um (auf eine lösbare Weise) mit der ersten bzw. der vierten Verbindungsein-

heit gekoppelt zu sein.

Revendications

1. Machine pour la fabrication de filtres (2) de l'industrie du traitement du tabac, en particulier des filtres pour des cigarettes; la machine (1) comprend un ensemble d'apport (3) pour apporter une mèche (4) de matière filtrante le long d'un trajet donné (P1), à travers un poste de commande (5) jusqu'à un poste de formage (7); la machine (1) comprenant, un ensemble de commande (8), qui est agencé dans la zone de le poste de commande (5) et est conçu pour étirer la mèche (4) de sorte que la mèche (4) elle-même s'étende et génère une mèche (4) plus grande, et un ensemble de formage (9), qui est agencé dans la zone de le poste de formage (7) et est conçu pour former une tige de filtre (10); la machine (1) étant **caractérisée en ce que** le trajet donné (P1) s'étend à travers un poste de traitement (6), qui est agencé entre le poste de commande (5) et le poste de formage (7); la machine (1) comprenant un premier module de traitement (11), qui est agencé dans la zone du poste de traitement (6), est conçu pour réaliser un premier traitement sur la mèche (4) de matière filtrante et peut être remplacé par un deuxième module de traitement (11), qui est conçu pour réaliser un deuxième traitement sur la mèche (4) de matière filtrante, qui est différent du premier traitement; et un troisième module de traitement (11), qui est agencé dans la zone du poste de traitement (6), est conçu pour réaliser un troisième traitement sur la mèche (4) de matière filtrante, qui est différent des premier et deuxième traitements, et, en particulier, peut être remplacé par un quatrième module de traitement (11), qui est conçu pour réaliser un quatrième traitement sur la mèche (4) de matière filtrante, qui est différent du troisième traitement.
2. Machine selon la revendication 1, dans laquelle l'ensemble de commande (8) est conçu pour appliquer une substance de durcissement (en particulier, la triacétine) à ladite mèche (4) plus grande; les premier, deuxième, troisième et quatrième traitements (11) étant sélectionnés dans le groupe constitué par: une insertion de particules (12) (en particulier, de charbon actif), une insertion d'un brin longitudinal (13), une insertion de capsules (15), un traitement de durcissement, un enveloppement avec une bande de papier (14).
3. Machine selon la revendication 1 ou 2, dans laquelle le troisième module de traitement (11) peut être remplacé par le quatrième module de traitement (11); le quatrième traitement étant différent des premier et deuxième traitements; en particulier, les premier, deuxième, troisième et quatrième traitements sont

différents les uns des autres.

4. Machine selon la revendication 1 ou 2, dans laquelle le premier module de traitement (11) occupe l'espace disponible entre l'ensemble de formage (7) et l'ensemble de commande (8) ; le troisième module de traitement (11) étant monté sur le premier module de traitement (11). 5
5. Machine selon l'une quelconque des revendications précédentes, et comprenant un cinquième module de traitement (11), qui est agencé dans la zone du poste de traitement (6), est conçu pour réaliser un cinquième traitement sur la mèche (4) de matière filtrante et peut être retiré et remplacé ; le cinquième traitement étant différent des premier et troisième traitements. 10 15
6. Machine selon la revendication 5, dans laquelle le cinquième module de traitement (11) est monté sur le premier et/ou le troisième modules de traitement (11) ; le cinquième traitement étant différent des deuxième et quatrième traitements. 20
7. Machine selon la revendication 5 ou 6, dans laquelle le cinquième traitement est sélectionné dans le groupe constitué par : une insertion de particules (12) (en particulier, de charbon actif), une insertion d'un brin longitudinal (13), une insertion de capsules (15), un traitement de durcissement, un enveloppement avec une bande de papier (14). 25 30
8. Machine selon l'une quelconque des revendications précédentes, dans laquelle le premier module de traitement (11) comprend une première unité de raccordement et une deuxième unité de raccordement; la première unité de raccordement raccorde (de manière libérable) le premier module de traitement (11) à l'ensemble de commande (8) et/ou à l'ensemble de formage (9) de sorte que le premier module de traitement (11) travaille de manière coordonnée par rapport à l'ensemble de commande (8) et/ou à l'ensemble de formage (9) ; le troisième module de traitement (11) comprend une troisième unité de raccordement, qui est couplée (de manière libérable) à la deuxième unité de raccordement pour raccorder les premier et troisième modules de traitement (11), de sorte que le troisième module de traitement (11) travaille de manière coordonnée par rapport au premier module de traitement (11). 35 40 45 50
9. Machine selon la revendication 8, dans laquelle les première, deuxième et troisième unités de raccordement comprennent des moyens de transfert de mouvement électrique et/ou mécanique respectifs (par exemple, un arbre et/ou une roue). 55
10. Machine selon la revendication 8 ou 9, dans laquelle

le deuxième module de traitement (11) comprend une quatrième unité de raccordement pour raccorder le deuxième module de traitement (11) au troisième module de traitement (11) en étant couplée (de manière libérable) à la troisième unité de raccordement; le quatrième module de traitement (11) comprend une cinquième unité de raccordement pour raccorder le quatrième module de traitement (11) aux premier et deuxième modules de traitement (11) en étant couplée (de manière libérable) à la première ou à la quatrième unité de raccordement, respectivement.

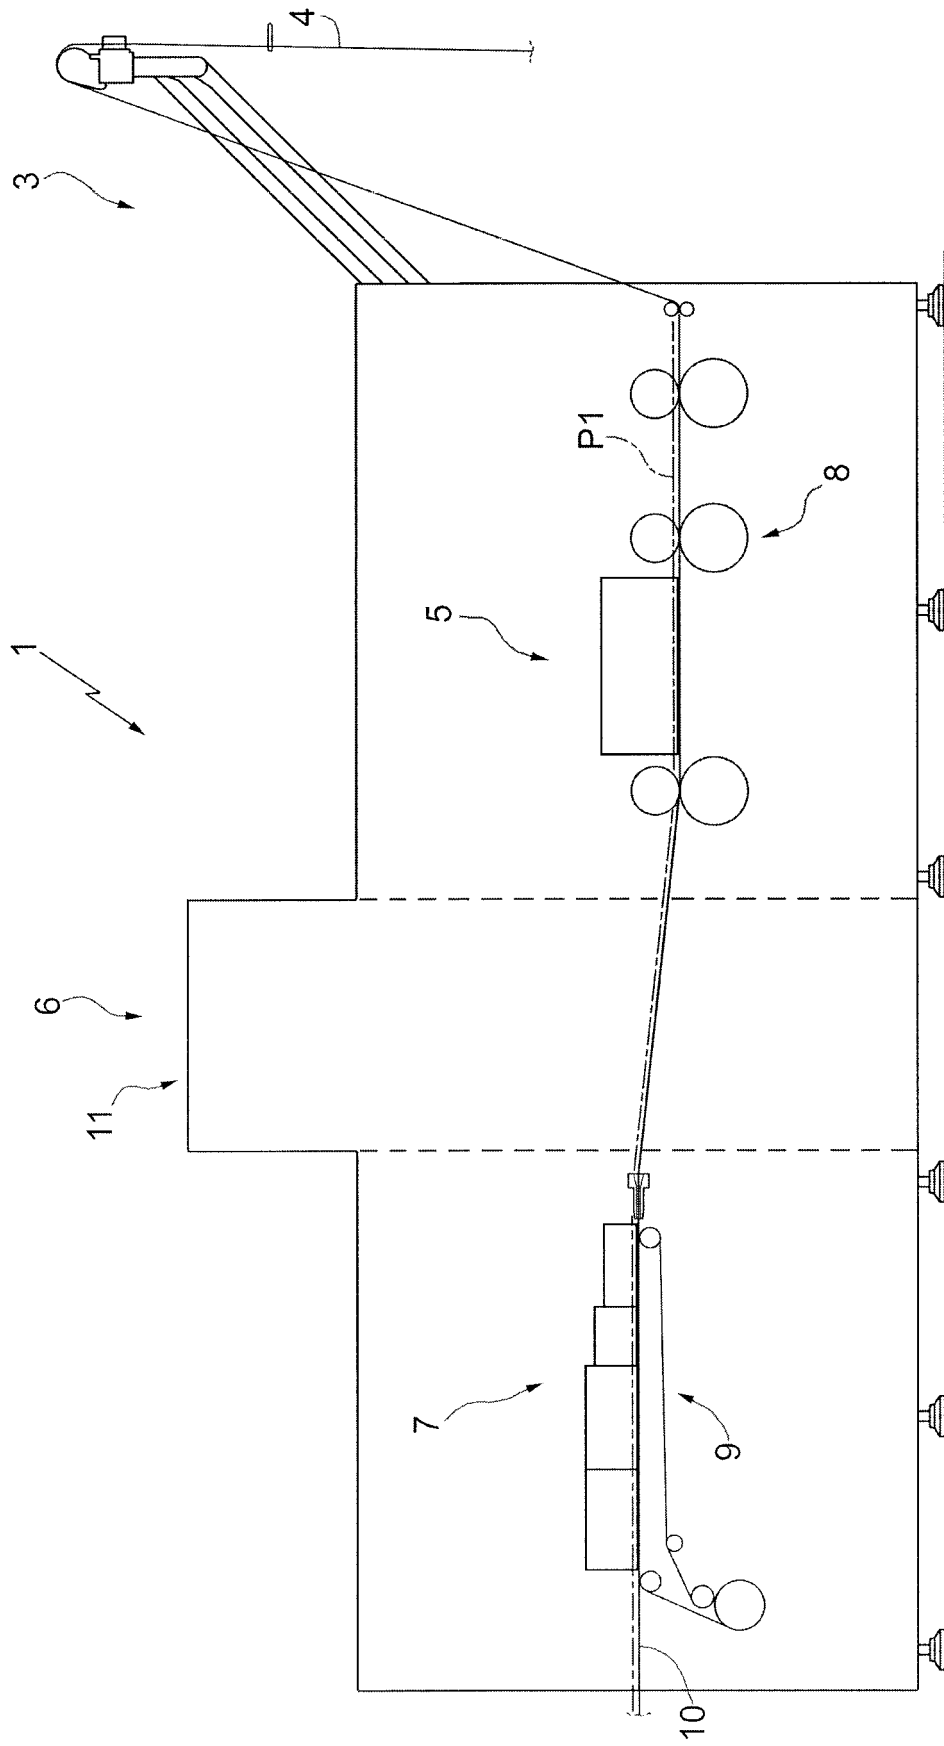
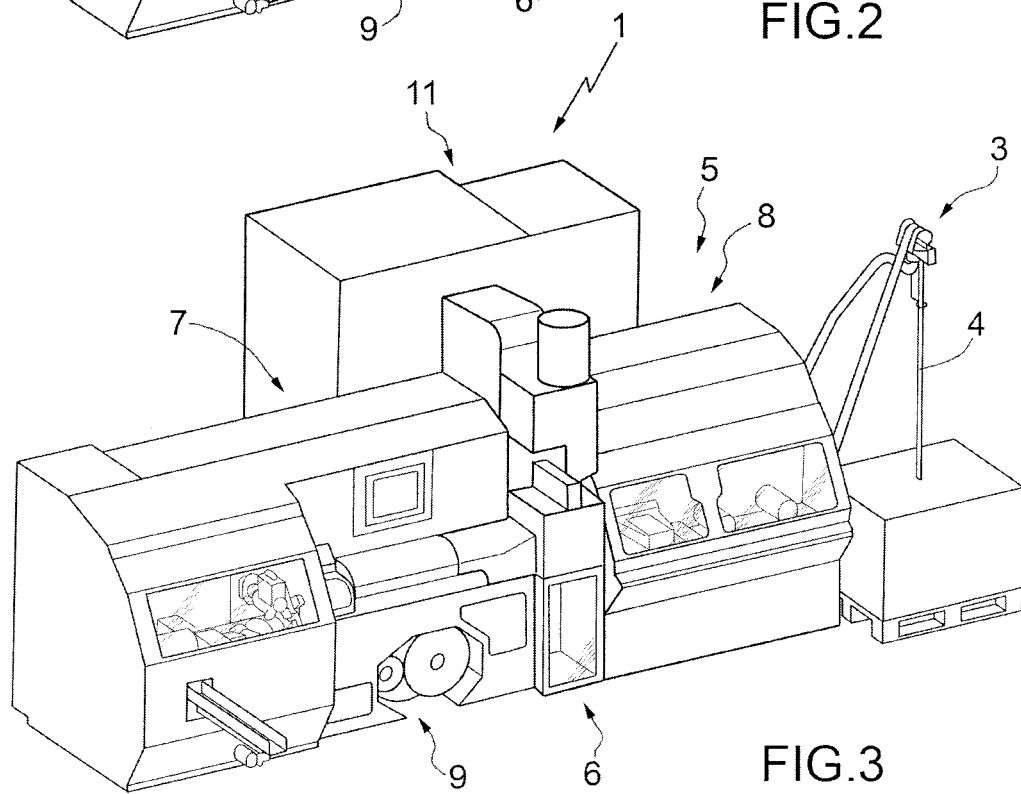
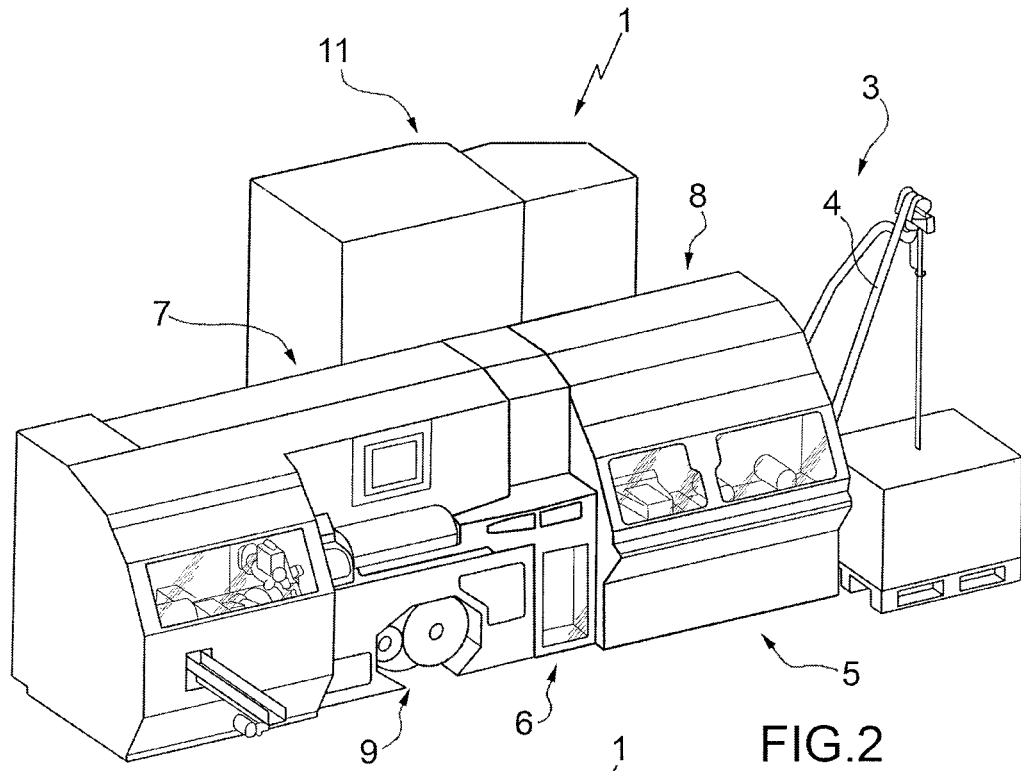


FIG.1



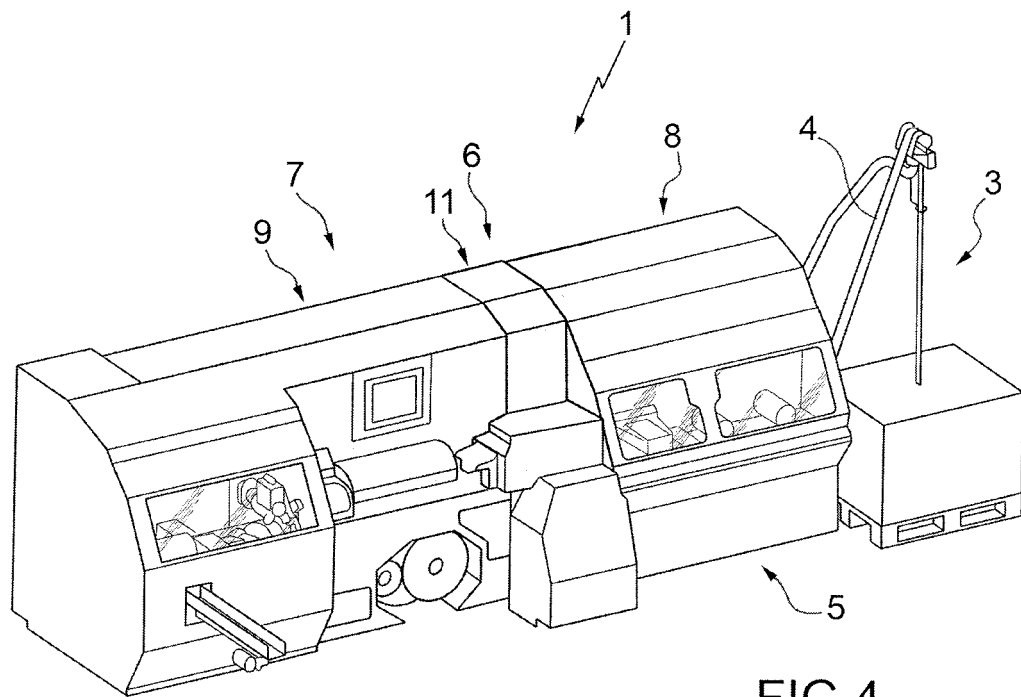


FIG. 4

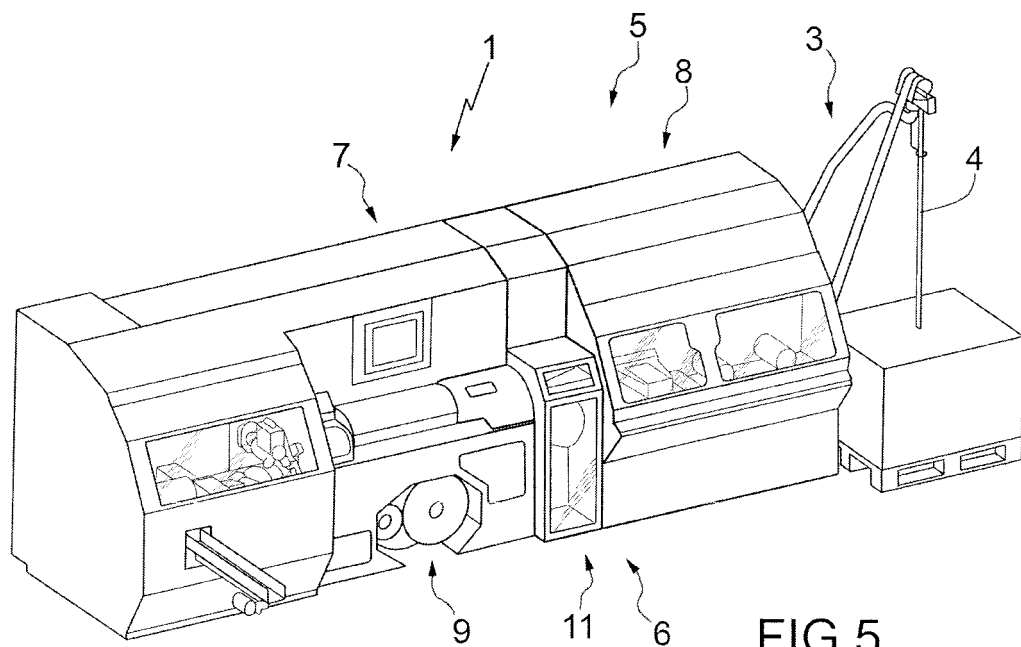
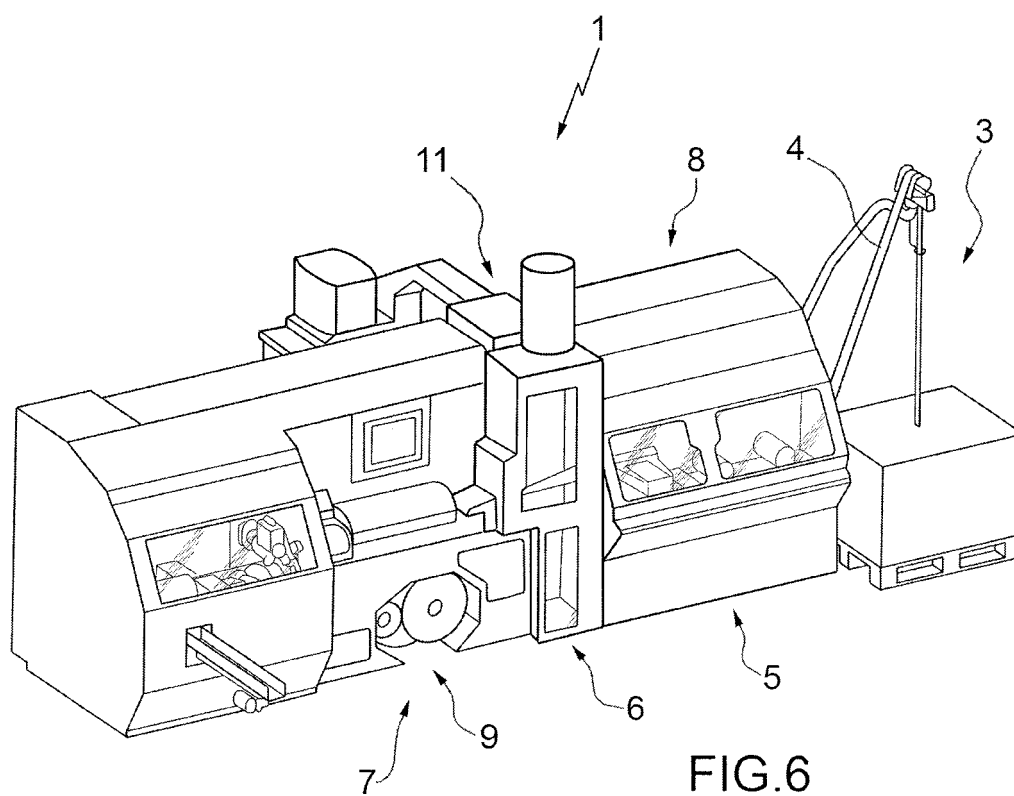


FIG. 5











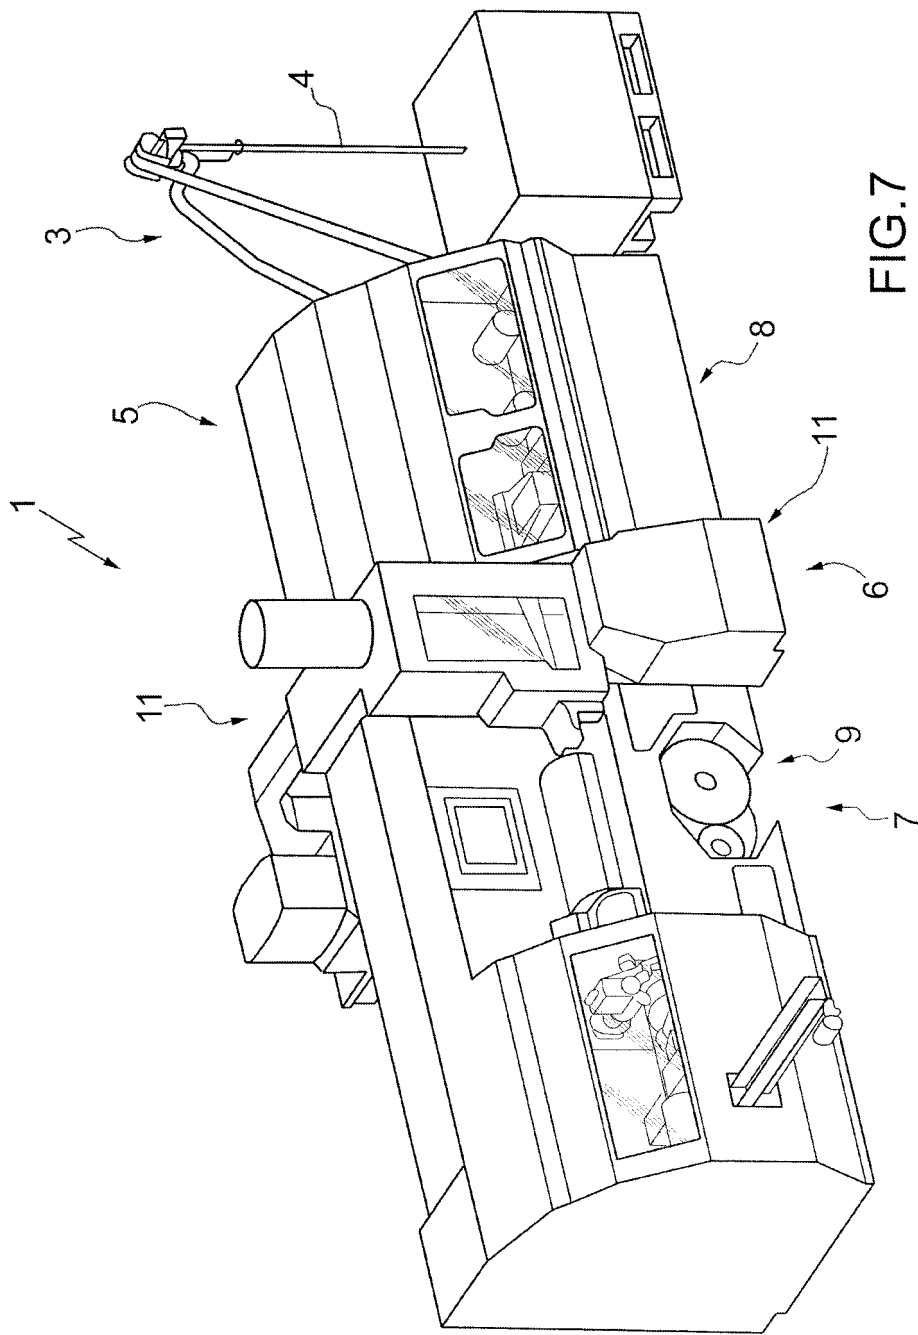


FIG. 7

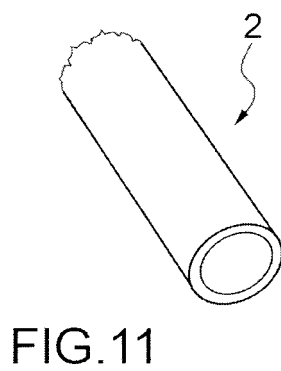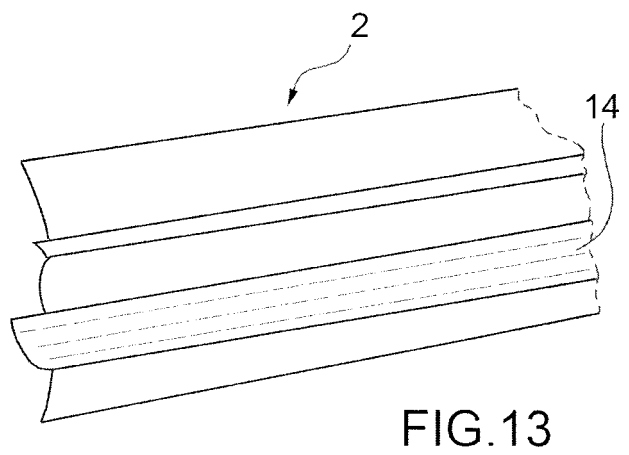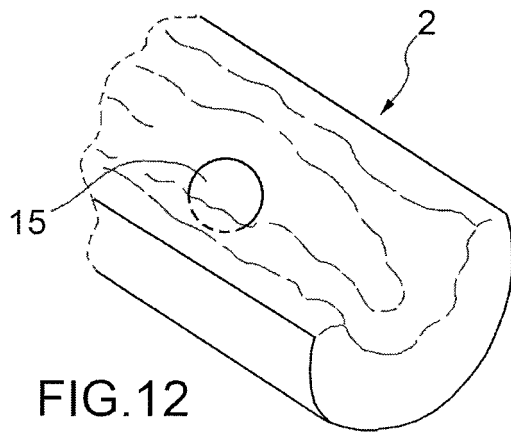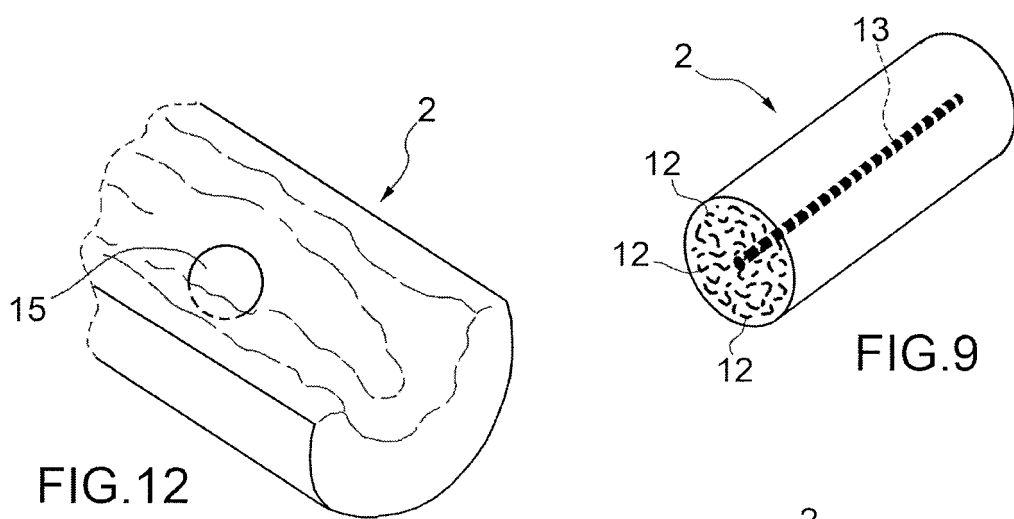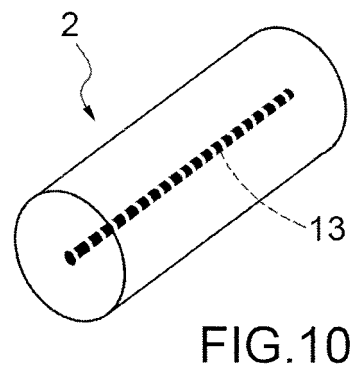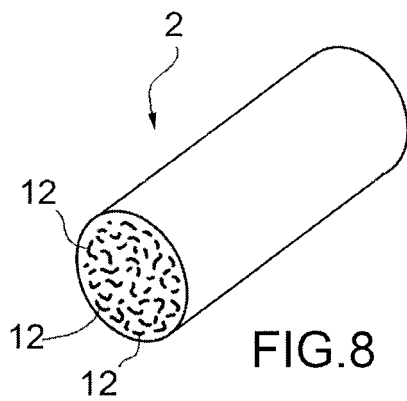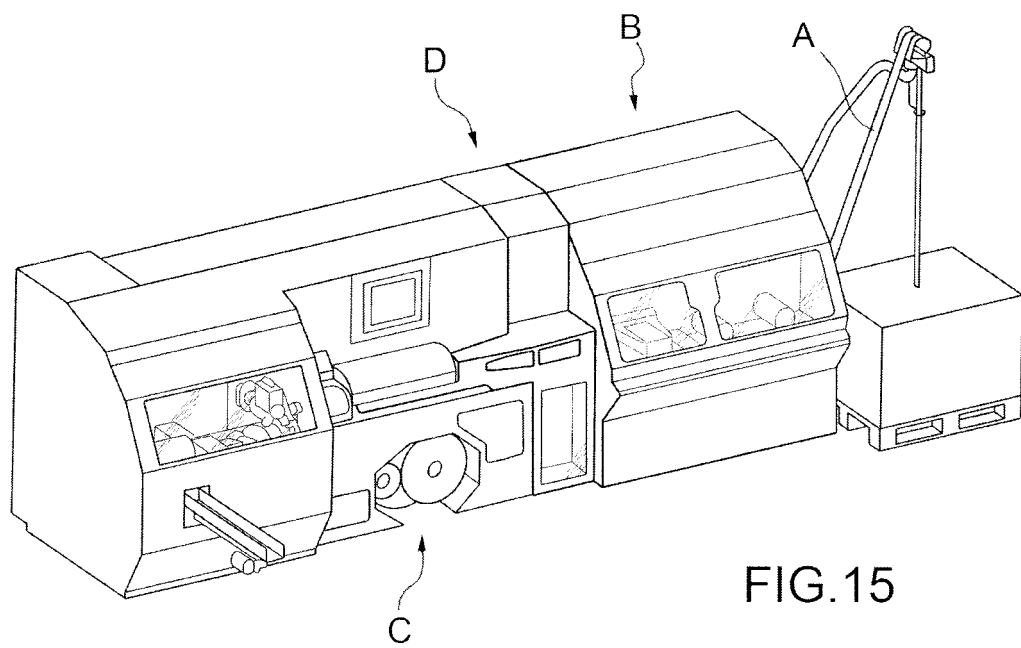

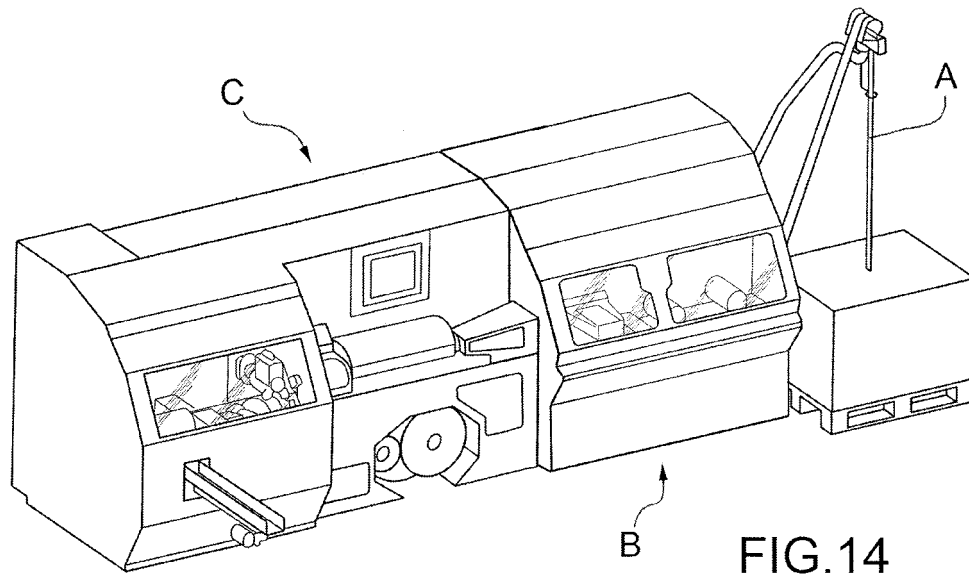

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2633769 A1 [0004]
- EP 263632B1 A [0014]
- GB 1585761 A [0016] [0021]
- US 3128680 A [0016]
- WO 2005087026 A [0016]
- US 6913784 B [0016]
- US 20140100099 A [0018]
- JP 2007000019 B [0020]