

(19)



(11)

EP 3 178 621 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

14.06.2017 Bulletin 2017/24

(51) Int Cl.:

B26B 21/40 (2006.01)

B26B 21/56 (2006.01)

(21) Application number: **17150373.3**

(22) Date of filing: **08.10.2012**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **06.10.2011 PCT/EP2011/067451**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:

12769122.8 / 2 763 822

(71) Applicant: **BIC-Violex S.A.**

145 69 Anixi, Attiki (GR)

(72) Inventors:

- **BOZIKIS, Ioannis**
GR-11741 KOUKAKI (GR)
- **KARO USSIS, Michalis**
GR-141 22 ATHENES (GR)

(74) Representative: **Cabinet Plasseraud**

66 rue de la Chaussée d'Antin
75440 Paris Cedex 09 (FR)

Remarks:

This application was filed on 05-01-2017 as a
divisional application to the application mentioned
under INID code 62.

(54) **RAZOR HEAD HAVING A LOW SHAVING ANGLE**

(57) The instant invention relates to a razor head 5
comprising:

- a housing 10 having a top face 6 defining a shaving
window 13 delimited by a front guard 12 and a rear cap
20 together defining a tangent plane P,
- at least one rigid cutting member 24, each freely mount-
ed in the housing, and having:
- a cutting edge portion 39 extending along a cutting edge
portion axis, and having a cutting edge accessible

through the shaving window,

- a guided portion 35 extending along a guided portion
axis, and
- a bent portion 53 intermediate the cutting edge portion
and the guided portion,

wherein an angle A measured between the cutting edge
axis and the tangent plane is between 5° and 30°, wherein
each cutting member comprises a blade which defines
a cutting edge portion 390, 260, and a blade support 600.

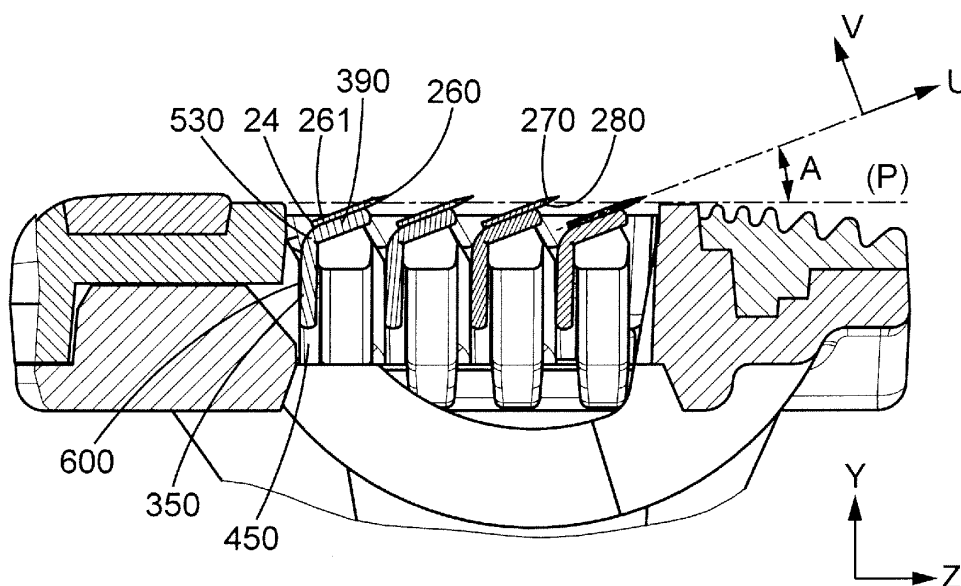


FIG. 6

EP 3 178 621 A1

Description

FIELD OF THE INVENTIONS

5 [0001] The instant invention relates to razor heads with blades having a low shaving angle.

BACKGROUND OF THE INVENTION

10 [0002] In the field of mechanical wet shavers, it has long been provided with shaver which has a head receiving one or more cutting members.

[0003] Recently, the trend has been to provide shavers with a multiplicity of blades with the goal of increasing the closeness of the shave that is achieved while also still providing a comfortable shaving experience. Shavers currently on the market strive to achieve an optimum balance between efficiency, closeness and comfort of a shave. Achieving this balance is made difficult because of many different types of hair, different shaving habits and variables of a razor cartridge that influence the shaving characteristics of a safety razor.

15 [0004] Efforts have been made to arrive at an optimal angle for the blades relative to a blade plane to achieve a shaving angle which provides efficiency, closeness and comfort.

SUMMARY OF THE INVENTION

20 [0005] It is provided a razor head comprising:

- a housing having a top face defining a shaving window delimited by a front guard and a rear cap together defining a tangent plane,
- 25 - at least one rigid cutting member, each freely mounted in the housing, and having:
 - a cutting edge portion extending along a cutting edge portion axis, and having a cutting edge accessible through the shaving window,
 - a guided portion extending along a guided portion axis, and
 - 30 • a bent portion intermediate the cutting edge portion and the guided portion,

[0006] Wherein an angle measured between the cutting edge axis and the tangent plane is between 5° and 30°.

35 [0007] Surprisingly, tests have shown that, by providing the shaving angle in that range, optimal shaving performance could be achieved. Indeed, a low shaving angle allows the blade edges to come in contact with the hair closer to being parallel with the skin, increase the shaving comfort, and reduces the irritation of the skin.

BRIEF DESCRIPTION OF THE DRAWINGS

40 [0008] Other characteristics and advantages of the invention will readily appear from the following description of some of its embodiments, provided as non-limitative examples, and of the accompanying drawings.

[0009] On the drawings :

- Fig. 1 is an exploded perspective view of a razor head,
- Figs 2a and 2b are two opposed perspective views of a blade of a razor head according to a first embodiment,
- 45 - Fig. 3 is a lateral view of the blade of Fig. 2a and 2b,
- Fig. 4 is a schematic sectional view along line VII-VII on Fig. 1 of a razor head according to the first embodiment,
- Figs 5a and 5b are schematic views of the blade of figure 3 in different positions position,
- Fig. 6 is a schematic sectional view along line VII-VII on Fig. 1 of a razor head according to a second embodiment,
- Figs 7a, 7b and 7c are schematic views of blades of a razor blade according to a variant of the second embodiment,
- 50 - Figs 8a and 8b are schematic views of a blade of the razor head of figure 6 in different positions,
- Fig. 9 is a schematic view of a cutting edge of a blade in a razor head according the first or the second embodiment when contacting an hair,
- Figs. 10a and 10b are schematic views of a blade contacting the skin of a user with different shaving angles.

55 [0010] On the different Figures, the same reference signs designate like or similar elements.

DETAILED DESCRIPTION

[0011] Figure 1 shows a head 5 of a safety razor (also called wet shaver), a shaver the blades of which are not driven by a motor relative to the blade unit.

[0012] The shaving head 5 is to be borne by a handle extending in a longitudinal direction between a proximal portion and a distal portion bearing the blade unit 5 or shaving head. The longitudinal direction may be curved or include one or several straight portions.

[0013] The blade unit 5 includes an upper face 6 defining a shaving window, and equipped with one or several cutting members and a lower face 7 which is to be connected to the distal portion of the handle by a connection mechanism. The connection mechanism may for instance enable the blade unit 5 to pivot relative to a pivot axis X which is substantially perpendicular to the longitudinal direction. Said connection mechanism may further enable to selectively release the blade unit for the purpose of exchanging blade units. One particular example of connection mechanism usable in the present invention is described in document WO-A-2006/027018, which is hereby incorporated by reference in its entirety for all purposes.

[0014] The blade unit 5 includes a frame 10 which is made solely of synthetic materials, i.e. thermoplastic materials (polystyrene or ABS, for example) and elastomeric materials.

[0015] More precisely, the frame 10 includes a plastic platform member 11 connected to the handle by the connection mechanism and having:

- a guard bar 12 extending parallel to the pivot axis X,
- a blade receiving section 13 situated rearward of the guard 12 in the direction of shaving,
- a rear portion 14 extending parallel to the pivot axis X and situated rearward of the blade receiving section 13 in the direction of shaving,
- and two side portions 15 joining the longitudinal ends of the guard bar 12 and of the rear portion 14 together.

[0016] In the example shown in the figures, the guard bar 12 is covered by an elastomeric layer 16 forming a plurality of fins 17 extending parallel to the pivot axis X.

[0017] Further, in this particular example, the underside of the platform member 11 includes two shell bearings 18 which belong to the connection mechanism and which may be for example as described in the above-mentioned document WO-A-2006/027018.

[0018] In an embodiment, and such as represented on the drawings, the frame 10 further includes a plastic cover 19 having a top face and an opposite bottom face, which faces the top face of the components of the platform 11. The cover 19 exhibits a general U shape, with a cap portion 20 partially covering the rear portion 14 of the platform and two side members 21 covering the two side members 15 of the platform. In this embodiment, the cover 19 does not cover the guard bar 12 of the platform.

[0019] The cap portion 20 of the cover 19 may include a lubricating strip 23 which is oriented upward and comes into contact with the skin of the user during shaving. This lubricating strip may be formed for instance by co-injection with the rest of the cover. The cover 19 is assembled to the platform 11 by any suitable means, such as, for example, by ultra-sonic welding, as explained in WO 2010/06,654, hereby incorporated here in its entirety for all purposes.

The present description of a housing is exemplary only.

At least one cutting member 24 is movably mounted in the blade receiving section 13 of the platform. The blade receiving section 13 may include several cutting members 24.

[0020] In a first embodiment, and such as represented figures 1 and 4 of the drawings, the blade receiving section includes four cutting members.

[0021] Each cutting member 24 is made of a blade which is integrally formed from a flat steel strip.

[0022] In particular, one may use a martensitic stainless steel with the following composition (in weight):

Carbon : between 0.62% and 0.75%,
 Chromium : between 12.7% and 13.7%,
 Manganese : between 0.45% and 0.75%,
 Silicon : between 0.20% and 0.50%,
 Iron: Balance

[0023] Such an alloy has no more than traces of other components, and notably no more than traces of Molybdenum.

[0024] The cutting members are L-shaped such as represented on figures 2a, 2b and 3, for example. The cutting members have a cutting edge portion 26, a guided portion 35, and a bent portion 53 is intermediate the cutting edge portion and the guided portion. The cutting member (or razor blade) has, opposed to the cutting edge 26, a rear edge 54.

[0025] Each blade 24 extends longitudinally, parallel to the pivot axis X, between two lateral sides 33, 33'. For example,

the lateral sides are straight.

[0026] Each blade 24 has a bent profile including:

- a substantially flat base portion 35 (for example substantially perpendicular to the tangent plane (also called shaving plane)) having a periodically serrated edge 54,
- a substantially flat cutting edge portion 39 comprising the cutting edge 26,
- a bent portion 53 extending between the base portion and the cutting edge portion. The bent portion has a concave face 28 and an opposed convex face 27. The face of the blade having the concave face is called inner face, and the other one the outer face. Such integrally formed blades are also called bent blades.

[0027] When the blade is mounted to slide in the head, the base portion is also sometimes called "guided portion".

[0028] The cutting edge 26 is oriented forward in the direction of shaving. The cutting edge 26 is accessible through the shaving window of the blade-receiving section 13, to cut hair.

[0029] The cutting edge portion 39 extends along a cutting edge portion axis. Advantageously, the cutting edge portion axis of all cutting member are positioned parallel to each other. The frame 10 defines a tangent plane (or shaving plane) which corresponds to the plane tangential to the skin contacting surfaces of the frame behind and at front of the cutting edges. The cutting edge of the blades extends below the tangent plane P (see figure 4). In other words, the blades have a positive exposure.

[0030] As previously said, each bent blade 25 has an outer face 27 oriented towards the skin to be shaved and an opposed inner face 28. The outer and inner faces 27, 28 of the blade include respectively two parallel main surfaces 29, 30 and two tapered facets 31, 32 which taper towards the cutting edge 26. The two tapered facets form an edge angle, and the bisecting line of said edge angle is the cutting edge portion axis.

[0031] As shown in figure 1, each cutting member 24 is borne by two elastic fingers 44 which are molded as a single piece with the platform 11 and which extend towards each other and upwardly from both side members 15 of the platform. For example, all the fingers 44 extending from a given side member are identical. Besides, as shown in figure 2, the base portions 35 of the cutting members are slidably guided in slots 45 provided in the inner face of each side member 15 of the platform. The slots are, for example, substantially perpendicular to the shaving plane.

[0032] The cutting members 24 are elastically biased by the elastic arms 44 toward a nominal position. In this nominal position, the outer faces 27 of the cutting member, and more precisely the cutting edge portion, at each lateral end of the cutting member, bear against corresponding upper stop portions 52 which are for example provided on the bottom stopping face of each side member 21 of the cover, said side member 21 covering the slots 45. In said nominal position an angle (also called shaving angle) may be measured between the cutting edge axis and the tangent plane defined by the front guard and the rear cap above-mentioned.

[0033] For movable bent blades of the type described above, a shaving angle of between 5° and 30° seemed to provide good results as described below. Better results are expected for a shaving angle between 12° and 27°, notably between 12° and 19°, and preferably between 12° and 18°.

[0034] Since the cutting edge portion axis of all cutting member are positioned parallel to each other, the angle between the cutting edge axis and the tangent plane is the same for all blades.

[0035] The guiding slots 45 define a direction Y for the razor head. The direction Z is the normal to the X-Y plane. The base portion 35 extends in a base portion plane. The base portion axis is the main axis of the base portion other than its profile axis, i.e. other than the X axis. In the present embodiment, it is the Y axis. In other words, the main axis along which the base portion extends is the same as the axis defined by the slots 45 in the razor head.

[0036] The cutting edge portion 39 extends in a cutting edge portion plane. The cutting edge portion axis is the main axis of the cutting edge portion other than its profile axis, i.e. other than the X axis. In the present embodiment, it is a U axis. In other words, the cutting edge portion axis extends in an X-U plane. A V axis is defined normal to the X-U plane.

[0037] To achieve the shaving, the user has to make into contact the razor head with his skin. As shown on figure 5a, the angle A" measured between the cutting edge axis and the tangent plane when the razor head is contacting the skin of the user and before any movement is different than the angle A measured between the cutting edge axis and the tangent plane in the nominal position. Indeed, a force will be applied to the cutting member by the user, along a direction Fr (see figure 4) which is sensibly normal to the tangent plane P (In other words, the force F is applied sensibly in the Y direction at approximately $\pm 5^\circ$) to achieve the contact between the skin and the cutting members.

[0038] Upon shaving, a force Fs will also be applied to the cutting member along a direction Fs which is sensibly parallel to the tangent plane P. The cutting members are guided for movement in a direction perpendicular to the tangent plane through the slots 45.

[0039] The shape of the bent blades and their placement inside the slot 45 allows a degree of rotational movement of said blades with regard to the frame of the razor head. In other words, the whole blade rotates in the slot when there is force acting on the hair during hair or skin contact (i.e. there is a deformation of the slots 45 receiving the blades). Said rotation tends to increase the shaving angle.

[0040] Moreover, the shape of the bent blades and their placement inside the slot 45 allows also a deflection movement of the blade (i.e. an elastic deformation of the blade itself). More precisely, the shape of the bent blades and their placement inside the slot 45 allows a movement of the cutting edge portion with regard to the guided portion, such as shown on figure 5b. More precisely, under a force applied along the direction F_r , the elastic fingers 44 retract into slot 45 and the blade has a movement of translation toward the bottom of the frame 10 through its guided portion and the slots 45. At the same time, the blade rotates in the slot and there is a deflection movement of the blades, and more precisely the bent portion moves and the angle between the cutting edge portion and the guided portion increase.

[0041] Since the force applied to the cutting member is different in a position when the head contact the skin without moving (also called rest-position) and a movable position during shaving (also called shaving position), the rotation of the cutting edge portion is different, and therefore also the angle. In the shaving position, the rotation increases the nominal shaving angle.

[0042] More precisely on figure 5b the S point represents the contact point between the skin and the cutting edge. The cutting member with a full line is the cutting member in the nominal position whereas the cutting member with dashed point represents the cutting member in the shaving position. In the nominal position, the angle A between the cutting edge axis and the tangent plane P is lower than the angle A' between the cutting edge axis and the tangent plane P in the shaving position. A direct relation exists between the angle A in the nominal position and the angle A' in the shaving position which depends on the force exerted by the user and on the elasticity degree of the elastic fingers. Therefore, a low shaving angle in the nominal position allows a low shaving angle in the rest and shaving positions which permits optimal shaving performances as described below. According to tests the optimal shaving angle depends on the shape of the blade and is, for bent blades between 5° and 30°, and more precisely between 12° and 27°, between 12° and 19°, or between 12° and 18° as previously said.

[0043] As aforementioned, a low shaving angle in the range above-described allows a better blade edge penetration and usage convenience. The cutting edge portion of a blade with a shaving angle being under 30° comes in contact to the hair sensibly parallel to the skin. The hair cutting action is mainly performed by the cutting edge, i.e. the sharpest point of the blade. The resistance to cutting is therefore lower which means a better usage convenience for the user.

[0044] The angle ranges aforementioned decrease the irritation of the skin. Fig. 10a represents the cutting edge portion of a blade with a nominal angle above 30°, whereas fig. 10b represents the cutting edge portion of a blade with a nominal angle being between 5° and 30°, or 12° and 28, or 12° and 19°, or 12° and 18°. The cutting edge portion exerts a force F_1 for a nominal angle above 30°, and F_2 for a low nominal angle such as defined on the skin. The forces F_1 and F_2 have the same module. The forces F_1 and F_2 create a small wave on the surface of the skin. Said wave is responsible for friction during shaving as well as irritation of the skin and decreasing the cutting forces. Therefore, it is important to create a wave of skin as small as possible. Forces F_1 and F_2 have each a component F_{1sx} , F_{2sx} along a skin longitudinal direction S_x and a component F_{1sy} , F_{2sy} along a skin transversal direction S_y . With a low shaving angle, such as represented fig. 10b, the component of the force F_2 along the S_y -axis F_{2sy} is smaller than the component of the force F_1 along the S_y direction F_{1sy} (more precisely the module of the force F_{2sy} is smaller than the module of the force F_{1sy}). Thus, the skin is less constrained along the S_y direction and the wave is "smaller" along said direction S_y .

[0045] A shaving angle below 5° and more precisely below 12° or 13° for bent blade may cause the user an unacceptable level of discomfort. While shaving, a blade with a shaving angle below 5° for example will push the hair to be cut into a position with regard to the cutting edge of the blade in which a skive-cut occurs (i.e. the blade edge cuts into one side of a hair and, rather than cutting straight across the hair, cuts diagonally through the shaft, leaving one side of the hair longer than another side). By not cutting a hair cleanly, a user may need to shave more frequently, or increase the number of shaving strokes. Therefore the shaving angle of the present invention is advantageous above 5°, and even above 12° for bent blades to avoid such discomfort. Figure 9 shows such features and represent in dashed points a cutting edge portion having a shaving angle below the afore-mentioned lower limit (i.e. 5°) and in unbroken curve a cutting edge portion having a shaving angle above the afore-mentioned lower limit (i.e. 5°).

[0046] A bent blade is shown on figures 2a, 2b and 3. Below, some geometrical characteristics of the blade are given. The geometrical characteristics of the blade are here nominal characteristics, which do not take into account the actual geometry of the blade due to the manufacturing process or dispersion. In particular, due to the manufacturing process, thickness variations and/or bow, sweep, camber of some blade portions are possible, and are even intrinsic to the product.

[0047] Following parameters are defined:

t: thickness of the blade;

L: length of the blade from one lateral side 33 to another 33';

H: height of the blade, measured along direction Y, from the rear edge 54 to the cutting edge 26;

D: cantilever dimension, measured along direction Z, from the cutting edge 26 to the plane of the base portion (X-Y);

α : included angle, measured between the base portion plane and the cutting edge portion plane;

Hb: height of the blade base portion, measured along direction Y, from the rear edge 54 to the bent portion 53;

R: radius of curvature of the inner face of the bent portion;

EP 3 178 621 A1

Hc: Extent of the cutting edge portion, measured along direction U, from the cutting edge 26 to the bent portion 53;
T: period of the serrated edge;
T1: extent of the protrusion of the serration;
h: height of the serrated end.

[0048] According to the first embodiment, a suitable razor blade shows the following geometric properties:

Parameter	Nominal value	Dispersion	Parameter	Nominal value	Dispersion
T	0.1 mm		Hb	1.43 mm	
L	37.1 mm		R	0.6 mm	
H	2.33 mm		Hc	0.28-1.14 mm	
D	1.35 mm	+/-0.05 mm	T	5.3 mm	± 0.003 mm
A	108°	+/- 2°	h	0.13-0.32 mm	
			T1	2 mm	

[0049] This value indicated for Hc is in fact an average between the value measured for Hc on both lateral sides of the blade. Due to the deformation of the blade, these two values were different, amounting in average to 0.81 mm and 0.85 mm, respectively. Hc might extend between 0.28 and 1.14 mm, preferably between 0.4 and 1 mm.

[0050] Other embodiments were successfully manufactured, which showed satisfactory. For example, parameters like $\alpha=112^\circ$, $H = 2.4$ mm, $Hc = 0.96$ mm show satisfactory.

[0051] Advantageously the cantilever dimension D is smaller than the distance between two adjacent cutting edges.

[0052] In a second embodiment, and such as represented figures 6, 7a, 7b and 7c of the drawings, each cutting member 24 comprises a blade which defines a cutting edge portion and a blade support 600. Each blade may be formed from a steel strip. The cutting members are L-shaped. Such cutting members are commonly called supported blades. The frame 10 (see figure 1 on which the bent blades may be replaced by blade on blade supports) defines a tangent plane (or shaving plane) which corresponds to the plane tangential to the skin contacting surfaces of the frame behind and at front of the cutting edges. The cutting edge of the blades extends below the tangent plane. In other words, the blades have a positive exposure. In an other variant the blades or one of the blades may have a negative exposure or a zero exposure.

[0053] Each blade and blade support extend longitudinally, parallel to the pivot axis X. Similar features than those described above with regard to the first embodiment may be used in the second embodiment, for example blade material, or dimensions.

[0054] As previously said, the razor blade has a cutting edge 260, and an opposed rear edge 261. The cutting edge 260 is oriented forward in the direction of the shaving. The cutting edge 260 is accessible through the shaving window of the blade receiving section 13, to cut hair. Each blade has an outer face 270 oriented toward the skin to be shaved and an opposed inner face 280. The outer and inner faces 270, 280 of the blade include respectively two parallel main surfaces and two tapered facets which taper toward the cutting edge 260. The two tapered facets form an edge angle, and the bisecting line of said edge angle is the cutting edge portion axis.

[0055] As previously said, each razor blade is fixed to a blade support 600. The blade support 600 includes:

- a substantially flat base portion 350 (for example substantially perpendicular to the tangent plane (also called shaving plane)),
- a substantially flat holder portion 390,
- a bent portion 530 extending between the base portion and the holder portion. The bent portion has a concave face and an opposed convex face.

[0056] When the cutting member is mounted to slide in the head, the base portion 350 is also sometimes called "guided portion".

[0057] The frame 10 defines a tangent plane which corresponds to the plane tangential to the skin contacting surfaces of the frame behind and at front of the cutting edges.

[0058] Each cutting member 24 is borne by two elastic fingers which are molded as a single piece with the platform of the frame and which extend towards each other and upwardly from both side members 15 of the platform. For example, all the fingers extending from a given side member are identical. Besides, as shown in figure 6, the base portions 350 of the cutting members are slidably guided in slots 450 provided in the inner face of each side member of the platform.

The slots 450 are, for example, substantially perpendicular to the shaving plane.

[0059] The cutting members 24 are elastically biased by the elastic fingers toward a nominal position. More precisely, the blade supports 600 are elastically biased by elastic fingers toward a nominal position. In this nominal position, the outer faces 270 of the cutting member, and more precisely the cutting edge portion, at each lateral end of the cutting member, bear against corresponding upper stop portions which are for example provided on the bottom stopping face of each side member of the cover, said side member covering the slots 450. In said nominal position an angle (also called shaving angle) may be measured between the cutting edge axis and the tangent plane defined by the front guard and the rear cap above-mentioned.

[0060] For movable supported blades of the type described above, a shaving angle of between 5° and 30° seemed to provide good results. Better results are expected for a shaving angle between 5° and 20° , and notably between 5° and 18° .

[0061] Since the cutting edge portion axis of all cutting member are positioned parallel to each other, the angle between the cutting edge axis and the tangent plane is the same for all blades.

[0062] The guiding slots 450 define a direction Y for the razor head. The direction Z is the normal to the X-Y plane. The base portion 350 extends in a base portion plane. The base portion axis is the main axis of the base portion other than its profile axis, i.e. other than the X axis. In the present embodiment, it is the Y axis. In other words, the main axis along which the base portion extends is the same as the axis defined by the slots 450 in the razor head.

[0063] The blade (or cutting edge portion) 390 extends in a cutting edge portion plane. The cutting edge portion axis is the main axis of the cutting edge portion other than its profile axis, i.e. other than the X axis. In the present embodiment, it is a U axis. In other words, the cutting edge portion axis extends in an X-U plane. A V axis is defined normal to the X-U plane.

[0064] To achieve the shaving, the user has to make the razor head into contact with his skin. As shown on figure 8a, the angle A" measured between the cutting edge axis and the tangent plane when the razor head is contacting the skin of the user and before any movement is different than the angle A measured between the cutting edge axis and the tangent plane in the nominal position. Indeed, a force F_r will be applied to the cutting member by the user, along a direction (see figure 8a) which is sensibly normal to the tangent plane P (In other words, the force F is applied sensibly in the Y direction at approximately $\pm 5^\circ$) to achieve the contact between the skin and the cutting members.

[0065] Moreover, upon shaving and such as represented on figure 8b a force F_s will be applied to the cutting member, along a direction F which is sensibly parallel to the tangent plane P. The cutting members are movable in translation inside the slots 450 and are therefore guided for movement in a direction perpendicular to the tangent plane. The shape of the supported blades and their placement inside a slot 450 allows a degree of rotational movement of said blades with regard to the frame of the razor head. In other words, the whole blade rotates in the slot when there is force acting on the hair during hair or skin contact. Said rotation tends to increase the shaving angle.

[0066] Moreover, the shape of the bent blades and their placement inside the slot 450 allows also a deflection movement of the blade with regard to the guided portion, such as shown on figure 8b. More precisely, under a force applied along the direction F_s , the elastic fingers retract into slot 450 and lead the blades, and more precisely the guided portion in a movement of translation toward the bottom of the frame 10. At the same time, the bent portion of the blade support moves and the angle between the holder portion and the guided portion increase. Since the force applied to the cutting member is different in a position when the head contact the skin without moving (also called rest-position) and a movable position during shaving (also called shaving position), the rotation of the cutting edge portion is different, and therefore also the angle.

[0067] In the shaving position, the rotation increases the nominal shaving angle such as shown figure 8b. The shaving angle affects the blade deflection that can be driven by the shaving forces.

[0068] On figure 8b, the S point represents the contact point between the skin and the cutting edge. A cutting member is represented with a full line and corresponds to the cutting member in the nominal position whereas the cutting member with dashed points represents the cutting member in the shaving position. In the nominal position, the angle A between the cutting edge axis and the tangent plane P is lower than the angle A' between the cutting edge axis and the tangent plane P in the shaving position. A direct relation exists between the angle A in the nominal position and the angle A' in the shaving position which depends on the force exerted by the user and on the elasticity degree of the elastic fingers. Therefore, a low shaving angle in the nominal position allows a low shaving angle in the rest and shaving positions which permits optimal shaving performances as described below. According to tests the optimal shaving angle depends on the shape of the blade and is, for supported blades on a bent support between 5° and 30° , and more precisely between 5° and 20° , or between 5° and 18° , as previously said. A shaving angle below 20° , and preferably below 18° or 15° degrees is preferred in order to minimize the lost cutting force due to blade deflection.

[0069] As aforementioned, a low shaving angle in the range above-described allows a better blade edge penetration and usage convenience. In the figure 9 in dashed point is represented the cutting edge portion of a blade with a shaving angle being over 30° . The continuous line in figure 9 represents the cutting edge portion of a blade with a shaving angle being under 30° . The cutting edge portion of a blade with a shaving angle being under 30° comes in contact to the hair

sensibly parallel to the skin. The hair cutting action is mainly performed by the cutting edge, i.e. the sharpest point of the blade. The resistance to cutting is therefore lower which means a better usage convenience for the user.

[0070] The aforementioned angle ranges decrease the irritation of the skin. Fig. 10a represents the cutting edge portion of a blade with a nominal angle above 30° , whereas fig. 10b represents the cutting edge portion of a blade with a nominal angle being between 5° and 30° , or 5° and 20° , or 5° and 18° . The cutting edge portion exerts a force F_1 for a nominal angle above 30° , and F_2 for a low nominal angle such as defined on the skin. The forces F_1 and F_2 have the same module. The forces F_1 and F_2 create a small wave on the surface of the skin. Said wave produces friction during shaving as well as irritation of the skin and decrease the cutting forces. Therefore, it is important to create a wave of skin as small as possible. Forces F_1 and F_2 have each a component F_{1sx} , F_{2sx} along a skin longitudinal direction S_x and a component F_{1sy} , F_{2sy} along a skin transversal direction S_y . With a low shaving angle, such as represented fig. 10b, the component of the force F_2 along the Y direction F_{2sy} is smaller than the component of the force F_1 along the S_y direction F_{1sy} . Thus, the skin is less constrained along the Y-axis direction and the wave is "smaller" along said direction S_y .

[0071] A shaving angle below 5° may cause the user an unacceptable level of discomfort. While shaving, a blade with a shaving angle below 5° for example will push the hair to be cut into a position with regard to the cutting edge of the blade in which a skive-cut occurs (i.e. the blade edge cuts into one side of a hair and, rather than cutting straight across the hair, cuts diagonally through the shaft, leaving one side of the hair longer than another side). By not cutting a hair cleanly, a user may need to shave more frequently, or increase the number of shaving strokes. Therefore the shaving angle of the present invention is advantageous above 5° to avoid such discomfort. Figure 9 shows such features and represent in dashed points a cutting edge portion having a shaving angle below the afore-mentioned lower limit (i.e. 5°) and in unbroken curve a cutting edge portion having a shaving angle above the afore-mentioned lower limit (i.e. 5°).

[0072] With a shaving angle below 5° there is also a possibility of hydroplaning effect. Indeed, since the hair has a degree of elasticity, if the blade lies very close to being parallel to the skin it can press the hair downwards passing over it without any engagement and no cutting action, reducing shaving efficiency.

[0073] Such as shown figures 7a, 7b and 7c the blades are in series one after the other. In order to not affect the rinsing, low shaving angles of the blades have to be combined with specific dimensions of the razor head. Figure 6a shows three blades having a shaving angle of 20° whereas figure 6b shows three blades having a shaving angle of 10° , and figure 6c three blades having a shaving angle of 5° . A passage for through flow of rinsing water is provided and allows effective removal of soap and shaving debris, for example from the underside of the blade. The passage for through flow of rinsing water connects a gap between a cutting edge 260 of a first blade and the opposed rear edge 261 of an adjacent blade. Following parameters are defined:

X1: thickness of the passage for through flow measured along direction Z from the cutting edge 260 to the opposed rear edge 261 of the adjacent blade;

Y1: length of the passage for through flow measured between two cutting edge portion axis of two adjacent blades;

D: cantilever dimension, measured along direction Z from the cutting edge 260 to the opposed rear edge 261 of the blade;

L: blade spacing, measured along direction Z from the cutting edge 260 of a blade, to the cutting edge of the adjacent blade.

[0074] Dimensions Y1 and X1 form the main windows of through flow passage. The windows can be significantly reduced when the shaving angle is small, as shown figure 6c with regard to figures 6a and 6b. Indeed, as long as the D dimension of the blade is equal or inferior to the L dimension, tests have shown that an acceptable water flow through passage is achieved.

[0075] In the present description, features used for the first embodiment may also be used for the second embodiment, and vice versa. For example, the dimensions disclosed for bent blades may also be used for supported blades.

Claims

1. A razor head comprising:

- a housing having a top face defining a shaving window delimited by a front guard and a rear cap together defining a tangent plane,

- at least one rigid cutting member, each freely mounted in the housing, and having:


- . a cutting edge portion extending along a cutting edge portion axis, and having a cutting edge accessible through the shaving window,

EP 3 178 621 A1

- . a guided portion extending along a guided portion axis, and
- . a bent portion intermediate the cutting edge portion and the guided portion,

Wherein an angle measured between the cutting edge axis and the tangent plane is between 5° and 30°, wherein each cutting member comprises a blade which defines a cutting edge portion, and a blade support.

2. Razor head according to the preceding claim, wherein said angle is between 12° and 27°.
3. Razor head according to any of the preceding claims, wherein said angle is between 12° and 19° and preferably between 12° and 18°.
4. Razor head according to any of the preceding claims, wherein said angle is between 5° and 20° and preferably between 5° and 18°.
5. Razor head according to any of the preceding claims, wherein the blade support comprises:
 - . the guided portion extending along the guided portion axis,
 - . a holder portion supporting the blade and extending along the cutting edge portion axis, and
 - . the bent portion between the cutting edge portion and the guided portion.
6. Razor head according to the preceding claim, wherein the bent portion is intermediate the holder portion and the guided portion.
7. Razor head according to any of the preceding claims, wherein the blade is rigidly fixed to the holder portion of the blade support and the blade extends beyond the holder portion along the cutting edge portion axis.
8. Razor head according to any of the preceding claims, wherein the housing has a guide, wherein the cutting members are guided for movement in said guide from a nominal position achieved when not shaving, wherein the angle measured between the cutting edge axis and the tangent plane is measured in said nominal position.
9. Razor head according to the preceding claim, wherein the cutting members are guided for movement in a direction perpendicular to the tangent plane.
10. Razor head according to claim 8 or 9, wherein the guided portion of the cutting members cooperates with the guide so that each cutting member is independently translatable with respect to the housing along a sliding direction parallel to the guided portion axis, under the effect of shaving forces applied to the blade during shaving.
11. Razor head according to any of claims 1 to 9, wherein the guided portion has a plane shape, the cantilever dimension, measured from the cutting edge to the plane of the guided portion along the direction of the tangent plane, is smaller than the distance between two adjacent cutting edges measured along the direction of the tangent plane to allow water flow through the razor head.
12. Razor head according to any of the preceding claims, wherein each cutting member has an exposure greater than zero.
13. Razor head according to any of the preceding claims, wherein the blade includes respectively two parallel main surfaces and two tapered facets which taper towards the cutting edge forming an edge angle, and wherein the bisecting line of said edge angle is the cutting edge portion axis.
14. Razor head according to any of the preceding claims, wherein each angle measured between the cutting edge axis and the tangent plane is the same.

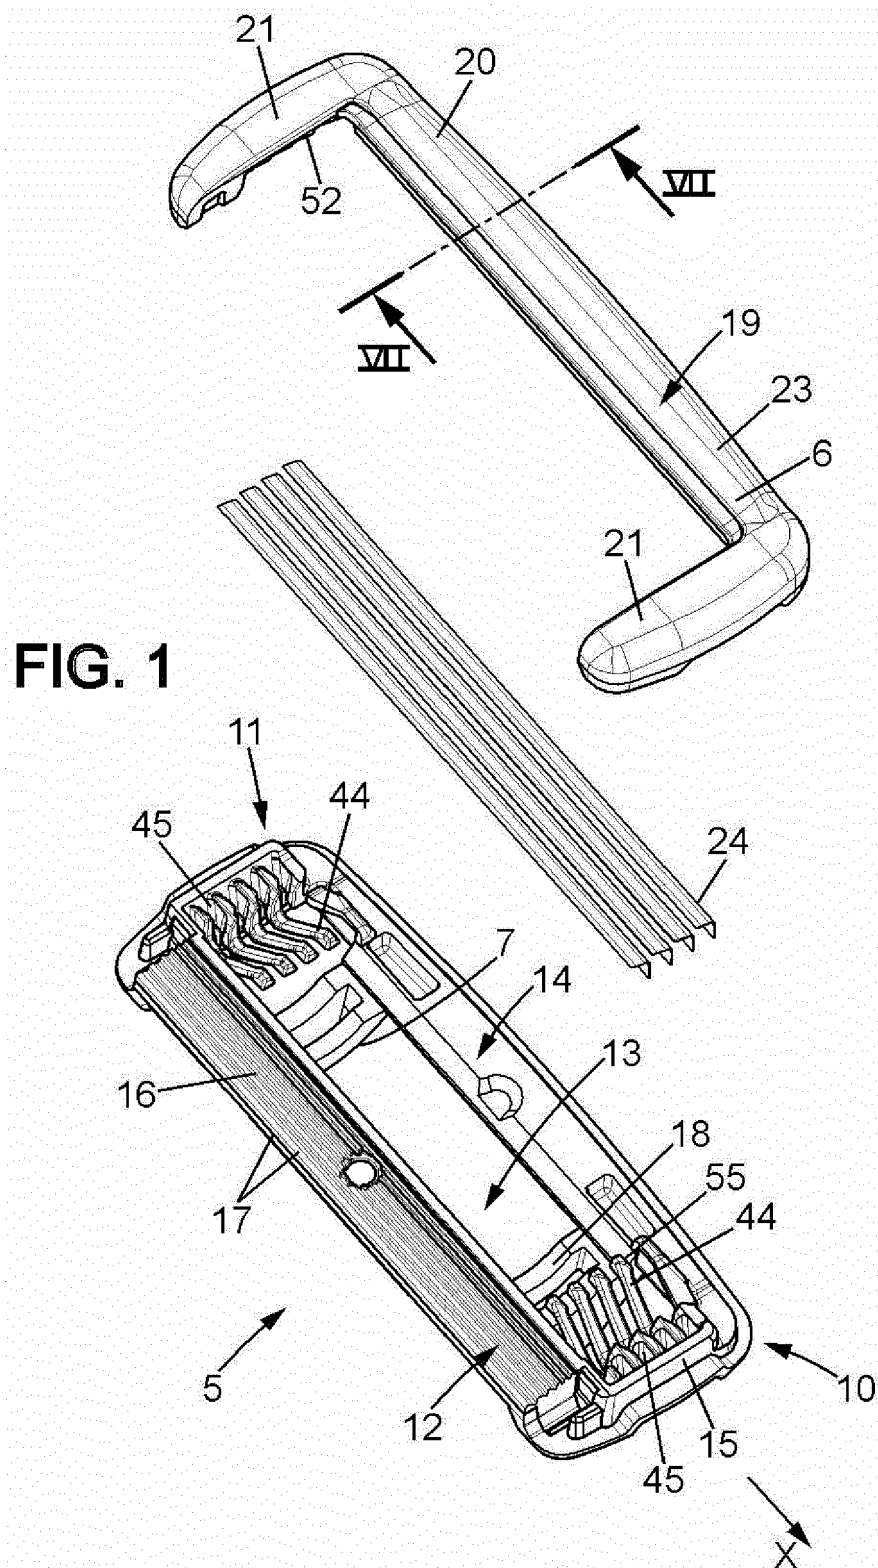

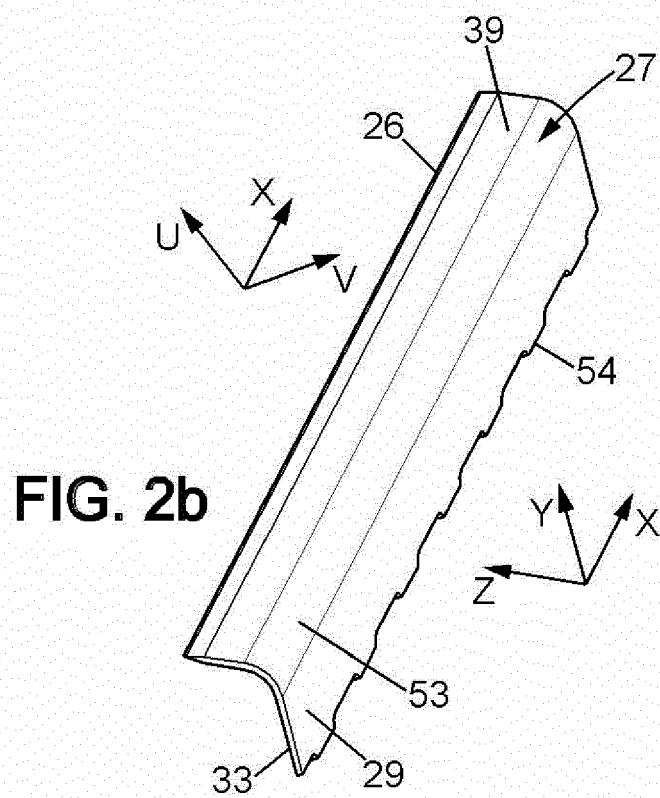
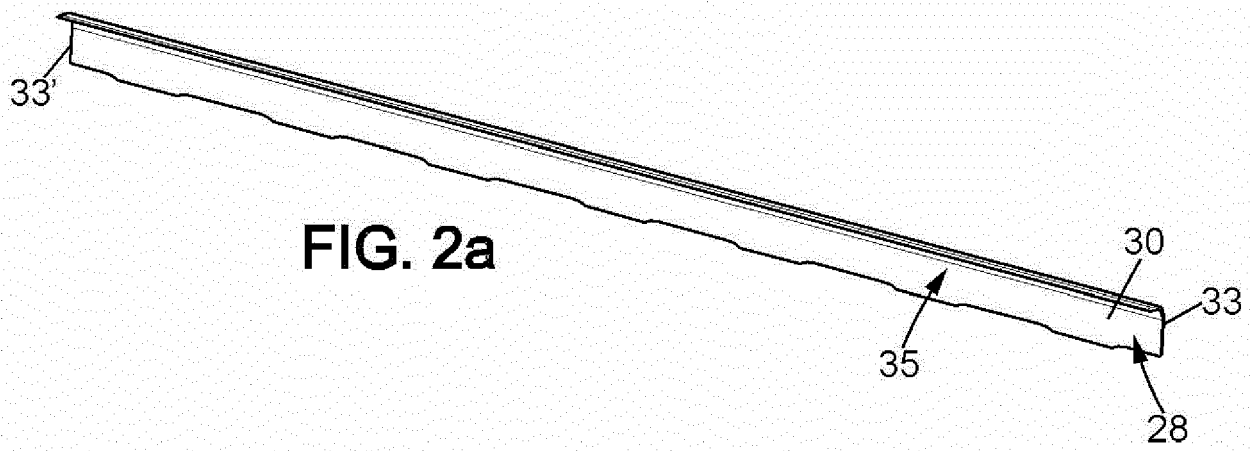


FIG. 3

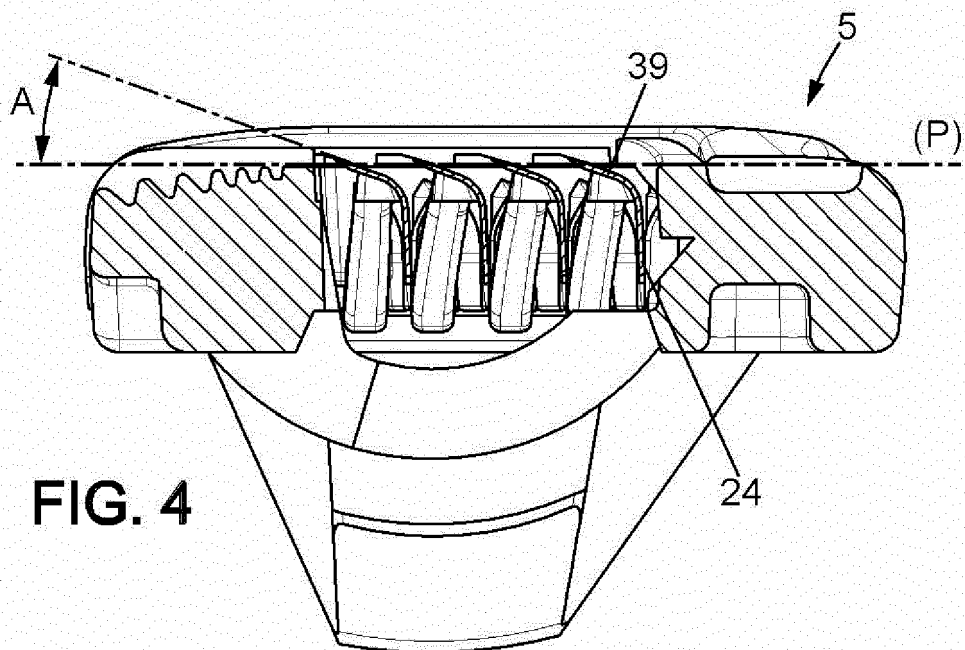
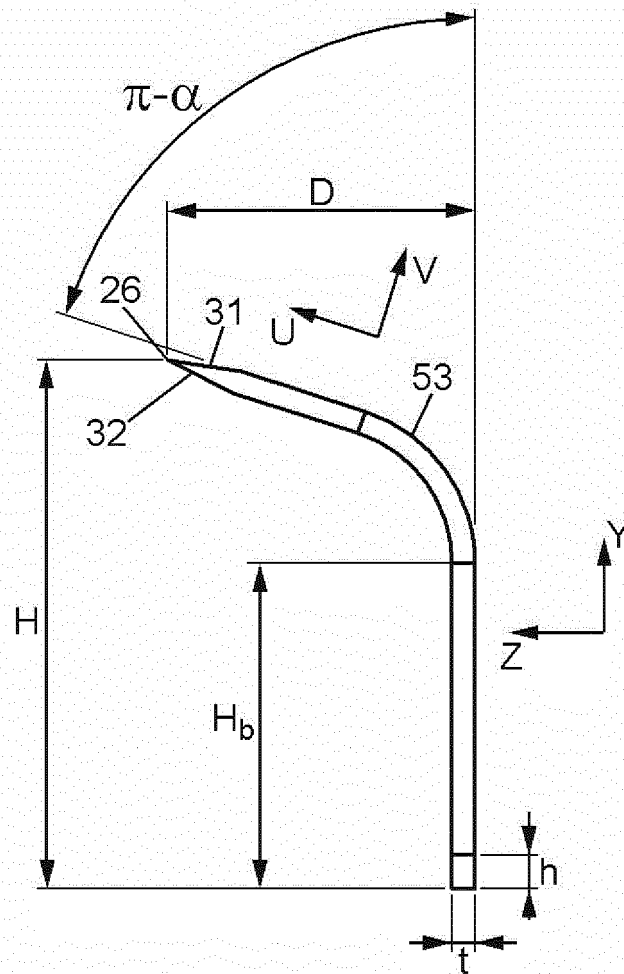


FIG. 4

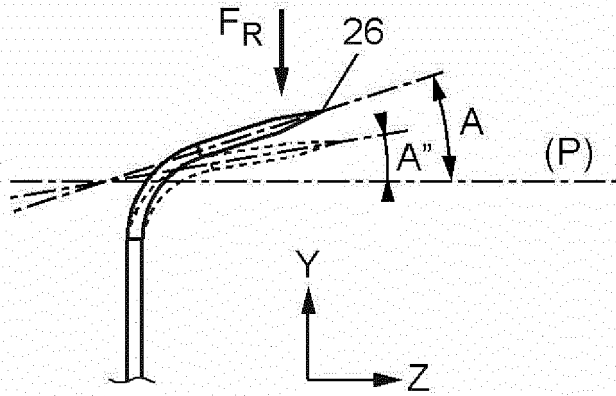


FIG. 5a

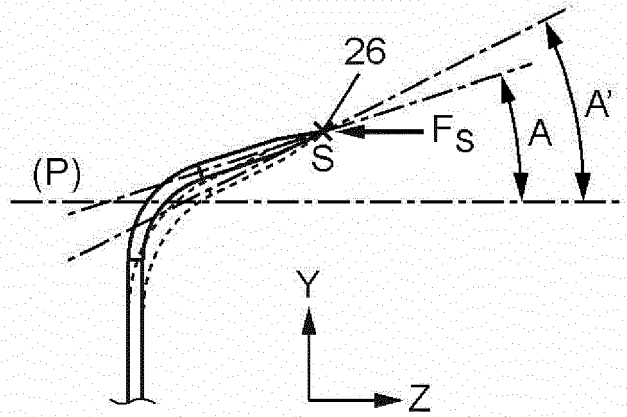


FIG. 5b

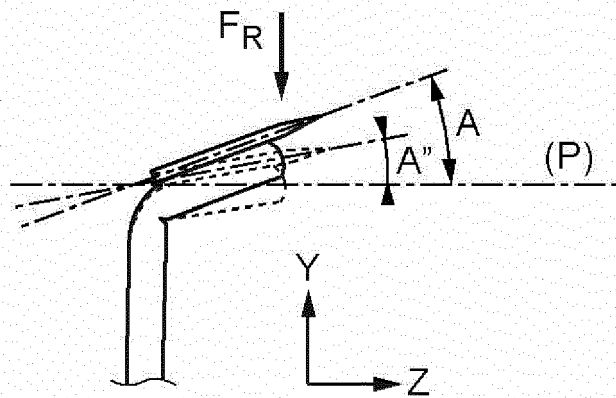


FIG. 8a

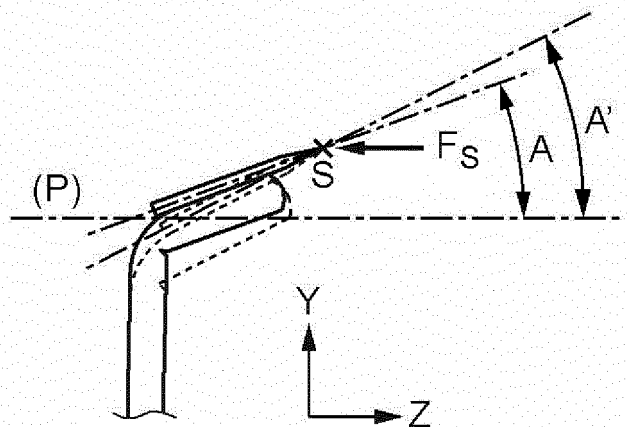


FIG. 8b

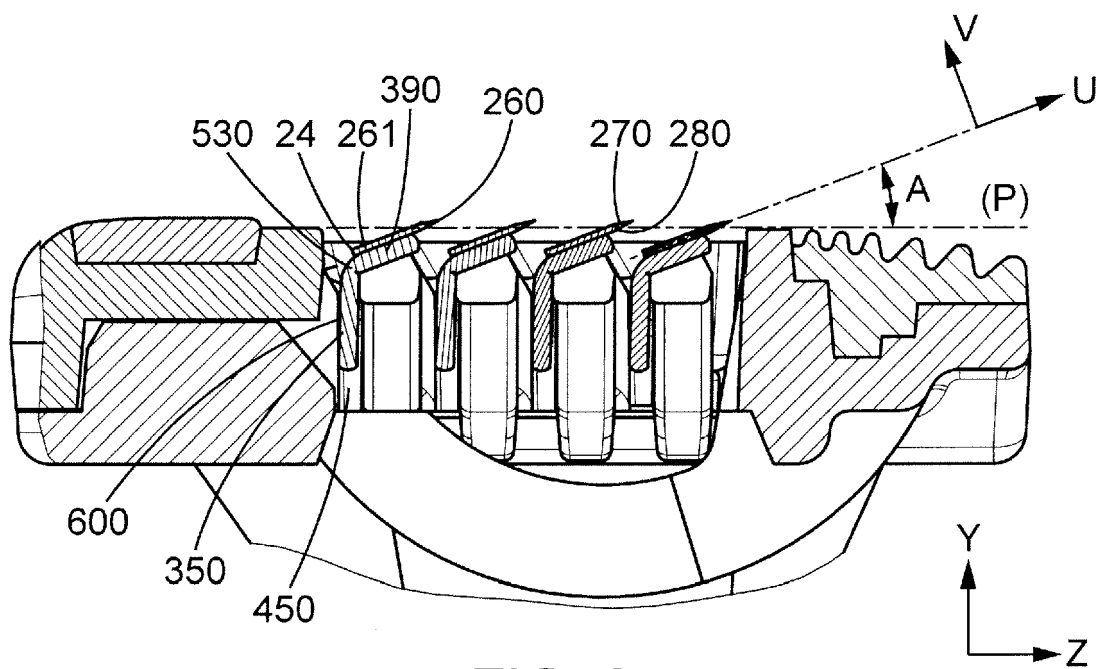


FIG. 6

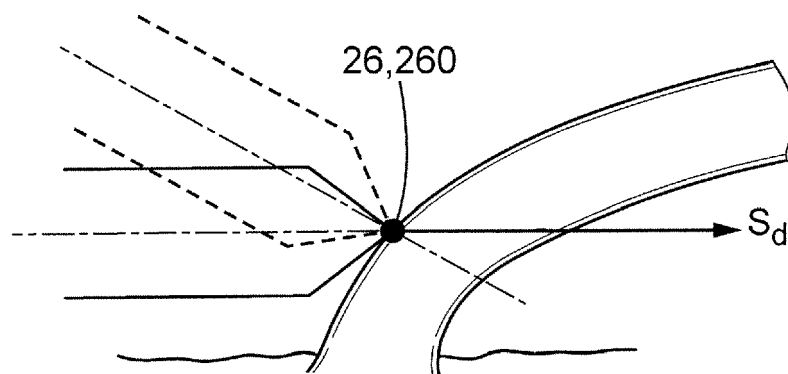
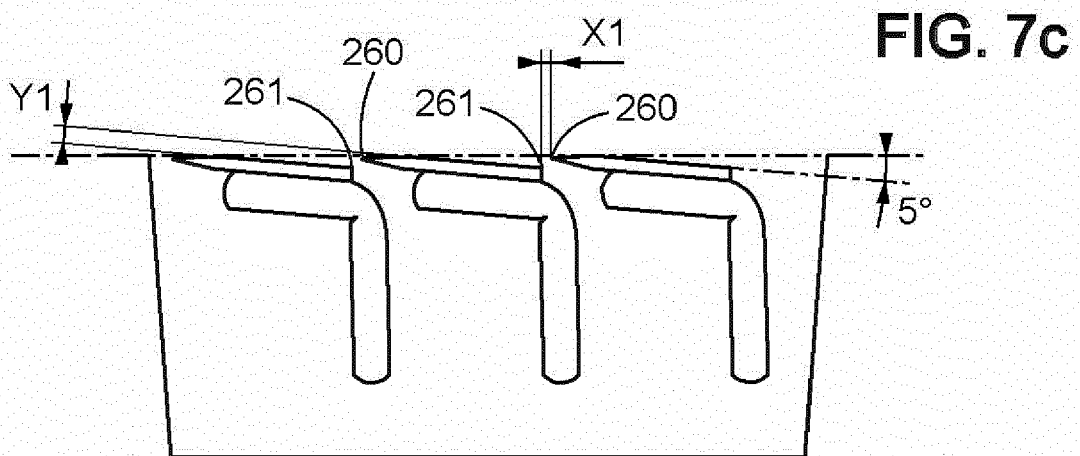
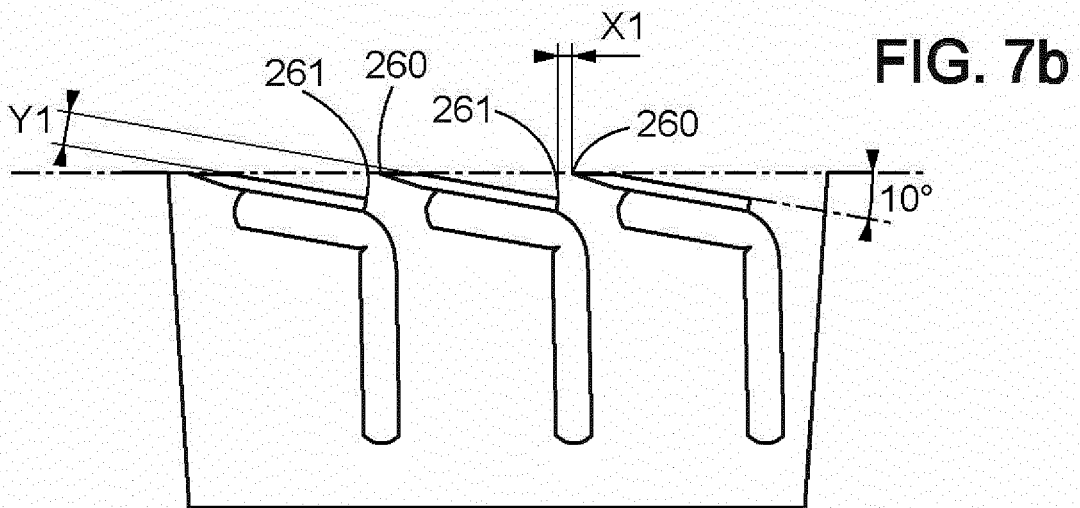
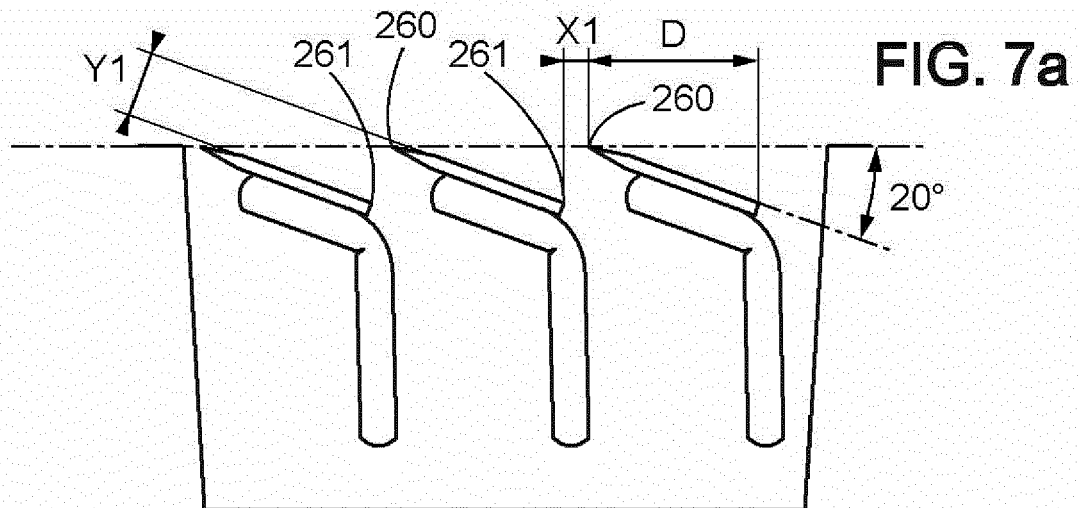


FIG. 9



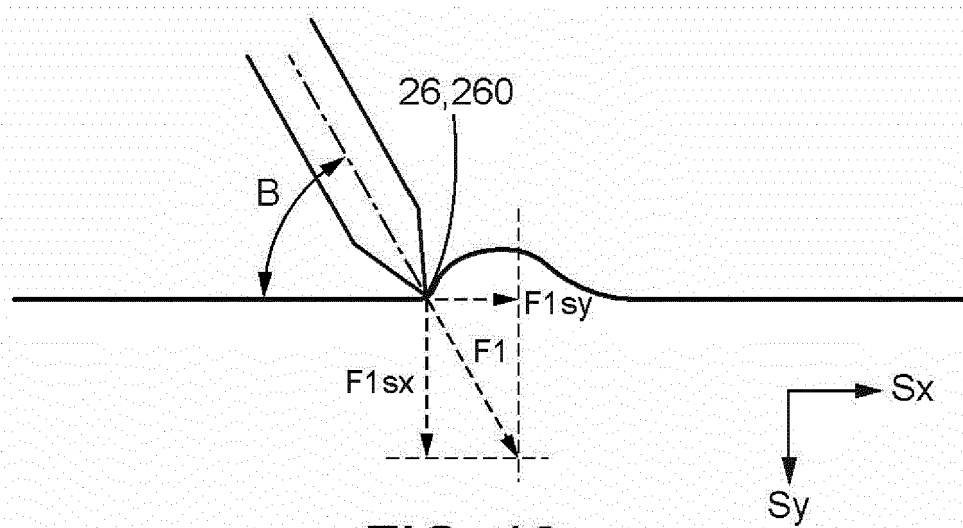


FIG. 10a

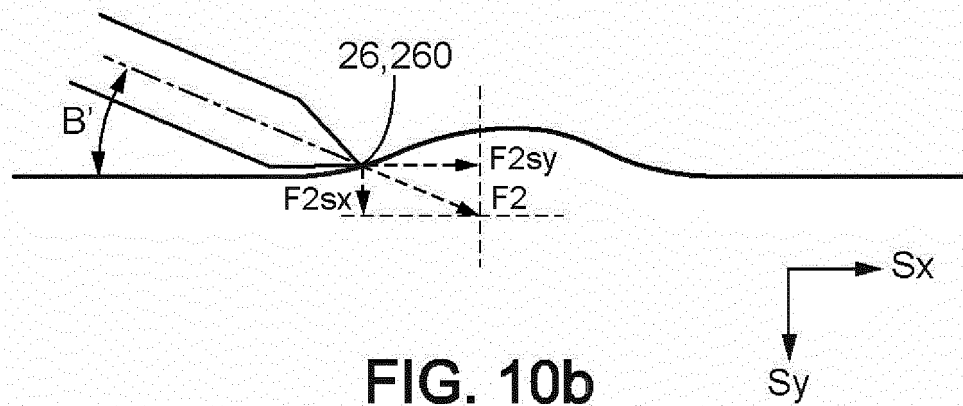


FIG. 10b



EUROPEAN SEARCH REPORT

 Application Number
 EP 17 15 0373

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2005/198837 A1 (RAWLE STEPHEN [GB]) 15 September 2005 (2005-09-15)	1-7, 13, 14	INV. B26B21/40
Y	* paragraph [0005]; figure 3 *	8-12	B26B21/56
Y	US 2005/223568 A1 (WALKER VINCENT P [US] ET AL) 13 October 2005 (2005-10-13) * paragraphs [0061], [0067], [0068]; figures 4, 5 *	8-11	
Y	US 2003/217469 A1 (COFFIN DAVID [US]) 27 November 2003 (2003-11-27) * paragraphs [0009], [0010], [0024]; figure 4 *	12	
A	WO 2011/062881 A1 (GILLETTE CO [US]; WAIN KEVIN JAMES [GB]) 26 May 2011 (2011-05-26) * page 6, paragraph 3; figure 3 *	1-14	
A	WO 2009/137389 A1 (EVEREADY BATTERY INC [US]; BYKOWSKI HENRYK [DE]; FISCHER STEPHAN [DE];) 12 November 2009 (2009-11-12) * page 3, lines 14-19; figures 1-3, 7 *	1-14	
			TECHNICAL FIELDS SEARCHED (IPC)
			B26B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 4 May 2017	Examiner Rattenberger, B
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
 EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 15 0373

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-05-2017

10

15

20

25

30

35

40

45

50

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005198837 A1	15-09-2005	AR 048091 A1	29-03-2006
		AU 2005222584 A1	29-09-2005
		BR P10508502 A	31-07-2007
		CA 2557296 A1	29-09-2005
		CN 1929964 A	14-03-2007
		EP 1722936 A1	22-11-2006
		JP 2007525310 A	06-09-2007
		KR 20070015142 A	01-02-2007
		MY 140807 A	15-01-2010
		RU 2336157 C2	20-10-2008
US 2005223568 A1	13-10-2005	US 2005198837 A1	15-09-2005
		WO 2005090014 A1	29-09-2005
		AR 048095 A1	29-03-2006
		AT 500040 T	15-03-2011
		AU 2005222581 A1	29-09-2005
		AU 2009201894 A1	04-06-2009
		BR P10508604 A	31-07-2007
		CA 2557297 A1	29-09-2005
		CA 2740258 A1	29-09-2005
		CN 1929972 A	14-03-2007
US 2003217469 A1	27-11-2003	CN 101559604 A	21-10-2009
		EP 1722944 A1	22-11-2006
		ES 2361999 T3	27-06-2011
		JP 4545789 B2	15-09-2010
		JP 4846839 B2	28-12-2011
		JP 2007525309 A	06-09-2007
		JP 2010099485 A	06-05-2010
		KR 20070012796 A	29-01-2007
		MY 144760 A	31-10-2011
		RU 2354539 C2	10-05-2009
WO 2011062881 A1	26-05-2011	US 2005223568 A1	13-10-2005
		WO 2005090023 A1	29-09-2005
		AT 412498 T	15-11-2008
		AU 2004215361 A1	10-09-2004
		EP 1601506 A1	07-12-2005
		EP 1987929 A1	05-11-2008
		JP 4463804 B2	19-05-2010
		JP 2006519067 A	24-08-2006
		US 2003217469 A1	27-11-2003
		WO 2004076137 A1	10-09-2004
WO 2011062881 A1	26-05-2011	CN 102686372 A	19-09-2012
		EP 2501526 A1	26-09-2012
		US 2011162208 A1	07-07-2011

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

55

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 15 0373

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-05-2017

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		WO 2011062881 A1	26-05-2011

WO 2009137389 A1	12-11-2009	AU 2009244489 A1	12-11-2009
		EP 2276591 A1	26-01-2011
		JP 5592875 B2	17-09-2014
		JP 2012525858 A	25-10-2012
		US 2010107425 A1	06-05-2010
		US 2012132036 A1	31-05-2012
		US 2016167104 A1	16-06-2016
		WO 2009137389 A1	12-11-2009

15

20

25

30

35

40

45

50

EPO FORM P0459

55

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2006027018 A [0013] [0017]
- WO 201006654 A [0019]