



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.06.2017 Bulletin 2017/24

(51) Int Cl.:
E04F 11/09 ^(2006.01) **E04F 11/104** ^(2006.01)
E04F 11/17 ^(2006.01) **E04F 15/10** ^(2006.01)
E04F 19/06 ^(2006.01)

(21) Application number: **17152773.2**

(22) Date of filing: **31.05.2011**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventors:
• **LEHTINEN, Liisa**
20740 Turku (FI)
• **LATIKKA, Harri**
16310 Virenoja (FI)

(30) Priority: **31.05.2010 FI 20105610**

(74) Representative: **Berggren Oy, Tampere**
Visiokatu 1
33720 Tampere (FI)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
11789312.3 / 2 585 647

(71) Applicant: **UPM-Kymmene Corporation**
00100 Helsinki (FI)

Remarks:

This application was filed on 24-01-2017 as a divisional application to the application mentioned under INID code 62.

(54) **L-PROFILE SHAPED ELEMENT, THE USE OF SAME AND A METHOD FOR INSTALLING SAME**

(57) The invention relates to an L-profile shaped element for covering an edge of a terrace structure. The L-profile shaped element includes a first (2) and a second (3) leg arranged to have substantially the same thicknesses. At least one edge of each leg is provided with joint parts (13), being selected from a groove or tongue structure, functioning in the substantially same manner regardless which way around the element has been

turned. The L-profile shaped element (1) being arranged to be joined from the thicknesswise end (7) of at least one of the first leg (2) and the second leg (3) to at least one plank-like additional element of substantially the same thickness, which is adapted to be connected to said L-profile shaped element by means of the joint parts (13).

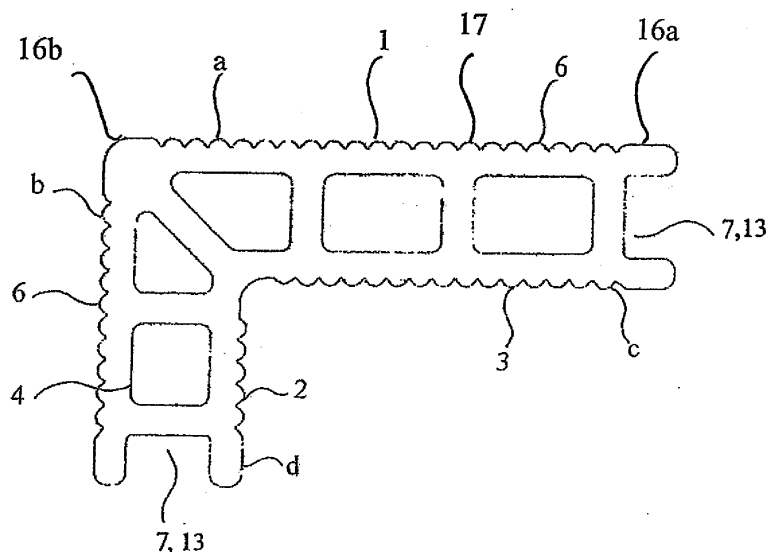


Fig. 1

Description

FIELD OF THE INVENTION

[0001] The invention relates to the L-profile shaped element for covering an edge of a terrace structure defined in the preamble of claim 1, to the use of such defined in the preamble of claim 12, and to the method for installing such defined in the preamble of claim 13, and to the terrace structure defined in the preamble of claim 14.

BACKGROUND OF THE INVENTION

[0002] Known from the prior art are different floor, ceiling and wall elements formed from a composite material for both interior and exterior use. Composite materials have lately become more general in the manufacture of different surface elements by virtue of their easy maintenance, tailored weather-resistance and new color palette.

[0003] Furthermore, it is known to use different edge strips in connection with floor or terrace structures formed from a composite material to finish the visual look. However, a problem in the use of the known edge strips is that they are easily loosened and seldom withstand intensive wear and use.

[0004] In addition, known from the prior art are different stair structures. Stairs have mainly been built from wood, concrete or metal. Known from publication US4951434 is a stair structure formed from plastic or carbon fiber, wherein the structure includes more than one step. The structure is formed by injection molding.

[0005] DE202009013314U1 and US2006242916A1 disclose a corner profile for a terrace structure.

OBJECTIVE OF THE INVENTION

[0006] An objective of the invention is to disclose a new type of an L-profile shaped element suitable for many purposes of use. Furthermore, an objective of the invention is to disclose a new manner of forming stair structures and terrace structures. In addition, an objective of the invention is to disclose a method for installing L-profile shaped elements to each other, e.g. in order to form stair structures.

SUMMARY OF THE INVENTION

[0007] The L-profile shaped element, the uses thereof and the installation methods therefor according to the invention are characterized by what is presented in the claims.

[0008] The invention is based on an L-profile shaped element. According to the invention the L-profile shaped element is formed as a monolithic piece, and the L-profile shaped element includes a first and a second leg, wherein the legs are arranged to have substantially the same thicknesses, at least one edge of each leg is provided

with joint parts functioning in substantially the same manner, and the element is turnable to a desired position.

[0009] An L-profile shaped element means in this context a profile of any length having an L-shaped cross section. The dimensions of the L-profile shaped element, such as the length as well as the width and thickness of the legs, may vary depending on the application. Preferably, the thicknesses of the legs as well as the widths of the inner and outer surfaces are predetermined and depend on the purpose of use of the L-profile shaped elements. In this invention the L-profile shaped element is preferably used as an angular element in order to form an angular structure. The L-profile shaped element preferably includes an interior angle and an exterior angle.

[0010] Preferably, joint parts functioning in the same manner are to be fitted to the edges of the legs, i.e. to the edges in the thickness direction, of the L-profile shaped element. In a preferred embodiment a joint part is to function in the same manner in the interior as well as exterior of the L-profile shaped element, regardless which way around the element has been turned. In this connection the joint part may be shaped for a joint member, or it may function as one directly. Preferably, the joint parts of the legs must be equally thick or disposed at the same height in the thickness direction of the leg, so that the legs of the elements to be joined are set flush with each other when joined together. Preferably, there is less than 2mm, more preferably less than 1 mm, of deviation in the thickness or mounting height of the joint parts. The joint part may be selected according to the purpose of use. E.g. a groove or tongue structure or other suitable structure may be used as a joint part.

[0011] In one embodiment the thickness of the leg of the L-profile shaped element is between 3 and 100 mm, preferably between 20 and 35 mm and more preferably between 25 and 30 mm. Preferably, the difference in the thickness between the legs is less than 2mm, more preferably less than 1 mm.

[0012] In one embodiment the width of the external dimension of at least one leg of the L-profile shaped element is between 30 and 280 mm, preferably between 40 and 250 mm and more preferably between 50 and 120 mm, and the width of the dimension of the inner surface is between 27 and 397 mm, preferably between 28 and 288 mm and in one preferred embodiment between 55 and 125 mm. In one embodiment the width of the external dimension of at least one leg of the L-profile shaped element is between 30 and 400 mm, preferably between 40 and 300 mm and more preferably between 80 and 150 mm, and the width of the dimension of the inner surface is between 27 and 397 mm, preferably between 28 and 288 mm and more preferably between 55 and 125 mm.

[0013] In one embodiment of the invention the L-profile shaped element includes a first and a second leg, wherein the legs are arranged to have substantially different widths but substantially the same thicknesses. In one embodiment the width of the second leg is 1 to 13.3 times,

preferably 1.1 to 7.5 times, more preferably 1.2 to 3 times and most preferably 1.5 to 1.7 times the width of the first leg.

[0014] In one embodiment the L-profile shaped element includes a first and a second leg, wherein the legs are arranged to have substantially the same widths and substantially the same thicknesses. In this case the difference in the width of the legs is less than 2 mm, more preferably less than 1 mm.

[0015] In one embodiment of the invention the L-profile shaped element is arranged to be joined from the thicknesswise end of at least one leg, which, at the same time, is the lengthwise face of the L-profile shaped element, by a joint part to at least one other element which may be e.g. another L-profile shaped element or an additional element to be connected to an L-profile shaped element, or another element. In one embodiment the joint part of the thicknesswise end of the leg is shaped for a joint member in order to facilitate the joining e.g. with another L-profile shaped element or another element.

[0016] In one embodiment of the invention a monolithic interior angle is formed without joints between the inner surfaces of the legs. In one embodiment a monolithic exterior angle is formed without joints between the outer surfaces of the legs. This way, the surface is continuous for the part of the entire angular structure which is seamless and safe. In this manner a jointless angular element is provided.

[0017] In one embodiment of the invention the patterning of the legs of the L-profile shaped element is arranged to be at least partially the same, which facilitates turning of the element. Preferably, also the patterning of both sides of the leg is arranged to be at least partially the same. Similar surfaces provide a harmonious look, regardless in which manner and which way around the element is installed. In one embodiment at least part of the surface of the leg is modified, e.g. by grooving. In one embodiment the top surface of the leg is at least partially smooth. In one embodiment the groove patterning or smooth surface provided to the legs is the same, but the area covered by the patterning may vary. The thicknesswise end surfaces of the legs need not be similar to the other side surfaces of the legs.

[0018] In one embodiment of the invention the same surface patterning is provided on both sides of the exterior angle between the legs. In one embodiment of the invention the same surface patterning is provided on both sides of the interior angle between the legs. In one embodiment of the invention the same surface patterning is provided on both sides of the exterior angle and the interior angle between the legs. The surface patterning may vary according to the purpose of use, but preferably all surfaces of all legs have a functionally similar patterning. In one embodiment the leg is provided with a groove-ridge patterning. In one embodiment the leg is provided with a substantially smooth framing area which may serve as a decorative area or border at the edge of the leg. In one embodiment the leg is provided with a groove

ridge patterning to provide the desired functionality to the surface of the leg and a substantially smooth border area and/or angular area to provide a decorative appearance to the surface of the leg. Preferably, the surface patterning is provided to the surface of the leg without any such rises or elevations on which one may stumble or which may affect the safety e.g. in stair structures.

[0019] In one embodiment of the invention at least one cavity structure is provided within at least one leg. The cavity structure may consist of one or several cavities, and the cavity may be a channel, opening or other cavity structure. If desired, the cavities may be filled with a suitable material, such as light, elastic, insulating or otherwise suitable material. In one embodiment the cavity is arranged to be elongated in the lengthwise direction of the leg. The cavities provide for control of the weight of the L-profile shaped element. The number or ratio of the cavities relative to the rest of the structure depends on the starting material used and the strength and/or load-carrying capacity desired for the element.

[0020] In one embodiment of the invention a border is provided to at least one lengthwise edge of at least one leg. The lengthwise edge may be the lengthwise outer edge of the leg or the lengthwise inner edge of the leg, i.e. the lengthwise edge forming an angle with another leg. In this case, in one stair embodiment, the up- and/or forward-projecting edge of the rise and the tread of a step to be formed from the elements can be bordered or covered. The width of the border may vary according to the purpose of use. In one preferred embodiment the border is formed in connection with the manufacture of the L-profile shaped element, e.g. by extrusion or an additional extrusion step or alternatively by modifying or patterning the material of the element in a desired area. In one preferred embodiment the border is provided to the L-profile shaped element symmetrically in such a manner that the element looks the same from different sides, when turned to a desired position.

[0021] In one embodiment of the invention a border is provided to at least one edge in the width direction of at least one leg. In one embodiment a profile of a desired shape is used as the border. The border may be formed from the same material or from a different material. The border may be an integral part of the element according to the invention, or it may be separate and joined to the element. The border may serve as a decorative part. In one embodiment the border may be formed in connection with the manufacture of the L-profile shaped element. In one embodiment the border can be joined to the L-profile shaped element after the manufacture of the element or in connection with the installation of the element.

[0022] In one embodiment the L-profile shaped element is formed by a forming method based on heat and pressure.

[0023] In one preferred embodiment the element is formed as a monolithic piece by extrusion.

[0024] In one embodiment the L-profile shaped element is formed from a starting material which contains

fiber-based and plastic-based components.

[0025] In one embodiment the L-profile shaped element is formed from a composite material which contains fiber-based components and/or plastic-based components and is used as the starting material. The composite material is formed from one or several raw stocks or raw stock materials. The raw stock or raw stock material may contain any fiber-based, e.g. plant fiber-based, such as wood fiber, straw, reed or flax-based, or other fiber-based components and/or plastic-based components. The composite material may be in a shredded, granulate, agglomerate, crushed or equivalent form.

[0026] In one embodiment the composite material is a wood-plastic composite material. Preferably, the wood-plastic composite material is formed from raw stocks which contain mainly fiber-based, e.g. paper-based, material, and plastic-based material, such as thermo-setting or thermoplastic resin.

[0027] In this context a paper-based material means any paper-based material which is preferably mainly formed from plant fibers. The paper-based material may be formed from chemical pulp fibers from which lignin has been removed and/or from fibers which contain lignin. In a preferred embodiment the paper-based material contains plant fibers in an amount of more than 50 w-% of the material.

[0028] In one embodiment the parts of the fiber-based components may vary between 0 and 80 % and the parts of the plastic-based components may vary between 0 and 100 % in the composite material.

[0029] In one embodiment the composite material contains glue matter preferably originating from the raw stock of the composite material.

[0030] In one embodiment the raw stock or raw stocks contain siliconized material, e.g. siliconized film or paper material. The siliconized material may be silicone-based or silicone compound-based material or silicone-containing compound that may be part of an other material or provided to the surface of another material, such as plastic-based and/or fiber-based material.

[0031] In one embodiment the L-profile shaped element is formed at least partially from recycled material. In one embodiment the L-profile shaped element is formed mainly from recycled material.

[0032] In one embodiment the L-profile shaped element is formed at least partially from adhesive laminate waste, in one preferred embodiment mainly, in an amount of more than 50 w-%, from adhesive laminate waste. In one embodiment the L-profile shaped element contains at least one adhesive laminate waste component. In one embodiment the L-profile shaped element contains more than one adhesive laminate waste component.

[0033] In one embodiment the adhesive laminate waste contains adhesive material on which a layer of glue matter has been provided, and fitted on the layer of glue matter as a protective sheet for the layer of glue is release material that can be easily released at the application site of the adhesive item. In one preferred embodiment

the adhesive material and/or the release material contains a wood fiber-based component and/or plastic- or polymer-based or other organic component. Also, the use of different inorganic materials is possible. In one embodiment the adhesive and/or release material is wood fiber-based paper, paperboard or the like. In one embodiment the wood fiber-based paper, paperboard or the like contains or is treated with plastic- or polymer-based material. In one embodiment the adhesive and/or release material may substantially be formed from plastic- or polymer-based material. In one embodiment the release material is mainly formed from plastic-based material, containing e.g. polypropylene, polyethylene, polyethylene terephthalate or their mixtures. In one embodiment the release material contains siliconized material, e.g. siliconized film or fiber-based material. In one embodiment the release material is coated with silicone-based material or compound.

[0034] In one embodiment finished adhesive laminate products, waste material produced by them and/or in their manufacture may be used as adhesive laminate waste in the manufacture of the composite material. In addition, reject material from production and recycling material from the upgrading step or end use applications of adhesive laminate products may be used. In one embodiment the adhesive laminate waste comes from adhesive laminate production which mainly produces production reject waste, edge trimming waste cut off from rolls, and roll ends, from the adhesive laminate printing plant which mainly produces roll ends and adhesive material left over from die-cutting of stickers and labels, and reject waste, and/or from the adhesive laminate end user customer who pastes the printed stickers and labels or the like on products. The waste from the end user is mainly release material, roll ends and waste from the finished product.

[0035] In one embodiment the adhesive laminate waste may contain a variable number of different adhesive laminate waste components, such as adhesive material, glue matter and release material. The glue matter may preferably be in connection with adhesive material and/or release material. In one embodiment the adhesive laminate waste contains 0 to 70 % of adhesive material, 0 to 100 % of release material and 0 to 40 % of glue matter.

[0036] In one embodiment the starting material, e.g. the composite material, may contain, in addition to plastic-based and/or fiber-based components, different additives and/or additional plastic to improve the mechanical properties, outdoor durability or processability of the product.

[0037] In one embodiment at least one additive is added to the starting material, e.g. the composite material, in connection with the manufacture of the composite material or in connection with the manufacture of the L-profile shaped element. E.g. a coloring agent, lubricant, fire retardant, adhesion promoter, anti-mildew compound, antioxidant and uv-stabilizer may be used as additives. Fibrous materials, organic fillers, inorganic fillers, pow-

dery reinforcements, powdery additives, talc, wood fibers, chemical pulp fibers, paper and their combinations may preferably be added to the composite material as the additive.

[0038] In one embodiment additional plastic is added to the starting material, e.g. the composite material, in connection with the manufacture of the composite material or in connection with the manufacture of the L-profile shaped element. Virgin plastic and/or recycling plastic may be used as additional plastic. The L-profile shaped element may be manufactured without additional plastic or with additional plastic. In one embodiment e.g. polyolefin, polypropylene, polyethylene (HDPE, LDPE) or other suitable plastic or a mixture thereof is added to the adhesive laminate waste material as additional plastic to manufacture the wood composite material.

[0039] Preferably, the L-profile shaped element is formed by extrusion. In one embodiment the L-profile shaped element is cooled after compressing to shape in connection with or after the extrusion. The extrusion may be performed by any manner and apparatus known *per se*.

[0040] In one embodiment of the invention the L-profile shaped element is used in connection with a stair structure in order to form a step, such that the L-profile shaped element forms the angular part of the step and at least partially the rise part of the step as well as the tread in such a manner that the angular part of the step is always one and the same piece. Preferably, one leg of the L-profile shaped element forms partially or entirely the rise part and the other leg forms the tread. In one embodiment the L-profile shaped element is used together with another L-profile shaped element in order to form a step in connection with a stair structure, such that the L-profile shaped elements form together both the rise part of the step as well as the tread. In one embodiment the L-profile shaped element forms both the rise part of the step as well as the tread.

[0041] In one embodiment of the invention the L-profile shaped element is used in connection with a terrace structure, e.g. as an edge strip or edge step.

[0042] In addition, the invention relates to a method for installing the L-profile shaped elements. According to the invention at least two L-profile shaped elements according to any of the descriptions presented above are fitted and joined in a position relative to each other as required by the purpose of use by means of joint parts provided to the edges of the legs, wherein all joint parts function substantially in the same manner. The joints between the elements are provided in stair embodiments in the rise or the step part of the stair, not at the corners.

[0043] In one embodiment of the invention at least one additional element is fitted and joined between the L-profile shaped elements.

[0044] An additional element in this context means an elongated element, such as a plank-like, board-like or correspondingly shaped element, or a slab-like element or an element having another shape. The additional el-

ement may be two- or three-dimensional. The plank-like element may be formed e.g. as a rectangle, elongated parallelogram, square or the like. The additional element may be of any size depending on the purpose of use.

Preferably, the dimensions of the additional element are such that it is compatible with the L-profile shaped element according to the invention. In one preferred element the thickness of the additional element is substantially the same as the thickness of the legs of the L-profile shaped element. In one embodiment the additional element is substantially equally long as the L-profile shaped element.

[0045] In one embodiment the additional element is formed from any of the composite materials presented above. Alternatively, the additional element is formed from another material suitable for the purpose of use.

[0046] In one embodiment of the invention the L-profile shaped element according to any of the descriptions presented above is fitted and joined from the thicknesswise end of at least one leg to at least one other L-profile shaped element and/or to at least one additional element.

[0047] In one embodiment of the invention the L-profile shaped element is fitted as the interior angle of an angular structure in connection with a stair structure.

[0048] In one embodiment of the invention the L-profile shaped element is fitted as the exterior angle of an angular structure.

[0049] In addition, the invention relates to a method for installing the L-profile shaped element. According to the invention at least one L-profile shaped element according to any of the descriptions presented above is fitted and joined in connection to a terrace structure in a position required by the purpose of use. By joining the L-profile shaped element to the edge of a terrace the edge becomes neat, and the L-profile shaped element covers the structures under the terrace elements, such as support structures, rails or equivalent structures.

[0050] In one embodiment of the invention the L-profile shaped element is fitted as the interior angle of an angular structure in connection with terrace structures. In one embodiment of the invention the L-profile shaped element is fitted as the exterior angle of an angular structure.

[0051] In one embodiment the L-profile shaped elements can be joined to each other, and the L-profile shaped element and an additional element or other element can be joined together by different joint members, e.g. T-joint members or joint profiles. A joint member in this context means a joint and/or mounting member. Any joint member or joint profile known *per se* and suitable for the purpose can be used as the joint member. The joint profile may be e.g. the joint profile disclosed in applications PCT/FI2010/051100 and PCT/FI2010/050703. Preferably, the L-profile shaped elements, additional elements or other elements to be used are made compatible with the joint members used. In one embodiment the end of at least one leg of the L-profile shaped element is so shaped that a concealed fixing is provided by the joint member.

[0052] In one embodiment the L-profile shaped element is mountable, e.g. to a base, by nailing or screwing or in an equivalent manner. In one embodiment the L-profile shaped element is provided with a site or location e.g. to facilitate the possible nailing-through or screwing-through.

[0053] In one embodiment the surface of the L-profile shaped element and/or additional element is provided coarse or grooved to provide friction. In one embodiment the surface of the L-profile shaped element and/or additional element is provided substantially smooth. The L-profile shaped element or the surface thereof may be shaped so as to also function as a decorative part.

[0054] The L-profile shaped element according to the invention may be used in connection with stair structures or terrace structures in both interior and exterior applications. In addition, the L-profile shaped element according to the invention can be used in forming e.g. benches, flower boxes or equivalent structures. The L-profile shaped element according to the invention can be used in assembled and disassembled structures or in fixed structures.

[0055] By the L-profile shaped element according to the invention, a desired type of a stair structure or terrace structure can be formed either by using the L-profile shaped elements alone or together with different additional elements. By using different colors on the additional elements and/or L-profile shaped elements, different patterns can be created on the surface.

[0056] By the invention, an ecological element that withstands intensive wear is provided for different purposes of use. An advantage of the L-profile shaped element according to the invention is that it is turnable around freely, and thereby e.g. different rise heights and runs can be provided for stair structures.

[0057] The L-profile shaped element can be manufactured easily and quickly in a single manufacturing step, e.g. extrusion step. One and the same extrusion apparatus can be used to manufacture an extensive range of unlike L-profile shaped elements.

LIST OF FIGURES

[0058]

- Fig. 1 illustrates one L-profile shaped element according to the invention as a cross-sectional view,
- Fig. 2a illustrates one L-profile shaped element according to the invention,
- Fig. 2b illustrates another L-profile shaped element according to the invention,
- Fig. 3 illustrates one structure according to the invention formed from the L-profile shaped elements as a cross-sectional view,

Fig. 4 illustrates a second structure according to the invention formed from the L-profile shaped elements as a cross-sectional view,

5 Fig. 5 illustrates a third structure according to the invention formed from the L-profile shaped elements as a cross-sectional view with additional elements provided between the L-profile shaped elements, and

10 Fig. 6 illustrates one structure according to the invention formed from the L-profile shaped elements including the joints.

15 DETAILED DESCRIPTION OF THE INVENTION

[0059] In the following, the invention will be described by detailed examples of its embodiments with reference to the accompanying, illustrative figures wherein the L-profile shaped elements and additional elements are not depicted fully on scale.

Example 1

25 **[0060]** The L-profile shaped element 1 illustrated in Fig. 1 and 2a was formed from a wood-plastic composite material. The wood-plastic composite material was mainly formed from adhesive laminate waste. Polypropylene had been added to the adhesive laminate waste. The L-profile shaped element was formed as a monolithic piece by extrusion.

30 **[0061]** The L-profile shaped element 1 according to Fig. 1 and 2a includes a first 2 and a second 3 leg, wherein the legs are arranged to have different widths 6 but the same thicknesses 7. The thickness 7 of the legs 2 and 3 is 28 mm in this embodiment. In this embodiment the width of the outer surface b of the leg in the first leg 2 is 68 mm and the width of the inner surface d is 40 mm. The width of the outer surface a of the leg in the second leg 3 is 110 mm and the width of the inner surface c is 82 mm. The length 5 of the L-profile shaped element 1 may vary depending on the purpose of use of the element.

35 **[0062]** An interior angle 14 and an exterior angle 15 are formed between the legs 2 and 3.

40 **[0063]** Within the legs 2 and 3 there are provided elongated cavity structures 4 fitted in the lengthwise direction 5 of the legs and, at the same time, in the lengthwise direction of the L-profile shaped element. The cavity structure consists of several channel-type cavities 4. The cross section of the cavities 4 is otherwise square but at the corners at least partially triangular or trapezoidal. By the cavities, the weight of the L-profile shaped element may be reduced. The thickness of the structures between the cavities 4 and of the structures on top of the cavities 4 depends on the purpose of use of the element. The thickness of the structures between the cavities 4 and of the structures on top of the cavities 4 is dimensioned in

such a way that the structures bear a sufficient load during use of the element and will not sag. In this embodiment the thickness of the structures between the cavities 4 and of the structures on top of the cavities 4 is at least 2 mm. The diameter of the cavities may be preferably between 3 and 12 mm.

[0064] The thicknesswise ends 7 of the legs 2 and 3, i.e. the lengthwise faces of the L-profile shaped element, are shaped for a joint member. A groove-type structure has been provided to the ends 7 as the joint part 13 of the element. This way, the joint member can be easily fitted in connection to the L-profile shaped element, the element can be easily turned around, and the joint member provides a concealed fixing, providing for a finished appearance.

[0065] If desired, borders may be provided to the lengthwise 5 edges of the legs of the L-profile shaped element 1, preferably in such a way that in turning the element around it is symmetrical for the part of the borders. Any suitable profile may be used as a border. Alternatively, the border may be formed by extrusion at the same time in connection with the manufacture of the L-profile shaped element as an integral part of the L-profile shaped element.

[0066] All the top surfaces of the first 2 and the second 3 leg of the L-profile shaped element 1, i.e. the widthwise 6 outer and inner surfaces a, b, c and d, are profiled to be identical by grooving. This provides similar functionality for all surfaces of each leg 2 and 3. This favors the turning around of the element. In particular, a groove-ridge structure 17 improves the frictional properties of the element and thus functions as a frictional area. The edges of the element 1 and particularly of the legs 2 and 3 are provided with decorative areas 16a and 16b. The outer edges of the legs 2 and 3 on both sides of the legs are provided with smooth, decorative framing areas 16a, all of which are substantially of the same width. The interior 14 and exterior 15 angles between the legs are also provided with smooth decorative areas 16b. By means of the decorative areas 16a and 16b the element can be better turned around in such a way that the element 1 looks symmetrical on both sides. The L-profile shaped element 1 is turnable to the desired position when the element is being used e.g. in a stair structure or in connection with a terrace structure, as seen in Fig. 3 to 6.

[0067] Fig. 2b illustrates an element equivalent to Fig. 1 and 2a with the exception that the element in Fig. 2b has a first 2 and a second 3 leg, wherein the legs are arranged to have substantially the same widths 6 and the same thicknesses 7.

Example 2

[0068] Fig. 3 illustrates a stair structure formed from the L-profile shaped elements 1 according to Example 1.

[0069] The L-profile shaped elements 1 according to Example 1 are fitted in predetermined positions, in this case alternately both ways around in order to achieve an

optimum rise and optimum run for the steps of the stair structure of this embodiment. The L-profile shaped element 1 forms together with another L-profile shaped element 1 the rise part 11 of the step and the tread 12.

[0070] Each L-profile shaped element is arranged to be joined from at least one thicknesswise end 7 of the leg to at least one thicknesswise end of the leg of another L-profile shaped element.

[0071] The joints between the elements are provided to the middle of the tread 12 or the rise part 11.

Example 3

[0072] Fig. 4 illustrates a stair structure formed from the L-profile shaped elements 1 according to Example 1.

[0073] The L-profile shaped elements 1 according to Example 1 are fitted in predetermined positions, in this case alternately both ways around in order to achieve the optimum rise and optimum run for the steps of the stair structure of this embodiment. The L-profile shaped element 1 forms together with another L-profile shaped element 1 the rise part 11 of the step and the tread 12.

[0074] Each L-profile shaped element is arranged to be joined from at least one thicknesswise end of the leg to at least one thicknesswise end of the leg of another L-profile shaped element.

[0075] The joints between the elements are provided to the middle of the tread 12 or the rise part 11.

Example 4

[0076] Fig. 5 illustrates a stair structure formed from the L-profile shaped elements 1 according to Example 1 wherein additional elements 8 have been provided between the L-profile shaped elements 1.

[0077] The additional elements used in this connection are elongated planks 8 formed substantially from the same wood-plastic composite material as the L-profile shaped elements 1.

[0078] The plank 8 is equally thick as the first 2 and the second 3 leg of the L-profile shaped element 1. The length of the plank is equal to the length of the L-profile shaped element. The width of the plank in this embodiment is 150mm. The width of the plank may vary between 50 and 400 mm, more preferably between 100 and 200 mm. Preferably, the thickness of the plank is substantially the same as that of the L-profile shaped element.

[0079] The L-profile shaped elements 1 according to Example 1 are fitted in predetermined positions and joined from at least one thicknesswise end of the leg to at least one thicknesswise end of another element which is either another L-profile shaped element 1 or the additional element 8. The L-profile shaped element 1 forms together with another L-profile shaped element 1 the rise part 11 of the step and together with the plank 8 the tread 12. The joints between the elements are provided in connection to the tread 12 or the rise part 11, not on the corners.

Example 5

[0080] Fig. 6 illustrates a terrace structure formed from the L-profile shaped element 1 according to Example 1 and the planks 8 according to Example 4 including the joints between the elements.

[0081] The L-profile shaped element 1 and the planks 8 are joined together by joint members 9. Any suitable joint member may be used as a joint member. The joint members according to Fig. 6 have a tongue-type structure matching to the groove-type structures of the L-profile shaped element 1 and the plank 8. In the structure according to Fig. 6 a base element 10 can be used to support the L-profile shaped element 1 and the entire construction. In addition, the L-profile shaped element 1 can be secured to the base element 10 by e.g. screws or nails, if desired.

[0082] The L-profile shaped element 1 can be used to cover the edge of a terrace structure formed from planks 8, thus providing to the terrace structure a neat external appearance.

[0083] The L-profile shaped element according to the invention is suitable as different embodiments to be used in the most different applications and structural solutions, preferably in stair structure solutions, alone or together with different additional elements.

[0084] The invention is not limited merely to the examples referred to above; instead, many variations are possible within the scope of the inventive idea defined by the claims.

Claims

1. An L-profile shaped element for covering an edge of a terrace structure wherein

- the L-profile shaped element (1) being formed as a monolithic piece,
- the L-profile shaped element (1) being formed from a composite material, which contains fiber-based components and/or plastic-based components and which is used as a starting material,
- the L-profile shaped element (1) includes a first leg (2) and a second leg (3), wherein dimensions of the L-profile shaped element (1) being length, width and thickness of the first leg (2) and the second leg (3),
- the first leg (2) and the second leg (3) being arranged to have substantially the same thicknesses,

characterized in that

- joint parts (13) are fitted to the edges in the thickness direction of the first leg (2) and of the second leg (3),
- the joint parts (13) being to function in the same

manner in the interior as well as exterior of the L-profile shaped element, regardless which way around the element has been turned,

- the joint parts (13) being selected from a groove or tongue structure,
- the L-profile shaped element (1) being arranged to be joined from the thicknesswise end (7) of at least one of the first leg (2) and the second leg (3), which is at the same time the lengthwise face of the L-profile shaped element (1), to at least one plank-like additional element of substantially the same thickness, which is adapted to be connected to said L-profile shaped element by means of the joint parts (13).

2. The L-profile shaped element for covering an edge of a terrace structure according to claim 1, **characterized in that** a monolithic interior angle (14) is formed without joints between the inner surfaces of the first leg (2) and the second leg (3).

3. The L-profile shaped element for covering an edge of a terrace structure according to any one of claims 1 to 2, **characterized in that** a monolithic exterior angle (15) is formed without joints between the outer surfaces of the first leg (2) and the second leg (3).

4. The L-profile shaped element for covering an edge of a terrace structure according to any one of claims 1 to 3, **characterized in that** an identical surface pattern is provided on both sides of the interior angle (14) between the first leg (2) and the second leg (3).

5. The L-profile shaped element for covering an edge of a terrace structure according to any one of claims 1 to 4, **characterized in that** an identical surface pattern is provided on both sides of the exterior angle (15) between the first leg (2) and the second leg (3).

6. The L-profile shaped element for covering an edge of a terrace structure according to any one of claims 1 to 5, **characterized in that** the surfaces of the first leg (2) and of the second leg (3) are provided with a surface patterning (17) to provide functionality.

7. The L-profile shaped element for covering an edge of a terrace structure according to any one of claims 1 to 6, **characterized in that** at least one cavity structure (4) is provided within at least one of the first leg (2) and the second leg (3).

8. The L-profile shaped element for covering an edge of a terrace structure according to any one of claims 1 to 7, **characterized in that** at least one lengthwise edge (5) of at least one of the first leg (2) and the second leg (3) is provided with a border.

9. The L-profile shaped element for covering an edge

of a terrace structure according to any one of claims 1 to 8, **characterized in that** the L-profile shaped element (1) is formed as a monolithic piece by extrusion.

5

10. The L-profile shaped element for covering an edge of a terrace structure according to any one of claims 1 to 9, **characterized in that** the L-profile shaped element (1) is formed from the starting material to which an additive and/or a plastic has been added. 10
11. The L-profile shaped element for covering an edge of a terrace structure according to any one of claims 1 to 10, **characterized in that** the plank-like additional element comprises a plank-like element, a board-like element, a slab-like element, a form of a rectangle, a form of an elongated parallelogram or a form of a square. 15
12. Use of the L-profile shaped element, according to any of the claims 1-11 for covering an edge of a terrace structure. 20
13. A method for installing the L-profile shaped element for covering an edge of a terrace structure according to any of the claims 1-11, **characterized in that** the method comprises fitting and joining the L-profile shaped element (1) from the thicknesswise end (7) of at least one of the first and the second leg (2, 3), which is at the same time the lengthwise face of the L-profile shaped element, to at least one plank-like additional element of substantially the same thickness by means of the joint part (13), in connection to a terrace structure. 25
30
35
14. A terrace structure comprising an L-profile shaped element for covering an edge of a terrace structure according to any of the claims 1-11. 40
45
50
55

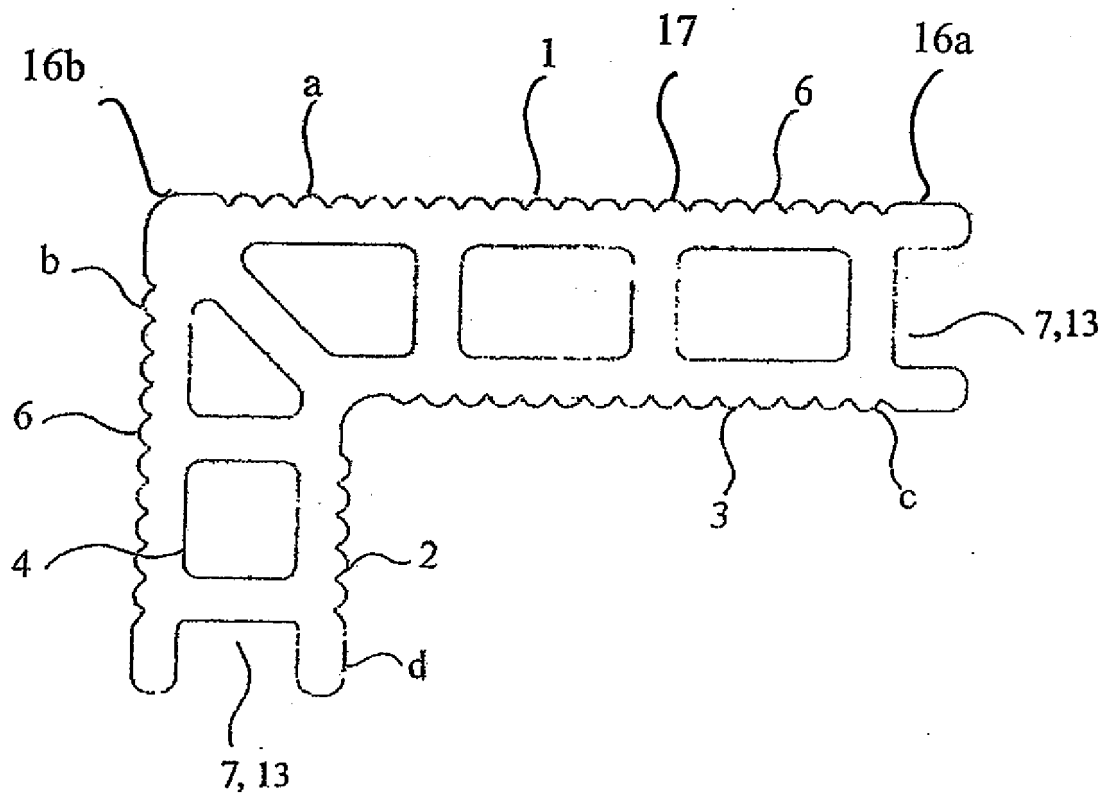


Fig. 1

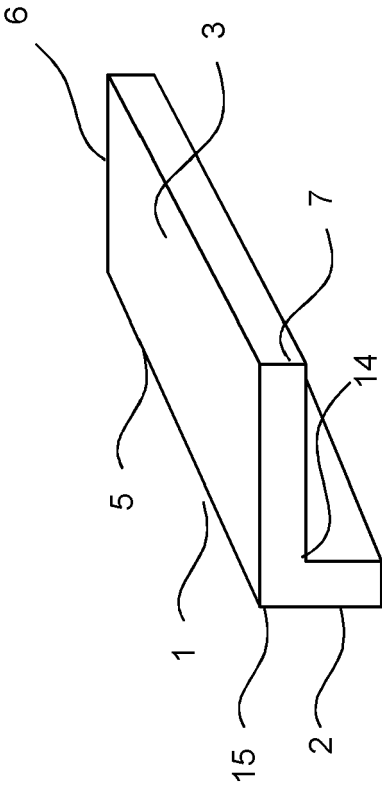


Fig. 2a

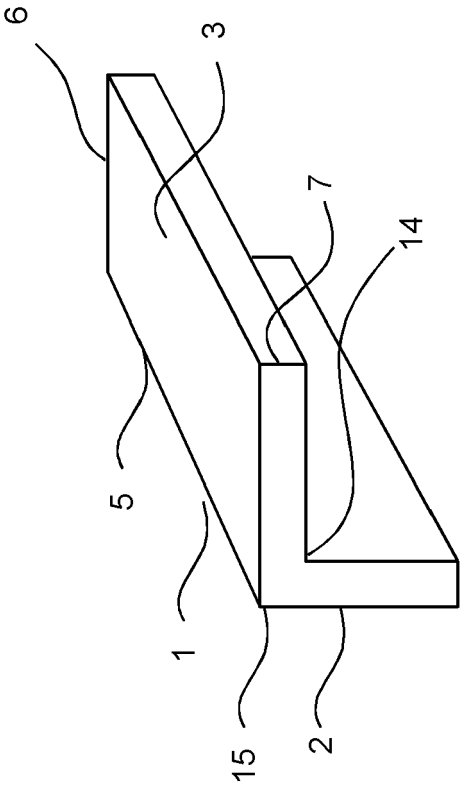


Fig. 2b

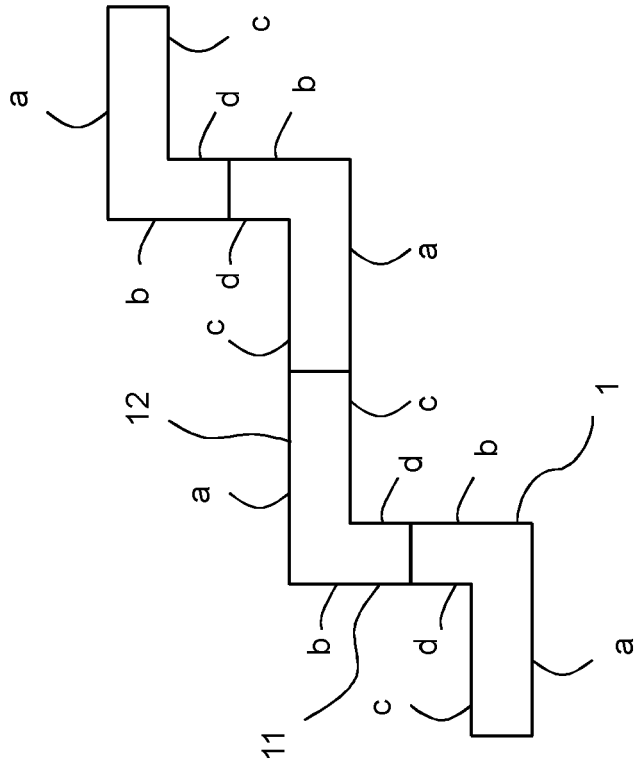


Fig. 3

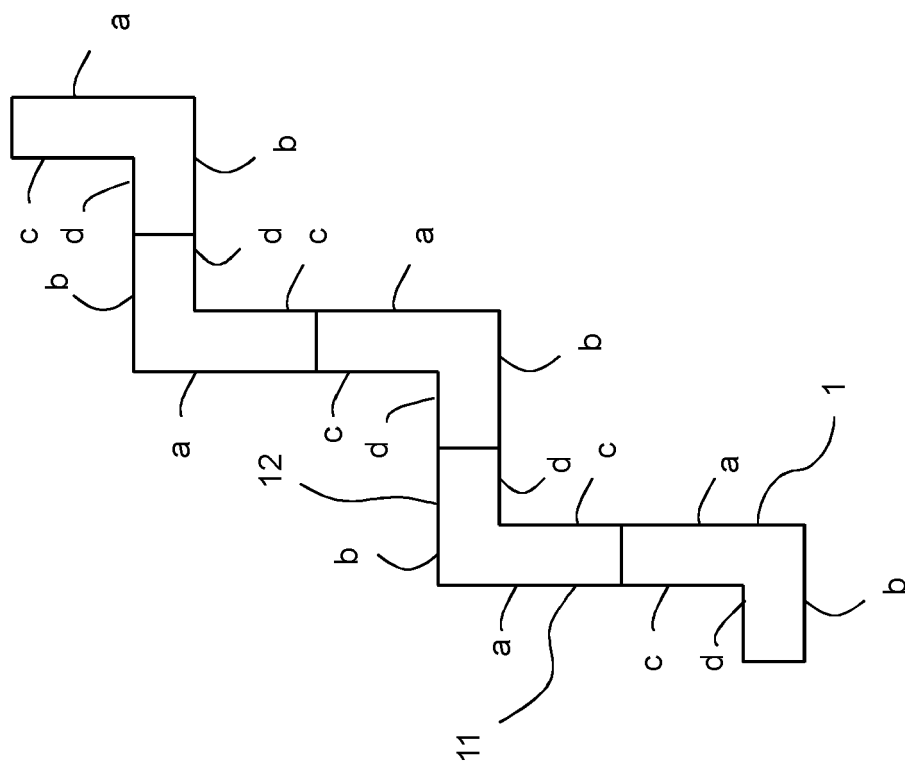


Fig. 4

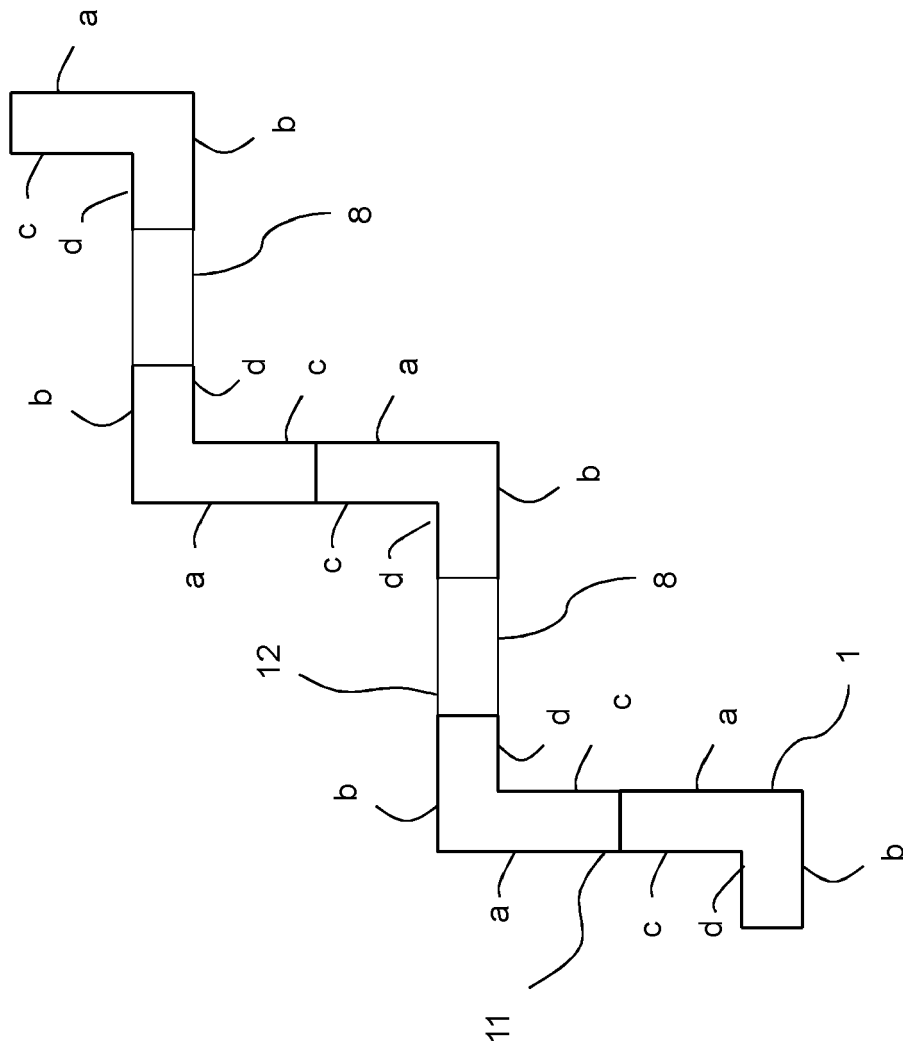


Fig. 5

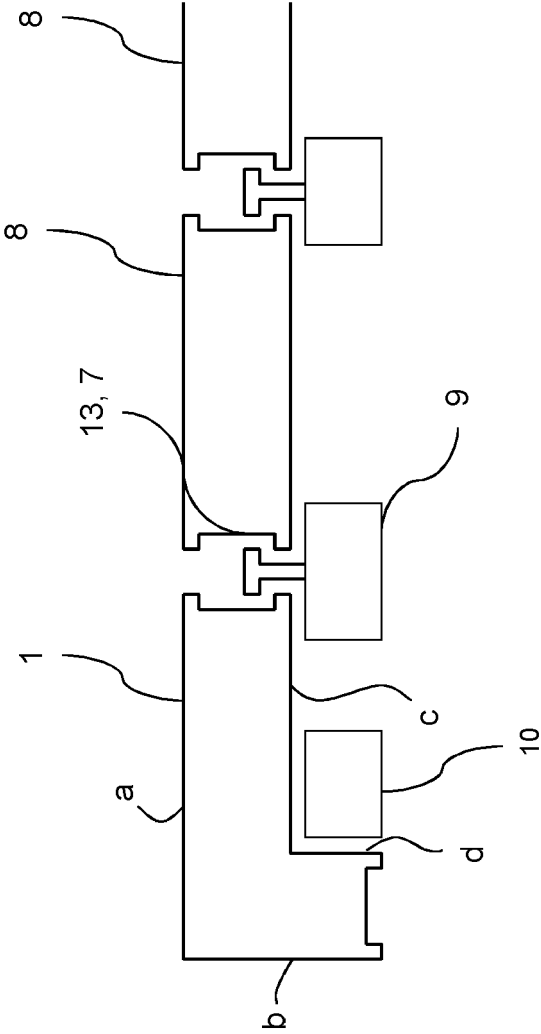


Fig. 6



EUROPEAN SEARCH REPORT

 Application Number
 EP 17 15 2773

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	BE 1 008 493 A4 (VANHEE ARNOLD [BE]) 7 May 1996 (1996-05-07) * figure 2 *	1	INV. E04F11/09
A	DE 29 21 457 A1 (BOHN GEB KOEHNLEIN IRMGARD) 27 November 1980 (1980-11-27) * figure 1 *	1	ADD. E04F11/104 E04F11/17 E04F15/10 E04F19/06
A	WO 2008/046955 A1 (UPM KYMMENE OYJ [FI]; LEHTINEN LIISA [FI]; KOIVISTO MARKKU [FI]) 24 April 2008 (2008-04-24) * the whole document *	1	
A	DE 92 14 772 U1 (BERGMANN GUNTHER [DE]) 25 March 1993 (1993-03-25) * page 4, line 18 - page 4, line 22; figure 1 *	1	
A	DE 20 2009 013314 U1 (BREMER HOLZWERKE GMBH [DE]) 11 February 2010 (2010-02-11) * figures 1,2 *	1-14	TECHNICAL FIELDS SEARCHED (IPC)
A	US 2006/242916 A1 (SIMKO PETER J [CA] ET AL) 2 November 2006 (2006-11-02) * figures 14,15 *	1	E04F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 24 April 2017	Examiner Fournier, Thomas
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
 EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 15 2773

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-04-2017

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
BE 1008493 A4	07-05-1996	BE 1008493 A4	07-05-1996
		NL 1000612 C2	02-01-1996
DE 2921457 A1	27-11-1980	NONE	
WO 2008046955 A1	24-04-2008	AU 2007311810 A1	24-04-2008
		AU 2007311811 A1	24-04-2008
		CN 101522309 A	02-09-2009
		CN 101522402 A	02-09-2009
		EP 2079548 A1	22-07-2009
		EP 2081754 A1	29-07-2009
		FI 20060923 A	30-05-2008
		JP 5484907 B2	07-05-2014
		JP 5635262 B2	03-12-2014
		JP 2010506759 A	04-03-2010
		JP 2010506760 A	04-03-2010
		KR 20090071638 A	01-07-2009
		KR 20090080524 A	24-07-2009
		RU 2009113446 A	27-11-2010
		RU 2009113452 A	27-11-2010
		US 2010267866 A1	21-10-2010
		US 2011024530 A1	03-02-2011
		WO 2008046955 A1	24-04-2008
		WO 2008046956 A1	24-04-2008
DE 9214772 U1	25-03-1993	NONE	
DE 202009013314 U1	11-02-2010	NONE	
US 2006242916 A1	02-11-2006	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4951434 A [0004]
- DE 202009013314 U1 [0005]
- US 2006242916 A1 [0005]
- FI 2010051100 W [0051]
- FI 2010050703 W [0051]