

(22) Date of filing: **13.06.2016**

(30) Priority: 22.12.2015 US 201514977748

inner ring (86) that are circumferentially continuous and uninterrupted along at least the outboard disc face (60) and the inboard disc face (62). The outer ring (84) is radially spaced from the inner ring (86) with the plurality of channels disposed radially between the outer ring and the inner ring. This arrangement increases shear strength of the brake disc while providing enhanced cooling.



## Description

### FIELD

**[0001]** The present disclosure generally relates to disc brake rotors and more particularly to ventilated disc brake rotors such as those used in vehicle brake systems.

### BACKGROUND

**[0002]** This section provides background information related to the present disclosure which is not necessarily prior art.

**[0003]** Many different types of vehicles are equipped with brake systems. Such vehicles may include, for example, heavy duty construction vehicles, tractors, trucks, and automobiles. One common type of brake system utilizes disc brake rotors that rotate with wheels of the vehicle. Such disc brake rotors generally comprise two parts, a hub portion that connects to the wheel and a brake disc that extends radially outward from the hub portion. Typical brake systems also include a brake caliper that applies a clamping force to the brake disc to slow the vehicle or to maintain the vehicle in a stationary condition. The brake caliper is installed over at least part of the brake disc. Each brake caliper typically includes two brake pads that are disposed on opposing sides of the brake disc. During operation of the brake system, the brake pads are moved into contact with the brake disc to apply the clamping force to the brake disc. The friction that is generated between the brake pads and the brake disc opposes rotational movement of the disc brake rotor and also produces heat as a by-product. Excessive heat generation in the disc brake rotor and other components of the brake system can contribute to brake failure, excessive wear, and can negatively impact brake performance, creating a condition that may lead to warping the disc brake rotor and/or decreased brake output torque.

**[0004]** Several attempts have been made to enhance heat transfer away from the disc brake rotor. For example, the brake disc in an internally ventilated disc brake rotor may be constructed of a pair of parallel discs that are connected to one another by a plurality of vanes. The parallel discs provide a braking surfaces that the brake pads contact. The plurality of vanes are circumferentially spaced apart from one another and are internally located within the disc brake rotor such that air can flow between the pair of parallel discs. In another example, cross-drilled disc brake rotors have a plurality of transverse holes drilled into the brake disc. In yet another example, slotted disc brake rotors have a plurality of shallow slots disposed along the braking surface.

**[0005]** In addition to disc brake rotors with the various cooling features described above, other disc brake rotor designs have been developed. One example is disclosed in U.S. Patent No. 6,739,437, which issued on May 25, 2004 to inventors George A. Garfinkel et al. This patent discusses internally ventilated disc brake rotors that have

curved vanes and surface ventilated disc brake rotors that have a plurality of external channels that extend radially across the brake disc. A concern exists regarding the plurality of external channels diminishing the strength of the brake disc, thus making the disc brake rotor more prone to mechanical and/or thermal failure.

### SUMMARY

**[0006]** This section provides a general summary of the disclosure, and is not a comprehensive disclosure of its full scope or all of its features.

**[0007]** In accordance with an aspect of the subject disclosure, a disc brake rotor including a hub portion and a brake disc is provided. The brake disc extends radially outward from the hub portion and includes an outboard disc face and an inboard disc face. A plurality of channels are disposed in the brake disc. The plurality of channels are circumferentially spaced apart from one another. Any one channel in the plurality of channels is open to the outboard disc face and is closed to the inboard disc face or is open to the inboard disc face and is closed to the outboard disc face. The brake disc also includes an outer ring and/or an inner ring that are circumferentially continuous and uninterrupted along at least the outboard disc face and the inboard disc face. The outer ring is radially spaced from the inner ring with the plurality of channels disposed radially between the outer ring and the inner ring. Advantageously, the plurality of channels provide increased cooling by greatly increasing a surface area of the brake disc and by generating increased air flow and turbulence in the vicinity of the outboard disc face and the inboard disc face. These characteristics enhance the transfer of heat away from the brake disc through improved convection at the outboard disc face, the inboard disc face, and in the plurality of channels. At the same time, the brake disc of the disclosed disc brake rotor has greater shear strength as compared to other surface ventilated disc brake rotor designs.

### BRIEF DESCRIPTION OF THE DRAWINGS

**[0008]** Other advantages of the present invention will be readily appreciated, as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

Figure 1 is an exploded front perspective view of a vehicle wheel-end assembly that includes an exemplary disc brake rotor constructed in accordance with the subject disclosure;

Figure 2 is a front perspective view of the exemplary disc brake rotor shown in Figure 1;

Figure 3 is a rear perspective view of the exemplary disc brake rotor shown in Figure 1;

Figure 4 is a front elevation view of the exemplary disc brake rotor shown in Figure 1;

Figure 5 is a side elevation view of the exemplary disc brake rotor shown in Figure 1;

Figure 6 is a side fragmentary view of part of the exemplary disc brake rotor illustrated in Figure 1 shown in relation to exemplary brake pads;

Figure 7 is another side fragmentary view of part of the exemplary disc brake rotor illustrated in Figure 1 shown in relation to other exemplary brake pads;

Figure 8 is another side fragmentary view of part of the exemplary disc brake rotor illustrated in Figure 1 shown in relation to other exemplary brake pads;

Figure 9 is a front perspective view of another exemplary disc brake rotor constructed in accordance with the subject disclosure;

Figure 10 is a rear perspective view of the exemplary disc brake rotor shown in Figure 9;

Figure 11 is a front elevation view of the exemplary disc brake rotor shown in Figure 9;

Figure 12 is a side elevation view of the exemplary disc brake rotor shown in Figure 9;

Figure 13 is a section view of the exemplary disc brake rotor shown in Figure 9 that is taken along section line A-A of Figure 9;

Figure 14 is a partial cross-sectional view of the exemplary disc brake rotor illustrated in Figure 11, taken along section line B-B of Figure 11, to show that each channel may optionally have rounded edges; and

Figure 15 is a partial cross-sectional view of the exemplary disc brake rotor shown in Figure 11, taken along section line B-B of Figure 11, to show that the exemplary disc brake rotor may optionally have rounded edges where the inboard and outboard disc faces meet the inner and outer periphery.

## DETAILED DESCRIPTION

**[0009]** Referring to the Figures, wherein like numerals indicate corresponding parts throughout the several views, a disc brake rotor **20** is disclosed.

**[0010]** Example embodiments are provided so that this disclosure will be thorough, and will fully convey the scope to those who are skilled in the art. Numerous specific details are set forth such as examples of specific components, assemblies, and methods, to provide a thorough understanding of embodiments of the present disclosure. It will be apparent to those skilled in the art that specific details need not be employed, that example embodiments may be embodied in many different forms and that neither should be construed to limit the scope of the disclosure. In some example embodiments, well-known components, well-known assemblies, well-known processes, and well-known technologies are not described in detail.

**[0011]** The terminology used herein is for the purpose of describing particular example embodiments only and is not intended to be limiting. As used herein, the singular forms "a," "an," and "the" may be intended to include the

plural forms as well, unless the context clearly indicates otherwise. The terms "comprises," "comprising," "including," and "having," are inclusive and therefore specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. The method steps, processes, and operations described herein are not to be construed as necessarily requiring their performance in the particular order discussed or illustrated, unless specifically identified as an order of performance. It is also to be understood that additional or alternative steps may be employed.

**[0012]** When an element or layer is referred to as being "on," "engaged to," "connected to," or "coupled to" another element or layer, it may be directly on, engaged, connected or coupled to the other element or layer, or intervening elements or layers may be present. In contrast, when an element is referred to as being "directly on," "directly engaged to," "directly connected to," or "directly coupled to" another element or layer, there may be no intervening elements or layers present. Other words used to describe the relationship between elements should be interpreted in a like fashion (e.g., "between" versus "directly between," "adjacent" versus "directly adjacent," etc.). As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

**[0013]** Although the terms first, second, third, etc. may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms may be only used to distinguish one element, component, region, layer or section from another region, layer or section. Terms such as "first," "second," and other numerical terms when used herein do not imply a sequence or order unless clearly indicated by the context. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the example embodiments.

**[0014]** Spatially relative terms, such as "inner," "outer," "beneath," "below," "lower," "above," "upper," and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. Spatially relative terms may be intended to encompass different orientations of the apparatus in use or operation in addition to the orientation depicted in the figures. For example, if the apparatus in the Figures is turned over, elements described as "below" or "beneath" other elements or features would then be oriented "above" the other elements or features. Thus, the example term "below" can encompass both an orientation of above and below. The apparatus may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly. In

addition, the term "substantially parallel" is used herein to describe elements that are generally aligned with one another plus or minus 5 degrees.

[0015] With reference to Figure 1, it should generally be appreciated that disc brake rotors, such as the disc brake rotor **20** disclosed in the Figures, may be used as part of a braking system **22** in a vehicle (not shown), such as in a heavy duty construction vehicle, tractor, truck, light truck, or automobile. Such braking systems **22** typically apply a clamping force to one or more disc brake rotors to slow the vehicle or to maintain the vehicle in a stationary condition. The braking system **22** includes components that are part of a vehicle wheel-end assembly **24**, mainly the disc brake rotor **20** and a brake caliper **26**. The vehicle wheel-end assembly **24** also includes a wheel **28** that is mounted to a hub **30** using a plurality of wheel studs **32**. The brake caliper **26** is installed over at least part of the disc brake rotor **20** and includes one or more brake pads **34**. During operation of the brake system, the one or more brake pads **34** are moved into contact with the disc brake rotor **20** to apply the clamping force to the disc brake rotor **20**. In at least some configurations, the brake pads **34** are moved hydraulically.

[0016] As illustrated in Figures 1-5, the disc brake rotor **20** disclosed herein includes a hub portion **36**. The hub portion **36**, which is sometimes referred to as a hat portion or a brake hat, has a mounting flange **38** and cylindrical wall **40**. The cylindrical wall **40** extends circumferentially about the mounting flange **38** to define a hub receiving cavity **42**. The hub receiving cavity **42** is bounded by the mounting flange **38** and the cylindrical wall **40** of the hub portion **36** and is sized to receive the hub **30** of the vehicle. It should be appreciated that when the vehicle is fully assembled, the wheel **28**, the hub **30**, and the disc brake rotor **20** all rotate together as a single unit. The mounting flange **38** of the hub portion **36** has an outboard hub face **44** and an inboard hub face **46**. When the disc brake rotor **20** is installed on the vehicle, the outboard hub face **44** generally faces outward and towards the wheel **28** while the inboard hub face **46** generally faces inward towards hub **30**. A central opening **48** is provided in the hub portion **36** that extends through the mounting flange **38** along a rotational axis **50** of the disc brake rotor **20**. In addition, a plurality of mounting holes **52** are provided in the hub portion **36** that extend through the mounting flange **38** at circumferentially spaced locations that are positioned radially between the central opening **48** and the cylindrical wall **40** of the hub portion **36**. When the disc brake rotor **20** is installed on the vehicle, a portion of the hub **30** may extend through the central opening **48** and the plurality of wheel studs **32** may extend through the plurality of mounting holes **52** to retain the wheel **28** on the hub **30**.

[0017] The disc brake rotor **20** also includes a brake disc **54** that extends radially outward from the cylindrical wall **40** of the hub portion **36**. As best seen in Figure 5, the brake disc **54** defines a brake disc plane **56** that bisects the brake disc **54** and that is transverse to the rotational axis **50** of the disc brake rotor **20**. The mounting

flange **38** of the hub portion **36** generally extends parallel to and is spaced from the brake disc plane **56** by an offset distance **58**. The brake disc **54** includes an outboard disc face **60** that is disposed on one side of the brake disc plane **56** and an inboard disc face **62** that is disposed on an opposite side of the brake disc plane **56**. The outboard disc face **60** extends parallel to and is spaced from the inboard disc face **62** by a brake disc thickness **64**. The brake disc thickness **64** extends in a direction that is transverse to the brake disc plane **56**. By way of example and without limitation, the brake disc thickness **64** may be within a range of 0.25 inches to 2 inches and the offset distance **58** may be within a range of one half the brake disc thickness **64** to 5 inches. As best seen in Figure 4 and 5, each of the outboard disc face **60** and the inboard disc face **62** have a first radial height **66**. The first radial height **66** of the outboard disc face **60** and the inboard disc face **62** can be measured in a direction that is parallel to the brake disc plane **56**. By way of non-limiting example, the first radial height **66** may be within a range of 1 inch to 6 inches.

[0018] Various different brake pad configurations may be utilized with the disc brake rotor **20** disclosed herein. In the example shown in Figure 6, the brake pads **34** come into contact with only part of the radial height of the outboard disc face **60** and the inboard disc face **62**. Each of the outboard disc face **60** and the inboard disc face **62** has a brake pad contact area **68** that is spaced radially between an outer non-contacting area **70** and an inner non-contacting area **72**. As best seen in Figures 4 and 5, the brake pad contact area **68** of the outboard disc face **60** and the inboard disc face **62** has a second radial height **74** that is less than the first radial height **66**. The second radial height **74** of the brake pad contact area **68** can be measured in a direction that is parallel to the brake disc plane **56**. By way of non-limiting example, the second radial height **74** may be within a range of 0.75 inches to 5.5 inches.

[0019] Referring generally to Figures 2-4, the disc brake rotor **20** may or may not include a plurality of ribs **76** that extend radially between and interconnect the cylindrical wall **40** of the hub portion **36** and the brake disc **54**. The plurality of ribs **76** are circumferentially spaced apart from one another by a plurality of vent passageways **78** that extend completely through the disc brake rotor **20**. As such, the plurality of vent passageways **78** permit fluid flow (i.e. air flow) through the disc brake rotor **20** at locations positioned radially between the cylindrical wall **40** of the hub portion **36** and the brake disc **54**. The plurality of vent passageways **78** are therefore open to the outboard disc face **60** and the inboard disc face **62** and fluid flow through the plurality of vent passageways **78** helps to cool the brake disc **54**. The plurality of ribs **76** may have a variety of different geometries. By way of non-limiting example, the plurality of ribs **76** may extend radially in a straight line, a curved line, or combinations thereof where the plurality of ribs **76** have straight and curved segments or where some of the ribs **76** are

straight and some of the ribs **76** are curved. In some configurations, the hub portion **36**, the brake disc **54**, and the plurality of ribs **76** may be integral with one another as part of a one-piece unit. Alternatively, other configurations are possible where the hub portion **36** and the brake disc **54** are separate components that are connected to one another at the plurality of ribs **76**. Obviously, various combinations are possible where the plurality of ribs **76** comprise a separate component part or where the plurality of ribs **76** are integral with the brake disc **54** and not the hub portion **36** or vice versa. It should also be appreciated that the hub portion **36**, the brake disc **54**, and the plurality of ribs **76** may all be made of the same material, different materials, or combinations thereof. By way of example and without limitation, any of the hub portion **36**, the brake disc **54**, and the plurality of ribs **76** may be made of cast iron, steel, aluminum, titanium, carbon fiber, ceramic, carbon ceramic materials, or other suitable materials.

[0020] Still referring to Figures 2-4, the disc brake rotor **20** includes a plurality of channels **80a**, **80b**, disposed in the brake disc **54**, that are circumferentially spaced apart from one another. The plurality of channels **80a**, **80b** includes a group of outboard channels **80a** that are open at the outboard disc face **60** and/or a group of inboard channels **80b** that are open at the inboard disc face **62**. The plurality of channels **80a**, **80b** are circumferentially staggered about the brake disc **54** in a sequentially alternating arrangement where each channel in the group of outboard channels **80a** is flanked by two channels of the group of inboard channels **80b** and where each channel in the group of inboard channels **80b** is flanked by two channels of the group of outboard channels **80a**. Each channel in the plurality of channels **80a**, **80b** extends deeply into the brake disc **54** and therefore has a channel depth **82**. The channel depth **82** of each channel in the plurality of channels **80a**, **80b** extends in a direction that is transverse to the brake disc plane **56**. In one example, the channel depth **82** of each channel in the plurality of channels **80a**, **80b** is equal to or greater than half the brake disc thickness **64**. By way of example and without limitation, the channel depth **82** may be within a range of just over 1 inch to 1.75 inches when the brake disc thickness **64** equals 2 inches. Due to the channel depth **82** specified herein, the plurality of channels **80a**, **80b** greatly increase a surface area of the outboard disc face **60** and the inboard disc face **62** and generate increased fluid flow and turbulence in the vicinity of the outboard disc face **60** and the inboard disc face **62**. Both of these characteristics enhance the transfer of heat away from the brake disc **54** through improved convection at the outboard disc face **60**, the inboard disc face **62**, and in the plurality of channels **80a**, **80b**.

[0021] As shown in Figure 4, each channel in the group of outboard channels **80a** may extend across at least part of the outer non-contacting area **70**, the brake pad contact area **68**, and the inner non-contacting area **72** of the outboard disc face **60**. Similarly, each channel in the

group of inboard channels **80b** extends across at least part of the outer non-contacting area **70**, the brake pad contact area **68**, and the inner non-contacting area **72** of the inboard disc face **62**. This arrangement, where the plurality of channels **80a**, **80b** extend radially beyond the brake pad contact area **68**, improves the cooling of the disc brake rotor **20**. Heat transfer and fluid dynamics testing has shown that heat transfer between the brake disc **54** and the surrounding fluid (i.e. the surrounding airflow) is greatest at the outer non-contacting area **70** and the inner non-contacting area **72** of the outboard disc face **60** and the inboard disc face **62**. These areas are where direct convection can occur. Even when disc brake rotors are internally ventilated, heat transfer is greatest at the outer non-contacting area and the inner non-contacting area of the outboard disc face and the inboard disc face.

[0022] The plurality of vanes in internally ventilated disc brake rotors tend to corrode (i.e. rust) over time. Rust tends to act as a thermal barrier such that the plurality of vanes in internally ventilated disc brake rotors tend to lose their ability to effectively transfer heat away from the internally ventilated disc brake rotor over time. Even when internally ventilated disc brake rotors are new and have little corrosion, heat must first be conducted through the pair of parallel discs before being transferred by convection to the airflow passing between the pair of parallel discs and the plurality of vanes. This also reduces the effectiveness of internally ventilated disc brake rotors. The outer non-contacting area and the inner non-contacting area of the outboard disc face and the inboard disc face on traditional disc brake rotors are relatively flat and therefore do not create turbulence in the vicinity of the outboard disc face and the inboard disc face. By contrast, the plurality of channels **80a**, **80b** in the disclosed disc brake rotor **20** extend radially beyond the brake pad contact area **68** and therefore create turbulence in the vicinity of the outer non-contacting area **70** and the inner non-contacting area **72** of the outboard disc face **60** and the inboard disc face **62** to maximize convective heat transfer at these critical areas.

[0023] With reference to Figures 2-4, the brake disc **54** includes an outer ring **84** and an inner ring **86** that are circumferentially continuous and uninterrupted along at least the outboard disc face **60** and the inboard disc face **62** of the brake disc **54**. This means that neither the plurality of vent passageways **78** nor the plurality of channels **80b**, **80b** cross, extend into, or otherwise interrupt the outer ring **84** and the inner ring **86** of the brake disc **54** at locations disposed along the outboard disc face **60** and the inboard disc face **62**. The outer ring **84** is radially spaced from the inner ring **86** and therefore circumscribes the inner ring **86**. It should be appreciated that the outer ring **84** defines an outer periphery **88** (i.e. the outermost part) of the brake disc **54** and the inner ring **86** defines an inner periphery **90** (i.e. the innermost part) of the brake disc **54**. The plurality of channels **80a**, **80b** are disposed radially between the outer ring **84** and the inner ring **86** and the plurality of ribs **76** and the plurality

of vent passageways **78** are disposed radially between the inner ring **86** and the cylindrical wall **40** of the hub portion **36** of the disc brake rotor **20**. In other words, the inner ring **86** is positioned radially between the plurality of vent passageways **78** and the plurality of channels **80a, 80b**. Accordingly, the plurality of channels **80a, 80b** do not, themselves, extend to the outer periphery **88** or the inner periphery **90** of the brake disc **54**. Advantageously, the continuous and uninterrupted construction of the outer ring **84** and an inner ring **86** at the outboard disc face **60** and the inboard disc face **62** increase shear strength of the brake disc **54**. This makes the disclosed disc brake rotor **20** less susceptible to mechanical and/or thermal failure as compared to other surface ventilated disc brake rotors that have channels that extend all the way to the outer periphery and/or the inner periphery of the disc brake rotor. In certain configurations, the brake disc **54** may optionally have an abrupt edge (e.g. a 90 degree transition) where the outboard and inboard disc faces **60, 62** meet the outer periphery **88**. Similarly, the brake disc **54** may optionally have an abrupt edge (e.g. a 90 degree transition) where the outboard and inboard disc faces **60, 62** meet the inner periphery **90**. As will be explained below, other configurations are possible where these edges or transitions are rounded.

[0024] As best seen in Figure 2, each channel in the group of outboard channels **80a** includes an open front **92**, a back wall **94**, a pair of radial walls **98a**, an outer wall **100a**, and an inner wall **102a**. The open front **92** opens to the outboard disc face **60** and the back wall **96** is arranged opposite the open front **92**. The pair of radial walls **98a** are substantially parallel to and circumferentially spaced from one another and are generally defined by material forming the brake disc **54**. The outer wall **100a** extends between the pair of radial walls **98a** and is generally defined by material forming the outer ring **84** and the inner wall **102a** extends between the pair of radial walls **98a** and is generally defined by material forming the inner ring **86**. Each of the pair of radial walls **98a**, the outer wall **100a**, and the inner wall **102a** meet the outboard disc face **60** at an external edge **104**. Optionally, the external edge **104** may be rounded to reduce brake pad wear and reduce the likelihood of material from one of the brake pads **34** (Figure 1) from catching in the group of outboard channels **80a**. The rounded shaped of external edge **104** may also help reduce the effects the group of outboard channels **80a** has on the machining of the outboard disc face **60** during the manufacturing process.

[0025] As best seen in Figure 3, each channel in the group of inboard channels **80b** includes an open back **106**, a front wall **96**, a pair of radial walls **98b**, an outer wall **100b**, and an inner wall **102b**. The open back **106** opens to the inboard disc face **62** and the front wall **94** is arranged opposite the open back **106**. The pair of radial walls **98b** are substantially parallel, other than casting draft angles, and circumferentially spaced from one another and are defined by the material forming the brake disc **54**. The outer wall **100b** extends between the pair

of radial walls **98b** and is defined by the material forming the outer ring **84** and the inner wall **102b** extends between the pair of radial walls **98b** and is generally defined by the material forming the inner ring **86**. Each of the pair of radial walls **98b**, the outer wall **100b**, and the inner wall **102b** meet the inboard disc face **62** at an internal edge **108**. Optionally, the internal edge **108** may be rounded to reduce brake pad wear and reduce the likelihood of material from one of the brake pads **34** (Figure 1) from catching in the group of inboard channels **80b**. The rounded shaped of internal edge **108** may also help reduce the effects the group of inboard channels **80b** has on the machining of the inboard disc face **62** during the manufacturing process.

[0026] It should be appreciated that the term "radially" is used herein to generally describe elements extending in or otherwise oriented along a direction located in the brake disc plane **56** that approaches or moves away from the outer periphery **88** of the brake disc **54**. The direction need not directly fall along a radian extending in the brake disc plane **56** from the rotational axis **50** of the disc brake rotor **20**. As such, the pair of radial walls **98a** of each channel in the group of outboard channels **80a** and the pair of radial walls **98b** of each channel in the group of inboard channels **80b** need not be straight and may be arranged at a variety of different angles and orientations. The inner wall **102a** of each channel in the group of outboard channels **80a** and the inner wall **102b** of each channel in the group of inboard channels **80b** are spaced from the inner periphery **90** of the brake disc **54** by an inner ring thickness **110**. The outer wall **100a** of each channel in the group of outboard channels **80a** and the outer wall **100b** of each channel in the group of inboard channels **80b** are spaced from the outer periphery **88** of the brake disc **54** by an outer ring thickness **112**. The inner ring thickness **110** and the outer ring thickness **112** may or may not be equal to one another and may be, for example and without limitation, in a range of 0.25 inches to 1 inch. It should also be appreciated that the channel depth **82** of each channel in the group of outboard channels **80a** can be measured between the back wall **94** and the open front **92** and the channel depth **82** of each channel in the group of inboard channels **80b** can be measured between the front wall **96** and the open back **106**.

[0027] Optionally, the back wall **94** of each channel in the group of outboard channels **80a** and the front wall **96** of each channel in the group of inboard channels **80b** may be provided with a surface treatment **114** that is corrosion resistant. The surface treatment **114** may also extend to the pair of radial walls **98a**, the outer wall **100a**, and the inner wall **102a** of each channel in the group of outboard channels **80a** and the pair of radial walls **98b**, the outer wall **100b**, and the inner wall **102b** of each channel in the group of inboard channels **80b**. As previously stated, corrosion often acts as a thermal barrier reducing the effectiveness of heat transfer along any corroded surface. The surface treatment **114** protects from corrosion the surface to which it is applied and therefore preserves

the effectiveness of heat transfer within the plurality of channels **80a**, **80b**. By way of non-limiting example, the surface treatment **114** may be a high temperature paint. In addition, the surface treatment **114** may have a color that is different from a color of the rest of the outboard disc face **60** and/or the inboard disc face **62** to give the disc brake rotor **20** an ornamental and an aesthetically pleasing appearance.

[0028] As noted above, the disc brake rotor **20** disclosed herein may be utilized with a number of different brake pad configurations. Figure 7 illustrates another exemplary arrangement where different brake pads **34'** are installed within the brake caliper **26**. The brake pads **34'** shown in Figure 7 extend radially outward of the outer periphery **88** of the brake disc **54**, but do not extend radially inward of the inner periphery **90** of the brake disc **54**. Each brake pad **34'** has an overhanging lip **115** that receives and overhangs at least part of the outer periphery **88** of the brake disc **54**, giving the brake pads **34'** an L-like shape or U-like shape when viewed from the side. In Figure 7, the outboard disc face **60** and the inboard disc face **62** still have a brake pad contact area **68'** and the inner non-contacting area **72**, but the outer non-contacting area **70** illustrated in Figures 4-6 is eliminated. By eliminating the outer and/or the inner non-contacting area **70**, **72**, the brake pad contact area **68'** in the configuration shown in Figure 7 extends all the way to the outer and/or inner periphery **88**, **90** of the brake disc **54** and therefore is larger than the brake pad contact area **68** shown in Figure 6. For example, with the outer non-contacting area **70** eliminated, the plurality of channels **80a**, **80b** extend radially across at least part of the brake pad contact area **68'** and optionally across at least part of the inner non-contacting area **72** of the outboard disc face **60** and the inboard disc face **62**.

[0029] In the example shown in Figure 8, another variation of brake pads **34''** are shown installed within the brake caliper **26**. These brake pads **34''** extend radially outward of the outer periphery **88** of the brake disc **54** and extend radially inward of the inner periphery **90** of the brake disc **54**. Therefore, in Figure 8, the outboard disc face **60** and the inboard disc face **62** have a brake pad contact area **68''** that is co-extensive with the outboard disc face **60** and the inboard disc face **62** and both the outer non-contacting area **70** and the inner non-contacting area **72** illustrated in Figures 4-6 are eliminated. By eliminating the outer non-contacting area **70** and the inner non-contacting area **72**, the brake pad contact area **68''** in the configuration shown in Figure 8 extends from the outer periphery **88** of the brake disc **54** to the inner periphery **90** of the brake disc **54** and therefore is larger than the brake pad contact area **68** shown in Figure 6 and the brake pad contact area **68'** shown in Figure 7. With both the outer non-contacting area **70** and the inner non-contacting area **72** eliminated, the plurality of channels **80a**, **80b** extend radially within the brake pad contact area **68''** only, and therefore do not extend radially beyond the brake pad contact area **68''**. When the braking

system **22** is activated, the brake pads **34''** contact the entire radial height of the brake disc **54** and therefore clear dust and corrosion from all of the outboard disc face **60** and all of the inboard disc face **62**. Advantageously, this configuration helps prevent rings of corrosion from forming on the outer non-contacting area **70** and the inner non-contacting area **72** of the outboard disc face **60** and the inboard disc face **62** and therefore helps maintain a clean appearance of the brake disc **54**.

[0030] Comparing the disc brake rotor **20** shown in Figures 1-8 to the disc brake rotor **20'** shown in Figures 9-12, the plurality of channels **80a**, **80b** may extend radially along the brake disc **54** in a curved line (Figures 1-8), a straight line (Figures 9-12), or combinations thereof where the plurality of channels **80a**, **80b** have straight and curved segments or where some of the channels **80a**, **80b** are straight and some of the channels **80a**, **80b** are curved (not shown). Referring to Figures 9-12, the inner wall **102b** of each channel in the group of inboard channels **80b** and the inner wall **102a** of each channel in the group of outboard channels **80a** optionally include an inner window **116**. Each inner window **116** extends through the inner ring **86** of the brake disc **54'** and passes between one channel in the plurality of channels **80a**, **80b** and one vent passageway in the plurality of vent passageways **78** to provide fluid communication therebetween. As a result, the inner windows **116** allow fluid flow between the plurality of vent passageways **78** and the plurality of channels **80a**, **80b** for enhanced convective cooling of the disc brake rotor **20'**. The outer ring **84** of the brake disc **54'** may optionally include an outer circumferential groove **118** that extends inwardly into the outer periphery **88** of the brake disc **54'** such that the outer ring **84** is split into two circumferentially continuous and uninterrupted sections **120**, each disposed to either side of the outer circumferential groove **118**. In the example shown, the outer circumferential groove **118** extends within the brake disc plane **56**, although other configurations are possible. The outer wall **100b** of each channel in the group of inboard channels **80b** and the outer wall **100a** of each channel in the group of outboard channels **80a** optionally include an outer window **122**. Each outer window **122** extends through the outer ring **84** of the brake disc **54'** and opens to the outer circumferential groove **118** to provide fluid communication therebetween. As a result, the outer windows **122** allow fluid flow between the plurality of channels **80a**, **80b** and the outer circumferential groove **118** for enhanced convective cooling of the disc brake rotor **20**. It should be appreciated that various fluid flow paths through the plurality of channels **80a**, **80b** are possible because fluid can enter or exit the plurality of channels **80a**, **80b** through the inner windows **116**, the outer windows **122**, the open front **92** of the channels in the group of outboard channels **80a**, and the open back **106** of the channels in the group of inboard channels **80b**.

[0031] It should be appreciated that in the configuration illustrated in Figures 9-12, the outer ring **84** and the inner

ring **86** are circumferentially continuous and uninterrupted along the outboard disc face **60** and the inboard disc face **62** of the brake disc **54'**. Although the inner windows **116** extend through the inner ring **86**, the inner ring **86** includes a ring of solid material along the outboard disc face **60** and a ring of solid material along the inboard disc face **62** that are disposed to each side of the inner windows **116**. Similarly, although the outer windows **122** extend through the outer ring **84**, the outer ring **84** includes a ring of solid material along the outboard disc face **60** and a ring of solid material along the inboard disc face **62** that are disposed to each side of the outer windows **122**. Apart from these additional features, the other elements of the disc brake rotor **20'** illustrated in Figures 9-12 are the same as those described above in connection with the disc brake rotor **20** illustrated in Figures 1-8.

[0032] Figure 13 is a section view of the disc brake rotor **20'** illustrated in Figure 9 taken along section line A - A. As shown in this view, the circumferentially staggered, sequentially alternating arrangement of the plurality of channels **80a**, **80b** described above gives the brake disc **54'** a serpentine cross-section **124**. It should be appreciated that the serpentine cross-section **124** of the brake disc **54'**, as seen in Figure 13, is transverse to both the brake disc plane **56** and the first radial height **66** of the outboard disc face **60** and the inboard disc face **62**. It should also be appreciated that the serpentine cross-section **124** of the brake disc **54'** illustrated generally follows the shape of an oscillating step waveform, which includes sequentially alternating valleys and peaks that are themselves generally rectangular in shape.

[0033] Figure 14 is a partial cross-sectional view of the disc brake rotor **20'** illustrated in Figure 11 taken along section line B - B where one of the channels in the group of outboard channels **80a** is shown. Each of the pair of radial walls **98a** meet the outboard disc face **60** at the external edges **104**. The external edges **104** are rounded for diminished brake pad wear. The curvature of the external edges **104** are defined by a radius **126** and the radius **126** intersects an imaginary plane **128** that is parallel to and spaced from or co-extensive with the brake disc plane **56**. The rounded shape of the external edges **104** may be created in a number of different ways, including by an initial casting operation followed by a machining operation. One exemplary method for creating the rounded shape of the external edges **104** is described below. The brake disc **54'** of the disc brake rotor **20'** may initially be formed to have an initial thickness **130** that is greater than the brake disc thickness **64** and a relatively large radius **126**. From this initial thickness **130**, the outboard disc face **60** and/or the inboard disc face **62** may be machined down until the brake disc thickness **64** is reached. The radius **126** of the external edges **104** may be created when the brake disc **54** is at the initial thickness **130** such that each of the external edges **104** may initially extend along a 90 degree arc from one of the radial walls **98a** to the outboard disc face **60**. As illustrated in Figure 14, the 90 degree arc is measured relative to

the imaginary plane **128**. As the outboard disc face **60** is machined down to achieve the brake disc thickness **64**, material is removed along the 90 degree arc (e.g. approximately 30 degrees of material adjacent the outboard disc face **60** may be removed). Accordingly, each of the external edges **104** may ultimately extend in a 60 degree arc from the one of the radial walls **98a** to the outboard disc face **60**. As illustrated in Figure 14, the 60 degree arc is also measured relative to the imaginary plane **128**. This same method may be applied to create the rounded shape of the external edges **104** located between the outboard disc face **60** and the outer wall **100a**, the outboard disc face **60** and the inner wall **102a**, and for all of the internal edges **108** that are disposed along the inboard disc face **62**.

[0034] Figure 15 is a partial cross-sectional view of the disc brake rotor **20'** illustrated in Figure 11 taken along section line B - B. The brake disc **54'** optionally includes rounded outside edges **132** where the outboard and inboard disc faces **60**, **62** meet the outer periphery **88**. Similarly, the brake disc **54'** optionally includes rounded inside edges **134** where the outboard and inboard disc faces **60**, **62** meet the inner periphery **90**. The curvature of the rounded outside and inside edges **132**, **134** is defined by a radius **136**. The radius **136** intersects the imaginary plane **128**, which is parallel to and spaced from or co-extensive with the brake disc plane **56**. The rounded shape of the rounded outside and inside edges **132**, **134** may be created in a number of different ways, including by an initial casting operation followed by a machining operation. For example, the rounded shape of the rounded outside and inside edges **132**, **134** may be created using the same machining process described above for creating the rounded shape of the external edges **104**. Accordingly, each of the rounded outside edges **132** may ultimately extend in a 60 degree arc from the one of the outboard and inboard disc faces **60**, **62** to the outer periphery **88** and each of the rounded inside edges **134** may ultimately extend in a 60 degree arc from the one of the outboard and inboard disc faces **60**, **62** to the inner periphery **90**. As illustrated in Figure 15, the 60 degree arc is measured relative to the imaginary plane **128**. Although this configuration is not limited to any particular brake pad configuration, the rounded outside and inside edges **132**, **134** may be particularly desirable where the brake pads **34'** have an L-like or U-like shape as shown in Figure 7. When brake pads **34'** having an L-like or U-like shape are used, a brake disc **54** with abrupt edges (Figure 2) may tend to make noise and/or create excessive brake pad wear.

[0035] The foregoing description of the embodiments has been provided for purposes of illustration and description. It is not intended to be exhaustive or to limit the disclosure. Individual elements or features of a particular embodiment are generally not limited to that particular embodiment, but, where applicable, are interchangeable and can be used in a selected embodiment, even if not specifically shown or described. These antecedent rec-



itations should be interpreted to cover any combination in which the inventive novelty exercises its utility. Many modifications and variations of the present invention are possible in light of the above teachings and may be practiced otherwise than as specifically described while within the scope of the appended claims.

## Claims

### 1. A disc brake rotor comprising:

a hub portion;  
a brake disc extending radially outward from said hub portion, said brake disc including an outboard disc face and an inboard disc face;  
a plurality of channels disposed in said brake disc that are circumferentially spaced apart from one another where any one channel in said plurality of channels is open to said outboard disc face and is closed to said inboard disc face or is open to said inboard disc face and is closed to said outboard disc face; and  
said brake disc including an outer ring and an inner ring that are circumferentially continuous and uninterrupted along at least said outboard disc face and said inboard disc face to increase a strength of said brake disc, said outer ring being radially spaced from said inner ring with said plurality of channels disposed radially between said outer ring and said inner ring.

2. The disc brake rotor as set forth in Claim 1, wherein said outer ring defines an outer periphery of said brake disc and said inner ring defines an inner periphery of said brake disc.

3. The disc brake rotor as set forth in Claim 2, wherein each channel in said plurality of channels includes at least a pair of radial walls that are circumferentially spaced from one another, an outer wall defined by said outer ring that extends between said pair of radial walls, and an inner wall defined by said inner ring that extends between said pair of radial walls.

4. The disc brake rotor as set forth in Claim 3, further comprising:

a plurality of ribs extending between and interconnecting said hub portion and said inner ring of said brake disc such that said inner ring is positioned radially between said plurality of ribs and said plurality of channels, said plurality of ribs being circumferentially spaced apart from one another by a plurality of vent passageways that extend entirely through said disc brake rotor.

5. The disc brake rotor as set forth in Claim 4, wherein said inner wall of each channel in said plurality of channels includes an inner window, each inner window extending between one channel in said plurality of channels and one vent passageway in said plurality of vent passageways to provide fluid communication therebetween.

6. The disc brake rotor as set forth in Claim 5, wherein said inner ring provides a ring of solid material along said outboard disc face and a ring of solid material along said inboard disc face.

7. The disc brake rotor as set forth in Claim 3, wherein said outer ring includes an outer circumferential groove that extends inwardly into said outer periphery of said brake disc such that said outer ring is split into two circumferentially continuous and uninterrupted sections.


8. The disc brake rotor as set forth in Claim 7, wherein said outer wall of each channel in said plurality of channels includes an outer window, each outer window extending between one channel in said plurality of channels and said outer circumferential groove to provide fluid communication therebetween.

9. The disc brake rotor as set forth in Claim 8, wherein said outer ring provides a ring of solid material along said outboard disc face and a ring of solid material along said inboard disc face that are disposed to each side of each outer window.


10. The disc brake rotor as set forth in Claim 3, wherein said inner wall of each channel in said plurality of channels is radially spaced from said inner periphery by an inner ring thickness and said outer wall of each channel in said plurality of outboard channels is radially spaced from said outer periphery by an outer ring thickness.


11. The disc brake rotor as set forth in Claim 3, wherein each of said pair of radial walls, said outer wall, and said inner wall have an external edge that is rounded.

12. The disc brake rotor as set forth in Claim 1, wherein said outboard disc face and said inboard disc face are spaced apart from one another by a brake disc thickness and each channel in said plurality of channels having a channel depth that is greater than half said brake disc thickness.

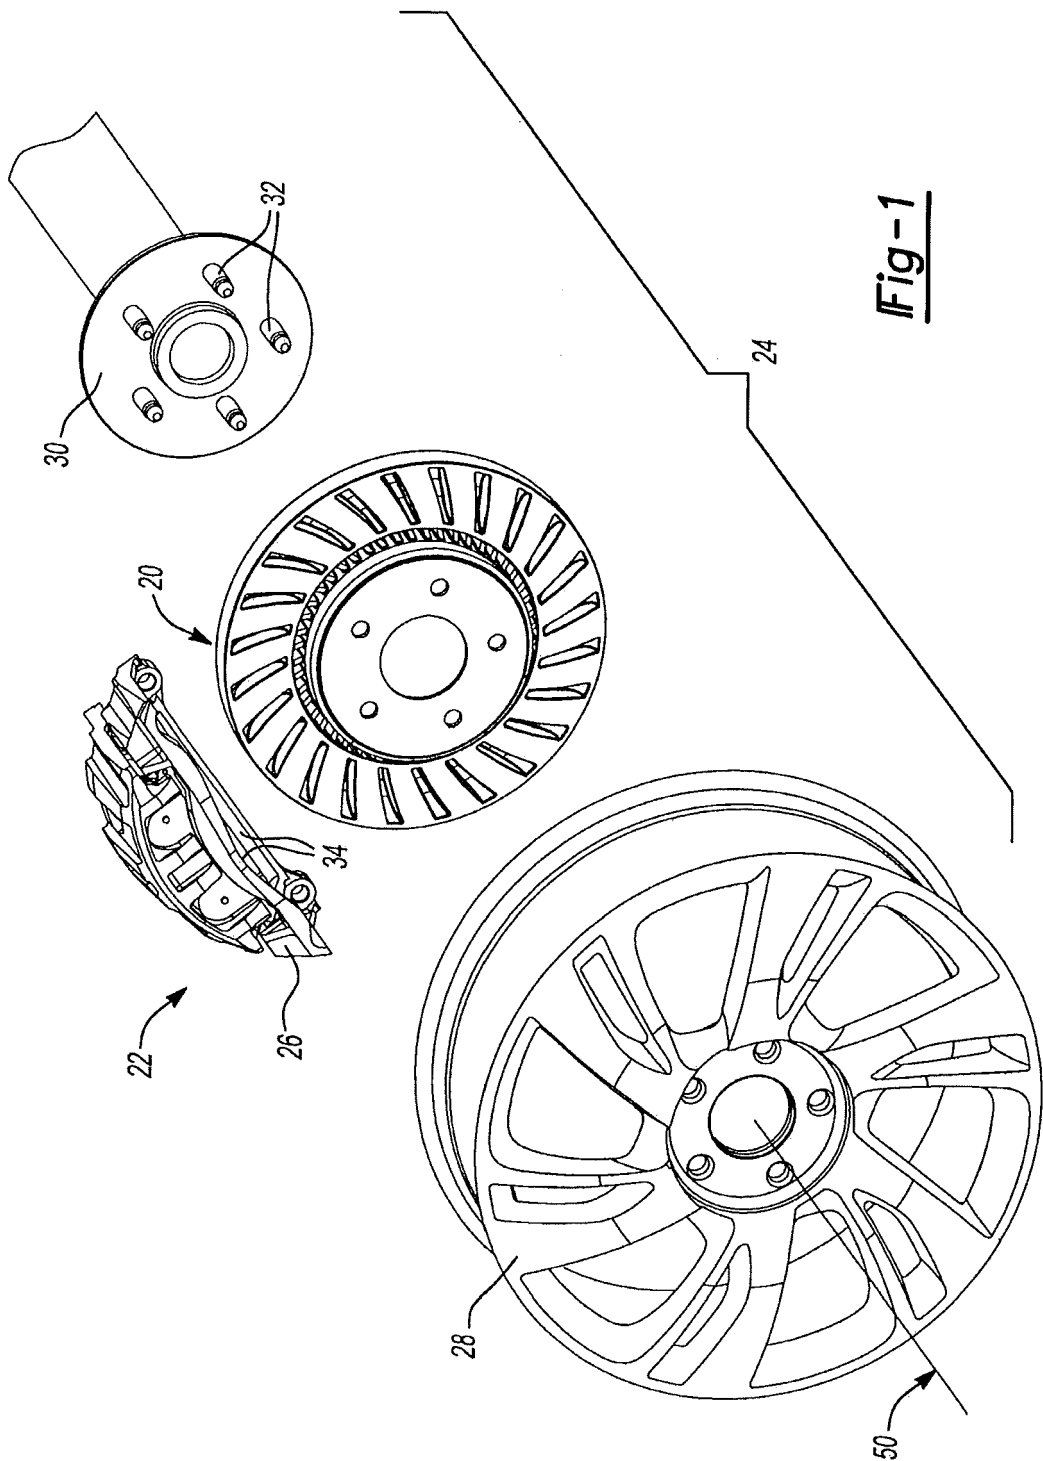

**Fig-1**

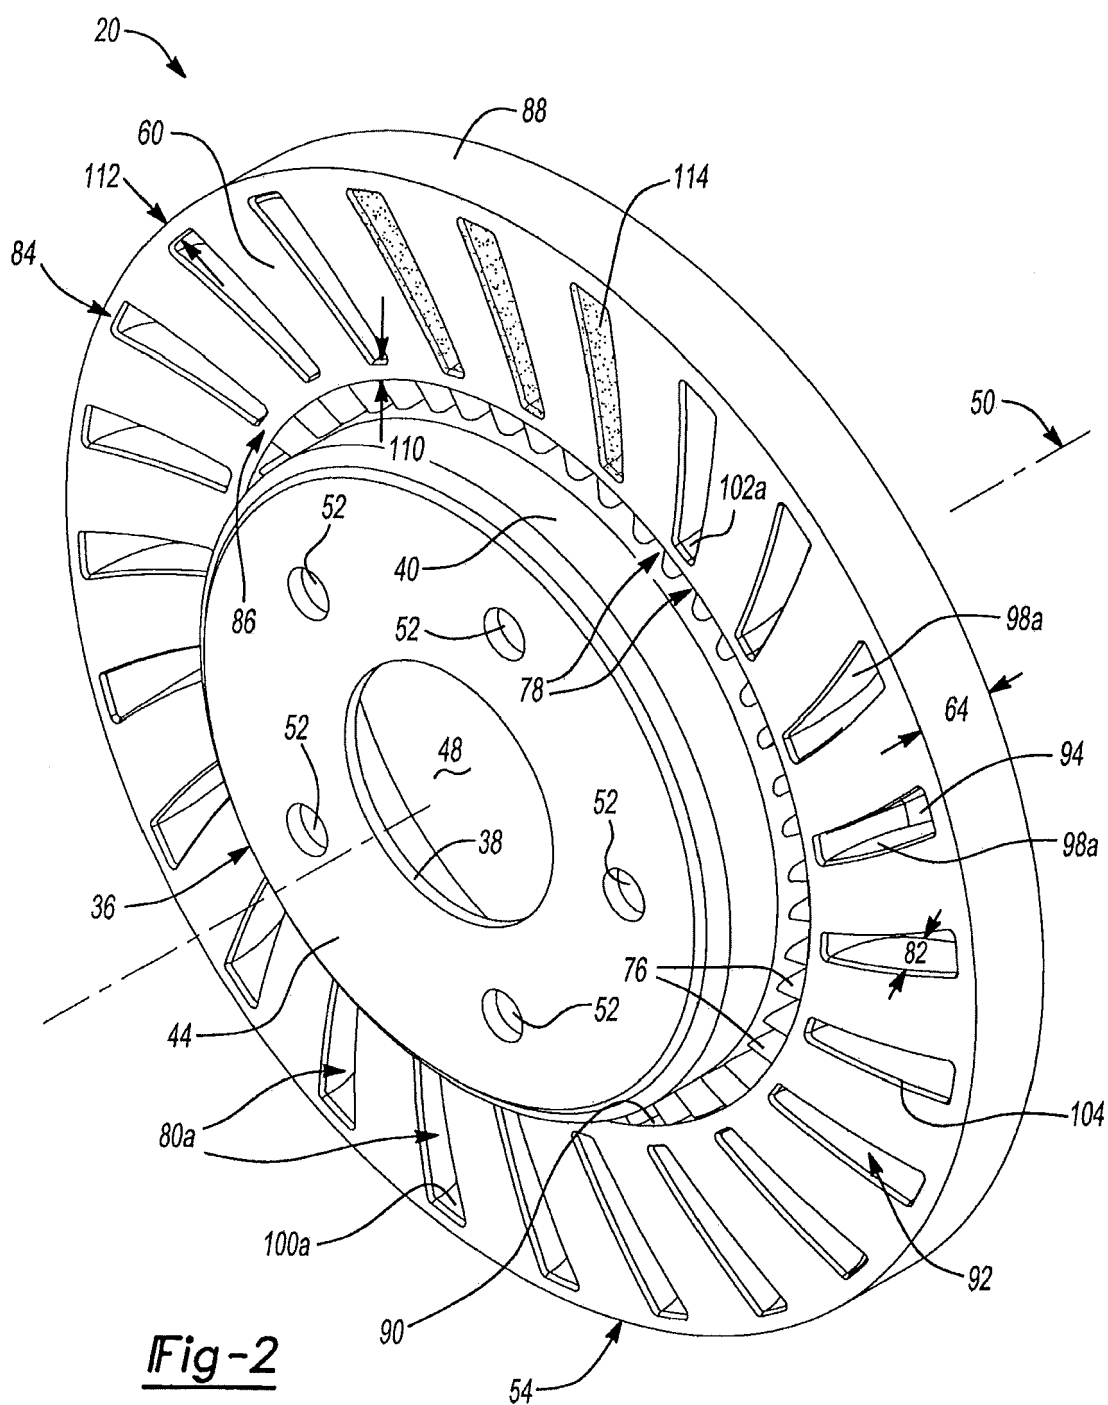

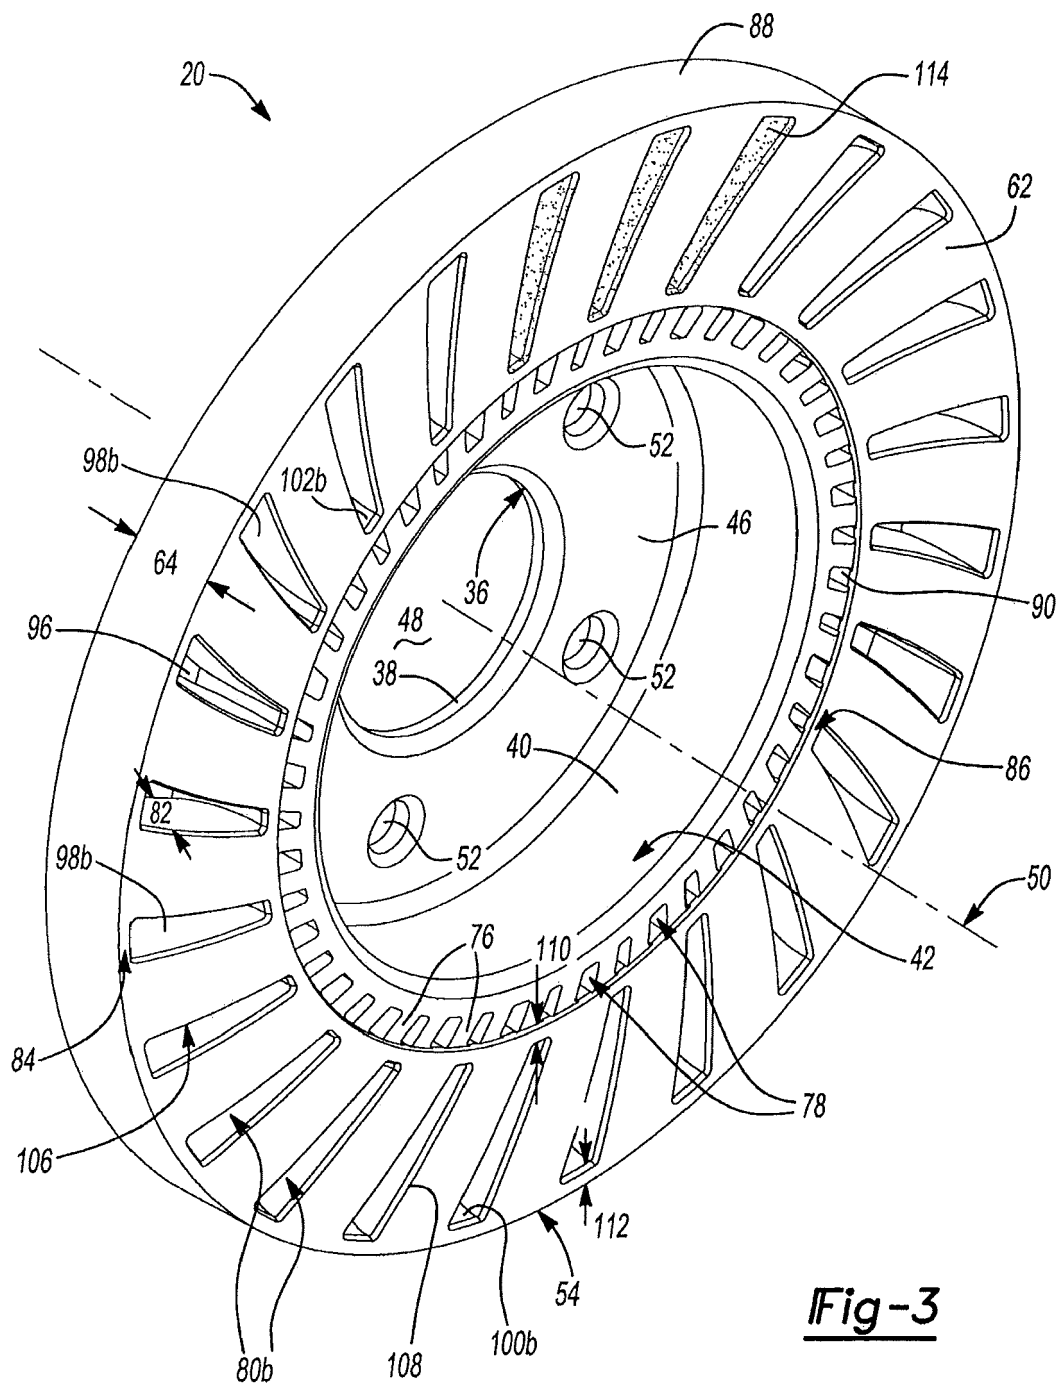

**Fig-3**

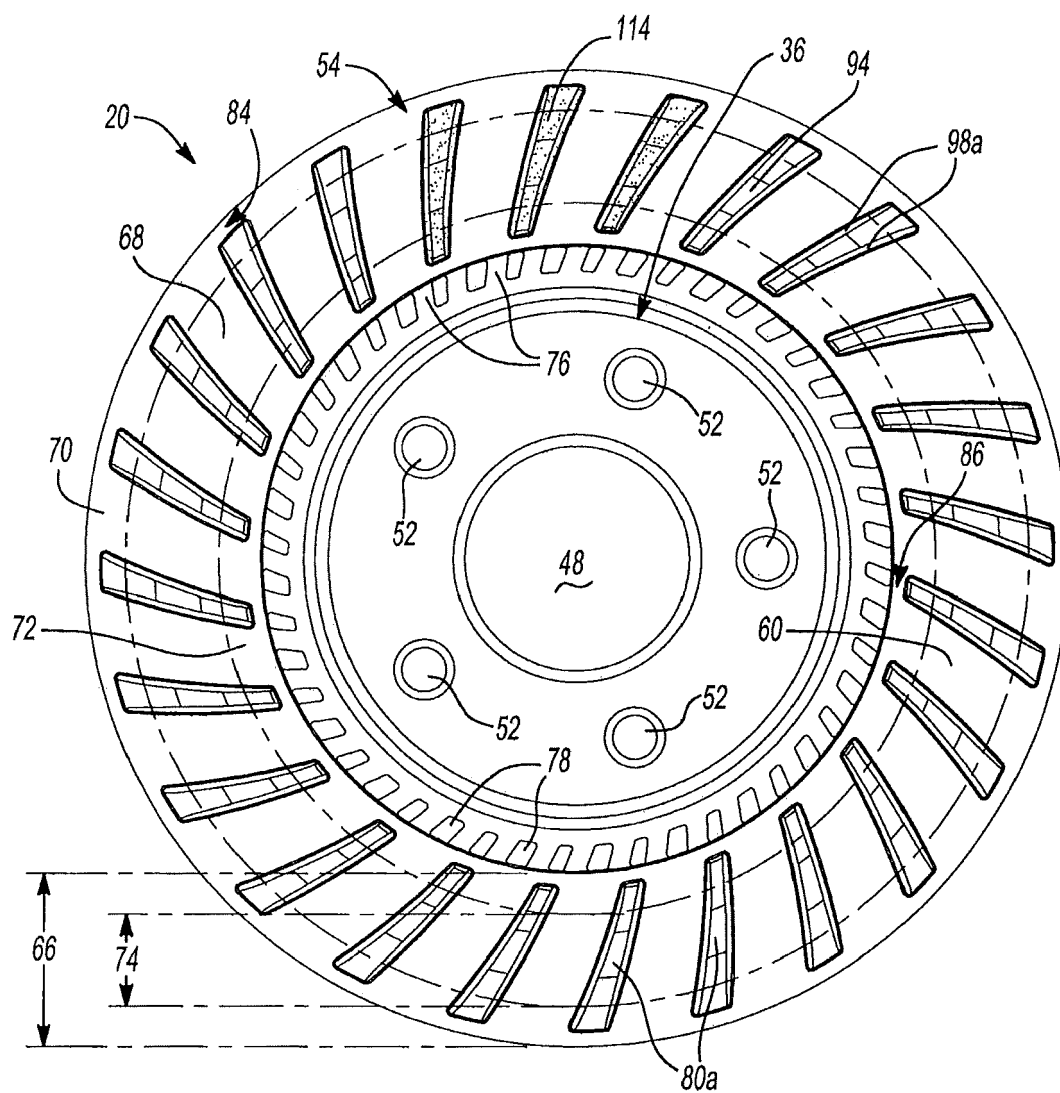


Fig-4



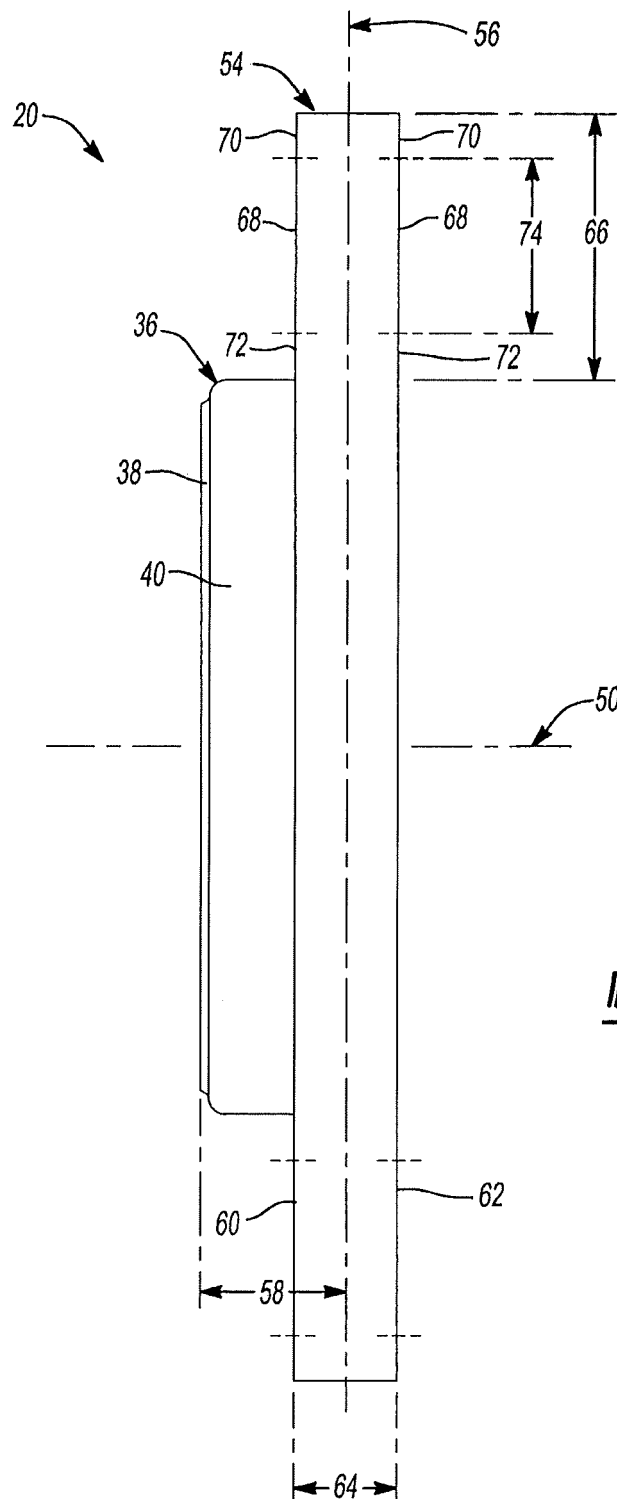



Fig-5

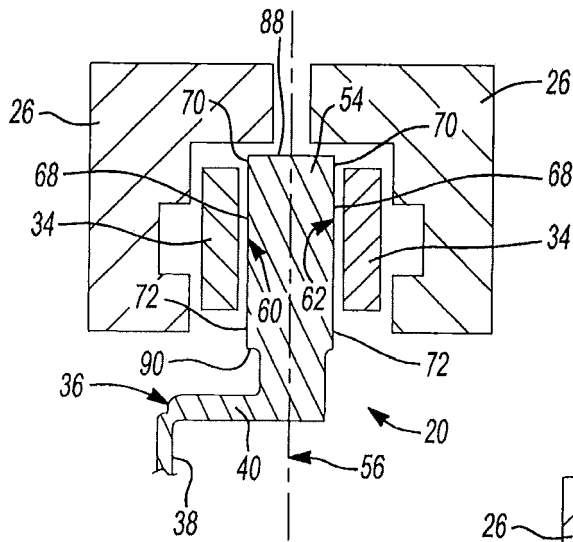


**Fig-6**

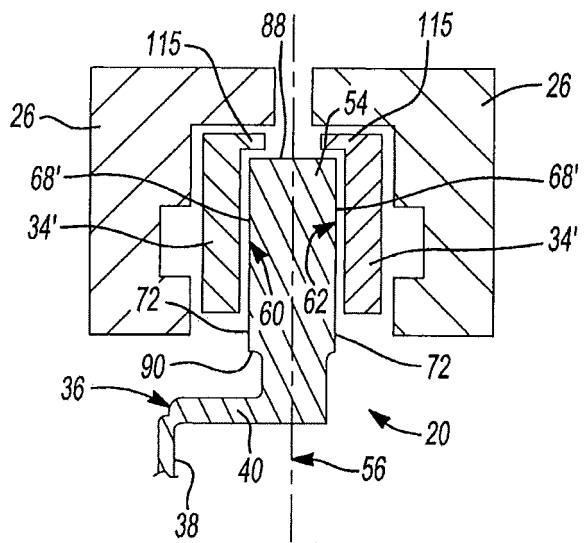


**Fig-7**

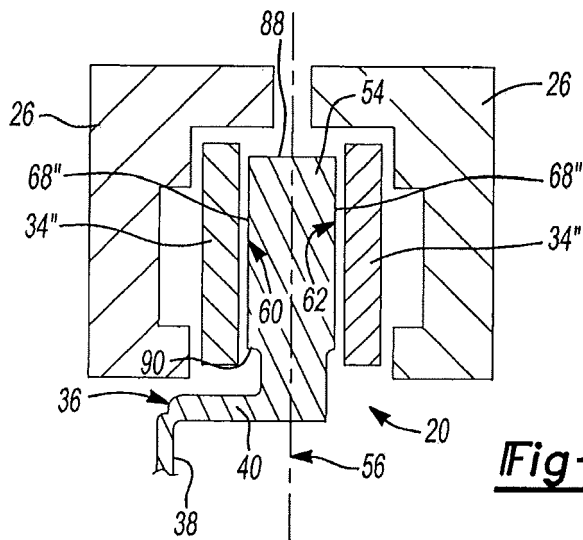


**Fig-8**

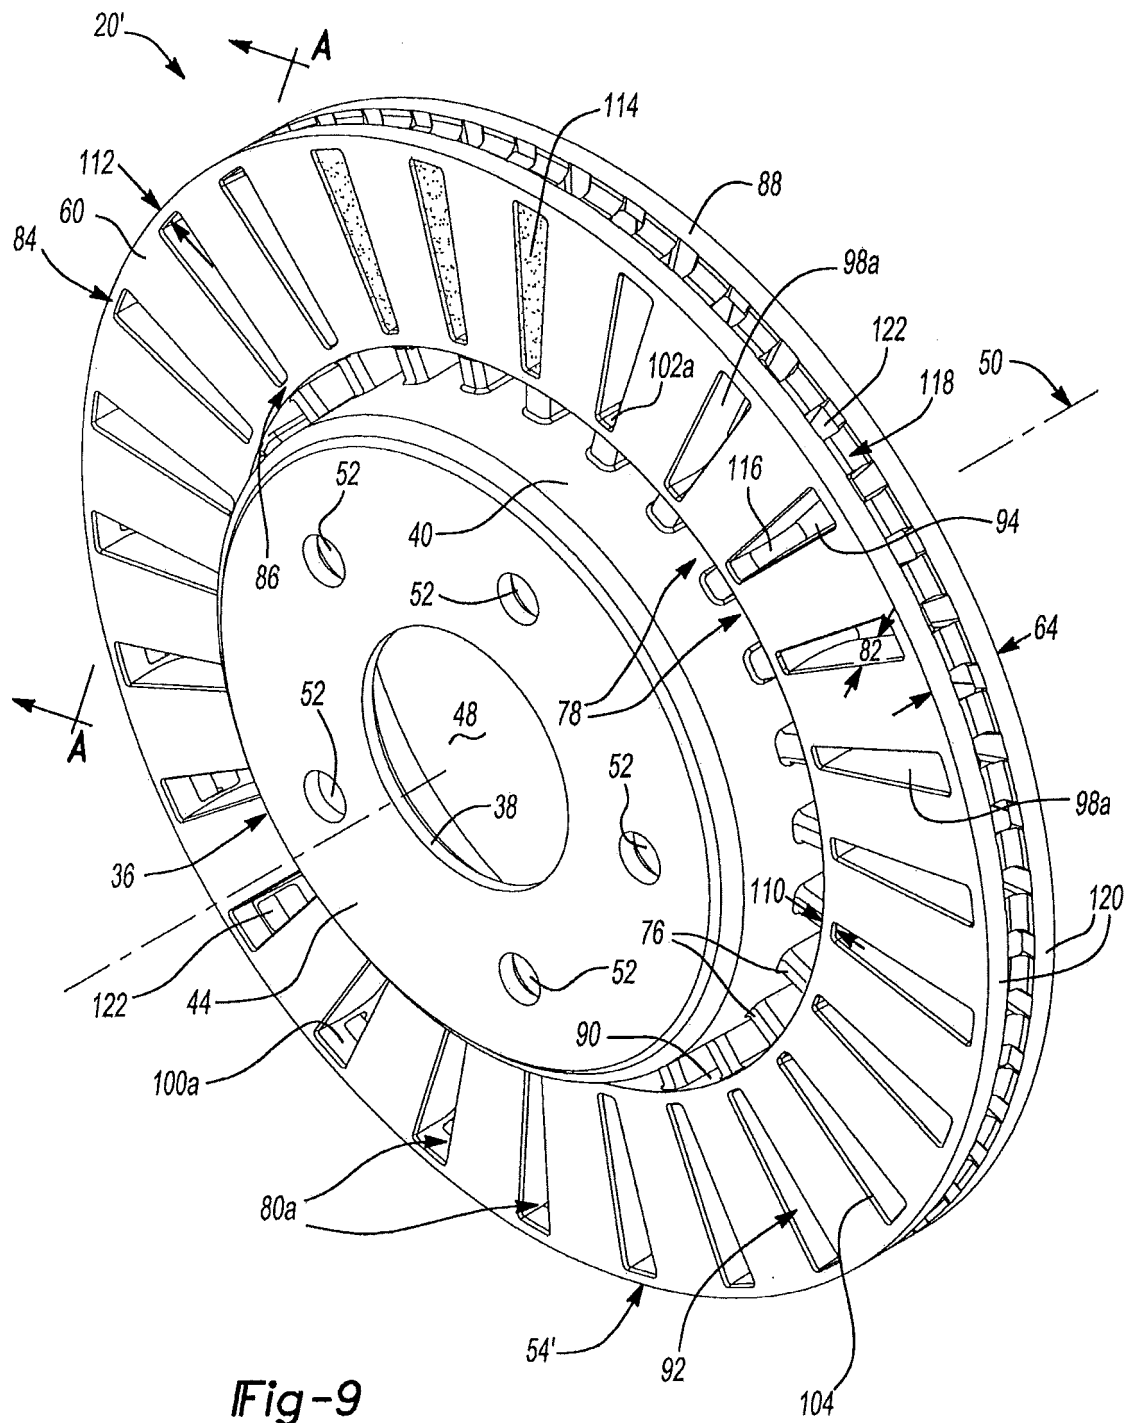




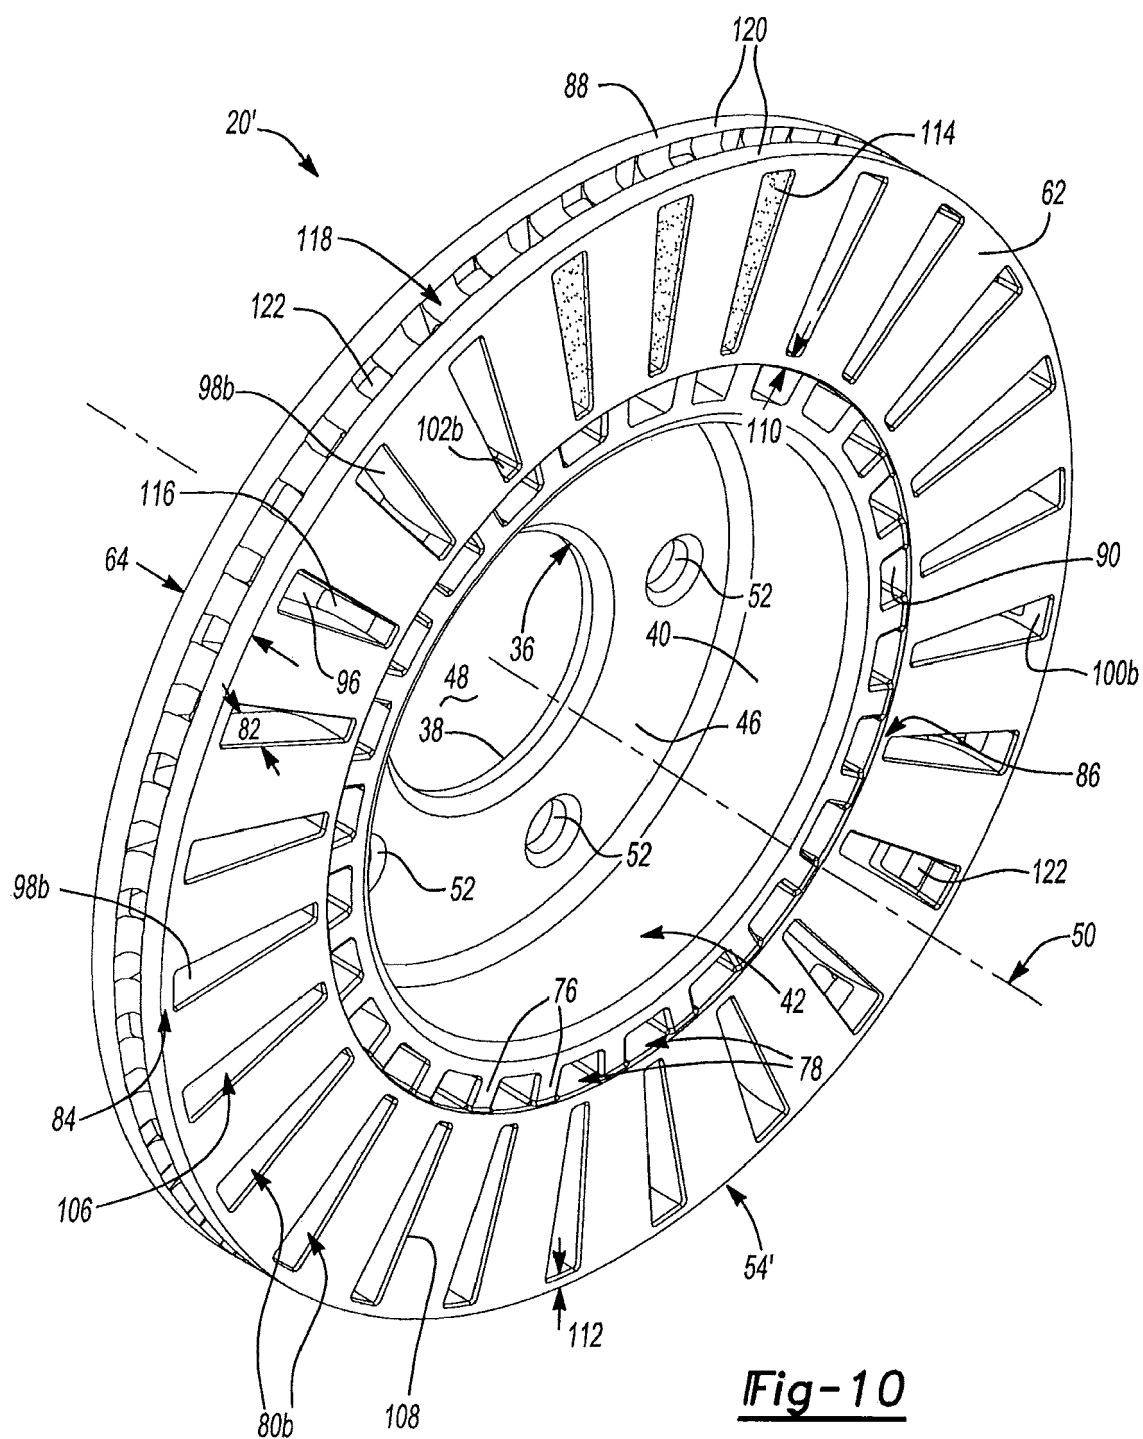


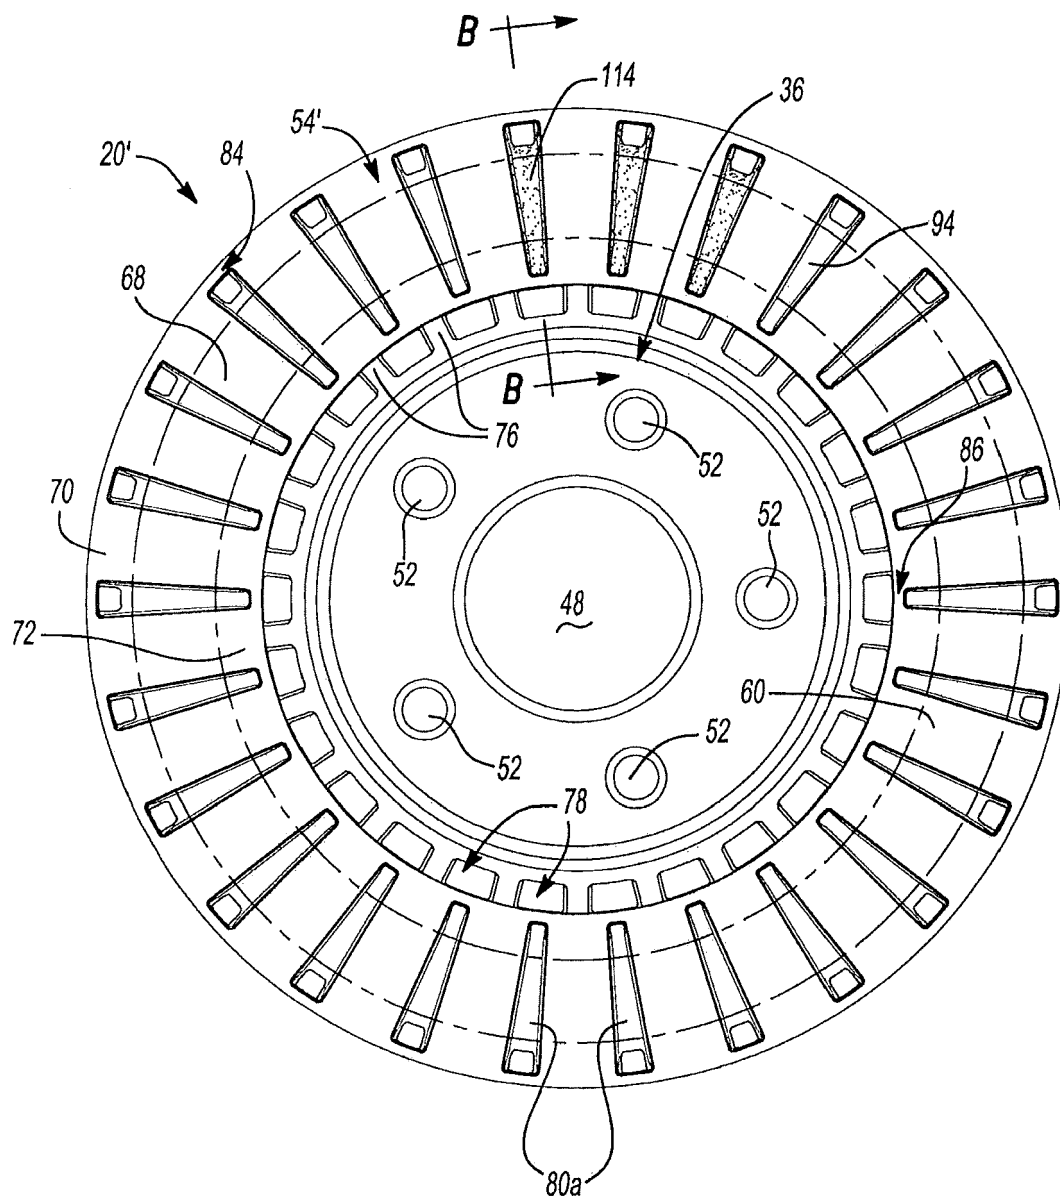


**Fig-11**

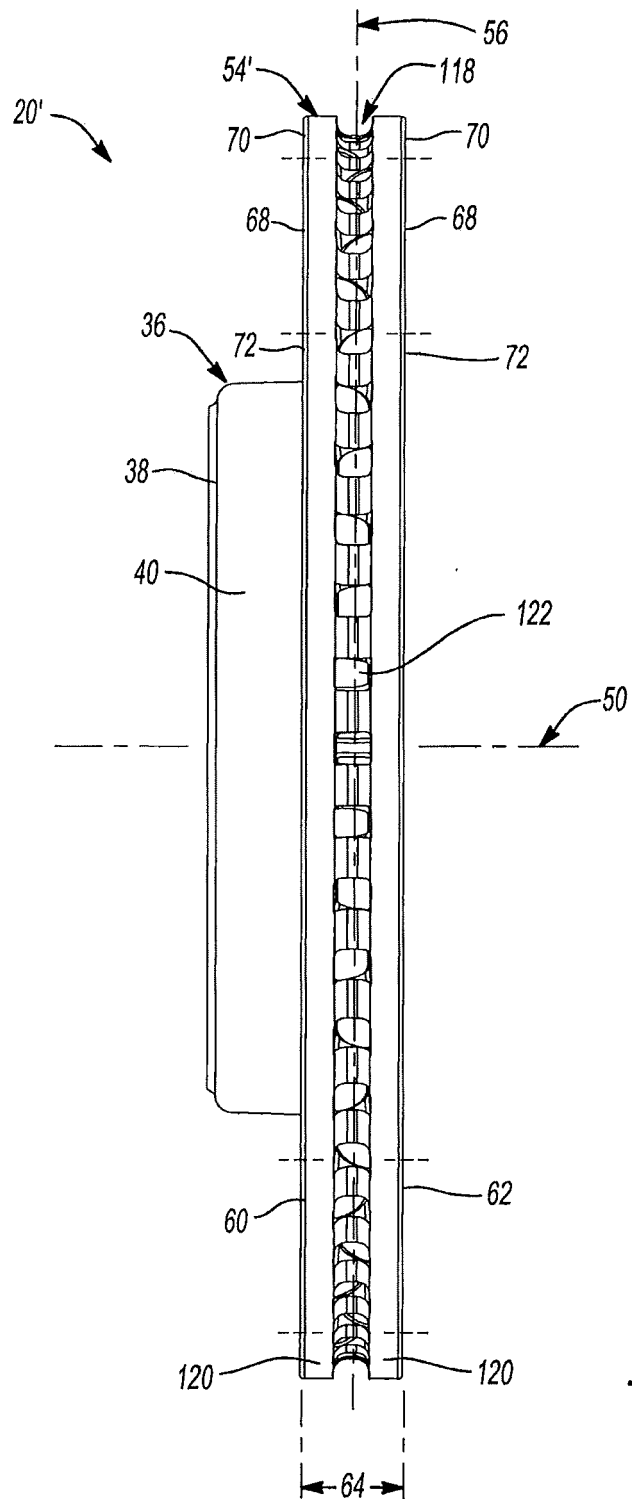


**Fig-12**

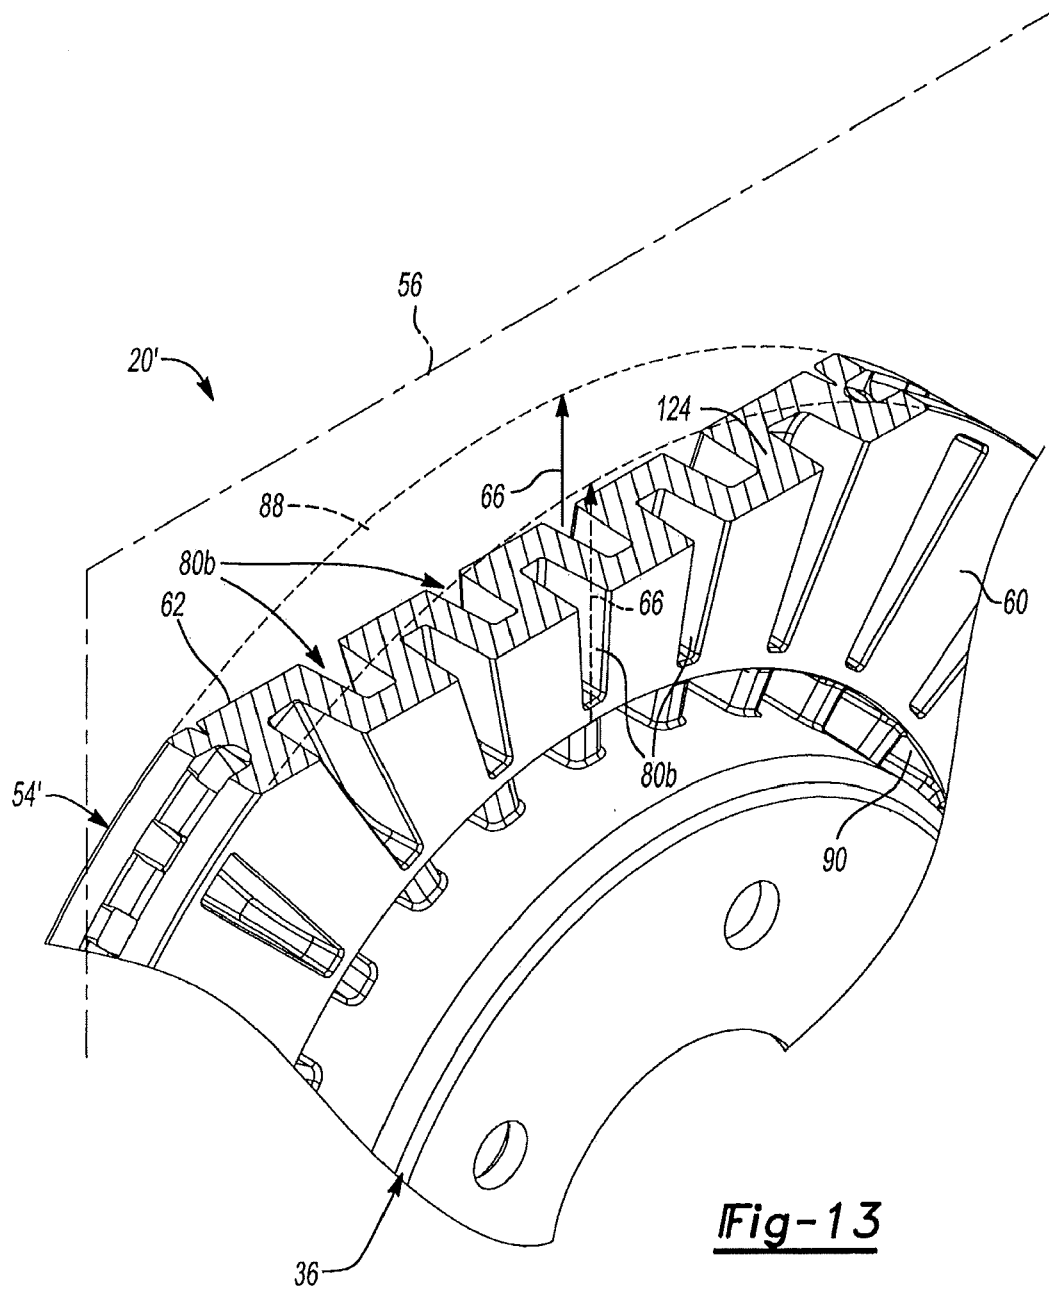

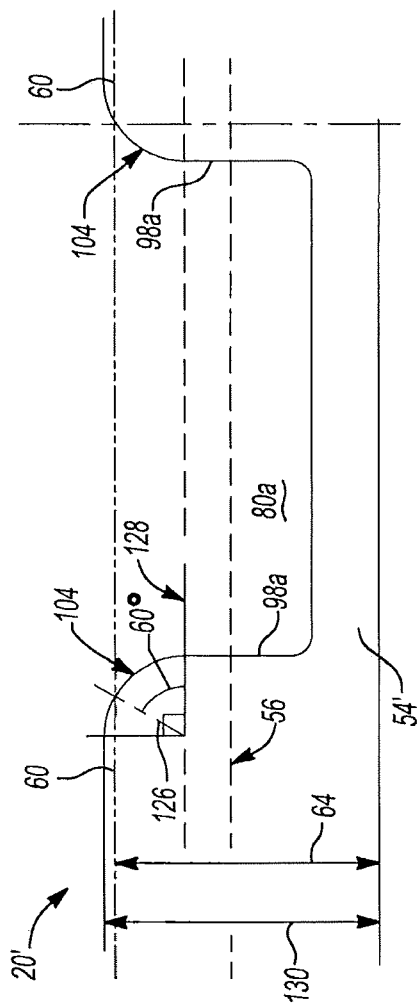

**Fig-14**

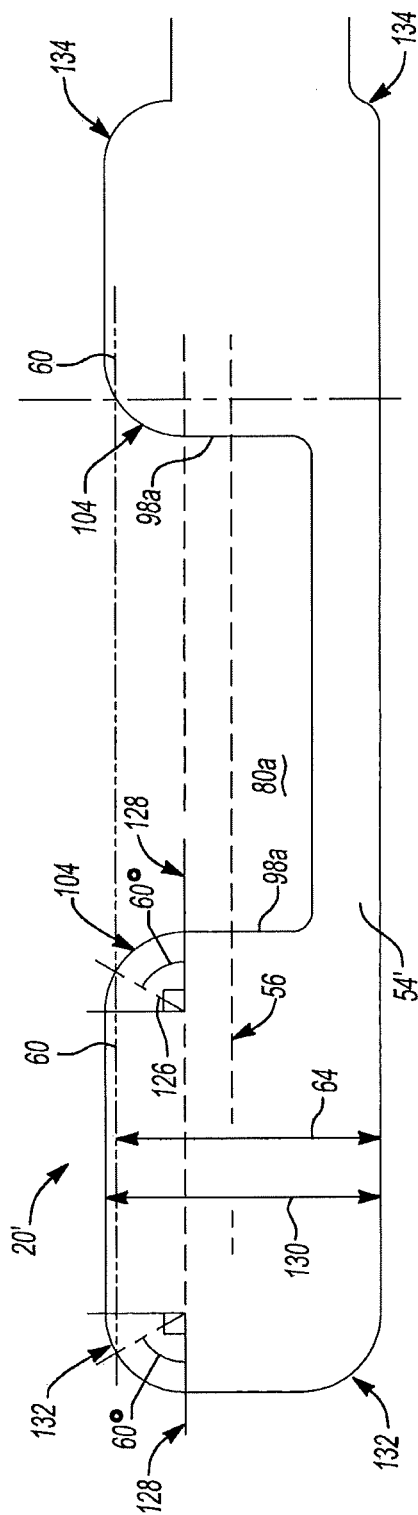

**Fig-15**



## EUROPEAN SEARCH REPORT

 Application Number  
 EP 16 17 4156

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	DE 26 20 261 A1 (SCHWABISCHE HUETTENWERKE GMBH) 17 November 1977 (1977-11-17) * page 7, paragraph 1 - page 9, last paragraph; figures *	1-12	INV. F16D65/12 F16D65/847
A	EP 1 085 230 A1 (CONTINENTAL TEVES AG & CO OHG [DE]) 21 March 2001 (2001-03-21) * paragraphs [0007], [0008]; figures 1,2 *	1-12	
A	US 2012/255820 A1 (MCCORD GEOFFREY K [CA] ET AL) 11 October 2012 (2012-10-11) * paragraphs [0040], [0041]; figure 5 *	1-12	
A	US 6 161 660 A (SUGA TOSHITAKA [JP] ET AL) 19 December 2000 (2000-12-19) * column 6, line 38 - line 59; figure 9 *	1-12	
			TECHNICAL FIELDS SEARCHED (IPC)
			F16D
The present search report has been drawn up for all claims			
Place of search <b>Munich</b>		Date of completion of the search <b>4 May 2017</b>	Examiner <b>van Koten, Gert</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1  
 EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 17 4156

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-05-2017

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 2620261 A1	17-11-1977	NONE	
EP 1085230 A1	21-03-2001	DE 19943893 A1 EP 1085230 A1	15-03-2001 21-03-2001
US 2012255820 A1	11-10-2012	CA 2769431 A1 GB 2488654 A US 2012255820 A1	01-09-2012 05-09-2012 11-10-2012
US 6161660 A	19-12-2000	JP H11141585 A US 6161660 A	25-05-1999 19-12-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 6739437 B, George A. Garfinkel **[0005]**