



(11) **EP 3 191 211 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

- (15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Description Paragraph(s) 15, 20, 38, 74, 95
- (48) Corrigendum issued on:
15.06.2022 Bulletin 2022/24
- (45) Date of publication and mention of the grant of the patent:
23.02.2022 Bulletin 2022/08
- (21) Application number: **14766461.9**
- (22) Date of filing: **12.09.2014**
- (51) International Patent Classification (IPC):
B01D 53/04 ^(2006.01) **B01J 20/28** ^(2006.01)
B01J 47/02 ^(2017.01) **B01D 53/047** ^(2006.01)
B01D 53/053 ^(2006.01)
- (52) Cooperative Patent Classification (CPC):
B01D 53/0415; A01K 63/042; B01D 53/0462;
B01D 53/047; B01D 53/053; B01J 20/20;
B01J 20/261; B01J 20/267; B01J 20/2805;
B01J 20/28052; B01J 20/28059; B01J 20/28069;
B01J 20/28078; B01J 20/2808; B01J 20/28083;
(Cont.)
- (86) International application number:
PCT/EP2014/069569
- (87) International publication number:
WO 2016/037668 (17.03.2016 Gazette 2016/11)

(54) **METHOD AND DEVICE FOR THE REVERSIBLE ADSORPTION OF CARBON DIOXIDE**
VERFAHREN UND VORRICHTUNG ZUR REVERSIBLEN ADSORPTION VON KOHLENDIOXID
PROCÉDÉ ET DISPOSITIF POUR L'ADSORPTION RÉVERSIBLE DE DIOXYDE DE CARBONE

- | | |
|---|--|
| <p>(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR</p> <p>(43) Date of publication of application:
19.07.2017 Bulletin 2017/29</p> <p>(73) Proprietor: Skytree B.V.
1098 XH Amsterdam (NL)</p> <p>(72) Inventors:
• BEAUMONT, Maximus Llewelyn
1011 HW Amsterdam (NL)
• THIRKETTLE, Anthony Charles
2312 VK Leiden (NL)</p> <p>(74) Representative: HGF
HGF BV
Benoordenhoutseweg 46
2596 BC The Hague (NL)</p> | <p>(56) References cited:
EP-A1- 1 364 698 WO-A2-01/21269
US-A- 3 627 478 US-A1- 2011 146 487</p> <p>• W. Richard Alesi ET AL: "Evaluation of a Primary Amine-Functionalized Ion-Exchange Resin for CO₂ Capture", INDUSTRIAL & ENGINEERING CHEMISTRY RESEARCH, vol. 51, no. 19, 7 May 2012 (2012-05-07), pages 6907-6915, XP055581507, ISSN: 0888-5885, DOI: 10.1021/ie300452c</p> |
|---|--|

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 191 211 B9

(52) Cooperative Patent Classification (CPC): (Cont.)
B01J 20/28085; B01J 20/3425; B01J 20/3441;
B01J 20/3458; B01J 20/3483; B01J 20/3491;
B01D 2253/202; B01D 2253/206; B01D 2253/306;
B01D 2253/308; B01D 2256/22; B01D 2257/504;
B01J 2220/62; Y02C 20/40; Y02P 60/20

DescriptionField of the Invention

- 5 **[0001]** The subject invention relates to a method and a device for the reversible adsorption of carbon dioxide from a gas mixture.
- [0002]** The invention relates to a regenerative system comprising an adsorbent for capturing carbon dioxide reversibly from a gas stream, including ambient air.
- 10 **[0003]** Presently applied processes for the adsorption and desorption of carbon dioxide typically focus on gas streams with higher concentrations thereof, e.g. flue gases from industrial and energy production processes, such as for instance integrated gasification combined cycle (IGCC) processes. Herein, typically fluid components are employed which are contacted with the gas mixture, and are energy intensive, and/or driven by the comparatively high carbon dioxide concentrations. Typically these processes also remove other gaseous components from flue gases, such as nitrogen and sulphuric oxides. The thus obtained carbon dioxide may be separated off and typically is then pressurized for storage and use; however it typically contains impurities that are difficult to separate off.
- 15 **[0004]** Where solid adsorbent materials with functionalized surfaces are used for carbon dioxide adsorption, it is usually contained in a closed system, such as a flue stacks. In the case of air recycling systems for confined spaces, such as offices, submarines and spacecraft, the material is held in a packed bed form and fed with pressurized gas.
- [0005]** Alternatively, bottled carbon dioxide is available from companies that are producing bottled gases through separation of air, typically using large scale cryostatic air liquefaction processes. Again, typically the products include concentrated solid and bottled liquid carbon dioxide, typically of high quality. However, the liquefaction processes consume a tremendous amount of energy, additional to the transport costs and energy use for storage and transport to a suitable user.
- 20 **[0006]** Conversely, a major use of the carbon dioxide is in the production of plants in greenhouses, and increasingly, also for the production of microalgae in photo-bioreactors, for fuels and products derived therefrom.
- [0007]** However, the above-described carbon dioxide production processes are typically located in industrial areas that are remote from those of the potential application, adding costs for transport of bottled carbon dioxide, or requiring the installation of pipelines that are expensive and difficult to maintain.
- [0008]** At the same time, greenhouse owners are known to often burn natural gas or even coal and to use the flue gas mixture to increase the growth of the plants in the greenhouses, since the costs for this are lower than those for bottled carbon dioxide, despite the negative environmental impact. Furthermore, components of the flue gas mixture may very well negatively affect plant growth.
- 30 **[0009]** Accordingly, there remains a need for a process that can efficiently and with low energy consumption, generate a gas mixture comprising carbon dioxide in a higher concentration than in ambient air, preferably also without comprising noxious components.
- 35 **[0010]** Recently, processes using solid amine adsorption to capture atmospheric carbon dioxide have been reported. WO-A-2010/091831 for instance discloses a structure composed of fibre filaments wherein the fibre material is carbon and/or polyacrylonitrile and containing a sorbent with amine groups that is capable of a reversible adsorption and desorption cycle for capturing CO₂ from a gas mixture.
- 40 **[0011]** WO-A-2007/016271 and WO-A-2008/131132 discloses methods for removing carbon dioxide from a gas stream, comprising placing the gas stream in contact with a tertiary or quaternary ammonium functionalised resin placed in a roll-geometry chamber or a plurality of roll-geometry chamber connected in series, wetting the resin with water, collecting water vapour and carbon dioxide from the resin, and separating the carbon dioxide from the water vapour.
- [0012]** US20110296872 discloses a process for removing carbon dioxide from a gas stream, comprising contacting the gas stream with a solid inorganic sorbent substrate comprising an immobilized ammonium functionalised inorganic material as sorbent, and releasing the carbon dioxide subsequently.
- 45 **[0013]** The disclosed process has the issue of achieving a suitable adsorption and flow rates through the sorbent substrate, while also having to move the substrate to release the carbon dioxide.
- [0014]** WO00/02643 discloses a process for removing carbon dioxide from closed or semi-closed aircraft or submarine cabins, using one or more parallel bed of beads of an ionic exchange resins having benzylamine groups for removal of carbon dioxide from closed or semi-closed space-, aircraft or submarine cabins; whereby the regeneration can only take place once there is access to outside air, without the issue of toxicity of the released carbon dioxide.
- 50 **[0015]** US2011/146487 discloses a device for the reversible desorption of gases from a gas mixture, among which CO₂. However, the document is silent about the specific adsorbents that may be employed, and also does not provide for a specific heating means or arrangement. An article by W. Richard Alesi et al., Industrial & Engineering Chemistry Research, vol. 51, no. 19, 7 May 2012, discloses the use of a specific adsorbent for the reversible adsorption and desorption of CO₂, using high pressure and temperature changes.
- 55 **[0016]** Applicants now have found a process and a device for executing the process that provides gas mixtures having

an increased carbon dioxide level, which permits to operate at a higher carbon dioxide yield, and with significantly lower energy use.

[0017] The subject process and device permits to produce gas mixtures having an increased carbon dioxide level without the need for using highly pressurized equipment and/or cryostatic devices at lower financial expenditure than other known air-capture processes. It also has a lower volume requirement, higher stability; creates no perceptible odours such as typically the case when quaternary amines were to be used, and offers at least an equal or higher CO₂ capture performance with respect to weight and more practical than present processes using solid or liquid adsorbents.

SUMMARY OF THE INVENTION

[0018] Accordingly, in a first aspect, the present invention relates to a device for the reversible adsorption of carbon dioxide from a gas mixture, comprising:

i) at least one adsorbent vessel comprising a plurality of gas permeable cartridges of an inert and dimensionally stable material, wherein each cartridge comprises a suitable polymeric particular adsorbent for carbon dioxide having a primary amino functionality at a total capacity of at least 2.0 eq./l, a surface area (BET) in the range of from 25 to 75 m²/g, and an average pore diameter of 1 to 200 nm, in a loose configuration, and wherein each cartridge further comprises a gas permeable membrane or mesh with an average pore diameter in the range of from 0.01 - 0.25mm, for holding the adsorbent,

ii) means for desorption of adsorbed carbon dioxide from the adsorbent in each cartridge by a pressure, humidity and/or temperature adsorption swing in the cartridge, and iii) means for directing desorbed carbon dioxide from each cartridge; and iv) means for heating the saturated adsorbent electrically to a temperature of from 60°C to 150°C.

[0019] In a second aspect, the subject invention relates to an arrangement for the enhancement of plant growth, comprising a device according to any one of the preceding claims, and further comprising means for distributing the desorbed carbon dioxide, such as a gas duct, and/or a sparger. The term "sparger" herein may be any suitable means for the distribution of gas, including ceramic or metal diffusers for aquatic use.

[0020] In yet a further aspect, the present invention relates to a process for separating carbon dioxide from a gas mixture by a pressure and/or humidity and/or temperature swing, adsorption - desorption process in a device according to any one of claims 1 to 6, the process comprising the steps of:

(a) contacting the gas mixture with the adsorbent at a pressure P_1 , a humidity H_1 and a temperature T_1 until a desired amount of carbon dioxide is adsorbed onto the adsorbent, and

(b) desorbing at least part of the carbon dioxide adsorbed in step (a), to produce a stream enriched in carbon dioxide at a total pressure P_2 and/or a temperature T_2 , at which temperature the carbon dioxide has a lower adsorption constant with respect to the adsorbent and therefore at least in part desorbs,

wherein step (b) includes heating the adsorbent in a cartridge with an electrical heating means to a temperature of from 60°C to 150°C, and further comprising:

(c) directing the released gaseous stream comprising the desorbed carbon dioxide to a desired application.

BRIEF DESCRIPTION OF THE FIGURES

[0021] Embodiments of the invention are described in greater detail hereinafter relative to the drawings, wherein:

Fig. 1 discloses a schematic view of the above described process which comprises of three main elements: the cartridges, a sealable enclosure volume to house the cartridges and process related energy and fluid flows.

Fig. 2 discloses a representation of an adsorbent stack comprising a preferred cartridge thickness and cartridge spacing optimized for ambient atmospheric CO₂ capture.

Fig. 3 shows a schematic overview of a preferred arrangement.

Fig. 4 shows CO₂ the desorption over time.

Fig. 5 shows the mass increase in % wt. of adsorbent in 1 and 5 cm thick cartridges at ambient conditions (22°C, 380 ppm CO₂, 45 % humidity).

Fig. 6 and 7 show schematically a preferred arrangement for use in an aquarium, with a single cartridge and electrical heating for the regeneration.

Fig.8 shows a line up for use with an aquarium.

[0022] The reference numbers are collated in Table 1:

Table 1 Reference numerals

1	Solar heat
2	Represents ambient air, gas stream & heating fluid
3	Concentrated CO ₂
4	Material cartridges
5	Material enclosure (sealable)
6	Heat, air and/or water recuperation
7	Cartridge enclosing material
8	Permeable membrane with minimum pore diameter
9	Cartridge width optimized for atmospheric adsorption (5-50mm)
10	Cartridge spacing optimized for adequate air convection (10-100mm)
11	Cartridge stacking optimizing unit volume
12	Closed greenhouse
13	CO ₂ -capture unit
14	Ambient atmospheric CO ₂
15	Concentrated CO ₂ supply
16	Power & low heat
17	Closed greenhouse vent transporting air with higher concentration CO ₂ out of greenhouse to the natural environment after venting it first through the air-capture unit
18	Mesh
19	Sorbent
20	Frame
21	Heater wire
22	Power contacts
23	Sparger
24	PCB Controller
25	Micro-Pump
26	Simple user controls
27	Enclosed volume
28	Actuator
29	Cartridge with wire heater (xn)
30	Ambient air
31	Storage buffer

DETAILED DESCRIPTION OF THE INVENTION

[0023] The present invention relates to carbon dioxide capture from a gas mixture, preferably ambient air, which could provide current and future users of carbon dioxide with a sustainable, on-site source of carbon dioxide offering greater supply reliability and location flexibility. The technology may advantageously be employed for enhancing plant growth in e.g. greenhouses for food or energy plants, or decorative purposes such as flowers; for biofuel or nutraceutical production through microalgae, and for other applications such as in the beverage industry, for storage under carbon dioxide, for medical applications and so on.

[0024] The subject process and device are in particular suitable for the fertilization by carbon dioxide enrichment of a greenhouse environment, where the process can increase crop yields and thus revenue, by up to 40%.

[0025] Further advantages of the carbon dioxide process according to the invention when used in greenhouses or other applications with respect to the traditional carbon dioxide sources include greater reliability of CO₂ supply; greater location flexibility for greenhouse not having to consider a fixed CO₂ source; a CO₂ mixture without contaminants detrimental to plant growth; more control over CO₂ supply given to the greenhouse operator; and the possibility to use sustainable air-captured CO₂ as a marketing tool to enhance sales of the greenhouse crop.

[0026] A particularly useful application of the present invention relates to a method and apparatus for supplying carbon dioxide to vivaria, such as terraria and aquaria. More particularly, it relates to a carbon dioxide production and delivery apparatus and related method to increase the carbon dioxide concentration in aquaria, to promote photosynthesis and plant growth.

[0027] It is well known that during photosynthesis plants absorb carbon dioxide from the surrounding medium and convert it into simple carbohydrates, utilising the sun's energy, whilst releasing oxygen.

[0028] This process is essential for the survival and growth of the plant. The rate of photosynthesis is affected, amongst other factors, by the availability of carbon dioxide in the surrounding medium. A higher concentration of carbon dioxide will lead to an increased rate of photosynthesis, whilst a low carbon dioxide concentration will severely retard the rate of photosynthesis.

[0029] Aquatic plants require dissolved carbon dioxide in the surrounding water to enable them to grow. The concentration of carbon dioxide in the water is limited, in part, by the surface area of the water that is in contact with a carbon dioxide supply, such as the atmosphere, and the volume of water in which carbon dioxide can dissolve. The same logic applies to other types of closed vivaria that require specific environmental conditions, e.g. containers enclosed to keep an ecosystem alive. The term "vivarium" herein relates to tanks, pools or otherwise containers essentially filled with water for keeping live fish and other aquatic aerobic animals, including storage tanks; and to terraria, i.e. enclosures for keeping and raising living animals and plants and observing them under natural conditions. Examples include enclosed miniature gardens for e.g. tropical plants such as orchids or ferns, whereby these are typically in a closed sun-light transparent environment, permitting percolation of water vapour gas streams, thereby creating self-sustained ecosystems.

[0030] Oceans, rivers or lakes have relatively large surface areas and volumes with regard to the few photosynthetic organisms, aquaria typically offer only a relatively small surface area, yet typically contain a high proportion of plant matter. This necessitates a relatively high concentration of carbon dioxide in the water to enable the plants to thrive. Furthermore, the maintenance of aquatic organisms often requires specific environmental conditions, including important parameters such as water temperature, pH, presence of salts and amount of dissolved gases, including oxygen and carbon monoxide and dioxide.

[0031] The potential for the growth and proliferation of certain aquatic life forms also may require presence of flora and fauna specific to the natural habitat besides the presence of appropriate nutrients. Hence, there is a general trend to encourage growth of certain plant species in aquaria, also due to the photosynthetic oxygen production, thus creating a better environment for aquatic aerobic organisms, as well as for aesthetic reasons. Typically, carbon dioxide concentration of aquarium water is maintained at a high level in order to encourage plant growth, and thereby also helps to maintain the dissolved oxygen concentration. Presently employed systems tend to either utilise compressed carbon dioxide from compressed gas cylinders. This solution requires high-pressure reducing valves and high-pressure tubing, which is impractical for the average aquarium owner, due to the high capital expenditure and high maintenance costs, and regular replacement of empty gas bottles. An alternative to such systems uses the carbon dioxide released by fermentation from e.g. sugar by yeasts to produce CO₂, which is then introduced into the aquarium.

[0032] The present invention relates to a device for the provision of atmospheric carbon dioxide to vivaria, and in particular to aquaria, which does not require the use of compressed gas, or confined carbon dioxide generating species.

[0033] Accordingly, it is also an object of the present invention to provide a system capable of producing and safely dissolving carbon dioxide into aquaria, whilst avoiding the problems of the presently employed systems.

[0034] Furthermore, it is an object of the present invention to provide a system capable of controllably introducing carbon dioxide into aquarium water selectively.

[0035] The invention therefore relates to a regenerative carbon dioxide production and delivery apparatus for aquaria comprising an adsorbent for capturing carbon dioxide reversibly from a gas stream, including ambient air, the apparatus comprising an adsorption/desorption device capable of producing a carbon dioxide enriched gas stream, a distribution means capable of introducing carbon dioxide or air into an aquarium through which the carbon dioxide is delivered into the aquarium.

[0036] The invention thus relates to a device for the adsorption of carbon dioxide from a gas stream on an adsorbent that is suitable for the regenerative adsorption of carbon dioxide, further comprising means for desorbing the carbon dioxide and a subsequent supply of the desorbed carbon dioxide to an aquarium, comprising means for the supply of the carbon dioxide enriched gas stream to an aquarium to form at least in part dissolved carbon dioxide. The regeneration

of the adsorbent is done by heating the saturated adsorbent electrically.

[0037] The present invention makes use of a reversible adsorption and desorption process, wherein the adsorbent composition can be regenerated, i.e. the absorbed carbon dioxide can be released again, through for instance temperature, humidity and/or pressure swing.

[0038] Different adsorbents may be employed according to the required circumstances. For the supply of carbon dioxide to e.g. aquaria, the adsorbent may be any suitable adsorbent that allows for regenerative adsorption and desorption under the mild conditions as employed. Typical adsorbents are solids, typically with an amine functionality, such as inorganic or organic polymeric components with sufficiently high surface areas per volume, e.g. zeolites, alumina, silica, silica alumina, and organic polymers, such as light and porous beads or membranes.

[0039] Examples include zeolites, also referred to as molecular sieves; ceramic based materials eg. alumina, alumina-silica; titania; activated carbon, all of which may be modified by suitable amines, e.g. Diethanolamine (DEA) or Polyethylenimine (PEI); or divinylbenzene based materials, or ethylenediamine-modified silica gels

[0040] While the inorganic materials typically excel in high physical strength, the modification and regeneration conditions require high temperature and pressure, due to e.g. high heat capacity, which makes the often unsuitable for household use, or applications under mild conditions.

[0041] Activated carbon may be employed, e.g. DEA embedded activated carbon; however, it was found that this compound is not as sufficiently stable for a prolonged use, as it showed degradation under room conditions after two months.

[0042] The present process preferably makes use of a particular adsorbent having primary amino functionality, e.g. benzyl amine, as this was found to be most effective, and highly stable. Such materials have wide spread use as ion-exchange resins in bead form. Typical uses are in waste treatment and water purification. The resins can be produced in the form of beads or membranes, the latter including beads with a particular particle size distribution, dependent on the manufacturing process.

[0043] The polymeric beads can be functionalized to act as ion exchangers or absorbers/adsorbers for certain molecules. Typically, they are held in a pack bed configuration in a closed system, and used as a filter medium. After completing their purification/capture task, they are usually regenerated by washing with a solution or by applying heat.

[0044] Applicants found that a particularly suitable adsorbent for the present process and device is a polymeric particular adsorbent having a primary amino functionality at a total capacity of at least 2.0 eq./l, a surface area (BET) in the range of from 25 to 75 m²/g, and an average pore diameter of 1 to 200 nm, more preferably of from 5 to 150 nm.

[0045] The surface area may preferably be determined according to Brunauer-Emmett-Teller (BET) Surface Area Determination - Test Method - BS 4359-1:1996 (ISO 9277:1). The total capacity and other properties may preferably be determined according to test method ASTM D2187-94.

[0046] A particularly preferred adsorbent is a free base amine bead functionalized with the primary amine benzylamine and supported on a porous polyester structure crosslinked with divinyl benzene. The adsorbent preferably is in the form of spherical beads, which are functionalised with benzyl amine groups. The polymeric matrix hence comprises crosslinked polystyrene. It preferably has an activity expressed as total capacity of at least 2 eq./l, more preferably at least 2.1 and yet more preferably at least 2.2. It preferably has a uniformity coefficient of at most 1.9, more preferably at most 1.8.

[0047] The beads preferably have a size in the range of from 0.25 to 1.5 mm, more preferably 0.3 to 1.3 mm, for at least 85% of the particles present. The adsorbent preferably has a bulk density of 600 g/l to 720 g/l, with a variation of +/- 5 %.

[0048] The water retention rate preferably is in the range of from 60 to 75 wt. %, more preferably in the range of from 65 to 70 wt. %.

[0049] The adsorbent surface area (BET) preferably is in the range of from 30 to 65 m²/g, more preferably 40 to 60, and most preferably 45 to 55 m²/g.

[0050] The pore volume preferably is in the range of from 0.2 to 0.4 cm³/gm. The adsorbent preferably has an average pore diameter of 25 nm.

[0051] The adsorbent is placed in one or more media containing elements, further referred to as cartridges herein. The adsorbent preferably is in a loose configuration, i.e. not a packed bed configuration, to permit the gas mixture to circulate through the adsorbent without the need for significantly pressurizing the fed gas mixture.

[0052] The cartridge further comprises a gas permeable membrane or division having an average pore diameter in the range of from 0.01 to 0.25 mm to allow the gas mixture ample access to the adsorbent particles, while maintaining the adsorbent particles in place. The cartridges may further comprise additional means to keep the adsorbent in place, e.g. they can be in the shape of stepped bags, or maintain corrugated structures, provided these do not negatively influence the diffusion of the gas mixture through the adsorbent particles or beads.

[0053] The adsorbent may also be employed in a different manner, e.g. it may come in the form of beads but also other shapes eg. cylinders, sheets, solid blocks may be useful, provided that they provide the surface area and activity as required. Blocks might be prepared for instance by processes include injection molding.

[0054] Preferably, independently from the actual shape chosen, the cartridges have a thickness in the direction of the

flow of the gas mixture in the range of from 5 mm to 50 mm, and are spaced apart in distance sufficient to allow for the adequate diffusion of atmospheric carbon dioxide between them.

[0055] Applicants found that the thickness of the cartridges was relevant for the adsorption speed, and largely independent from various low gas flow speeds. A higher thickness no longer permitted to have adsorption/desorption cycles useful for industrial processes, which preferably are in the range of from 2 to 24 hours if working under ambient conditions.

[0056] The actual gas flow rates are preferably in the range of from 0.1 to 15m/s, more preferably in the range of from 0.5 to 5 m/s. The actual the shape and thickness of the cartridges may be adjusted according to the desired adsorption - desorption regeneration cycle, which preferably is in the range of from 2 to 24 hours.

[0057] Preferably, the cartridges are placed sequentially with respect to the direction of the gas mixture.

[0058] The device according to the invention further preferably comprises means for the supplying the gas mixture to the cartridges.

[0059] The device advantageously allows the use of low grade heat sources, more preferably renewable or sustainable heat sources, e.g. geothermal energy, solar energy or industrial waste heat for the desorption.

[0060] The heat may be applied to the device via a heat exchanger, where suitable. During the regeneration, i.e. desorption process, a suitable construction like a reverse valve, or other means of sealing the device from the ambient air flow may be applied in order to capture the released carbon dioxide.

[0061] The desorption process is preferably done by a fluid, e.g. a gas stream such as air, water vapour, or water purging the adsorbent, preferably at atmospheric or reduced pressure. This fluid stream may also be used to heat up the system for the desorption process before and after entering the structure.

[0062] The present device and process is particularly suitable for producing rather carbon dioxide enriched gas streams, such as air, containing of from 1 % to 99.99% of carbon dioxide, which is for example in the range demanded by greenhouse operators who fertilize their plants with higher carbon dioxide concentrations.

[0063] Preferably, the device according to the invention further comprises means for desorption of the adsorbed carbon dioxide by pressure, humidity and/or temperature adsorption swing, and means for directing the desorbed gas mixture from the adsorbent cartridges.

[0064] The device and process preferably operate at a pressure in the range of from 0.05 - 1 .5 bar, more preferably of from 0.1 - 1 .3 bar.

[0065] The device and process preferably operate at a temperature of from - 20 to 150 °C, preferably in the range of from 0 to 120°C, yet more preferably 10 to 100 °C.

[0066] Preferably, the device according to the invention further comprises a means for recuperation of heat and/or fluids, and a desorbed gas mixture. Preferably, the device according to the invention further comprises a means for measuring the carbon dioxide adsorption level and/or gas flow rates.

[0067] Preferably, the device according to the invention comprises a means for contacting the adsorbent with a warm fluid for inducing desorption of the carbon dioxide.

[0068] Preferably, the device according to the invention also comprises an arrangement to subject the cartridges to reduced pressure, and subsequently to contact the cartridges with water having a temperature in the range of from 60 ° C to 100 °C, and means for separating water or water vapour from the released carbon dioxide for recycling to arrangement.

[0069] Preferably, in the device according to the invention, one or more cartridges are arranged sequentially and/or parallel such that one or more cartridges can be removed for replacement and/or maintenance of any cartridge without having to stop the adsorption process.

[0070] The present invention further relates to an arrangement also comprising a green house for higher plants, or a photo bioreactor for microalgae growth.

[0071] The arrangement preferably comprises a low grade energy provision means, preferably a renewable source of heat, as set out above.

[0072] In the process according to the invention, step (b) includes contacting the cartridges with a fluid at a temperature in the range of from 60 °C to 100 °C, and optionally, optionally at a reduced pressure. Preferably, the fluid is water or air.

[0073] Alternatively, step (b) includes heating the adsorbent material in a cartridge directly. This may advantageously be done by having heating means present in the cartage, e.g. metal wires or foils that are electrically heatable by resistance or induction. Preferably these are made from a suitable material which is inert towards the adsorbent material and the formed carbon dioxide.

[0074] Examples for such materials include is palladium, platinum , nickel, cobalt, chrome, and/or iron wires, or alloys thereof such as Ni/Chr. The temperature required for a suitable release depends on the material to be employed, but generally should not reach a temperature whereby the adsorbent starts to release amine or starts retropolymerisation. A lower temperature applied, e.g. heating the adsorbent to a temperature of from 60 °C to 80 °C will allow for more cycles without adsorbent deactivation or decomposition as compared to heating to temperatures above 150°C.

[0075] The process preferably comprises alternating steps (a) and (b) in a pattern of between 2 minutes and 2 days, more preferably between 30 minutes and 24 hours. Preferably, the flow of the gas mixture for step (b) is reversed, the

temperature increased. Where a constant flow is desired, this may advantageously be achieved by the use of a buffer, whereby the carbon dioxide amount released into the final application can be kept constant, or by a using more than one cartridge in parallel, however different stages of the cycle.

5 [0076] For aquatic applications such as aquaria, the present invention has the benefit that the amount of carbon dioxide released, and thus present in an aquarium can be readily regulated by the amount of air that is removed from the adsorbent upon regeneration conditions, e.g. upon heating. This allows a number of highly relevant conditions to be achieved in the volume of an aquarium by simple flow and temperature controls, and therefore makes the subject process and apparatus in particular valuable for this application.

10 [0077] Accordingly, the present invention also relates to the use of the apparatus and process for the control the pH of a given aqueous environment. The control of the pH by simple addition of carbon dioxide at a predetermined flow and amount allows for instance the control of the water quality of fish ponds and fish installations, such as e.g. fish farms or koi ponds, whereby the quality of the fish, shrimp or koi is safeguarded. Kois (*Cyprinus carpio carpio*) tend to get stains from too high or too low pH, which is detrimental for their value, while fish farms need different, however controlled conditions for the fish larvae, or later stages of the fish's development.

15 [0078] A further use is the provision of carbon dioxide for the formation of calcium carbonate in salt water ponds, e.g. for colony forming aquatic life forms, such as a corals, or for the formation of the exoskeletons of diatomic microalgae.

[0079] The control of the pH of the water may also be employed to control the water quality in closed systems, e.g. the drink or use water piping on large marine vessels, such as cruise ships or airplane carries. These presently typically employ high pressured carbon dioxide canisters that need to be exchanged on regular instances, for the control of the water in the ships piping.

20 [0080] The process preferably comprises step (c) of directing the released gaseous stream comprising the desorbed carbon dioxide to a desired application, including a green house, a (micro) algae photo incubator, a beverage plant, and/or a storage facility.

[0081] The system may advantageously also include a storage buffer. Preferably the storage buffer comprises to store an amount of carbon dioxide enriched gas mixture as required for of from 0.1 to 2 days CO₂ usage for a particular application. The buffer can either hold the CO₂ gas in a compressed form, or by taking advantage of a solid storage structure such as Activated Carbon or a Metal Organic Framework.

25 [0082] The present invention also relates to the use of the subject device, arrangement and process for use in air-conditioning/ventilation applications, whereby carbon dioxide can be removed from confined spaces such as buildings, offices, hotel rooms, schools, air planes, submarines, high speed trains, and the likes, whether with or without pressurized cabins.

30 [0083] It furthermore relates to carbon dioxide supply for laboratories/scientific equipment and/or medical facilities, where presently compressed gas is employed.

35 Experimental Part

[0084] The following non-limiting examples illustrate the usefulness of the present invention.

40 Example 1: Adsorption Test

[0085] A round cartridge was loosely filled with adsorbent material, which was held in a container between two layers of mesh, at a thickness of 1 cm. The adsorbent material was a primary amino functional ion exchange resin (a divinyl benzene based polymeric particular adsorbent having a primary amino functionality at a total capacity of at least 2.0 eq./l, a surface area (BET) in the range of from 25 to 75 m²/g, and an average pore diameter 5 to 150 nm) and held between two layers of appropriately pored metal mesh was placed in an airtight sealable container. The container was linked to a vacuum pump, and a carbon dioxide sensor measuring out-coming gas streams. Temperature and humidity as well as carbon dioxide concentration were measured by suitable sensors throughout the test.

45 [0086] The adsorbent was exposed by opening the container allowing for natural diffusion of CO₂ into the material. It was then heated up to 60°C to 100°C.

[0087] During this process the adsorbed CO₂ was released and the resulting CO₂-rich gas inside the container was pumped through a flow meter and a CO₂ sensor. Combining measurements from these components enabled the direct measurement of the quantity of CO₂ adsorbed by the material over the exposure period (see Figure 4, showing the desorption over time, at a continuous flow rate of 1.0 l/min).

50 [0088] Table 2 discloses the adsorption of carbon dioxide, wherein the adsorption levels given as a percentage of [mass CO₂ adsorbed] / [dry mass sorbent material].

Table 2: CO₂ adsorption.

Exposure Period [hours]	CO ₂ captured [mass CO ₂ adsorbed] / [dry mass sorbent material]
5	0.46
5	0.41
5	0.44
>24	3.35

[0089] The container was then closed, and the adsorbed gas was removed via application of vacuum, while measuring the carbon dioxide concentration.

Summary of the results

[0090] As described, the material cartridges can be exposed to the ambient air at a determined thickness that negates need for using pressurized gas in the capture process. The test proves adequate of adsorption of CO₂ in this configuration by using a specialized set-up which exposes the material at a thickness of 10mm.

Example 2: Ambient adsorption test

[0091] Two rectangular cartridges having a dimensions of length by width of 10 cm, with an adsorbent bed thickness for cartridge 1 of 1 cm, and 5 cm for cartridge 2 by 20 cm (length by width by height). The cartridges comprised a stainless steel mesh, were loosely filled with a primary amino functional ion exchange resin, i.e. a divinyl benzene based polymeric particular adsorbent having a primary amino functionality at a total capacity of at least 2.0 eq./l, a surface area (BET) in the range of from 25 to 75 m²/g, and an average pore diameter 5 to 150 nm). The test cartridges were placed in a vacuum oven with nitrogen purge (MSL) to remove all adsorbed carbon dioxide. Then the cartridges was taken from the vacuum oven and placed on a scale, thereby exposed to the ambient air. The weight gain was measured over time, and corrected for humidity. Carbon dioxide adsorption was measured by a Mettler Toledo mass balance/4kg range (MSL), Sartorius BP310S mass balance/310g range (MSL).

[0092] The result indicated that at a given wind speed, cartridge 1 showed a sufficiently high adsorption rate that permitted a sufficiently fast adsorption/desorption rate for an industrial process, whereas the additional adsorbent in cartridge 2 did not permit to increase the amount of carbon dioxide that could be adsorbed and desorbed in this cycle, as illustrated in Figure 5.

Example 3: Electrically heated regeneration arrangement

[0093] In a cartridge according to Example 2 having a volume of 100 cm³, prior to loading with adsorbent material, a Nichrome wire, as typically used in hair dryers as heating means, of 40 cm length was embedded in a manner that allowed to heat the entirety of the content of the cartridge, by direct heat transfer to the adsorbent, which is in direct contact with the wire (see Figure 6). The cartridge was then loaded with adsorbent. Applying less than 15 W of electricity to the wire allowed heating the entire cartridge to over 80 °C in less than 20 minutes.

[0094] The wire may be configured in differently ways to maximize heating efficiency based on the shape of the cartridge, ie. spirally in the case of a cylindrical volume. Example 4: Aquarium CO₂ air-capture arrangement including timer, flow control and internet connectivity (figures 6 and 7): A device was prepared comprising the cartridge of Example 3. The cartridge was allowed to come into contact with ambient air at atmospheric conditions. For circulation of the released carbon dioxide, a small pump was employed.

[0095] The device operates by intermittently heating the adsorbent cartridge which had been exposed to the room air where the aquarium was placed, relying entirely on natural diffusion of the carbon dioxide. For larger applications this may also comprise a means for air flow, such as a fan to speed up the adsorption process by increasing the overall amount of carbon dioxide that the adsorbent is exposed to in the same period.

[0096] After the adsorption period, the cartridge enclosure is then sealed using a sealing mechanism comprising an actuator, then heated up to 80 °C while a micro-pump is used to extract the released carbon dioxide into the aquarium through a ceramic sparger/diffuser. The pump was chosen to supply the slight overpressure needed to ensure homogeneous gas distribution by the sparger, i.e. an overpressure of between 0.5 to 2.5 bar for the gas to get through.

[0097] The pump works either at a slow continuous rate, or at a faster rate at regular intermittencies, so as to avoid clear fluctuations in the CO₂ concentration in the water, to avoid stress to the living inhabitants of aquariums ie. the fish/shrimp/snails etc..

[0098] Alternatively a storage buffer for the CO₂ may be used from which the CO₂ is released gradually.

[0099] An advantage of the system is that additional functionality can be easily applied to the CO₂ supply device. For example, it will be easy to accurately adjust the flow rate of CO₂ as this can be directly linked to the pump, ie. no continuous adjusting with a pressure regulator required to get to the right bubble count. In addition, a timer can easily be integrated, without the need to buy an additional solenoid valve attached to the regulator. This is important because CO₂ is only required when incandescent light is available for the plants to perform photosynthesis. The system may further advantageously be remotely connected, e.g. through to the internet, to allow remote monitoring and controlling of the CO₂ supply, pH and other values, without the need to replace a gas cylinder.

[0100] Finally the system completely avoids the danger of 'end-of-tank' CO₂ dumps which can otherwise harm/kill the aquarium inhabitants.

Claims

1. A device for the reversible adsorption of carbon dioxide from a gas mixture (30), comprising:
 - i) at least one adsorbent vessel (13) comprising a plurality of gas permeable cartridges (7) of an inert and dimensionally stable material (7), wherein each cartridge (3) comprises a suitable polymeric particular adsorbent (19) for carbon dioxide having a primary amino functionality at a total capacity of at least 2.0 eq./l, a surface area (BET) in the range of from 25 to 75 m²/g, and an average pore diameter of 1 to 200 nm, in a loose configuration, and wherein each cartridge (3) further comprises a gas permeable membrane (8) or mesh (18) with an average pore diameter in the range of from 0.01 - 0.25mm, for holding the adsorbent (19),
 - ii) means for desorption of adsorbed carbon dioxide from the adsorbent (19) in each cartridge (3) by a pressure, humidity and/or temperature adsorption swing in the cartridge (3), and
 - iii) means (17) for directing desorbed carbon dioxide from each cartridge; and
 - iv) a means (21) for heating the saturated adsorbent electrically to a temperature of from 60°C to 150°C.
2. A device according to claim 1, further comprising means for the supplying the gas mixture to the cartridges; a means for recuperation of heat and/or fluids, and a desorbed gas mixture, a means for measuring the carbon dioxide adsorption level and/or gas flow rates.
3. A device according to any one of the preceding claims, wherein the cartridges (3) are arranged sequentially and/or parallel such that one or more cartridges (3) can be removed for replacement and/or maintenance of any cartridge without having to stop the adsorption process or without forcing the dismantling of the capture unit (13).
4. A device according to any one of the preceding claims, the device further comprising a storage buffer (31) configured and operable to keep the amount of carbon dioxide released into the final application constant, preferably, wherein the storage buffer (31) has a storage volume equivalent to an amount of carbon dioxide enriched gas mixture as required for of from 0.1 to 2 days CO₂ usage for a particular application.
5. A device according to claim 1 for the provision of a carbon dioxide enriched gas stream to an aquarium, further comprising means for the supply of the carbon dioxide enriched gas stream to an aquarium, to form at least in part dissolved carbon dioxide.
6. A device according to claims 4, wherein the storage buffer holds the carbon dioxide in a compressed form, or in a solid storage structure including activated carbon, and/ or a metal organic framework.
7. An arrangement for the enhancement of growth of a plant, carbonation of a beverage, pH control of an aqueous environment and/or enhancement of the storage of perishable goods, comprising:
 - a) a device (13) according to any one of claims 1 to 6, and further comprising
 - b) means, such as a gas duct (17), pump (25) and/or sparger (23), for distributing the directed desorbed carbon dioxide from the cartridge to the plant, beverage, aqueous environment or perishable goods.
8. An arrangement according to claim 7, further comprising a greenhouse (12) for increasing plant growth, a vivarium, an aquarium, or a photo bioreactor for microalgae growth.
9. An arrangement according to any one of claims 7 to 8 for the enhancement of plant growth in an aquaria, comprising

means for distributing the desorbed carbon dioxide to the aquaria.

10. A process for separating carbon dioxide from a gas mixture by a pressure and/or humidity and/or temperature swing, adsorption - desorption process in a device according to any one of claims 1 to 6, the process comprising the steps of:

(a) contacting the gas mixture with the adsorbent at a pressure P_1 , a humidity H_1 and a temperature T_1 until a desired amount of carbon dioxide is adsorbed onto the adsorbent, and

(b) desorbing at least part of the carbon dioxide adsorbed in step (a), to produce a stream enriched in carbon dioxide at a total pressure P_2 and/or a temperature T_2 , at which temperature the carbon dioxide has a lower adsorption constant with respect to the adsorbent and therefore at least in part desorbs,

wherein step (b) includes heating the adsorbent in a cartridge with an electrical heating means to a temperature of from 60°C to 150°C, and further comprising:

(c) directing the released gaseous stream comprising the desorbed carbon dioxide to a desired application.

11. The process according to claim 10, wherein the desired application includes a green house, a (micro) algae photo incubator, a beverage plant, a vivarium, an aquarium, and/or a storage facility

12. The process according to claim 11, wherein the released gaseous carbon dioxide is at least in part sparged through an aqueous medium.

13. A process according to any one of claims 10 to 12, comprising alternating steps (a) and (b) in a pattern of between 0.1 minutes and 48 hours, and/or reversing the flow of the gas mixture for step (b) and increasing the temperature.

14. Use of a device according to any one of claims 1 to 6 or the arrangement according to any one of claims 7 to 9 for the provision of carbon dioxide to aquaria, or for the provision of carbon dioxide to control the pH of an aqueous medium.

Patentansprüche

1. Vorrichtung zur reversiblen Adsorption von Kohlendioxid aus einem Gasgemisch (30), umfassend:

i) mindestens ein Adsorptionsmittelgefäß (13), umfassend eine Vielzahl von gasdurchlässigen Kartuschen (7) aus einem inerten und formstabilen Material (7), wobei jede Kartusche (3) ein geeignetes polymeres spezielles Adsorptionsmittel (19) für Kohlendioxid mit einer primären Aminofunktionalität bei einer Gesamtkapazität von mindestens 2,0 Äq./l, einer Oberfläche (BET) im Bereich von 25 bis 75 m²/g und einem durchschnittlichen Porendurchmesser von 1 bis 200 nm, in lockerer Konfiguration umfasst, und wobei jede Kartusche (3) ferner eine gasdurchlässige Membran (8) oder ein Netz (18) mit einem durchschnittlichen Porendurchmesser im Bereich von 0,01-0,25 mm zum Halten des Adsorptionsmittels (19) umfasst,

ii) Mittel zur Desorption von adsorbiertem Kohlendioxid aus dem Adsorptionsmittel (19) in jeder Kartusche (3) durch einen Druck-, Feuchtigkeits- und/oder Temperaturadsorptionswechsel in der Kartusche (3), und

iii) Mittel (17) zum Leiten von desorbiertem Kohlendioxid aus jeder Kartusche; und

iv) ein Mittel (21) zum elektrischen Erhitzen des gesättigten Adsorptionsmittels auf eine Temperatur von 60 °C bis 150 °C.

2. Vorrichtung nach Anspruch 1, ferner umfassend Mittel zum Zuführen des Gasgemischs zu den Kartuschen; ein Mittel zur Rückgewinnung von Wärme und/oder Fluiden und ein desorbiertes Gasgemisch, ein Mittel zum Messen des Kohlendioxid-Adsorptionsniveaus und/oder der Gasdurchflussraten.

3. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei die Kartuschen (3) sequenziell und/oder parallel angeordnet sind, sodass eine oder mehrere Kartuschen (3) zum Austausch und/oder zur Wartung einer beliebigen Kartusche entnommen werden können, ohne dass der Adsorptionsprozess gestoppt werden muss oder ohne die Demontage der Auffangeinheit (13) zu erzwingen.

4. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei die Vorrichtung ferner einen Speicherpuffer (31) umfasst, der konfiguriert und betreibbar ist, um die Menge an Kohlendioxid, die in die finale Anwendung freigesetzt wird, konstant zu halten, wobei der Speicherpuffer (31) vorzugsweise ein Speichervolumen äquivalent zu einer Menge an mit Kohlendioxid angereichertem Gasgemisch aufweist, wie es für eine CO₂-Verwendung von 0,1 bis 2

EP 3 191 211 B9

Tagen für eine bestimmte Anwendung benötigt wird.

- 5
5. Vorrichtung nach Anspruch 1 zur Bereitstellung eines mit Kohlendioxid angereicherten Gasstroms zu einem Aquarium, ferner umfassend Mittel zum Zuführen des mit Kohlendioxid angereicherten Gasstroms zu einem Aquarium, um zumindest teilweise gelöstes Kohlendioxid zu bilden.
6. Vorrichtung nach Anspruch 4, wobei der Speicherpuffer das Kohlendioxid in komprimierter Form oder in einer festen Speicherstruktur, einschließlich Aktivkohle und/oder einem metallorganischen Gerüst enthält.
- 10
7. Anordnung zur Verbesserung des Wachstums einer Pflanze, Karbonisierung eines Getränks, pH-Steuerung einer wässrigen Umgebung und/oder Verbesserung der Lagerung verderblicher Waren, umfassend:
- 15
- a) eine Vorrichtung (13) nach einem der Ansprüche 1 bis 6, und ferner umfassend:
b) Mittel, wie etwa eine Gasleitung (17), eine Pumpe (25) und/oder einen Sparger (23), zum Verteilen des geleiteten desorbierten Kohlendioxids aus der Kartusche an die Pflanze, das Getränk, die wässrige Umgebung oder verderbliche Waren.
8. Anordnung nach Anspruch 7, ferner umfassend ein Gewächshaus (12) zur Steigerung des Pflanzenwachstums, ein Vivarium, ein Aquarium oder einen Photobioreaktor zum Mikroalgenwachstum.
- 20
9. Anordnung nach einem der Ansprüche 7 bis 8 zur Verbesserung des Pflanzenwachstums in Aquarien, umfassend Mittel zum Verteilen des desorbierten Kohlendioxids an die Aquarien.
- 25
10. Prozess zum Abscheiden von Kohlendioxid aus einem Gasgemisch durch einen Adsorptions-Desorptionsprozess mit Druck- und/oder Feuchtigkeits- und/oder Temperaturwechsel in einer Vorrichtung nach einem der Ansprüche 1 bis 6, wobei der Prozess die folgenden Schritte umfasst:
- 30
- (a) Kontaktieren des Gasgemischs mit dem Adsorptionsmittel bei einem Druck P_1 , einer Feuchtigkeit H_1 und einer Temperatur T_1 , bis eine gewünschte Menge Kohlendioxid auf dem Adsorptionsmittel adsorbiert ist, und
(b) Desorbieren zumindest eines Teils des in Schritt (a) adsorbierten Kohlendioxids, um einen mit Kohlendioxid angereicherten Strom bei einem Gesamtdruck P_2 und/oder einer Temperatur T_2 zu erzeugen, wobei das Kohlendioxid bei dieser Temperatur eine niedrigere Adsorptionskonstante in Bezug auf das Adsorptionsmittel aufweist und daher zumindest teilweise desorbiert wird,
wobei Schritt (b) das Erhitzen des Adsorptionsmittels in einer Kartusche mit einem elektrischen Heizmittel auf eine Temperatur von 60 °C bis 150 °C einschließt, und ferner umfassend:
- 35
- (c) Leiten des freigesetzten gasförmigen Stroms, der das desorbierte Kohlendioxid umfasst, zu einer gewünschten Anwendung.
- 40
11. Prozess nach Anspruch 10, wobei die gewünschte Anwendung ein Gewächshaus, einen (Mikro-)Algen-Photoinkubator, eine Getränkeanlage, ein Vivarium, ein Aquarium und/oder eine Lagereinrichtung einschließt.
12. Prozess nach Anspruch 11, wobei das freigesetzte gasförmige Kohlendioxid zumindest teilweise durch ein wässriges Medium gesprüht wird.
- 45
13. Prozess nach einem der Ansprüche 10 bis 12, umfassend abwechselnde Schritte (a) und (b) in einem Muster zwischen 0,1 Minuten und 48 Stunden und/oder Umkehren des Gasgemischstroms für Schritt (b) und Erhöhen der Temperatur.
- 50
14. Verwendung einer Vorrichtung nach einem der Ansprüche 1 bis 6 oder der Anordnung nach einem der Ansprüche 7 bis 9 zur Bereitstellung von Kohlendioxid in Aquarien oder zur Bereitstellung von Kohlendioxid zur Steuerung des pH-Werts eines wässrigen Mediums.

Revendications

- 55
1. Dispositif destiné à l'adsorption réversible de dioxyde de carbone à partir d'un mélange gazeux (30), comprenant :
- i) au moins un récipient adsorbant (13) comprenant une pluralité de cartouches perméables aux gaz (7) d'un

- matériau inerte et dimensionnellement stable (7), chaque cartouche (3) comprenant un adsorbant polymère particulier approprié (19) pour le dioxyde de carbone possédant une fonctionnalité amine primaire à une capacité totale d'au moins 2,0 éq./l, une surface spécifique (BET) comprise dans la plage allant de 25 à 75 m²/g, et un diamètre moyen de pores de 1 à 200 nm, dans une configuration lâche, et chaque cartouche (3) comprenant
- 5 en outre un maillage (18) ou une membrane perméable aux gaz (8) avec un diamètre de pore moyen compris dans la plage allant de 0,01 à 0,25 mm, pour contenir l'adsorbant (19),
- ii) un moyen de désorption du dioxyde de carbone adsorbé de l'adsorbant (19) dans chaque cartouche (3) par une variation d'adsorption de pression, d'humidité et/ou de température dans la cartouche (3), et
- 10 iii) un moyen (17) pour diriger le dioxyde de carbone désorbé de chaque cartouche ; et
- iv) un moyen (21) pour chauffer électriquement l'adsorbant saturé à une température de 60°C à 150°C.
2. Dispositif selon la revendication 1, comprenant en outre un moyen pour la fourniture du mélange gazeux aux cartouches ; un moyen pour la récupération de chaleur et/ou de fluides, et d'un mélange gazeux désorbé, un moyen pour la mesure du taux d'adsorption de dioxyde de carbone et/ou des débits de gaz.
- 15 3. Dispositif selon l'une quelconque des revendications précédentes, lesdites cartouches (3) étant agencées séquentiellement et/ou parallèlement de sorte qu'une ou plusieurs cartouches (3) puissent être retirées pour le remplacement et/ou l'entretien de n'importe quelle cartouche sans avoir à arrêter le processus d'adsorption ou sans forcer le démontage de l'unité de captage (13).
- 20 4. Dispositif selon l'une quelconque des revendications précédentes, le dispositif comprenant en outre un tampon de stockage (31) conçu et utilisable pour maintenir constante la quantité de dioxyde de carbone libérée dans l'application finale, de préférence, ledit tampon de stockage (31) possédant un volume de stockage équivalent à une quantité de mélange gazeux enrichi en dioxyde de carbone tel que requis pour de 0,1 à 2 jours d'utilisation de CO₂ pour une application particulière.
- 25 5. Dispositif selon la revendication 1 pour l'approvisionnement en flux de gaz enrichi en dioxyde de carbone un aquarium, comprenant en outre un moyen pour la fourniture du flux de gaz enrichi en dioxyde de carbone à un aquarium, afin de former au moins en partie du dioxyde de carbone dissous.
- 30 6. Dispositif selon la revendication 4, ledit tampon de stockage contenant le dioxyde de carbone sous une forme comprimée, ou dans une structure de stockage solide comprenant du charbon actif, et/ou un squelette organométallique.
- 35 7. Agencement pour l'amélioration de la croissance d'une plante, la carbonatation d'une boisson, la régulation du pH d'un environnement aqueux et/ou l'amélioration du stockage de denrées périssables, comprenant :
- a) un dispositif (13) selon l'une quelconque des revendications 1 à 6, comprenant en outre :
- 40 b) un moyen, tel qu'un conduit de gaz (17), une pompe (25) et/ou un dispositif de barbotage (23), pour distribuer le dioxyde de carbone désorbé dirigé de la cartouche vers la plante, la boisson, l'environnement aqueux ou les denrées périssables.
8. Agencement selon la revendication 7, comprenant en outre une serre (12) pour augmenter la croissance des plantes, un vivarium, un aquarium ou un photobioréacteur pour la croissance de microalgues.
- 45 9. Agencement selon l'une quelconque des revendications 7 à 8 pour l'amélioration de la croissance de plantes dans un aquarium, comprenant un moyen pour distribuer le dioxyde de carbone désorbé aux aquariums.
10. Procédé permettant la séparation du dioxyde de carbone d'un mélange gazeux par un procédé d'adsorption-désorption, variation de pression et/ou d'humidité et/ou de température, dans un dispositif selon l'une quelconque des revendications 1 à 6, le procédé comprenant les étapes de :
- 50 (a) mise en contact du mélange gazeux avec l'adsorbant à une pression P₁, une humidité H₁ et une température T₁ jusqu'à ce qu'une quantité souhaitée de dioxyde de carbone soit adsorbée sur l'adsorbant, et
- 55 (b) la désorption d'au moins une partie du dioxyde de carbone adsorbé à l'étape (a), pour produire un flux enrichi en dioxyde de carbone à une pression totale P₂ et/ou une température T₂, température à laquelle le dioxyde de carbone possède une constante d'adsorption plus faible par rapport à l'adsorbant et donc au moins en partie désorbe,

EP 3 191 211 B9

ladite étape (b) comprenant le chauffage de l'adsorbant dans une cartouche avec un moyen de chauffage électrique à une température de 60°C à 150°C, et comprenant en outre :

(c) l'orientation du flux gazeux libéré comprenant le dioxyde de carbone désorbé vers une application souhaitée.

- 5
- 11.** Procédé selon la revendication 10, ladite application souhaitée comprenant une serre, un (micro) photoincubateur d'algues, une usine de boissons, un vivarium, un aquarium et/ou une installation de stockage.
- 10
- 12.** Procédé selon la revendication 11, ledit dioxyde de carbone gazeux libéré est au moins en partie barboté à travers un milieu aqueux.
- 10
- 13.** Procédé selon l'une quelconque des revendications 10 à 12, comprenant l'alternance des étapes (a) et (b) selon un schéma entre 0,1 minute et 48 heures, et/ou l'inversion de l'écoulement du mélange gazeux pour l'étape (b) et l'augmentation de la température.
- 15
- 14.** Utilisation d'un dispositif selon l'une quelconque des revendications 1 à 6 ou de l'agencement selon l'une quelconque des revendications 7 à 9 pour l'approvisionnement en dioxyde de carbone des aquariums, ou pour l'approvisionnement en dioxyde de carbone afin de réguler le pH d'un milieu aqueux.

20

25

30

35

40

45

50

55

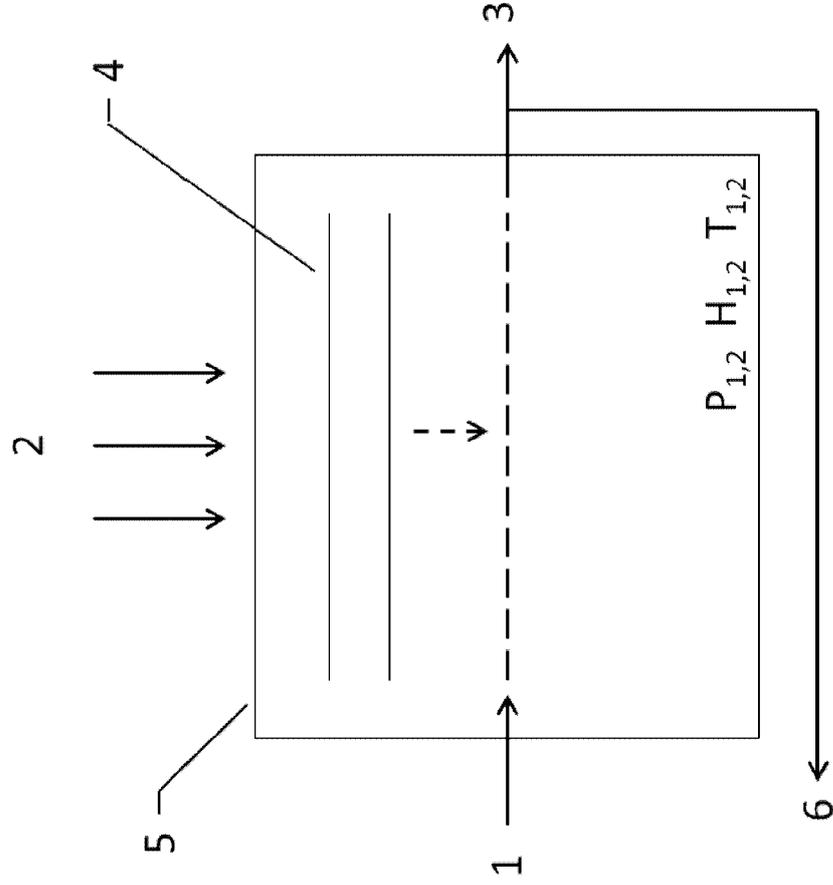


Fig. 1

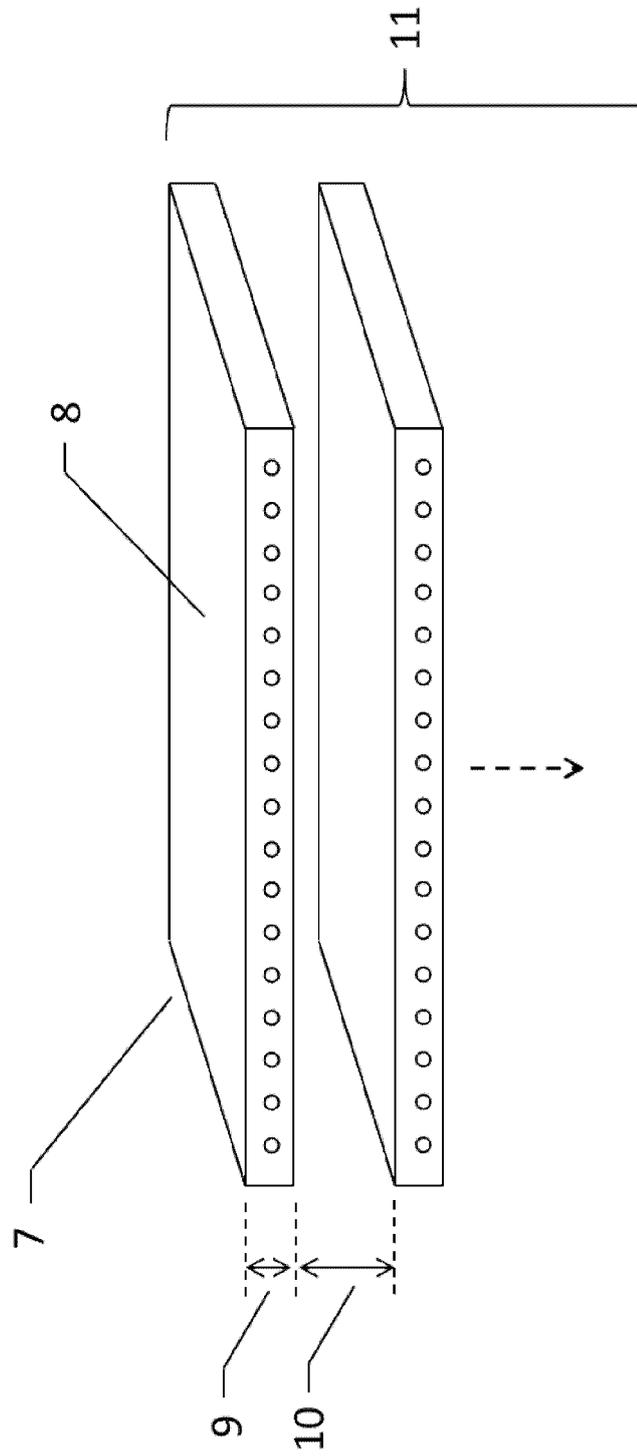


Fig. 2

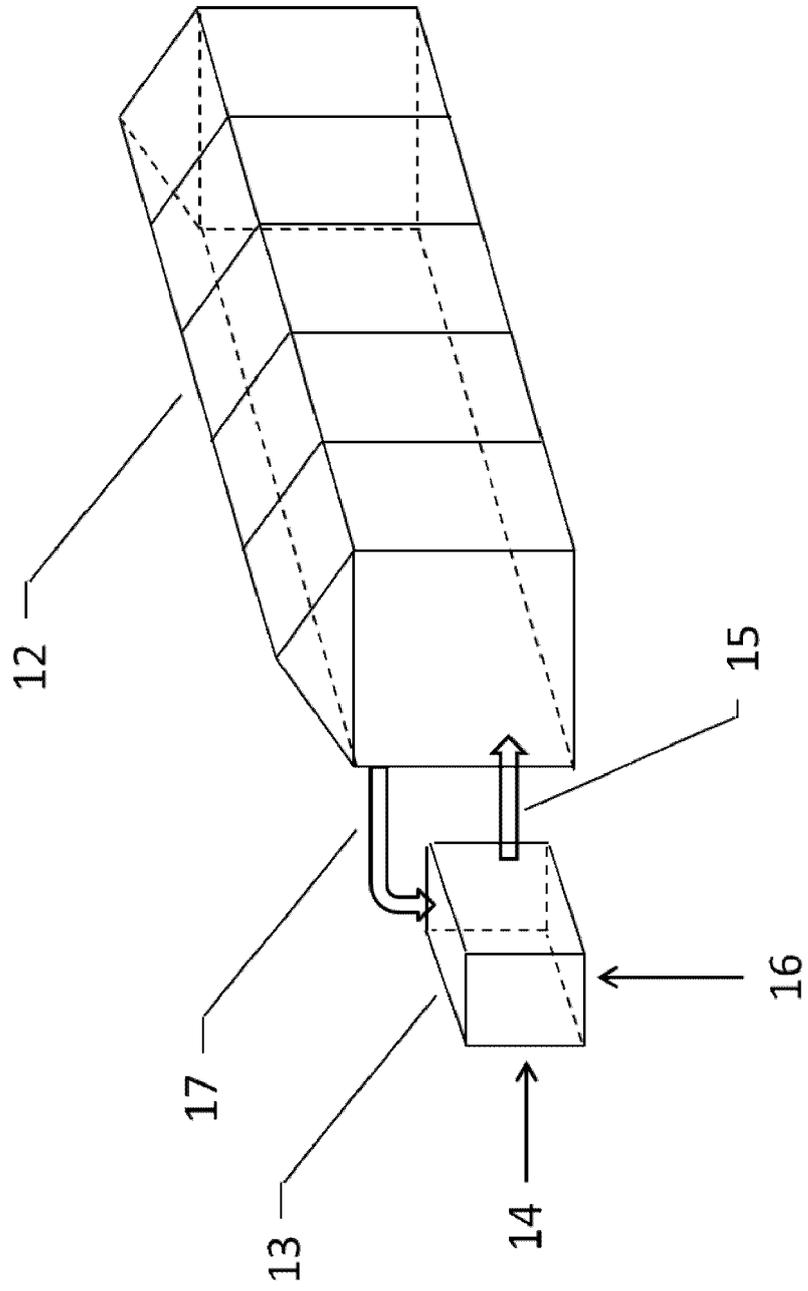


Fig. 3

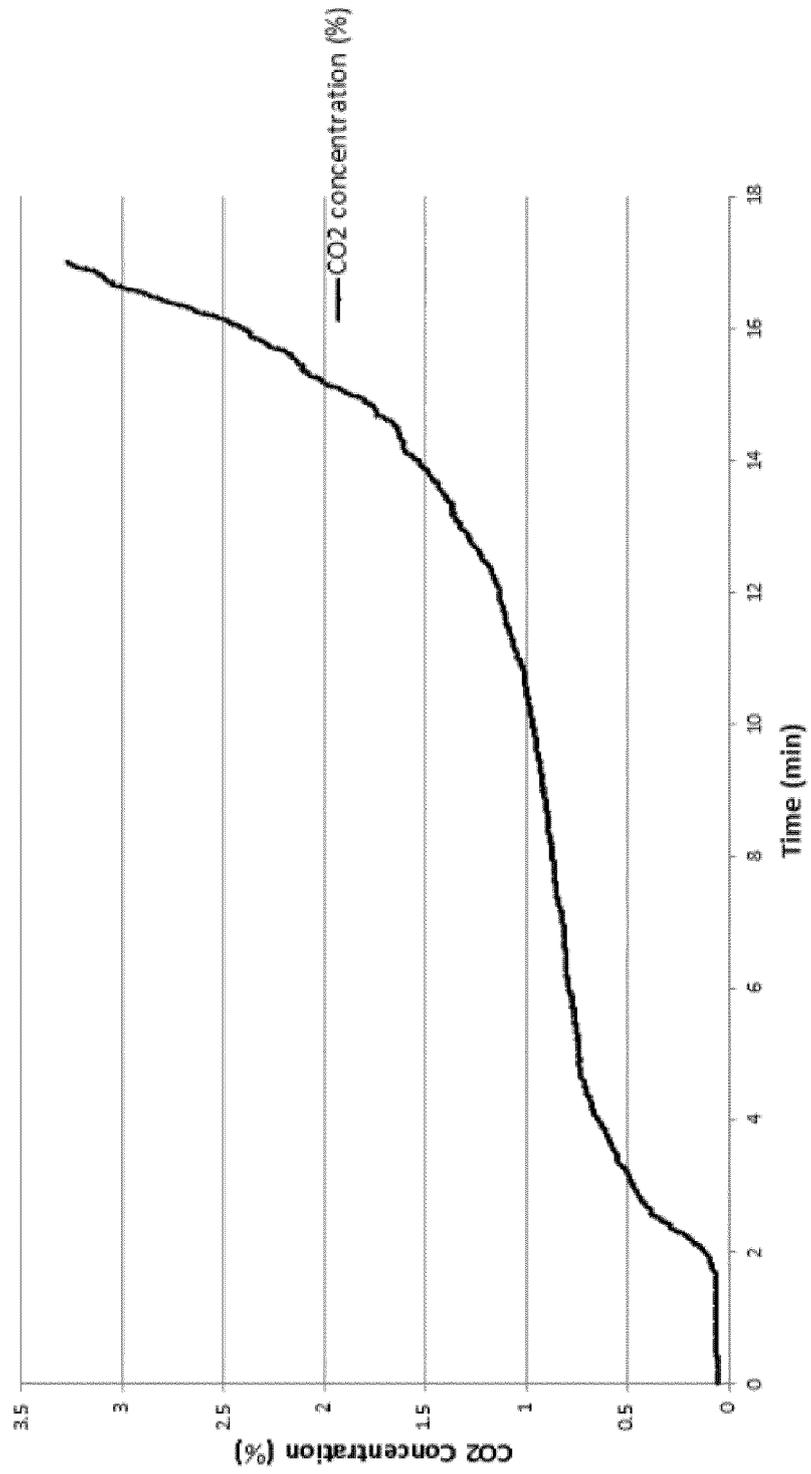


Fig. 4

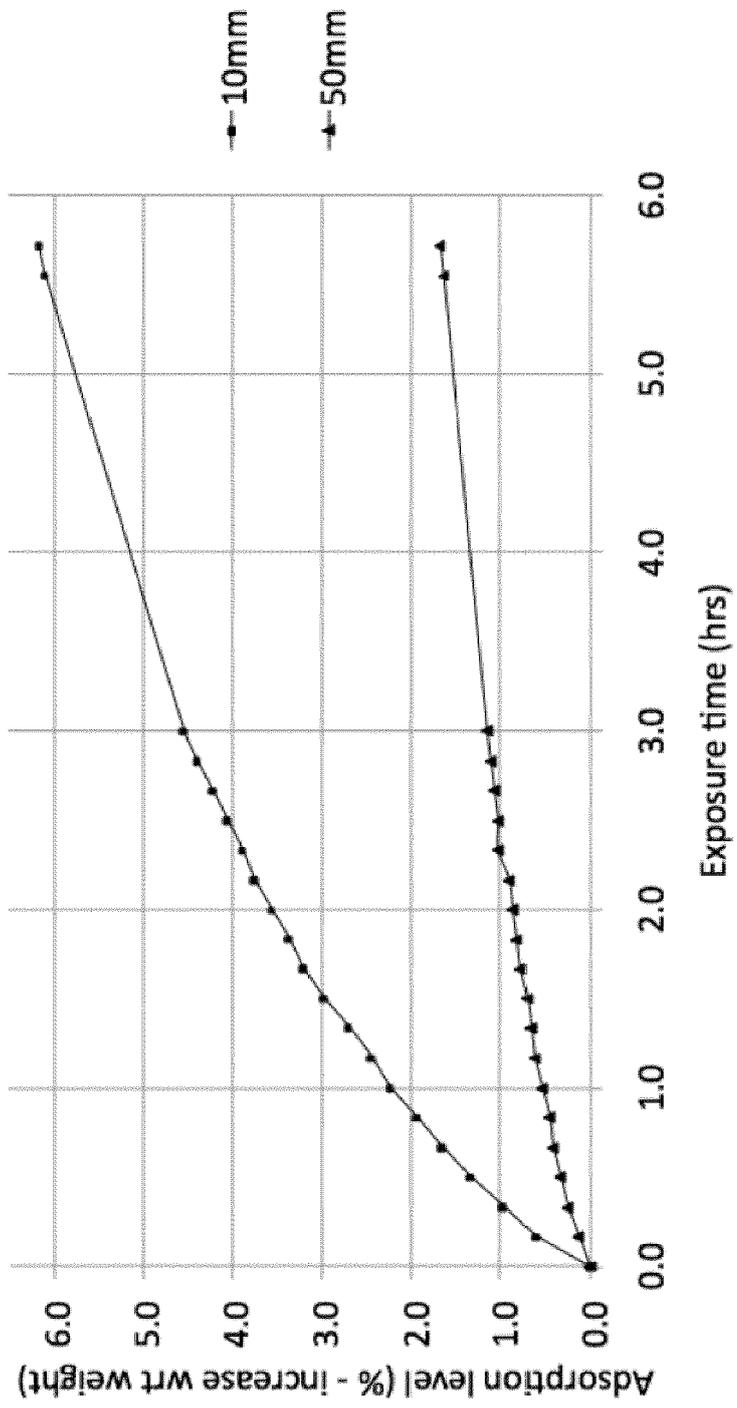


Fig. 5

SORBENT CARTRIDGE:

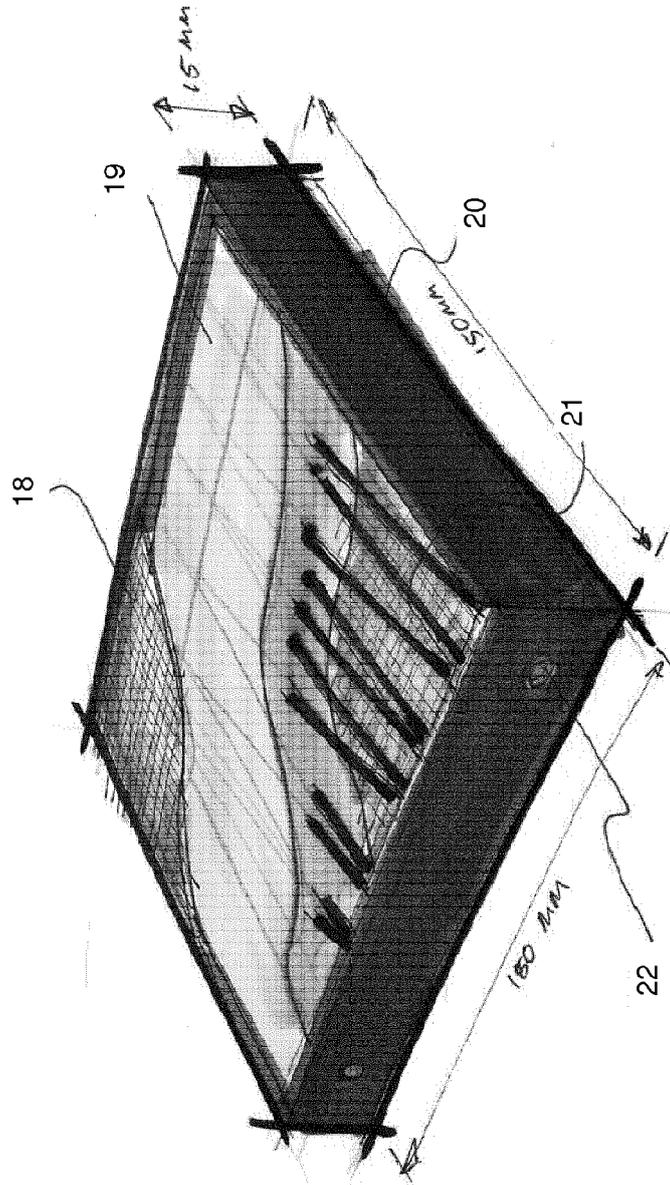


Fig. 6

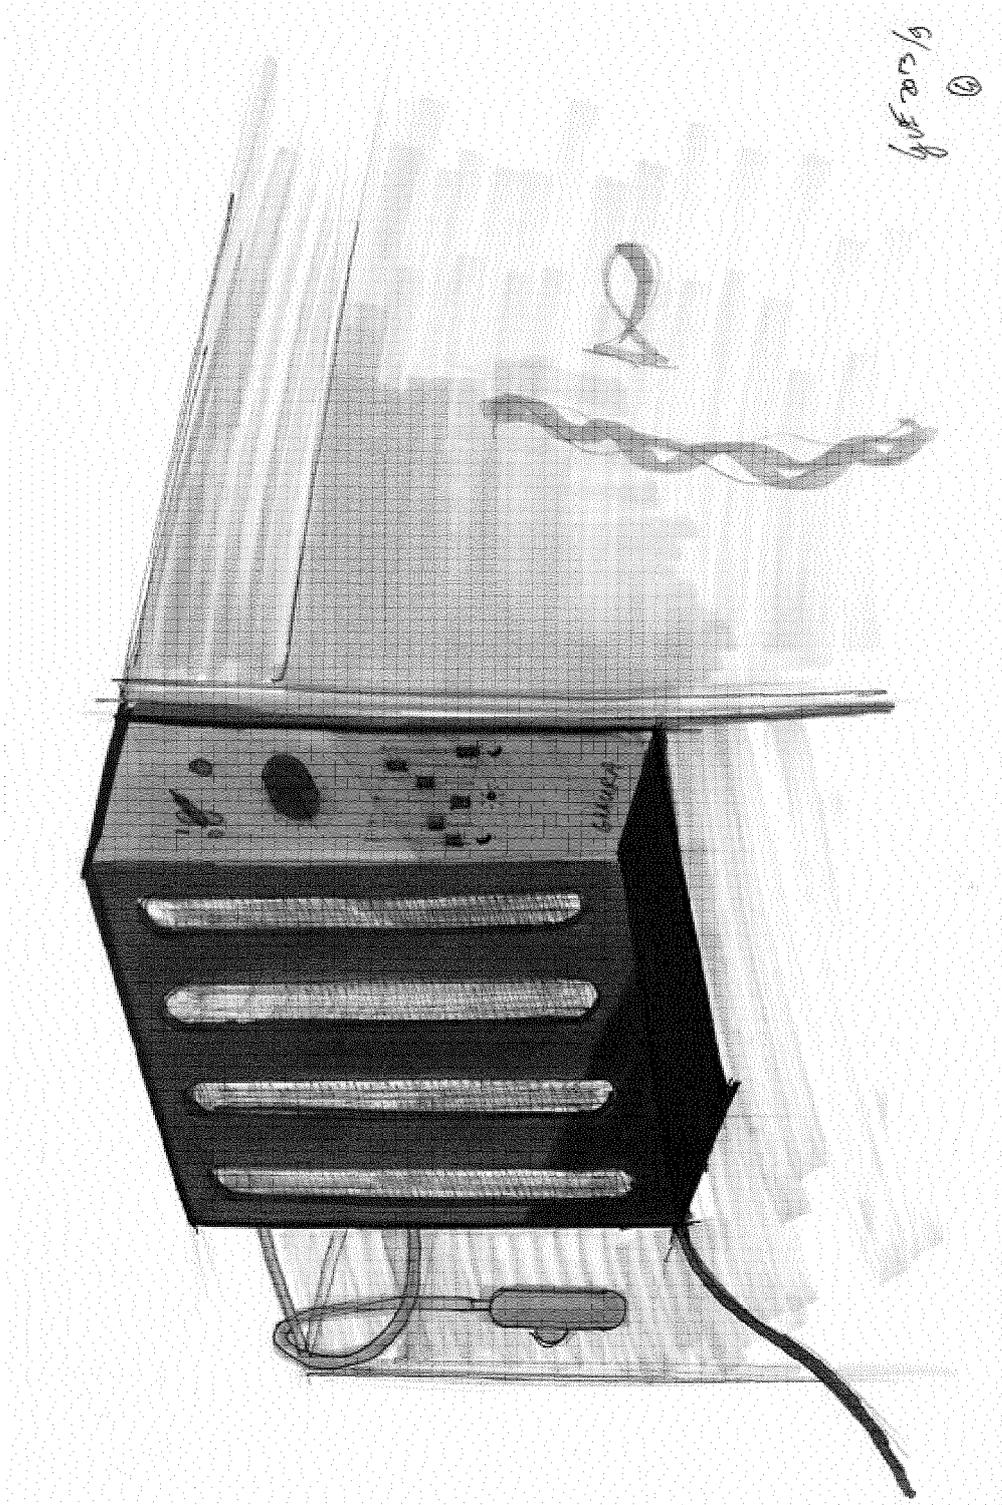


Fig. 7

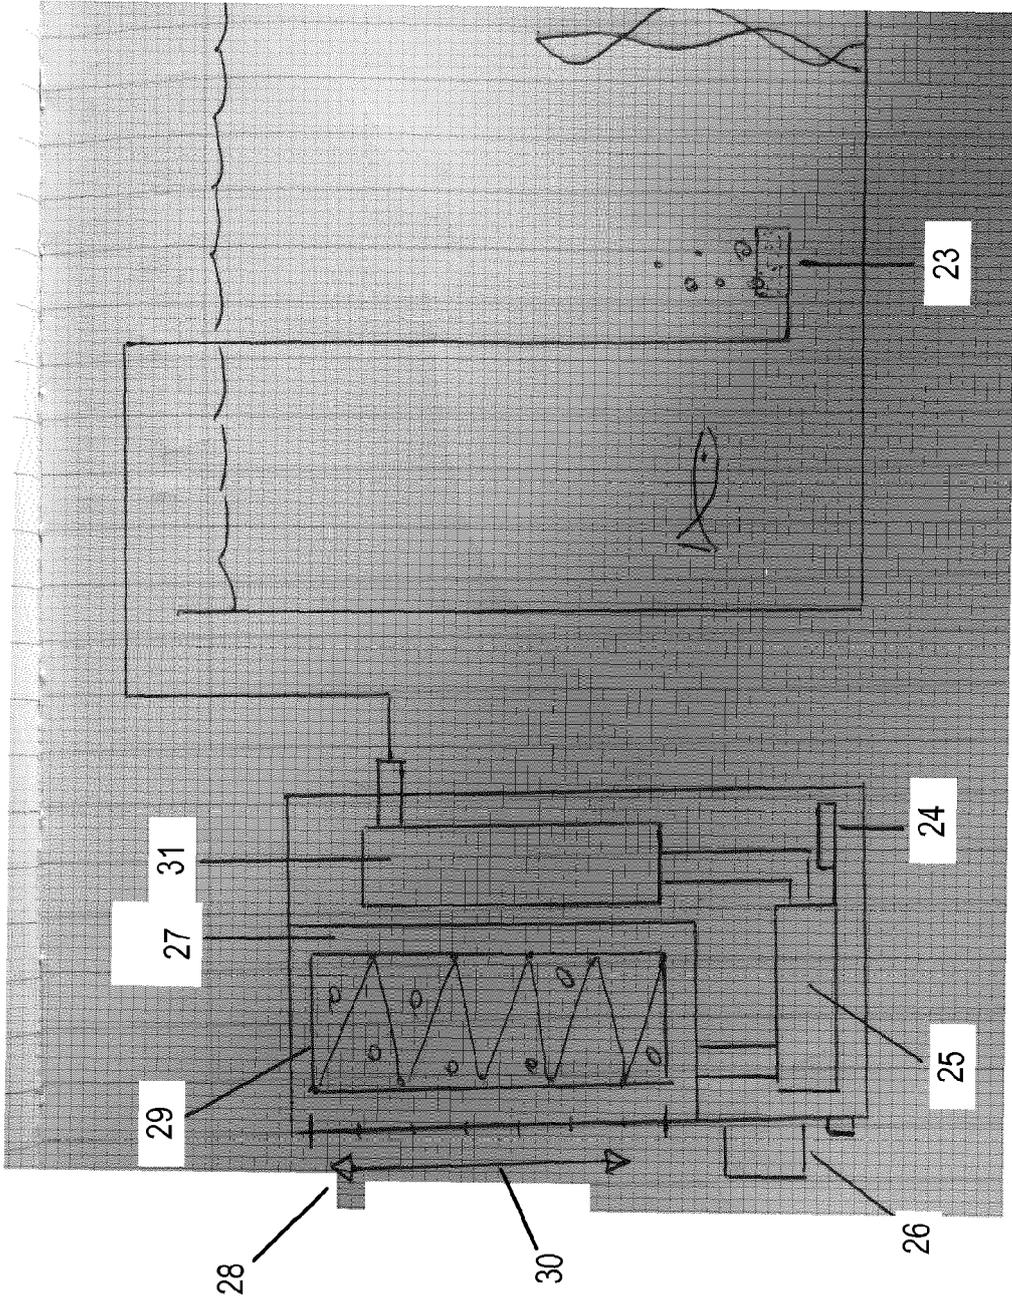


Fig. 8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2010091831 A [0010]
- WO 2007016271 A [0011]
- WO 2008131132 A [0011]
- US 20110296872 A [0012]
- WO 0002643 A [0014]
- US 2011146487 A [0015]

Non-patent literature cited in the description

- **W. RICHARD ALESI et al.** *Industrial & Engineering Chemistry Research*, 07 May 2012, vol. 51 (19) [0015]