



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
19.07.2017 Bulletin 2017/29

(21) Application number: **15839194.6**

(22) Date of filing: **31.08.2015**

(51) Int Cl.:
G01R 31/36 (2006.01) **H01M 10/42** (2006.01)
H01M 10/44 (2006.01) **H01M 10/48** (2006.01)
H02J 7/00 (2006.01)

(86) International application number:
PCT/JP2015/074666

(87) International publication number:
WO 2016/039204 (17.03.2016 Gazette 2016/11)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA

(30) Priority: **12.09.2014 JP 2014186347**

(71) Applicant: **NTN Corporation**
Osaka-shi, Osaka 550-0003 (JP)


(72) Inventors:
• **NODA, Hiroyuki**
Kuwana-shi
Mie 511-8678 (JP)
• **MIZUTANI, Masatoshi**
Kuwana-shi
Mie 511-8678 (JP)
• **MORI, Natsuhiko**
Kuwana-shi
Mie 511-8678 (JP)

(74) Representative: **Maikowski & Ninnemann**
Patentanwälte Partnerschaft mbB
Postfach 15 09 20
10671 Berlin (DE)

(54) **BATTERY CHECKER**

(57) A battery checker (1) is provided with: voltage application unit (3) configured to apply an AC voltage to a battery (2) to be measured; ripple voltage measurement unit (4) configured to measure a ripple voltage contained in a terminal voltage of the battery (2); and electric power storage level detection unit (5) configured to detect an electric power storage level of the battery (2) by compar-

ing the measured ripple voltage with a set reference (R). The voltage application unit (3) includes a transformer (8) that transforms voltage for an alternating current of an AC power supply (7) such as a commercial AC power supply, and an output circuit (9) that applies, to the battery (2), an alternating current with transformed voltage.

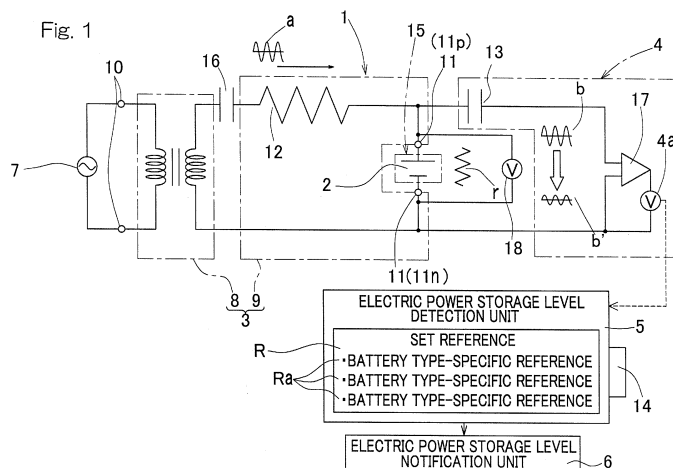

Description

CROSS REFERENCE TO THE RELATED APPLICATION

[0001] This application is based on and claims Convention priority to Japanese patent application No. 2014-186347, filed September 12, 2014, the entire disclosure of which is herein incorporated by reference as a part of this application.

BACKGROUND OF THE INVENTION

(Field of the Invention)

[0002] The present invention relates to a battery checker that detects an electric power storage level such as a fully charged state during charging of a rechargeable battery and remaining power of the battery in various devices, each having the rechargeable battery, such as an electric vehicle, a smart phone, a rechargeable dry battery, and a DIY electric tool.

(Description of Related Art)

[0003] Conventionally, a rectified and smoothed DC power has been used to charge a battery, and an electric power storage state such as a fully charged state of the battery has been checked by detecting the terminal voltage of the battery (e.g., see Patent Documents 1 and 2). As a device that is designed for research and experimental applications for measuring a very low resistance value such as an internal resistance of a battery, a battery tester or internal resistance measuring instrument that uses an AC four-terminal method is commercially available (Non-Patent Document 1).

[Related Document]

[Patent Document]

[0004]

[Patent Document 1] JP Laid-open Patent Publication No. 2004-38029

[Patent Document 2] JP Laid-open Patent Publication No. H10-170615

[Non-Patent Document]

[0005] [Non-Patent Document 1] Battery tester/internal resistance measuring instrument using AC four-terminal method, IW7807-BP (Datasheet and manual, Rev.1.7.1, February 16, 2015, Tokyo Devices), (https://tokyodevices.jp/system/attachments/files/000/000/298/original/IW7807-BP-F_MANUAL.pdf)

[0006] With the conventional methods for checking the

electric power storage state from the terminal voltage of the battery, it is difficult to know an accurate electric power storage state. Accordingly, overcharge occurs especially during quick charging, and a problem may arise that a battery lifespan is shortened. Therefore, the inventors of the present invention have paid attention to a proportional relationship between the internal resistance and the electric power storage level of a battery, and considered detecting the electric power storage level by detecting the internal resistance. The internal resistance of the battery can be detected with high precision by using the internal resistance measuring instrument.

[0007] However, the conventional internal resistance measuring instruments are devices intended for research and experimental applications and are expensive, and it is difficult to use the instruments for general purposes. Moreover, a measured value varies due to, for example, a resistance value being varied depending on how the terminal is placed, and it is therefore difficult for ordinary people to perform accurate measurement with the instruments.

SUMMARY OF THE INVENTION

[0008] The present invention is made to solve the above-described problem, and an object of the invention is to provide a battery checker that can detect an electric power storage level of a battery with high precision and prevent overcharge during charging with a simple configuration.

[0009] A battery checker according to the present invention includes: a voltage application unit configured to apply or input an AC voltage to a battery to be measured; a ripple voltage measurement unit configured to measure a ripple voltage contained in a terminal voltage of the battery; and an electric power storage level detection unit configured to detect an electric power storage level of the battery by comparing the ripple voltage measured by the ripple voltage measurement unit with a set reference. The ripple voltage measurement unit may be connected between output terminals, which are connected to the battery, of the voltage application unit.

[0010] As used herein, "ripple voltage" refers to a voltage that is superimposed on a direct current component, having periodical fluctuation.

[0011] Attention is paid to the proportional relationship between the internal resistance and the charged state of the battery, and the battery checker having this configuration is configured to detect the electric power storage level by measuring the internal resistance, and to apply a voltage for measurement in the AC state so as to allow the internal resistance to be accurately measured with ease. The application of the AC voltage causes generation of a ripple voltage in a terminal voltage of the battery. The fluctuating range, that is, the amplitude of the ripple voltage is proportional to the internal resistance of the battery. In addition, the internal resistance of the battery decreases as charging progresses. Accordingly, the fluctuating range, that is, the amplitude of the ripple voltage is proportional to the internal resistance of the battery.

tuating range of the terminal voltage of the battery is measured by the ripple voltage measurement unit and the detected ripple voltage is compared with the set reference by the electric power storage level detection unit, whereby the electric power storage level of the battery can be accurately detected.

[0012] Although the set reference is a reference that is generated as appropriate for determining an electric power storage level that can be known or obtained from the relationship between the ripple voltage and the internal resistance, it may be a reference directly representing the relationship between the ripple voltage and the electric power storage level, without particularly representing the internal resistance as a resistance value. The set reference may be represented as a curve that indicates the relationship between the ripple voltage and the electric power storage level, or may simply be a value representing a predetermined electric power storage state such as a fully charged state as a fixed threshold value of the ripple voltage.

[0013] Since the electric power storage level of the battery can be accurately detected in this manner, a fully charged state during charging can be detected with high precision, and overcharge during quick charging or the like can be avoided, thereby preventing reduction in the lifespan of the battery. Furthermore, the above-described accurate detection of the electric power storage level can be performed with a simple configuration merely including the voltage application unit configured to apply an alternating current, and the ripple voltage measurement unit and the electric power storage level detection unit that have the above-described configurations.

[0014] In the battery checker according to an embodiment of the present invention, the voltage application unit may include a transformer configured to transform a voltage of an AC power supply to a voltage suitable for a voltage of the battery, and an output circuit configured to apply, to the battery, the AC voltage transformed by the transformer.

[0015] In the case of this configuration, by using an AC 100V commercial power supply or the like for general household use or the like as the AC power supply, the voltage application unit can have a simple configuration merely including a transformer and a circuit that simply outputs the AC voltage transformed by the transformer.

[0016] In the battery checker according to an embodiment of the present invention, the electric power storage level detection unit may include a reference storage unit configured to store, as the set reference, a plurality of battery type-specific references corresponding to types of the battery to be detected or measured, and a reference switching unit configured to switch between the plurality of battery type-specific references.

[0017] The relationship between the ripple voltage and the internal resistance differs, for example, according to the types of the battery such as a lead battery, a manganese battery, and a lithium ion battery, or according to the voltage varying with the number of stacked cells in

the battery. Therefore, by setting the plurality of battery type-specific references and providing the reference switching unit, application to various batteries is possible. The reference switching unit may switch the reference for each use. Alternatively, the reference switching unit may switch the reference once, and thereafter use one battery type-specific reference as a fixed reference, so that the battery checker may be used as a battery checker dedicated to a predetermined battery.

[0018] In the battery checker according to an embodiment of the present invention, the ripple voltage measurement unit may include a capacitor connected to an output terminal on a positive electrode side of the battery, an amplifier configured to amplify a voltage between the capacitor and a terminal on a negative electrode side of the battery, and a voltmeter configured to measure a ripple voltage amplified by the amplifier. Since the capacitor is interposed between the battery and the amplifier, a DC voltage of the battery is not applied to the amplifier, and only a ripple voltage of the battery is applied to the amplifier, thereby making it possible to measure the ripple voltage with high precision.

[0019] Any combination of at least two constructions, disclosed in the appended claims and/or the specification and/or the accompanying drawings should be construed as included within the scope of the present invention. In particular, any combination of two or more of the appended claims should be equally construed as included within the scope of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] In any event, the present invention will become more clearly understood from the following description of preferred embodiments thereof, when taken in conjunction with the accompanying drawings. However, the embodiments and the drawings are given only for the purpose of illustration and explanation, and are not to be taken as limiting the scope of the present invention in any way whatsoever, which scope is to be determined by the appended claims. In the accompanying drawings, like reference numerals are used to denote like parts throughout the several views, and:

Fig. 1 is an explanatory diagram showing a circuit configuration of a battery checker according to an embodiment of the present invention by using an electric circuit and blocks.

DESCRIPTION OF EMBODIMENTS

[0021] An embodiment of the present invention will be described in conjunction with the drawings. A battery checker 1 of the present embodiment includes a voltage application unit 3 configured to apply an AC voltage to a battery 2 to be measured, a ripple voltage measurement unit 4 configured to measure a ripple voltage contained in a terminal voltage of the battery 2, and an electric power

storage level detection unit 5 configured to detect an electric power storage level of the battery 2 by comparing the ripple voltage measured by the ripple voltage measurement unit 4 with a set reference R. In addition to these, the battery checker 1 includes an electric power storage level notification unit 6 configured to make notification of the electric power storage level detected by the electric power storage level detection unit 5. Although the battery 2 is mounted in a battery mounting device 15, it may be in a stand-alone state. The battery mounting device 15 may be any device that has a rechargeable battery 2. Examples thereof include a charging socket for a rechargeable dry battery, an electric vehicle, a smart phone, a personal computer, and a DIY electric tool.

[0022] The voltage application unit 3 includes a transformer 8 that transforms a voltage of an AC power supply 7 to a voltage suitable for checking a voltage of the battery 2, and an output circuit 9 that applies or inputs, to the battery 2, the AC voltage transformed by the transformer 8. Although the voltage suitable for checking the voltage of the battery 2 differs depending on the capacity of the battery 2, it may be a voltage that is higher than the voltage of the fully charged battery 2 by several volts (2 to 3 V) or more, for example. The AC power supply 7 is, for example, a single-phase 100V or 200V AC commercial power supply. Input terminals 10 such as a plug that is inserted into an outlet (not shown) in the wiring of the AC power supply 7 are provided to an upstream of the transformer 8.

[0023] The output circuit 9 may be configured to output to output terminals 11 which apply, to the battery 2 or the battery mounting device 15, the AC voltage transformed by the transformer 8. In the illustrated example, a current limiting resistor 12 and a capacitor 16 for preventing the passage of the DC voltage of the battery 2 are provided between the output terminals 11, 11 and a secondary coil of the transformer 8 in the output circuit 9. In order to set the ripple current value corresponding to the battery 2, the current limiting resistor 12 can be replaced with a resistor having a different resistance value.

[0024] The ripple voltage measurement unit 4 includes an amplifier 17 that includes an operational amplifier or the like, a capacitor 13, and a voltmeter 4a. The amplifier 17 is an amplifier that amplifies the voltage between two differential input terminals. The output terminal 11 (11p) on the positive electrode side of the battery 2 is connected, via the capacitor 13, to an input terminal of the amplifier 17 on the positive electrode side, and the output terminal 11 (11n) on the negative electrode side of the battery 2 is directly connected to an input terminal of the amplifier 17 on the negative electrode side. Since the capacitor 13 is interposed between the battery 2 and the amplifier 17, the DC voltage of the battery 2 is not applied to the amplifier 17, and only the ripple voltage of the battery 2 is applied to the amplifier 17. The ripple voltage amplified by the amplifier 17 in this manner is measured by the voltmeter 4a. The voltage between the output terminals 11, 11 of the battery 2 is measured by another

voltmeter 18 connected between the output terminals 11.

[0025] The electric power storage level detection unit 5 includes a reference storage unit 19 configured to store, as the set reference R, a plurality of battery type-specific references Ra corresponding to respective types of the battery 2 to be measured, and a reference switching unit 14 configured to switch between the plurality of battery type-specific references Ra. The reference storage unit 19 includes an electronic circuit, a microcomputer, or the like that includes a storage device having the set reference R stored therein. The reference switching unit 14 includes, for example, an operation device operated by an operator, and a circuit, a program, or the like (each of which is not shown) configured to switch between the battery type-specific references Ra in response to the operation of the operator.

[0026] Although the set reference R is a reference that is generated as appropriate for indicating an electric power storage level that can be known or obtained from the relationship between the ripple voltage and the internal resistance, it may be a reference directly representing the relationship between the ripple voltage and the electric power storage level, without particularly representing the internal resistance as a resistance value. The set reference R may be represented as a curve that indicates the relationship between the ripple voltage and the electric power storage level, or may simply be a value representing a fully charged state as a certain threshold value of the ripple voltage.

[0027] The plurality of battery type-specific references Ra in the set reference R are set, for example, according to the type of battery such as a lead battery, a manganese battery, or a lithium ion battery, according to the voltage varying with the number of stacked cells in the battery 2, or according to both of these. The reference switching unit 14 may switch the reference for each use. Alternatively, the reference switching unit 14 may switch the reference once, and thereafter use one battery type-specific reference as a fixed reference, so that the battery checker may be used as a battery checker dedicated to a predetermined battery.

[0028] The electric power storage level notification unit 6 is a unit configured to notify a person or a device of information representing the electric power storage level detected by the electric power storage level detection unit 5, and includes an image display device having a liquid crystal screen that indicates the electric power storage level as an image such as a bar chart, or one or a plurality of lamps that are controlled such that, according to the electric power storage level, the number of lamps that are lit up is changed, or the lamps are switched between a lit-up state, a blinking state, and the like. The electric power storage level notification unit 6 may have a function of stopping a charge performed by a charger device (not shown) when the electric power storage level is a fully charged state.

[0029] According to the battery checker 1 having this configuration, an alternating current is applied to the bat-

tery 2, so that a ripple voltage is generated in the terminal voltage of the battery 2. That is, the application of an alternating current a shown in Fig. 1 to the battery 2 causes generation of a ripple voltage b having a waveform shown in Fig. 1. The fluctuating range, that is, the amplitude of the ripple voltage is proportional to an internal resistance r of the battery 2. The internal resistance r of the battery 2 decreases as charging progresses. Accordingly, as charging progresses, the ripple voltage b decreases as indicated by a waveform denoted by reference character "b".

[0030] Accordingly, the fluctuating range of the terminal voltage of the battery 2 is measured by the ripple voltage measurement unit 4 and the detected ripple voltage is compared with the set reference by the electric power storage level detection unit 5, whereby the electric power storage level of the battery 2 can be accurately detected.

[0031] Since the electric power storage level of the battery 2 can be accurately detected in this manner, a fully charged state during charging can be detected with high precision, and overcharge during quick charging or the like can be avoided, thereby preventing reduction in the lifespan of the battery 2. Furthermore, the above-described accurate detection of the electric power storage level can be performed with a simple configuration merely including the voltage application unit 3 configured to apply the alternating current, and the ripple voltage measurement unit 4 and the electric power storage level detection unit 5 that have the above-described configurations.

[0032] Since the voltage application unit 3 in this example includes the transformer 8 that transforms the voltage of the AC power supply 7 and the output circuit 9 that applies, to the battery 2, the voltage transformed by the transformer 8, an AC 100V commercial power supply or the like for general household use or the like can be used as the AC power supply 7. Therefore, the voltage application unit 3 is allowed to have a simple configuration.

[0033] The electric power storage level detection unit 5 includes the plurality of battery type-specific references Ra corresponding to the respective types of the battery 2 to be detected and the reference switching unit 14 for switching between the plurality of the battery type-specific references Ra, so that application to various types of the battery 2 is possible.

[0034] Although the present invention has been fully described in connection with the preferred embodiments thereof with reference to the accompanying drawings, those skilled in the art will readily conceive numerous changes and modifications within the framework of obviousness upon the reading of the specification herein presented of the present invention. Accordingly, such changes and modifications are, unless they depart from the scope of the present invention as delivered from the claims annexed hereto, to be construed as included therein.

[Reference Numerals]

[0035]

5	1	battery checker
	2	battery
	3	voltage application unit
	4	ripple voltage measurement unit
	4a	voltmeter
10	5	electric power storage level detection unit
	6	electric power storage level notification unit
	7	AC power supply
	8	transformer
	9	output circuit
15	11p	output terminal on positive electrode side of battery
	11n	output terminal on negative electrode side of battery
	15	battery mounting device
20	19	reference storage unit
	R	set reference
	Ra	battery type-specific reference

25 Claims

1. A battery checker comprising:

a voltage application unit configured to apply an AC voltage to a battery to be measured;
a ripple voltage measurement unit configured to measure a ripple voltage contained in a terminal voltage of the battery; and
an electric power storage level detection unit configured to detect an electric power storage level of the battery by comparing the ripple voltage measured by the ripple voltage measurement unit with a set reference.

2. The battery checker as claimed in claim 1, wherein the voltage application unit includes a transformer configured to transform a voltage of an AC power supply to a voltage suitable for a voltage of the battery, and an output circuit configured to apply, to the battery, the AC voltage transformed by the transformer.

3. The battery checker as claimed in claim 1 or 2, wherein the electric power storage level detection unit includes a reference storage unit configured to store, as the set reference, a plurality of battery type-specific references corresponding to types of the battery to be measured, and a reference switching unit configured to switch between the plurality of battery type-specific references.

4. The battery checker as claimed in any one of claims

1 to 3, wherein

the ripple voltage measurement unit includes a capacitor connected to an output terminal on a positive electrode side of the battery, an amplifier configured to amplify a voltage between the capacitor and a terminal on a negative electrode side of the battery, and a voltmeter configured to measure a ripple voltage amplified by the amplifier.

5

10

15

20

25

30


35

40

45

50

55

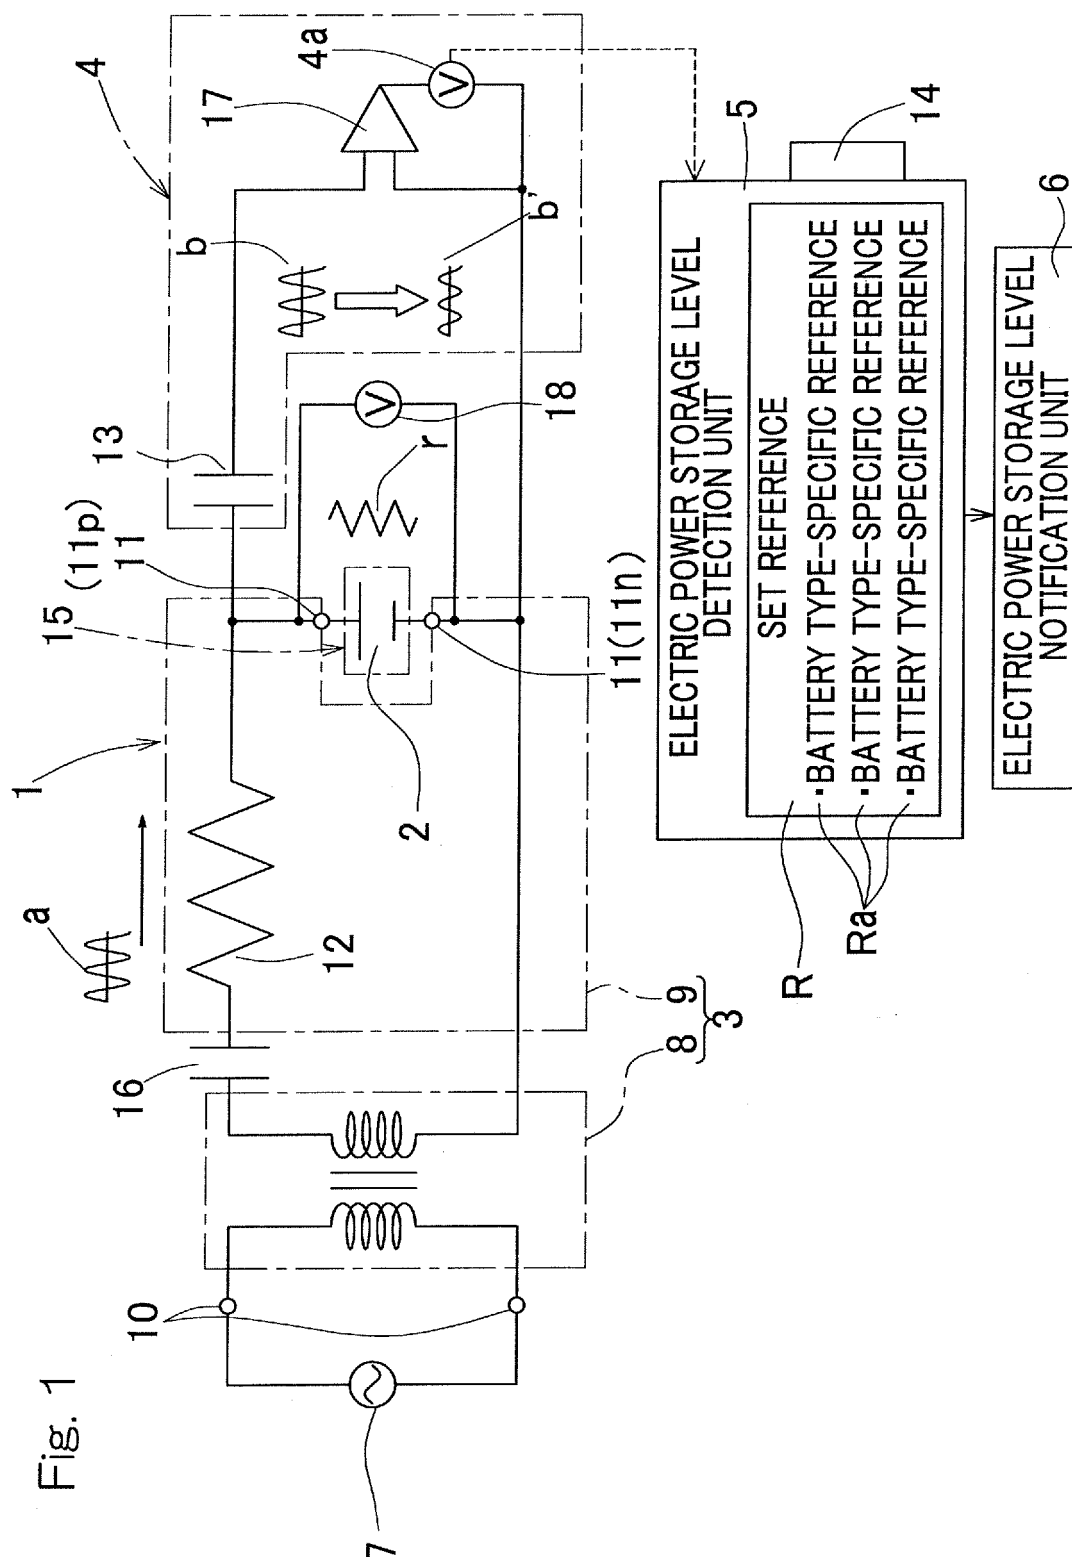

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2015/074666

A. CLASSIFICATION OF SUBJECT MATTER

G01R31/36(2006.01)i, H01M10/42(2006.01)i, H01M10/44(2006.01)i, H01M10/48(2006.01)i, H02J7/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01R31/36, H01M10/42, H01M10/44, H01M10/48, H02J7/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2015
Kokai Jitsuyo Shinan Koho 1971-2015 Toroku Jitsuyo Shinan Koho 1994-2015

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 9-288155 A (Beltecno Corp.), 04 November 1997 (04.11.1997), paragraphs [0001], [0002], [0006] to [0012]; fig. 1, 7, 8 (Family: none)	1-4
Y	JP 2000-81469 A (Asahi Optical Co., Ltd.), 21 March 2000 (21.03.2000), paragraphs [0008] to [0022], [0033] to [0034]; fig. 1, 5 & US 6134391 A column 4, line 30 to column 7, line 39; column 9, lines 31 to 58; fig. 1, 5 & DE 19928610 A1	1-4

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
30 October 2015 (30.10.15)

Date of mailing of the international search report
10 November 2015 (10.11.15)

Name and mailing address of the ISA/
Japan Patent Office
3-4-3, Kasumigaseki, Chiyoda-ku,
Tokyo 100-8915, Japan

Authorized officer

Telephone No.

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2015/074666

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	CD-ROM of the specification and drawings annexed to the request of Japanese Utility Model Application No. 32895/1993 (Laid-open No. 82839/1994) (Sun-Eh Electric Co., Ltd.), 25 November 1994 (25.11.1994), paragraphs [0002], [0005] to [0007]; fig. 1, 2, 4 (Family: none)	2-4
Y A	JP 2005-520158 A (Midtronics, Inc.), 07 July 2005 (07.07.2005), paragraphs [0009] to [0016]; fig. 1 & US 2003/0001579 A1 paragraphs [0013] to [0020]; fig. 1 & GB 2401952 A & WO 2003/079032 A1 & AU 2003223266 A1	4 1-3

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2014186347 A [0001]
- JP 2004038029 A [0004]
- JP H10170615 A [0004]