



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
26.07.2017 Bulletin 2017/30

(51) Int Cl.:
F21V 21/008 ^(2006.01) **F21V 21/116** ^(2006.01)
F21V 21/104 ^(2006.01) **F21V 21/35** ^(2006.01)
F21S 8/06 ^(2006.01)

(21) Application number: **17150686.8**

(22) Date of filing: **09.01.2017**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Sonneman, Robert A.**
Mamaroneck, NY 10543 (US)


(72) Inventor: **Sonneman, Robert A.**
Mamaroneck, NY 10543 (US)

(74) Representative: **Studio Torta S.p.A.**
Via Viotti, 9
10121 Torino (IT)

(30) Priority: **07.01.2016 US 201662275921 P**
30.06.2016 US 201615197919
30.08.2016 US 201615251369
02.09.2016 US 201615255289
06.10.2016 US 201615286977
07.10.2016 US 201615287897
14.12.2016 US 201615378207

(54) **MODULAR LIGHTING SYSTEM USING HANGERS AND POWER BARS**

(57) A modular lighting system (10) for providing light in various areas includes one or more canopies (100), a set of buses/bars (300), a set of hangers (200) for supporting the bars from canopies and, optionally other supports, a set of pendants (400) with light emitting elements and a set of hangers for supporting the pendants from the bars. The bars (300) include two segments with conductive rails disposed or imbedded in their inner surfaces. The hangers (200) have one or two rods and bases shaped and sized for mounting on the bars (300) with the rods contacting the conductive rails. The hangers (200) and bars (300) cooperate to allow the hangers to be placed anywhere along the bars. Pendants (400) can be hung on the bars singly, or in clusters. In this manner systems can be formed easily and quickly to achieve systems having various esthetic and utilitarian configurations.

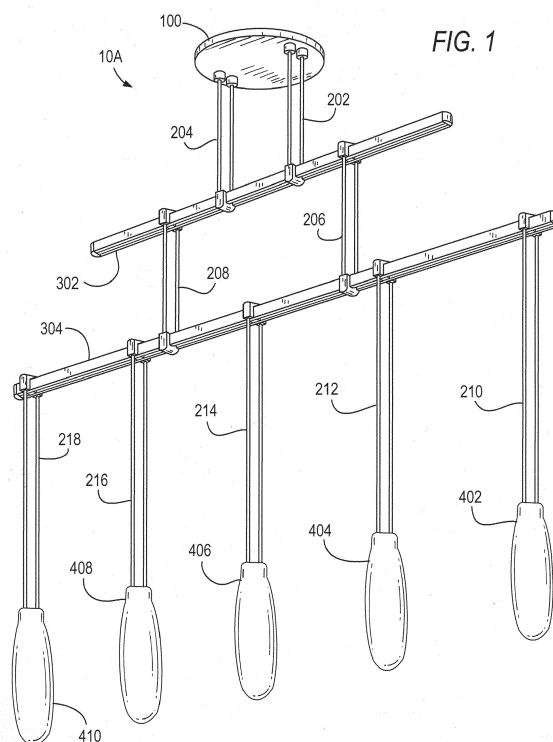

Description

BACKGROUND OF THE INVENTION

A. Field of Invention

[0001] This invention pertains to a modular system having components that can be assembled to form multi-level lights of various sizes, shapes and configurations. The main elements are canopies supporting the system, hangers, power bars, and pendants, preferably including light engines driving LED bulbs.

B. Description of the Prior Art

[0002] Designing lighting for a space has always been an interesting challenge because the lighting equipment has to meet utilitarian, technical and esthetic needs. Thus, any such endeavor is successful only if combining technical, architectural and artistic skills.

[0003] Several different types of ceiling lights are presently available, including surface mounted lights, recessed lights and hanging lights disposed on tracks either attached to the ceiling or suspended below the ceiling. The first two light categories are very conventional and are disadvantageous because the positions of the lights are fixed and the configurations available for each light is very limited. Conventional track lighting provides a little more flexibility especially as far as the positions of the lights are concerned. However, because of power requirements and other factors, the number, size and shape of light fixtures that can be used in such systems is fairly limited.

SUMMARY OF THE INVENTION

[0004] Briefly, a modular lighting system for providing light in a space includes canopies connectable to a power source; a plurality of horizontal bars; a plurality of hangers, including a first set of hangers supporting bars from said canopy and a second set of hangers, each said hangers including a first end disposed between and engaging said bar segment. The system further includes a plurality of pendants supported by the second set of hangers from the bars. The hangers and bars cooperate to provide electric power to said pendants from said canopy.

[0005] Preferably, each bar includes two bar segments facing each other and being made of a non-conductive material. Conductive rails are provided on the inner surface of each bar segment. The hangers include a base configured to form an interference fit with the bar segments. In one embodiment, the hangers are made of conductive rods or cables that are in electrical contact with the rails through the respective bases.

[0006] In one embodiment, the bars are straight or linear. In another embodiment, the bars are circular or have some other curvilinear shape.

[0007] The bars preferably extend horizontally, however different bars are disposed at different heights and are supported from one or more canopies or straight from a ceiling by hangers of various configurations or cables.

[0008] Preferably, at least one of the canopies is connected to a line voltage and transformer is used to step down the line voltage to a lower voltage such as 24 vac which is then distributed to the pendants through the hangers and bars.

[0009] The pendants include light emitting elements such as LEDs, electronic circuitry for driving the LEDs, and are preferably shaped for heat dissipation. Since the LEDs have a long life, they are not replaceable but instead the whole pendant is replaced as needed.

[0010] These various elements are combined in many different ways resulting in a virtually infinite number of configurations. One class of configuration may include several bars disposed in a vertical plane. In another class of configurations, several bars extend at different angles in one plane, and are joined at a common point. Another class of configurations may include a combination of the first to classes. Another class of configurations may include several bars disposed at different heights or tiers, some bars being perpendicular to other bars.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

Fig. 1 shows an isometric view a modular lighting system constructed in accordance with this invention with two parallel bars suspended from a single canopy;

Fig. 2 shows an isometric view of another embodiment with bars disposed at an angle with each other in a single tier and suspended from a single canopy; Fig. 3 shows an isometric view of another embodiment of the invention in which six bars disposed at various tiers and angles are suspended from a single canopy;

Fig. 4 shows an isometric view of another embodiment of the invention in which several different bars are disposed at right angle and are supported by a canopy and other ceiling supports;

Fig. 5 shows an isometric view another embodiment of the invention in which two circular bars are disposed at different tiers and supported by a single canopy;

Fig. 6 shows another embodiment of the invention in which a single bar disposed at a right angle with respect to wall and supported by a wall-mounted canopy;

Figs. 7A-7K show an isometric and a cross-sectional view of a bar used in the embodiments of Figs. 1-6; Fig. 7L shows an isometric view of a connector used to connect three bars in the embodiments of Figs. 2 and 3;

Figs. 8A-8E show details of a canopy used in the

embodiments of Figs 1-6;

Fig. 9A-9J show details of a bar hanger used for interconnecting two bars in the embodiments of Figs. 1-6;

Fig. 10 shows a front view of a hanger used for connecting a bar to a pendant or a canopy in the embodiments of Figs. 1-6;

Fig. 11 shows an isometric view of a hanger with a single rod for the embodiment of Fig. 4;

Figs. 12A-12C show views of a non-conductive hanger with a single rod for the embodiment of Fig. 4;

Figs. 13A-13C show a top, front and isometric view of a pendant cluster used in the embodiment of Fig. 1;

Figs. 14A-14P show details of a bayonet-type hanger and a pendant that is mounted using a twisting of the hanger and is used in the embodiment of Fig. 1.

DETAILED DESCRIPTION OF THE INVENTION

[0012] The present invention pertains to a modular lighting system having a plurality of interchangeable elements that can be combined in many different ways to obtain a large variety of configurations. Figs. 1-6 show four such systems identified respectively as 10A, 10B, 10C, 10D, 10E and 10F. Generally speaking, each system includes one or more canopies 100, a plurality of hangers 200, a plurality of power bars 300 and a plurality of pendants 400. In addition, some systems may also include optional connectors 500. Unless otherwise noted, all the hangers and all power bars consist of two elements that have dual functions, they support the pendants 400 and they provide power to the pendants, with one elements forming the positive or hot power connection and the other element defining the negative or ground power connection.

[0013] For example, system 10 in the Fig. 1, system 10A includes a canopy 100 that supports the system from a ceiling or other similar architectural member in a conventional manner. In this case, the canopy also provides power to the system. Canopy 100 includes a conventional power supply connected to standard AC lines for providing power to the LED tubes in the pendants as discussed below. The power supply is hidden within the canopy.

[0014] Two hangers 202, 204 extend downwardly from the canopy. In one embodiment, each hanger discussed hereinafter consists of two solid bars or rods. These hangers are termed the power feed hangers. In an alternate embodiment the hangers are replaced by multi-strand twisted cables. As explained above, each hanger is formed of two elements (e.g., rods or cables). Preferably only two of the four elements (e.g., the rods of hanger 202) carry power and the other two elements are used for support.

[0015] The hangers 202, 204 are used to support a power bar 302. Two hangers 206, 208 are used to support a second power bar 304 and are termed bar hangers.

[0016] Another set of hangers 210-218 are used to

support a plurality of pendants 402-410. These hangers are termed pendant hangers. The pendants 402-410 preferably include LED.

[0017] Included in canopy 100 is a transformer steps down the line voltage from a standard power line to 24 VAC for the pendants 402-410. The other hanger 204 may be electrically floating. The power from the hanger 202 flows through the bar segments of bar 302, hanger 206, bar 304 and hangers 210-212 to the pendants. Thus, in this embodiment, only some of the pendants carry power but all the power bars do.

[0018] Fig. 2 shows a system 10B in which three bars 306 are connected at a common connector 308 that keeps the bars at a specific angle with respect to each other to form a Y-shaped arrangement. This angle could be 120°, 45°, 135°, etc. and the bars may but need not be disposed at a constant angle between each other. Bars 306 are supported by respective hangers 202, 204, 206 from the canopy 102 as shown. The pendants and hangers supporting them have been omitted in this figure for the sake of simplicity.

[0019] Fig. 3 shows a system 10C with pendants arranged at several levels and extending in different directions from a central point below the canopy 102. This is achieved by starting with a Y-shaped bar arrangement of Fig. 2 formed again of three bars 306 supported by hangers 202, 204, 206 and joined by a connector 308. However, in this case, each bar 306 is used to support another bar 310, each bar 310 being supported by a pair of hangers 208, 210. Hanging from each bar 310 are a plurality of pendants 410 supported by hangers 212. All of pendants 410 supported by the same bar 310 can be disposed at different height, or different hangers may be disposed at different heights.

[0020] Fig. 4 shows yet another system 10D. This system 10D includes a canopy 104 with a transformer 106. Attached to the canopy 104 is a first bar 302A using two hangers 214. As opposed to the hangers discussed previously, hangers 214 have a single extended element, such as bar, as described in more detail later. Each of the hangers 214 provides power to one of the elements of bar 302A. However because the bar 302A is not centered below the canopy 104 but extends in one direction away therefrom, another hanger 216, which may be referred to as a ceiling hanger, is used to support a distal end 314 of bar 302. At its top, hanger 216 is attached to a sleeve 106 secured to the ceiling in a conventional manner.

[0021] Hangers 218 are used to attach respective pendants 402 from bus 302. Another hanger 220 is used to support a cluster of pendants 410.

[0022] A second bar 304A is also provided. This bar 304A is supported at one end by a hanger 222 from bar 302A. This hanger 222 also provides power to bar 304A. A third bar 306 is also provided that is supported from the ceiling by ceiling hangers 216 (only one such ceiling hanger is being shown for the sake of clarity). Bar 306 supports the second end of bar 304A and receives power

from said bus 304 through hanger 224. Each of the bars 302A, 304A, 306 can be used to hang pendants of various sizes and shapes and arranged in different configurations as desired.

[0023] Fig. 5 shows another system 10E having a canopy 100E supporting two ringshaped, rather than rectangular bars 330, 332 arranged at two levels and with various shapes and types of pendants 420 extending downwardly from the respective bars 330, 332, each being supported and powered by a respective hanger 218. Since the diameters of the ringshaped bars 330, 332 are larger than the diameter of the canopy 100E, rods or cables 221.

[0024] Fig. 6 shows a wall-mounted system 10F with a wall mounted canopy 112. A horizontal bar 321 attached directly to and extending away from the canopy 112 provides power and supports a pendant 402 via a hanger 221. Alternately, other horizontal bars may be supported from bar 321 for hanging various pendants (not shown).

[0025] Details of a generic bar 300 are shown in Figs. 7A -7K. Unless otherwise noted, all the bars discussed here have the same configuration. In this Figure, bar 300 is shown as being straight however, it can be circular ellipsoid or can have other geometric shape. The bar 300 includes two identical longitudinal segments 352, 354 facing each other. A cross-sectional view of segment 354 is seen in Fig. 7B. Segment 354 is formed of a C-shaped main body 355 made of a non-conductive material, such as a plastic material that is light weight but strong so that it can support various pendants, other bars, etc. Imbedded in this main body 355 is a rail 356 made of a light weight conductive material such as aluminum.. Preferably rail 356 is formed with a rectangular channel 360. The two segments 352, 354 are joined together at the two ends by end connectors 362. The connectors 362 are attached to the bars by conventional means, such as screws 364, by an adhesive or other means.

[0026] Preferably, the two segments 352, 354 have inner surfaces spaced at a nominal distance d throughout the length of the bar 300. The bar 300 is made in standard lengths ranging from to 12 to 48 inches. For very long bars, for example in excess of 24 inches, a spacer 366 is placed between the segments. The spacer 366 may be held in place by screws or other means.

[0027] Fig. 7C shows details of a connector 370 used to connect three bars, for example for the systems of Figs. 2 and 3. The connector 370 is formed of three arms 372 disposed at an angle of 120 degrees. The inner surfaces of the arms 372 are provided with rails 374 having the size and shape to fit into the channels of the rails of bars 300. Three bars having the same, or different length are attached telescopically to the connector 370.

[0028] Details of a typical canopy 100 are shown in Figs. 8A-8C. Each canopy 100 includes a cup-shaped housing 120 that can be cylindrical, square, rectangular, etc. The housing 120 holds a transformer 122 receiving power from line wires 124 and outputting power at a lower

voltage on output wires 126. The output wires 126 are connected to a terminal strip 127 used to distributed the low ac voltage power through a plurality of lines 129. As will be discussed in more detail below, preferably transformer 122 outputs power at about 24 vac. On its bottom surface 128, the housing 120 is provided with a plurality of ferrules 130. Depending on the exact required configuration, these ferrules 130 may be arranged single or in pairs, and a canopy may be provided with two four, six, eight ferrules, etc. Some of the ferrules provide power to the respective hangers or cables and also provide structural support. Other ferrules do not provide power but merely provide structural support.

[0029] As shown in Figs. 8C and 8E, each conducting ferrule 130 terminates in a threaded bolt 132. An eyelet 134 is attached to each bolt 132 using a threaded nut 133 or other conventional means. Each eyelet is connected to one of the output wires 129.

[0030] As seen in Figs. 8C, 8D and 8E, each ferrule 130 further includes cylindrical sleeve 140 with a ferrule body 147 attached to bolt 132 and extending through the housing 120 and below surface 128. The sleeve 140 is electrically insulated from the housing 120 and receives the conductive end of a rod 142 forming a part of a hanger as described below or a cable. A set screw 144 is used to secure the rod 142 in the sleeve 140. A washer 139 is disposed below nut 133 and is insulated from the housing 120 by an insulating disc 143. A second insulating disc 145 is disposed above the ferrule body 147 to insulate it from the housing 120 as well. The rod 142 is preferably covered with an insulator 149.

[0031] The non-conductive ferrules have a similar configuration but are not connected to any output wires 126. The ferrules receive rods similar to rod 142 but these latter rods do not provide power.

[0032] There are several different types of bar hangers are provided: hangers for supporting bars from canopies, hangers for supporting bars from ceilings (without a power connection), hangers for supporting one bar from another bar and hangers for supporting pendants. All these hangers have must be able to interface with a bar at least at one end as described below.

[0033] There are two types bar-to-bar hangers: parallel hangers for connecting two parallel bars and perpendicular hangers connecting two bars running perpendicular two each other.

[0034] Figs. 9A-9G show details of parallel bar hanger such as hanger 206 supporting bar 304 from bar 302 in Fig. 1. The hanger 206 includes two vertical segments 230A, 230B. At the top and the bottom, the two segments 230A, 230B have their ends imbedded in identical W-shaped bases 232, shown in more detail in Figs. 9B-9E. The base 232 forms two channels 234, 236 with a wall 238 separating the two channels. The base 232 is further formed with two metallic springs or clips 240, 242. Clip 240 is electrically attached to segment 230A within the base 232, and clip 242 is connected to segment 230B. Preferably, base 232 is made of a non-conductive mate-

rial and is overmolded to cover portions of the clips 240, 242 and segments 230A, 230B. In one embodiment, the two bases 232 have a single, unitary structure. In another embodiment, at least the top base is made of two sections 232A, 232B that snap together along line 232 forming an interference fit therebetween.

[0035] As can be seen in Figs. 9F and 9G, the bases 232 as sized and shaped so that they fit over and engage the bars 302, 304. Importantly, the clips 240, 242 are sized and shaped so that they engage the rails 356, 358. The clips 240, 242 have a flat section 244 sized and shaped to snap into the channels 356, 358 of the bars 302, 304. In this manner not only do the clips 240, 242 provide a solid electrical contact with the rails 356, 358 but they also stabilize the hangers on the bars and insure that the lower bar 304 remains stiff and does move around in use. The clips may be made from beryllium copper.

[0036] Hanger 208 has a similar configuration however the clips need not be connected electrically to the hanger segments. In other cases, for example, in the configuration shown in Fig. 4, hangers 222 do provide electrical connection to bars 304A and 306.

[0037] The hanger segments 230A, 230B are provided in various lengths as required to obtain the various systems described above, and they are preferably made in the shape of rods of a stiff but somewhat springy material having shape memory such as a phosphor/bronze alloy. Preferably except where an electrical contact is required, the rods are covered or painted with with a thin electrically insulating material.

[0038] The hangers can be installed by separating the two segments 230A, 230B, passing the ends of the respective bars 302, 304... between the segments, then lowering or raising the bars toward the respective bases 232 and then snapping the bases onto the bars into the configurations shown in Figs. 9F and 9G.

[0039] As discussed above, and illustrated in more detail below, in some instances, the power bars extend perpendicularly to each other. For example, in Fig. 4, bars 302 and 304 are perpendicular to each other. These bars are interconnected using a hanger 222 shown in Figs. 9H-9J. This hanger 222 has two segments 272A, 272B and a base 232 similar to the base 232 in Figs. 9A-9G. However, at the bottom hanger 222 is provided with a different base 274. This base 274 is formed with two side wings 274A, 274B and a center wall 274C. Clips 276, 278 are provided on the center wall 274C and are connected electrically with segments 272A, 272B, respectively as show in Fig. 9J. The center wall 274C is made with two holes 280A, 280B with the lower ends of segments 272A, 272B extending into the holes and being secured to the base 222. The base 270 is sized and shaped to engage and support the power bar segments 304A, 304B of a bar 304A with the segments 272A, 272B providing power to these power bar segments. The base 232 engages the segments of the bar 302 in the manner discussed above.

[0040] In addition to the bar hangers, other types of hangers are used in the system as well. Fig. 10 shows a side view of a hanger having a base 232 and two segments 252A, 252B. The difference between this hanger and the hanger in Figs. 9A is that the ends of segments 252A, 252B are straight bare ends of the conductive rods. This bare ends are then inserted into the ferrules 130 as shown in Fig. 8D. (Of course, for this use, the hanger is turned upside down). Alternatively, the hanger is used a pendant cluster such as cluster 410 in Fig. 4 or other pendants.

[0041] Fig. 11 shows a single rod hanger 214. This hanger 214 includes a base 274A similar to base 274 shown in Figs. 9H, 9J. The base 274A has two clips 276, 278. When the base 274 is mounted on a bar (such as bar 302A), the clips 276, 278 engage the rail within the bar 302A as discussed above. However only one of the clips (say clip 276) is connected to rod 272C. The free end 272D of the rod 272C is attached to the ferrule of a canopy. Two such hangers 214 are used to support bar 302A (as seen in Fig. 4), with each of the hangers feeding power to one of the rails of the bar.

[0042] Fig. 12A-12C show a nonconductive hanger 216 used for supporting a bar, such as bar 304A in Fig. 4 from a ceiling. This hanger 216 provides only support and therefore it can have an elongated member 272D which may but need not be identical to the rod 272C in Fig. 11. The member 272D ends in a base 274B that is similar to the base 274 but need not have any clips since there is no need to connect to the rails of the bus 304A. Since there are no clips provided for the base 274B, a cover 274C is attached to the body 274D of the base 274B to insure that the bar does not slip out. The cover 274C is attached to the body 274D by screws 274E or other conventional means. The other end of the elongated member 272D is attached to a sleeve 277 via a set screw 277A. Preferably, the ferrule 277 is similar to the ferrules of the canopy 100 in that it has a similar sleeve for capturing the end of the member 272D. A small screw (not shown) is used as an attachment means. A large screw 279 or other conventional means may be used to attach the sleeve 277 directly to the ceiling or other architectural surface. Alternatively, the screw 279 is attached to a mounting post 281 and an anchor 283 (Fig. 12C).

[0043] Figs. 13A-13C show a top, plan and isometric view of lamp cluster 410. The cluster 410 includes a distributor 430, and three pairs of connectors 432 connecting the distributor 430 to three pendants 402A, 402B, 402C. The pendants can have the same or different shapes. Importantly, the distributor has to top holes 434, 436. The ends of the rods shown in Fig. 9 are inserted into the holes 434, 436 and then set screws on the sides of the distributor, such as at 438 are tightened thereby attaching and mechanically securing the pendant cluster 410 to the hanger. The hanger and the cluster can now be hanged from a bar 300.

[0044] Other structures may be used for attaching pen-

dants to the hangers. One such structure is shown in Figs. 14A-14O. Fig. 14A shows an orthogonal view of hanger 210 being inserted into pendant 402. As shown in Figs. 14A, 14B 14C and 14D, the hanger 210 includes two vertical segments 602A, 602B joined by standard base 232. The segment 602A is terminated at the bottom with a connecting spade 604 that has a generally flat, rectangular cross section (as seen in Fig. 14D) of thickness t_1 . Spade 604 includes a narrow shank 606 having a height h_1 and a generally square tip having a width w_1 . Segment 602B has the same shape as segment 602A and the two spades 604 are normally aligned in parallel to each other and perpendicular to the plane formed by the two parallel segments 602A, 602B, as seen in Fig. 14A.

[0045] Pendant 410 is formed with an upper and a lower section 610, 612 (see Fig. 14L). The upper section 610 contains a light engine (not shown) that is powered by the 24 vac source provided by the segments 602A, 602B and generates appropriate power to light generators (such as LEDs -not shown) disposed in the lower section 612. The walls of the lower section are translucent or transparent to allow the light from the light sources to be projected outwardly and provide space illumination. Various pendants may have sections of different shapes and sizes. In one embodiment, the upper section 610 includes a cavity 620 with two holes 622, 624 .

[0046] The cavity 620 holds two contacts 630, 640 (see Figs. 14E, 14F). Each contact is connected to the light engine (not shown). Contact 630 is formed with two facing blades having flat portions 632, 634. The distance between the blade portions 632, 634 is t_2 which is preferably equal or slightly larger than t_1 but smaller than w . Contact 640 has two similar blades with flat portions 642, 644. The blade portions 632, 634, 642, 644 have a height h_2 that is slightly smaller than height h_1 .

[0047] The pendant 410 is attached to the hanger 210 as follows. First, the hanger 210 is positioned on top of pendant 410 with the tips of spades 604 inserted into holes 622, 624 as seen in Fig. 14A, 14G. In this orientation, the spades 604 come into contact with the top of respective blades 630, 640, as shown in Fig. 14H and stop because they can go no further.

[0048] Next, the pendant 610 and top of the hanger 210 is rotated in direction A by a quarter turn (90 degrees). This rotation causes the spades 604 to turn by the same angle so that they are now in parallel with the blade sections 632, 634, or 642, 644 respectively, as seen in Figs. 14I and 14J. At this point, the hanger 210 can be and is pushed further downward so that the spades 604 enter into cavity 620 between the blades. This motion downward can continue until the tips 608 pass the blade sections 632, 634, 642, 644 (Fig. 14K).

[0049] Now the hanger 210 is released and the spring action of the two segments 602A, 602B cause the top of the hanger 210 to rotate back in direction B (Fig. 14L) toward its natural or rest configuration. This action causes the spades 604 to rotate as well. As this action is

completed, the tips 608 become trapped under the blade sections (see Figs. 14M-14O). In this manner the hanger 210 and pendant 410 become interlocked. The hanger 210 and pendant 410 can be attached to any bus 300 as required. If necessary, the pendant 410 can be separated from the hanger 210 by twisting it by a quarter turn and reversing the sequence discussed above.

[0050] As discussed above, and illustrated in the drawings, the various components or elements described above can be combined into numerous different kinds of configurations. The figures show some systems that include several subsystems that are attached so that they can be extend in three dimensions, to create a linear or circular configurations, or combinations thereof. Moreover, while the systems discussed above are all suspended from a ceiling, other systems are shown and described (together with any special components, if any) that are attached to vertical walls-e.g. sconce-type systems.

[0051] Electrically, all these systems have one or more canopies, buses, and hangers that provide a power supply for the canopies. As discussed above, preferably power within the system is distributed at 24 vac to the individual pendants. Light engines within the pendants use this source to generate light via LEDs or other similar efficient, long life light elements. The systems do not use any conventional bulbs that need replacement. It is presently estimated that the linear distance between a canopy and the furthest pendant can be up to about 30 feet. For larger systems, it is advisable to use two or more canopies. As indicated above, for two or more source-systems, the bars can be interconnected mechanically but isolated electrically as needed. As discussed above, in conjunction with Fig. 3, one bar of a system, for example bar 306 can have two sections 306A, 306B that are electrically insulated from each other with the rails of each section being fed and electrically connected to a different canopy 100.

[0052] In this manner, the modular presented herein can be used to make systems having different configurations. Because the hangers can be attached easily in the field to the canopies, the bars and the pendants, each system can be assembled very quickly and efficiently using the various components described above. Moreover, many different kinds of pendants can be used with the system. As long as each pendant is capable of being connected to any of the hangers described above, it can be incorporated into a system without any changes to any of its other components.

[0053] Obviously numerous modifications may be made to the invention without departing from its scope as defined in the appended claims.

Claims

1. A modular lighting system for providing light in a space comprising:

a canopy connectable to a power source;
 a plurality of horizontal bars including two parallel bar segments extending in parallel with equidistant from each other;
 a plurality of hangers, including a first set of hangers supporting bars from said canopy and a second set of hangers, each said hangers including a first end disposed between and engaging said bar segment; and
 a plurality of pendants supported by said second set of hangers from said bars;

wherein said hangers and bars cooperate to provide electric power to said pendants from said canopy.

2. The system of claim 1 wherein at least one of said hangers includes a first and a second rod made of an electrically conductive material.
3. The system of claim 1 wherein at least one of said hangers includes a cable.
4. The system of claim 1 further comprising non-conductive hangers provided to support some of said bars.
5. The system of claim 1 wherein said bars are linear and are interconnected to form a linear configuration extending in one direction or more directions.
6. The system of claim 1 wherein at least some of said bars are connected to each other at one end to form a star configuration.
7. The system of claim 1 wherein at least one of said bars is suspended by a bar hanger from another one of said bars.
8. The system of claim 1 wherein said bar includes first bar and a second bar segment arranged in a facing relationship with each other to define a space therebetween, said bar segments having respective internal surfaces made of an electrically conductive material and segment ends; and a first connector disposed at one respective end of each bar segments and arranged to hold said bar segments together; and a second connector disposed at another respective end of each bar segments and arranged to hold said bar segments together at a preselected distance.
9. The system of claim 8 wherein each internal surfaces are formed with a trench engaging an end of one of said hangers.
10. A support for a cluster of pendants, each pendant including a pendant body selectively generating light and two parallel rods, each rod ending with a cylin-

drical rod end made of an electrically conductive material, said support comprising:

a distributor having an outer surface with receiving holes arranged in sets of two including a top set of holes receiving respective rods providing power to the distributor, and the remaining holes being arranged and constructed to receive the rod ends of pendants to support the respective pendants and provide the pendants with electrical power.

11. A modular lighting system for providing light in a space comprising:

a canopy connectable to a power source;
 a plurality of horizontal bars including two parallel bar segments extending in parallel at equidistant from each other;
 a plurality of hangers, including a first set of hangers supporting bars from said canopy and a second set of hangers, each said hangers including a first end disposed between and engaging said bar segment; and
 a plurality of pendants supported by said second set of hangers from said bars;

wherein said hangers and bars cooperate to provide electric power to said pendants from said canopy; wherein at least one hanger has two parallel rods, an interconnecting top portion interconnecting top ends of the rods, each rod terminating in a rod end; and
 at least one pendant is formed with a pendant portion attached to the light fixture and including a pendant body with an internal cavity; and an aperture receiving one of said rod ends;
 said hanger and said pendant portion cooperating to interlock said hanger with said light fixture as said one rod end is inserted into said aperture and said internal cavity, wherein twisting said rod end causes a mechanical interlock between the respective rod and said pendant portion.

12. A lighting system comprising:

a canopy including a power source;
 a plurality of bars disposed horizontally;
 a plurality of bar hangers configured to support said bars;
 a plurality of pendants configured to provide light when receiving electrical current; and
 a plurality of pendant hangers adapted to support said pendants from said bars;

wherein said bars and hangers cooperate to conduct said electric current from said power source to said pendants;

wherein said canopy is connectable to a power source, said canopy including a cup having a cup wall, at least one ferrule, said ferrule including an upper portion adapted to be connected to a wire receiving power and a lower portion including a sleeve 5 extending through said cup wall and in electrical contact with said upper portion, and a sleeve cover disposed below said cup wall.

10

15

20

25

30


35


40

45

50

55

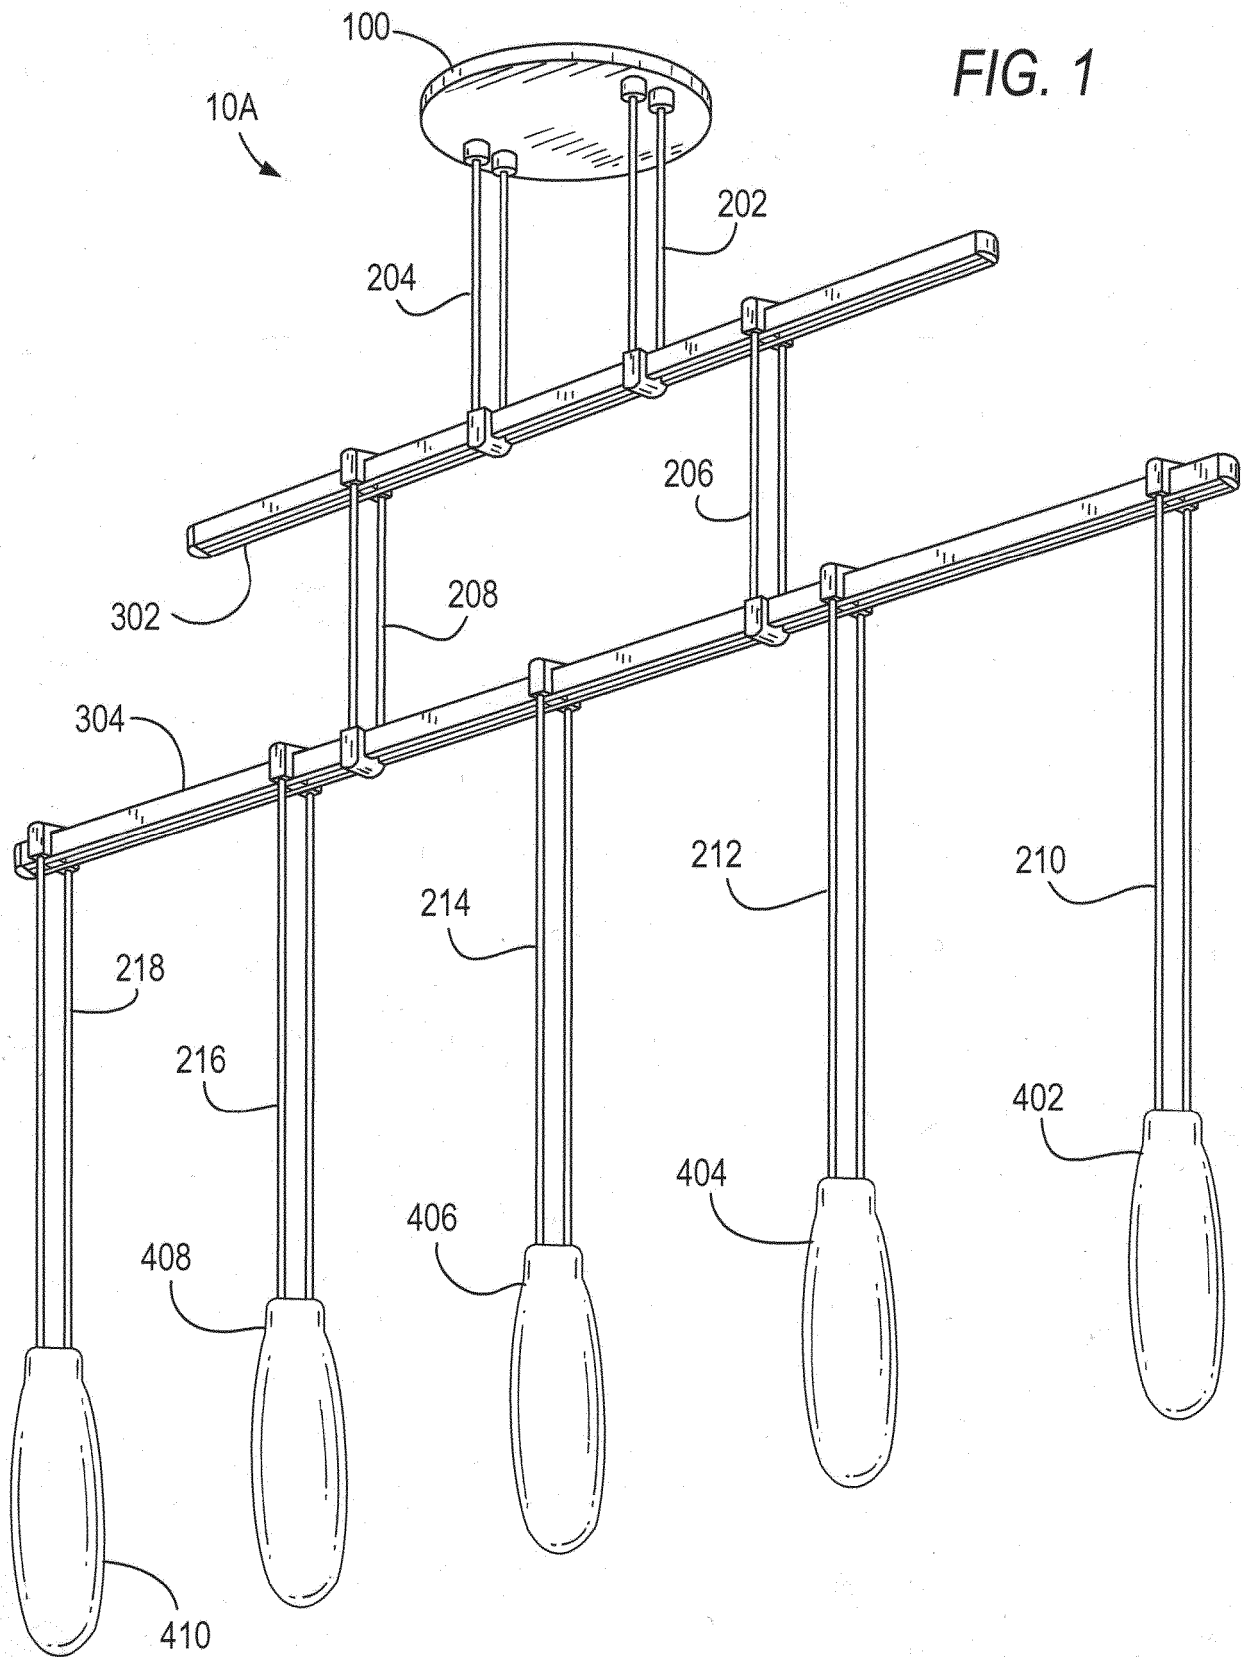

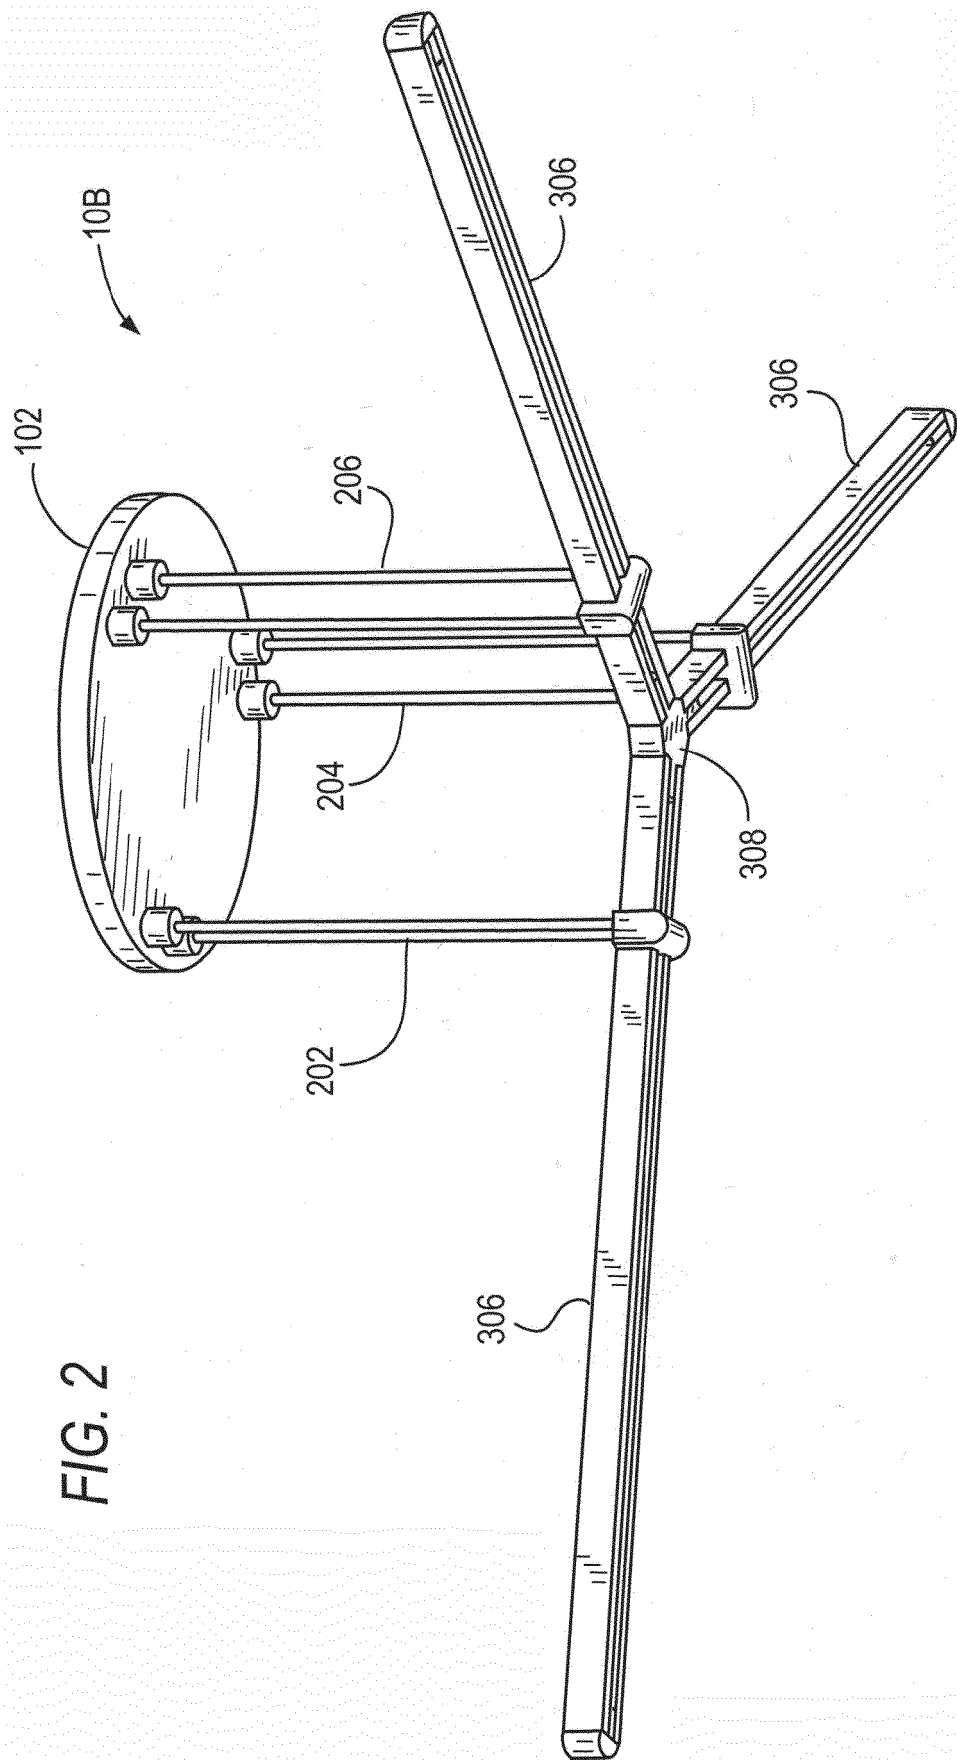

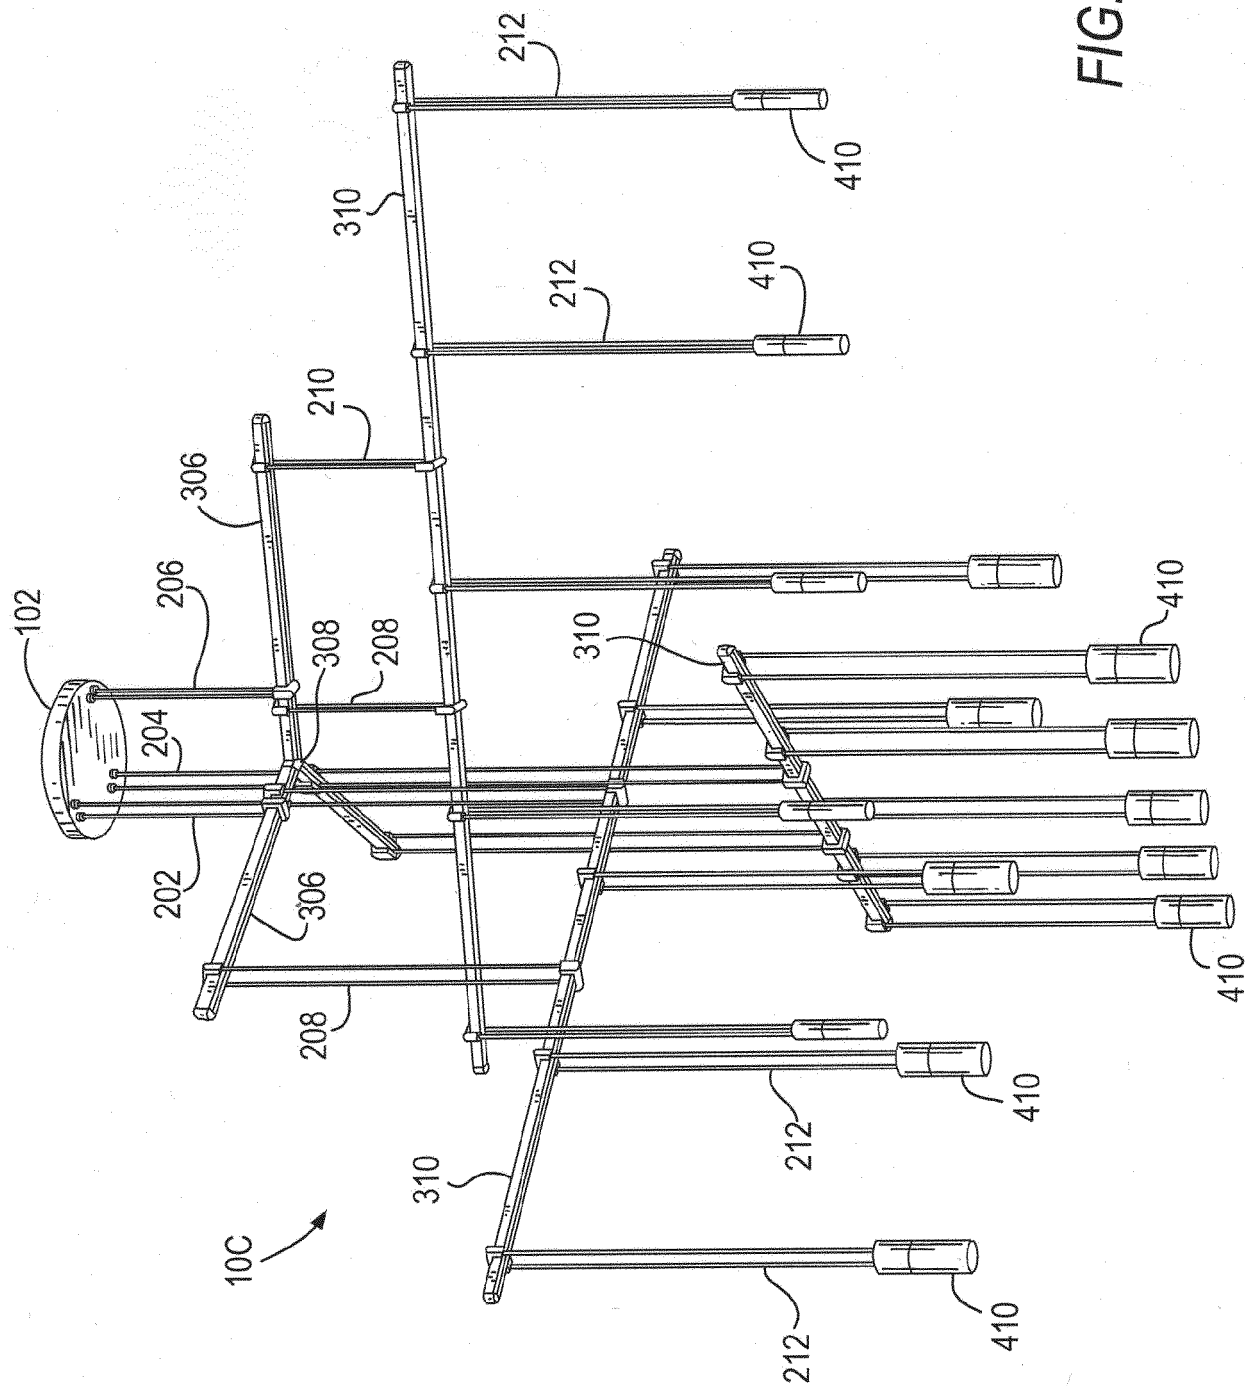
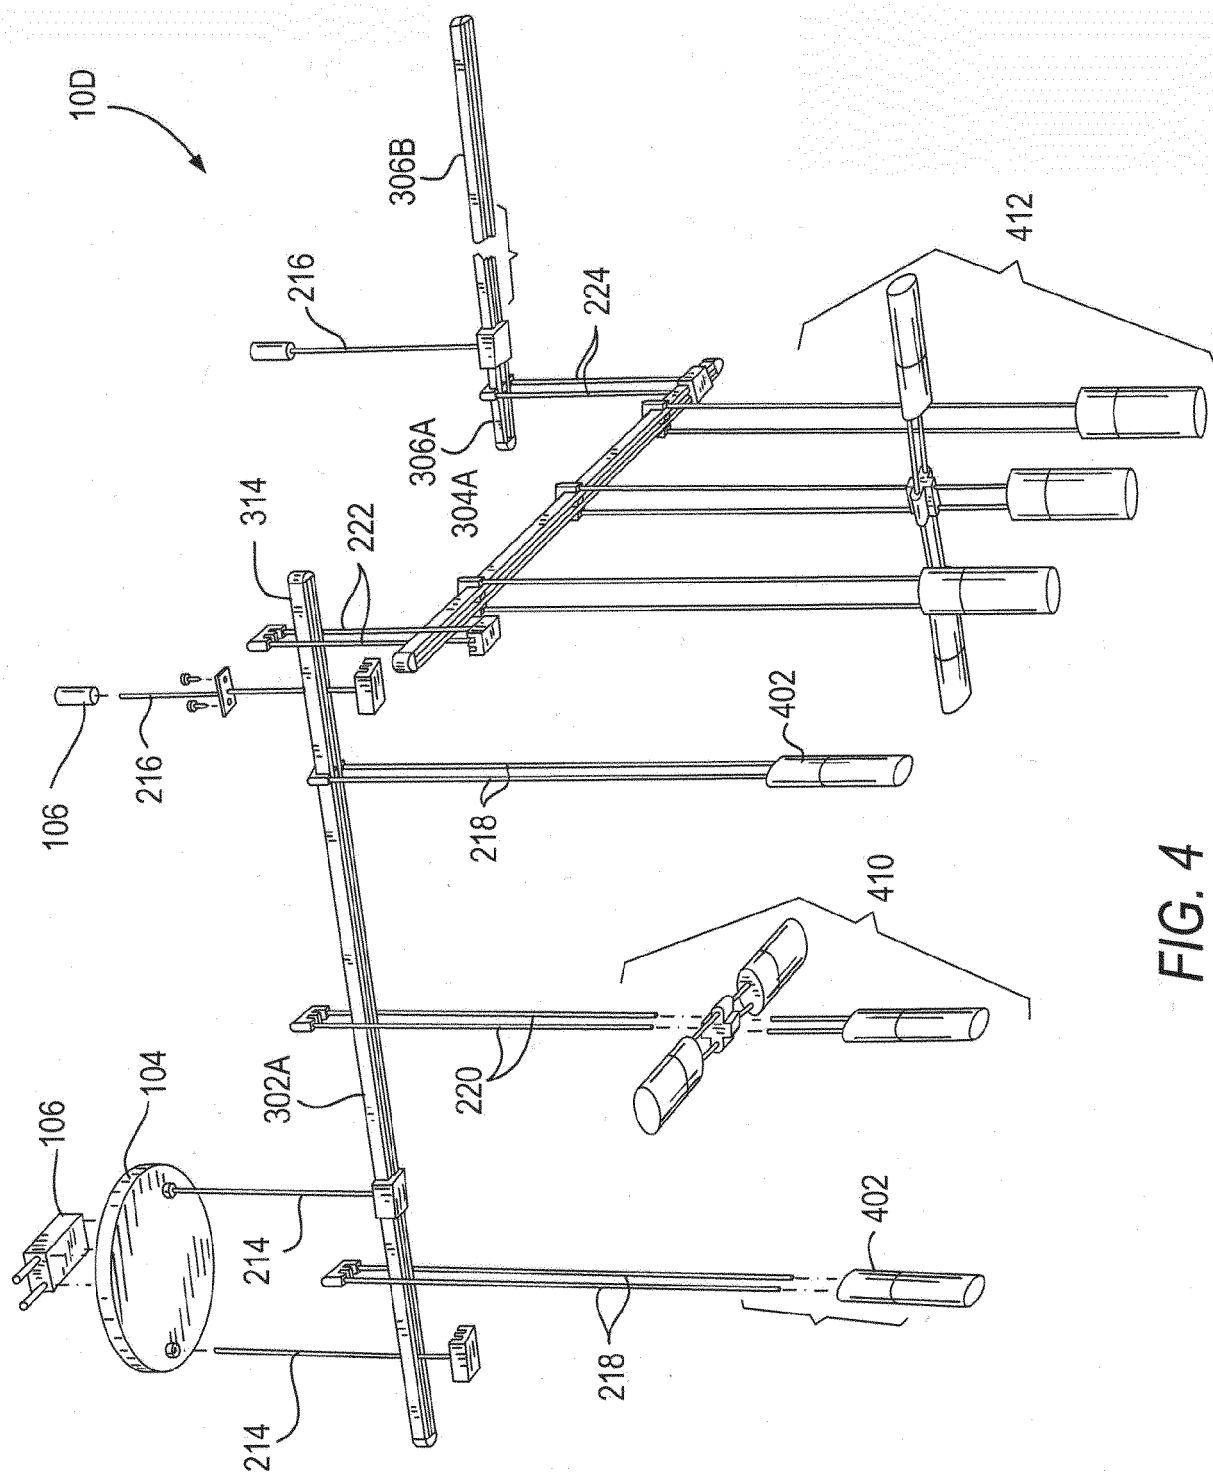


FIG. 3



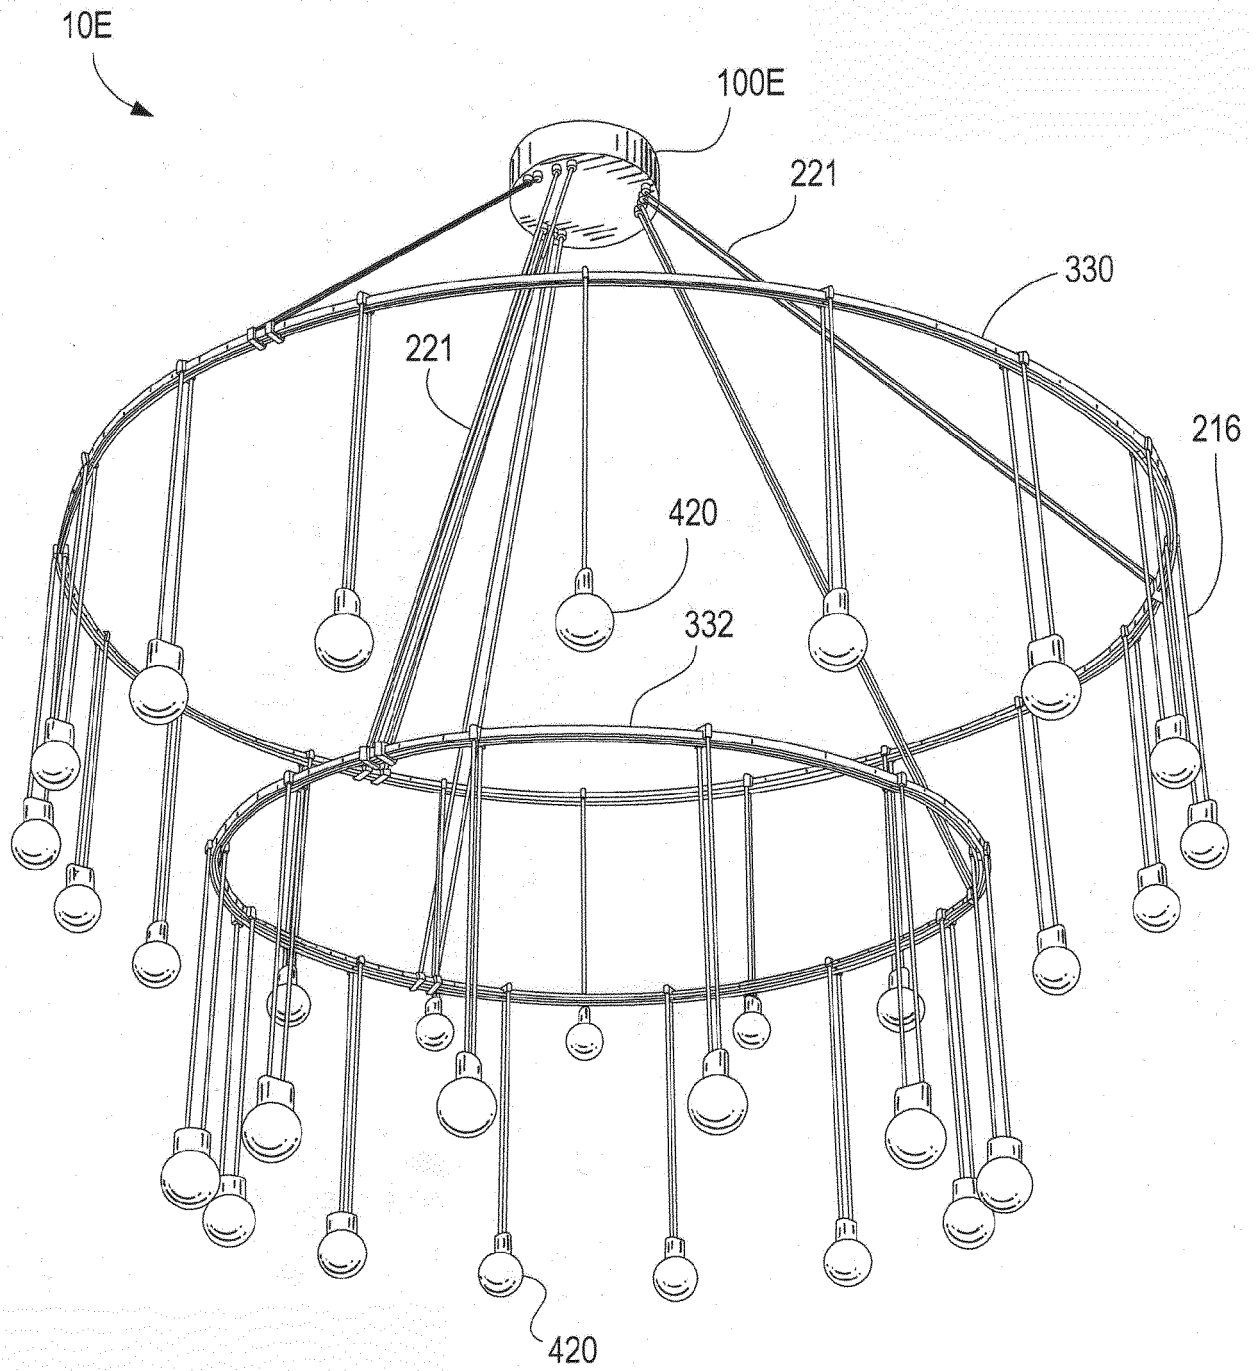


FIG. 5

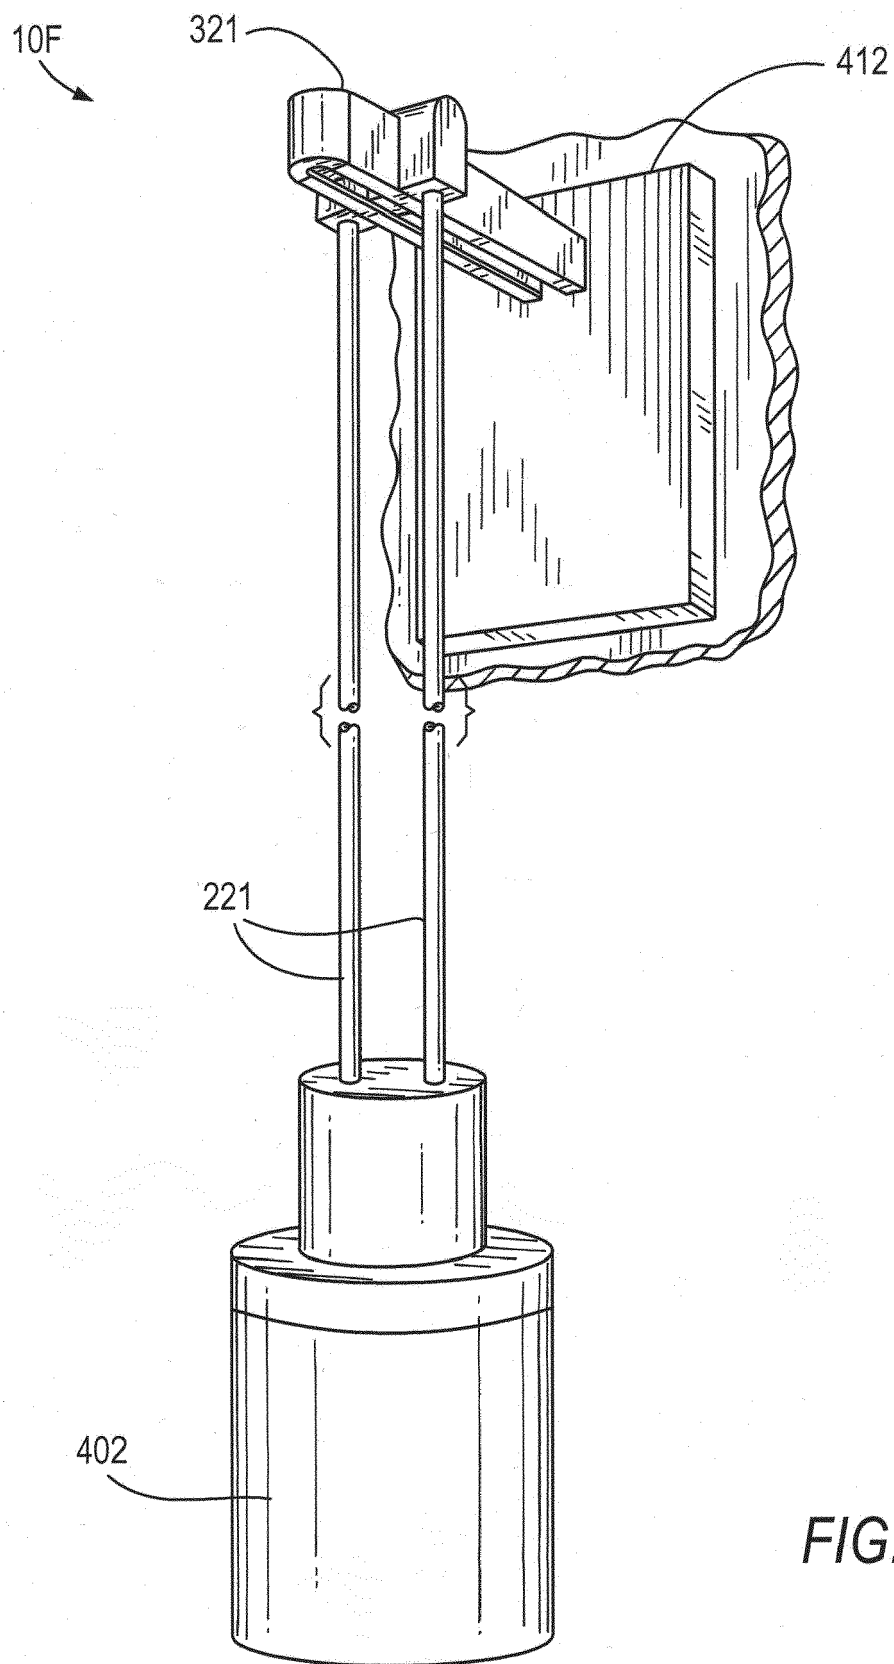


FIG. 6

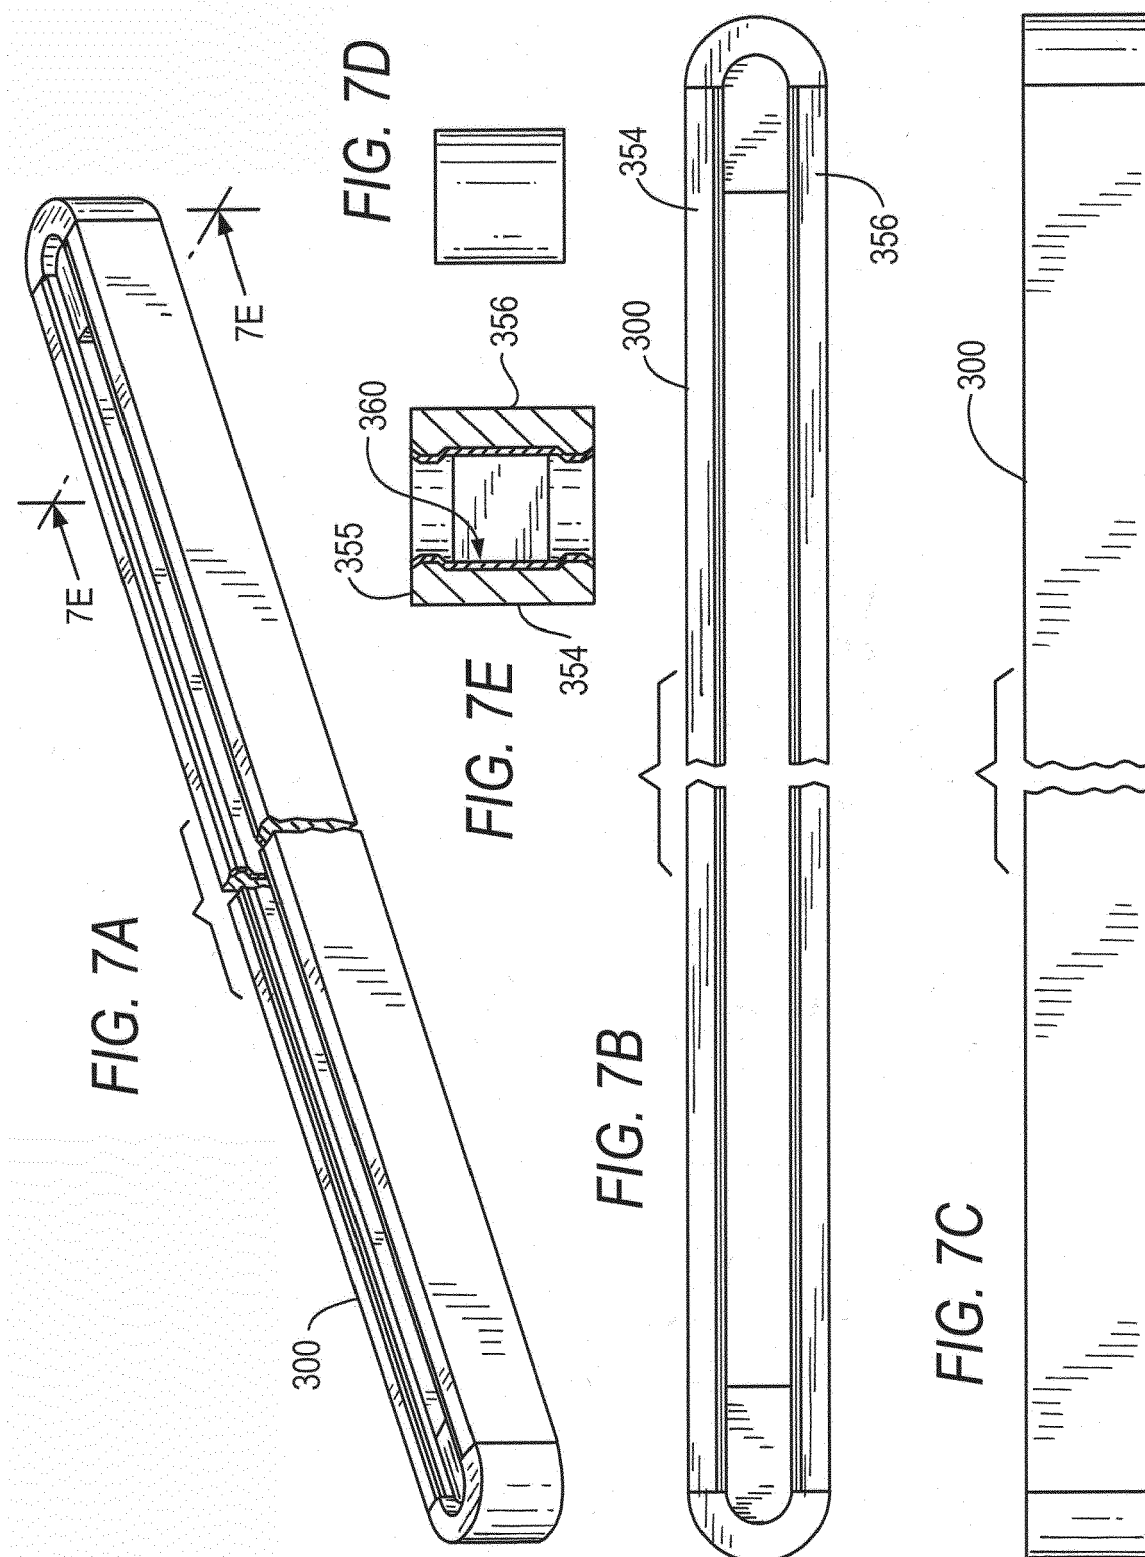


FIG. 7J

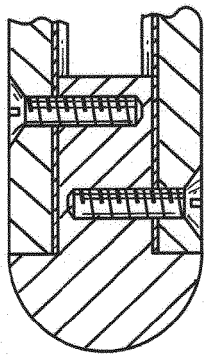


FIG. 7F

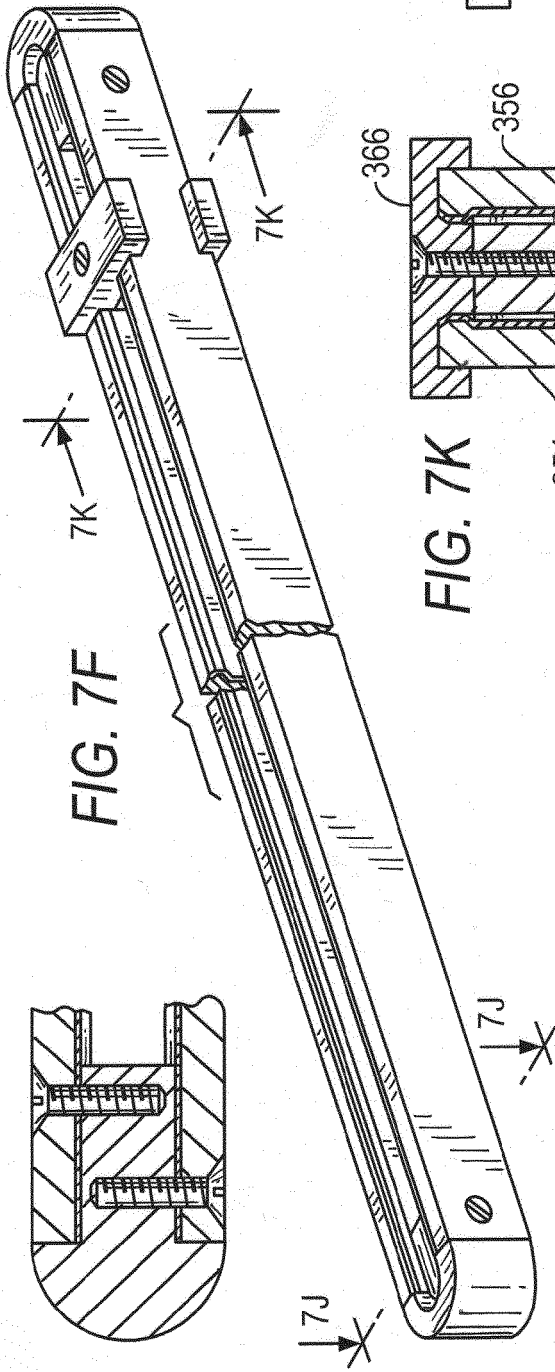


FIG. 7I




FIG. 7K

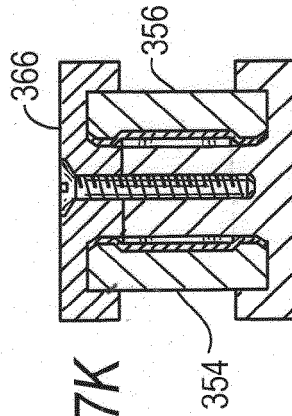


FIG. 7G

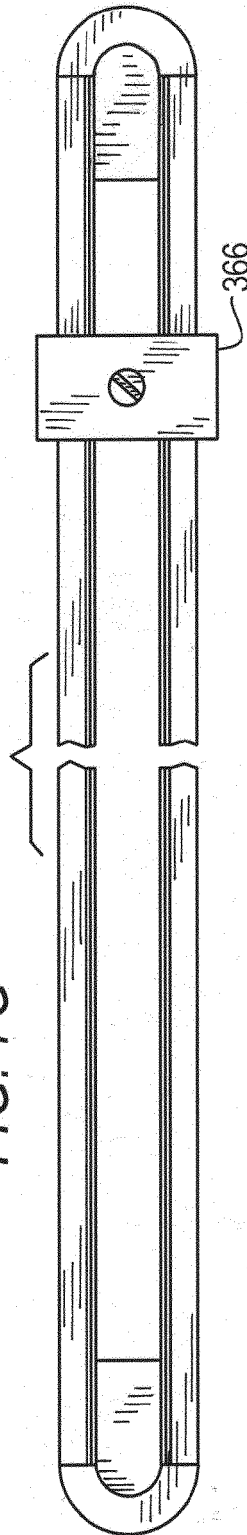
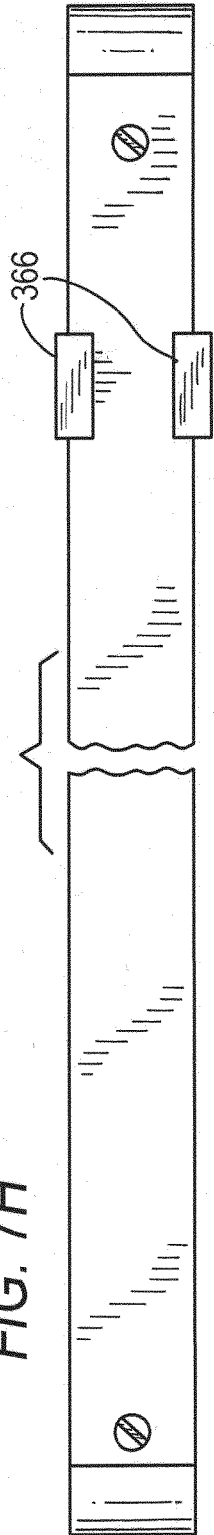
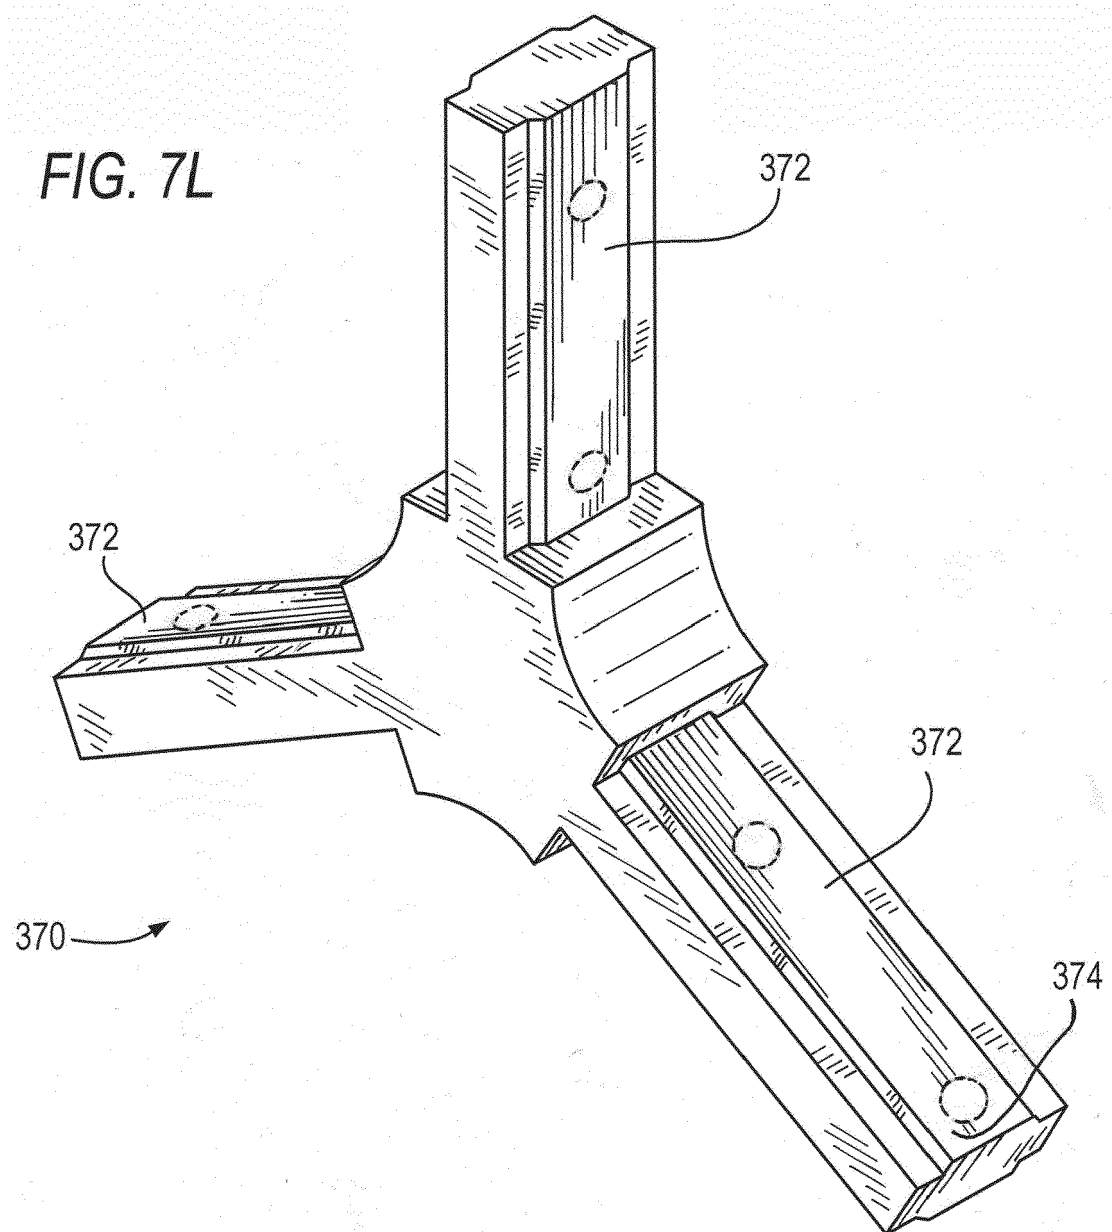


FIG. 7H





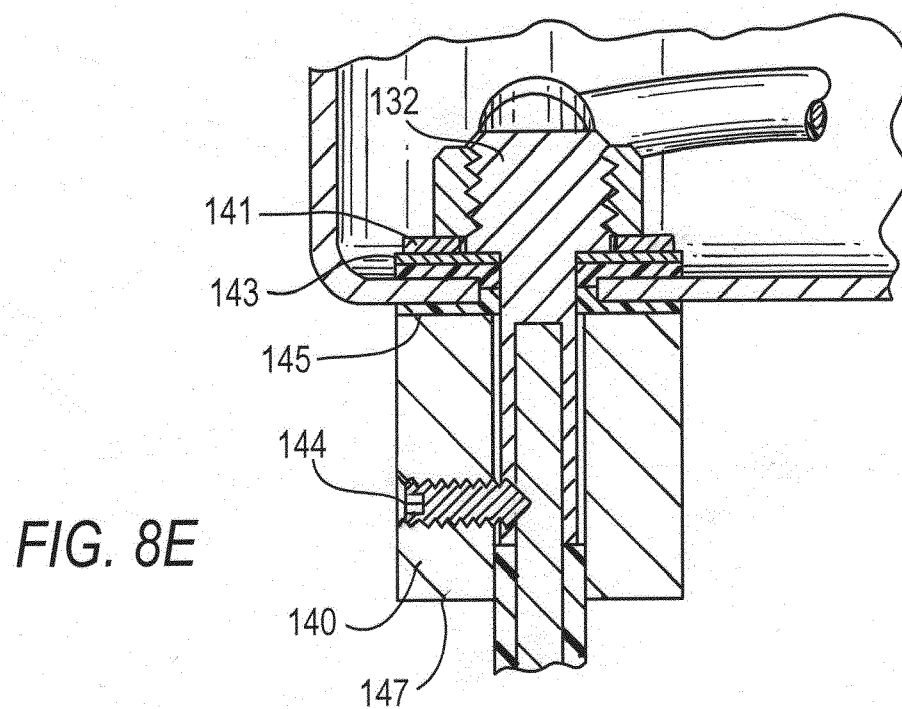
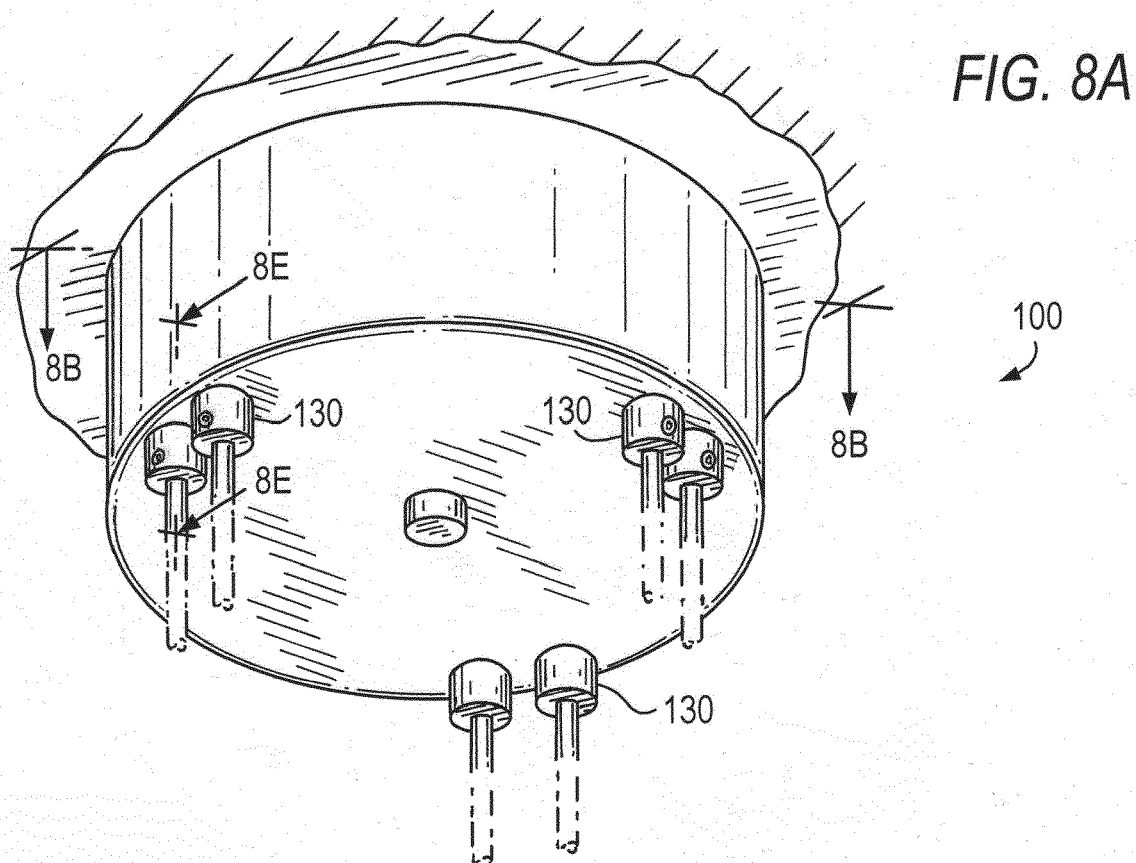
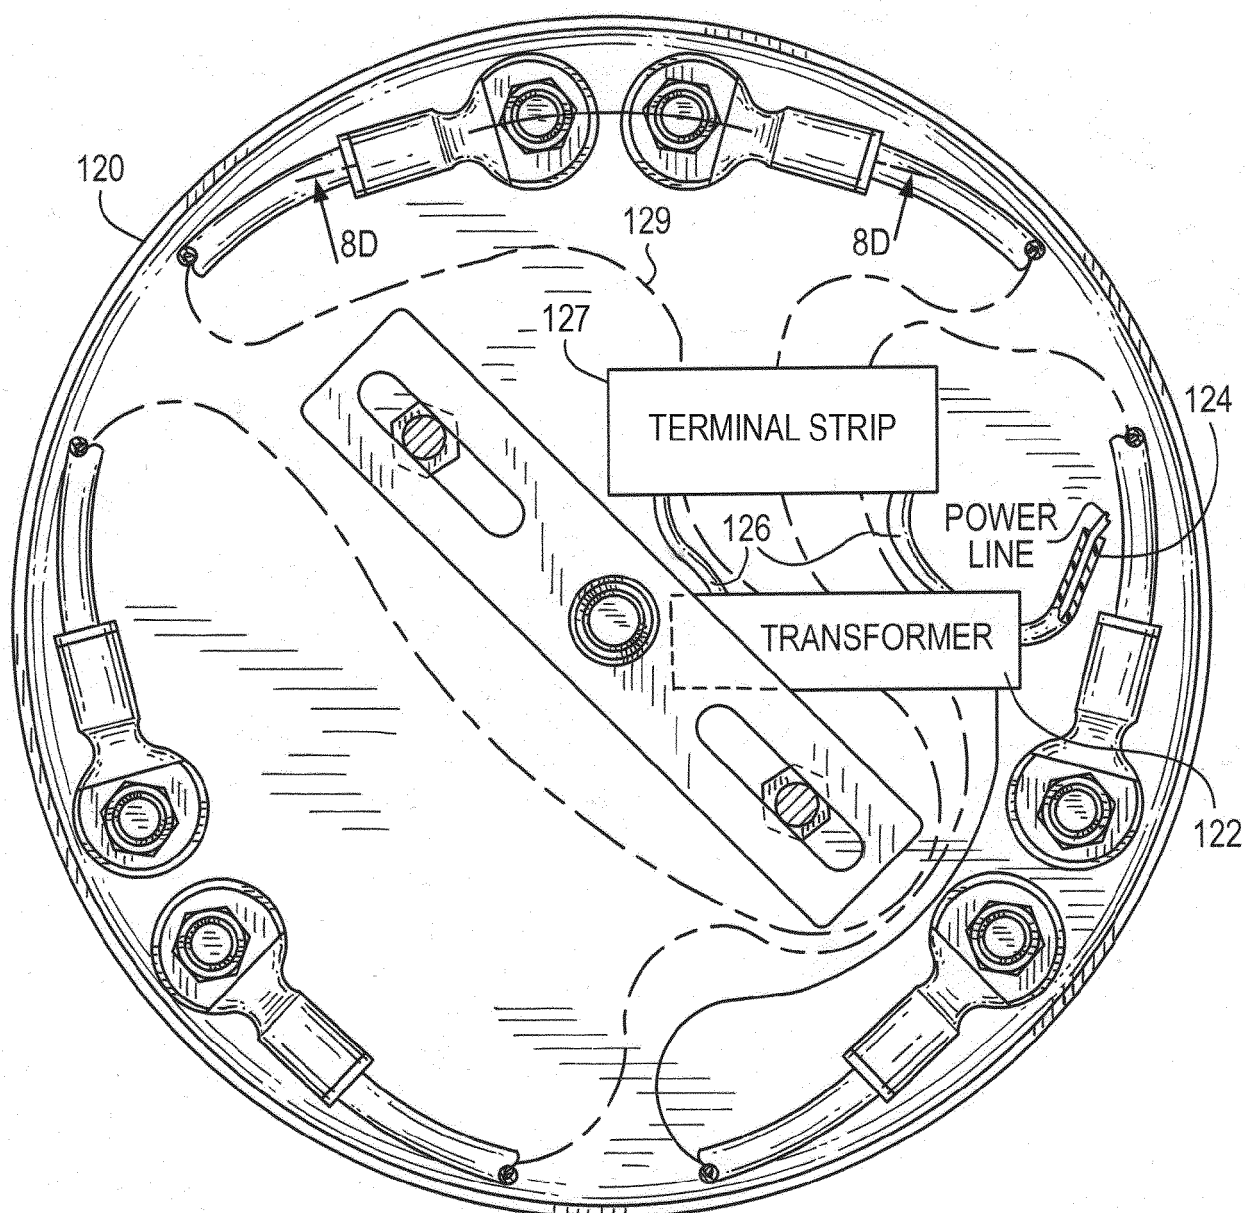


FIG. 8B



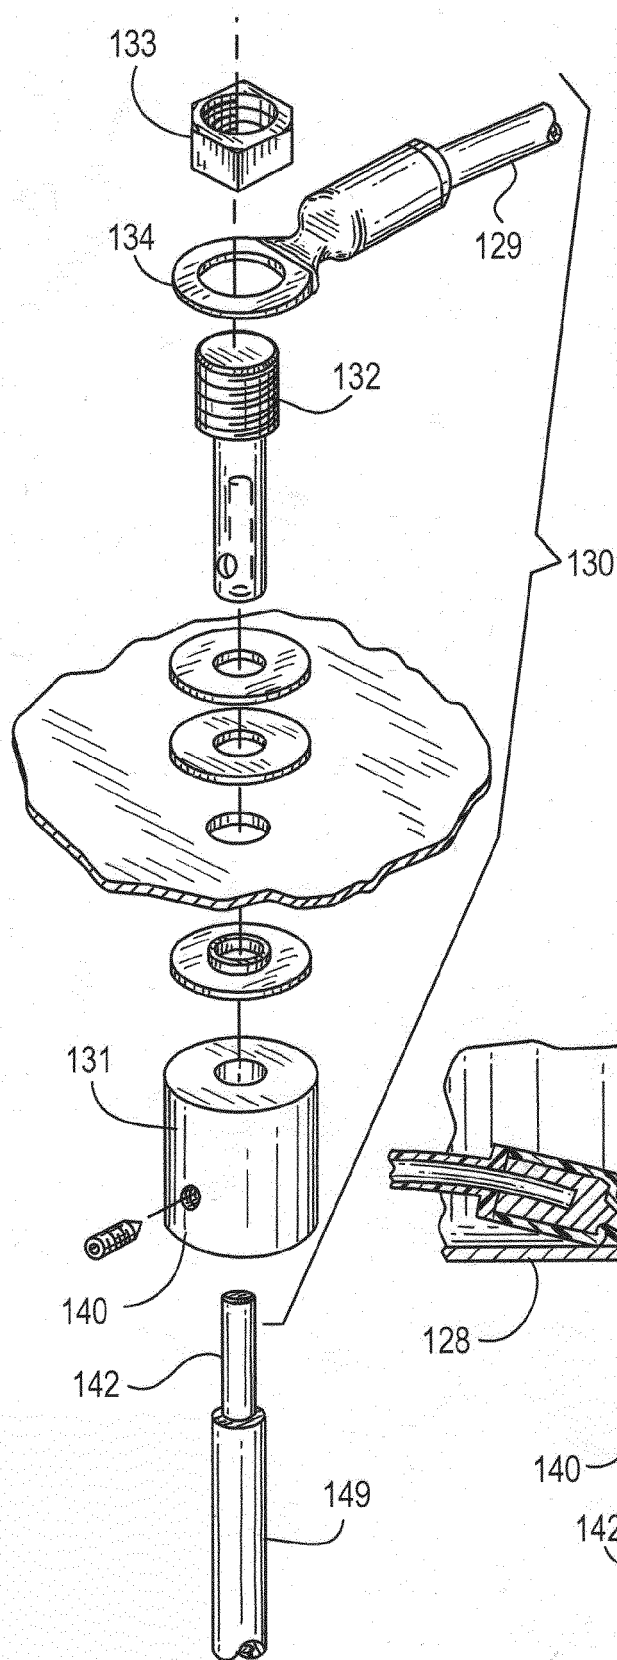


FIG. 8C

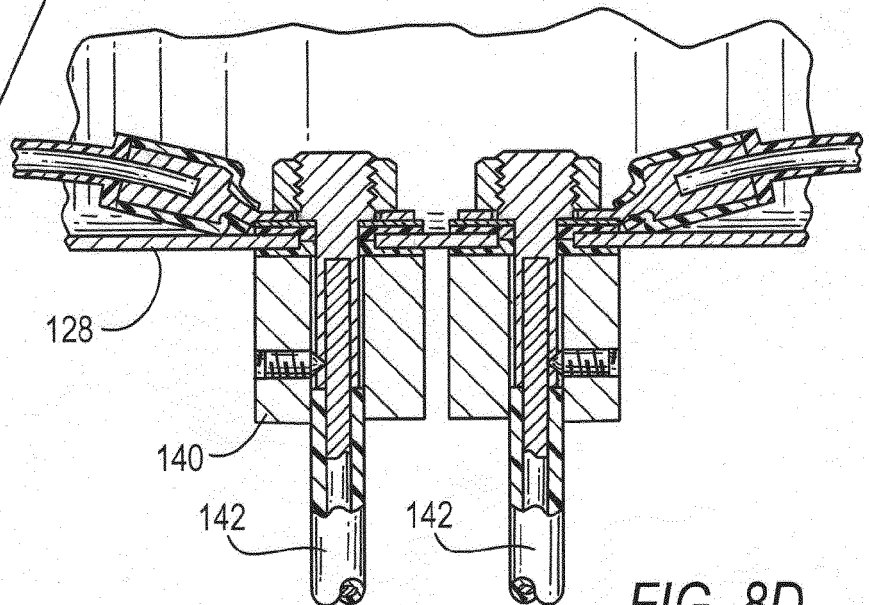


FIG. 8D

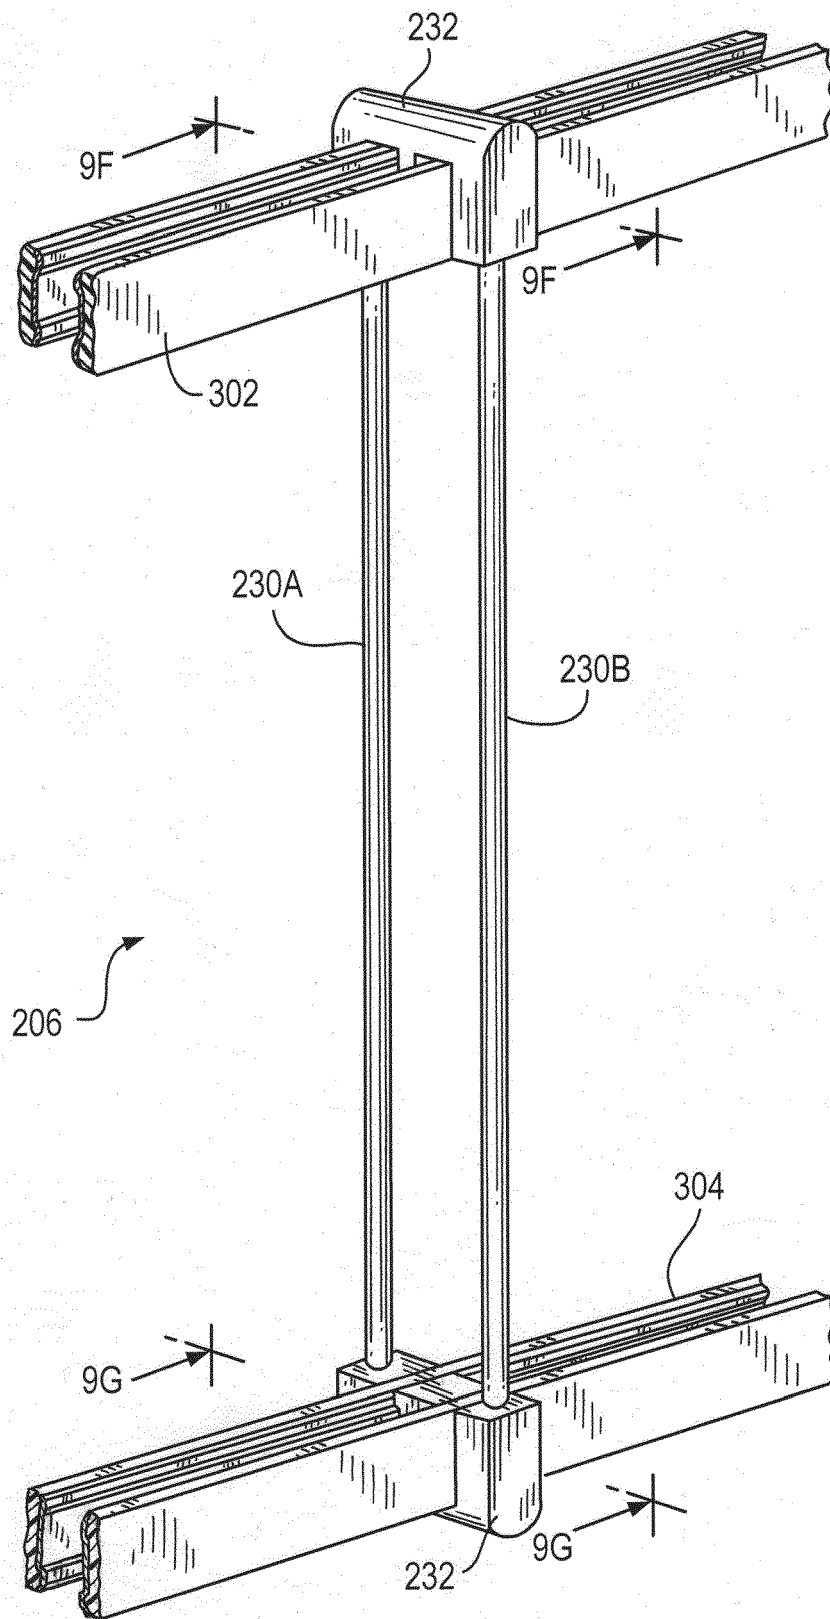


FIG. 9A

FIG. 9B

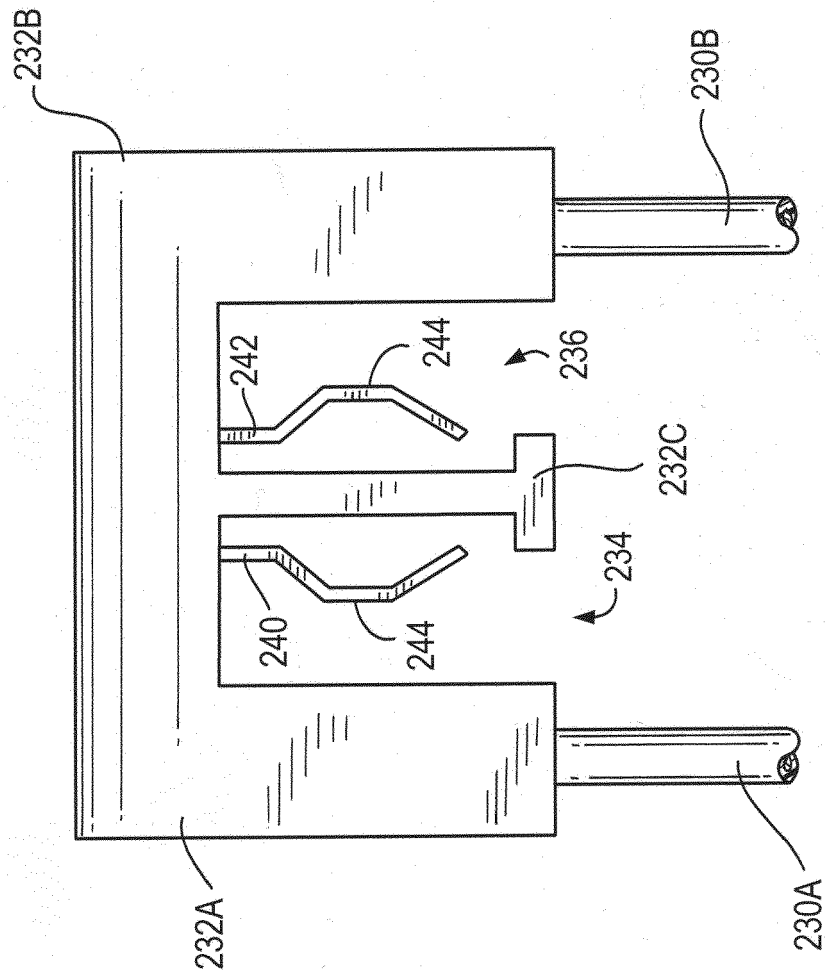


FIG. 9C

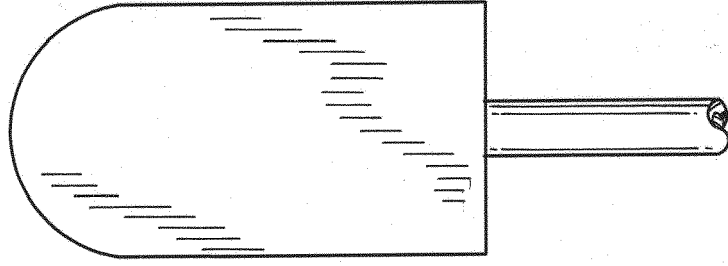


FIG. 9D

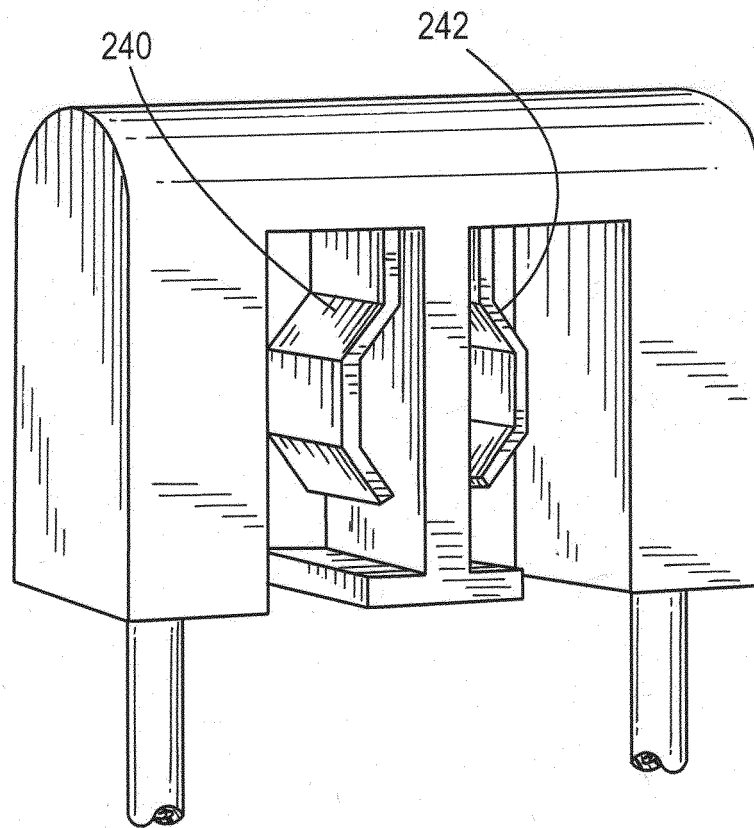


FIG. 9E

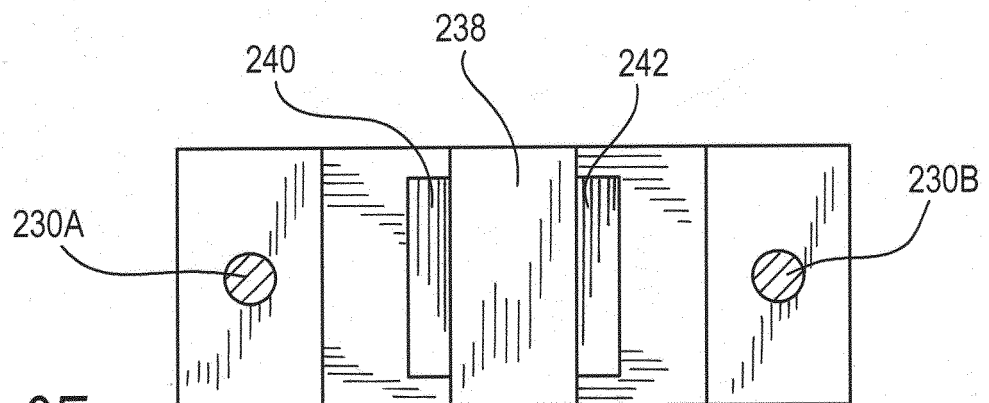


FIG. 9F

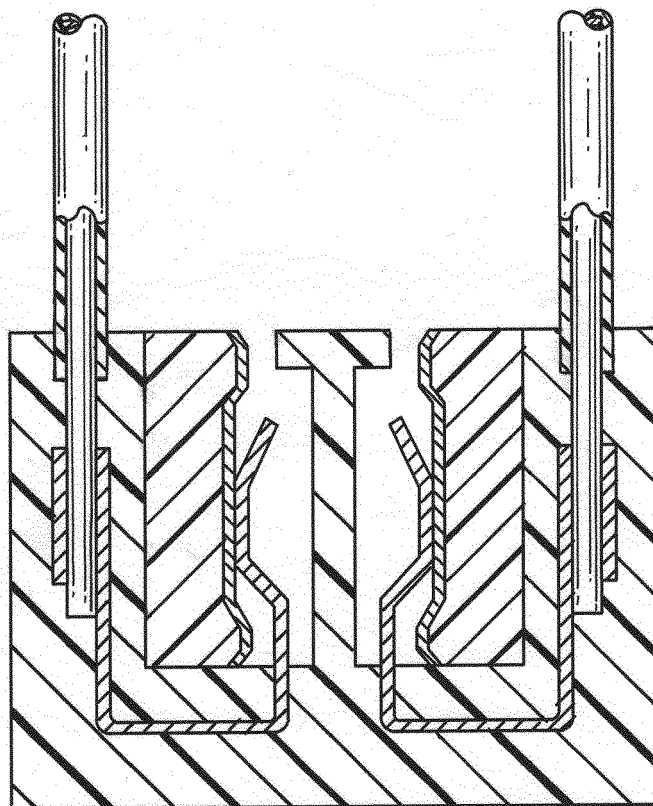
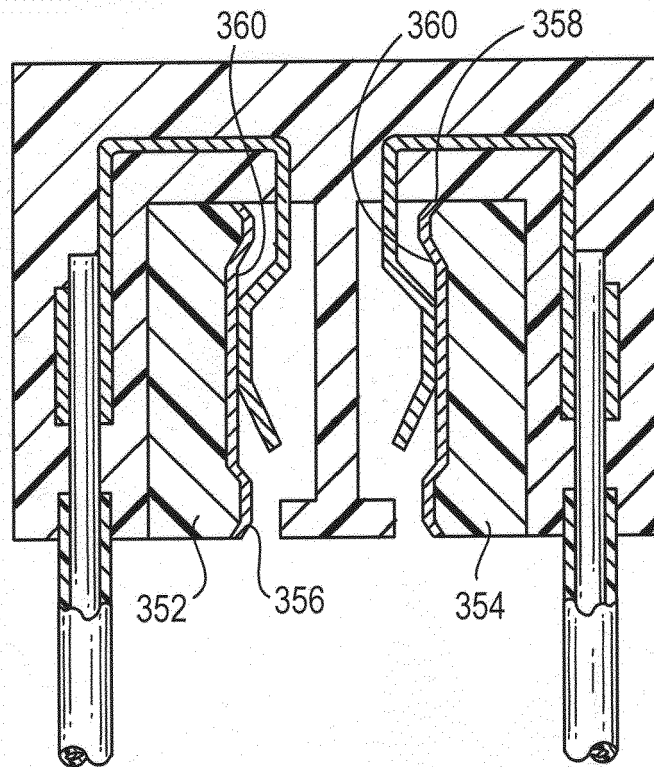


FIG. 9G

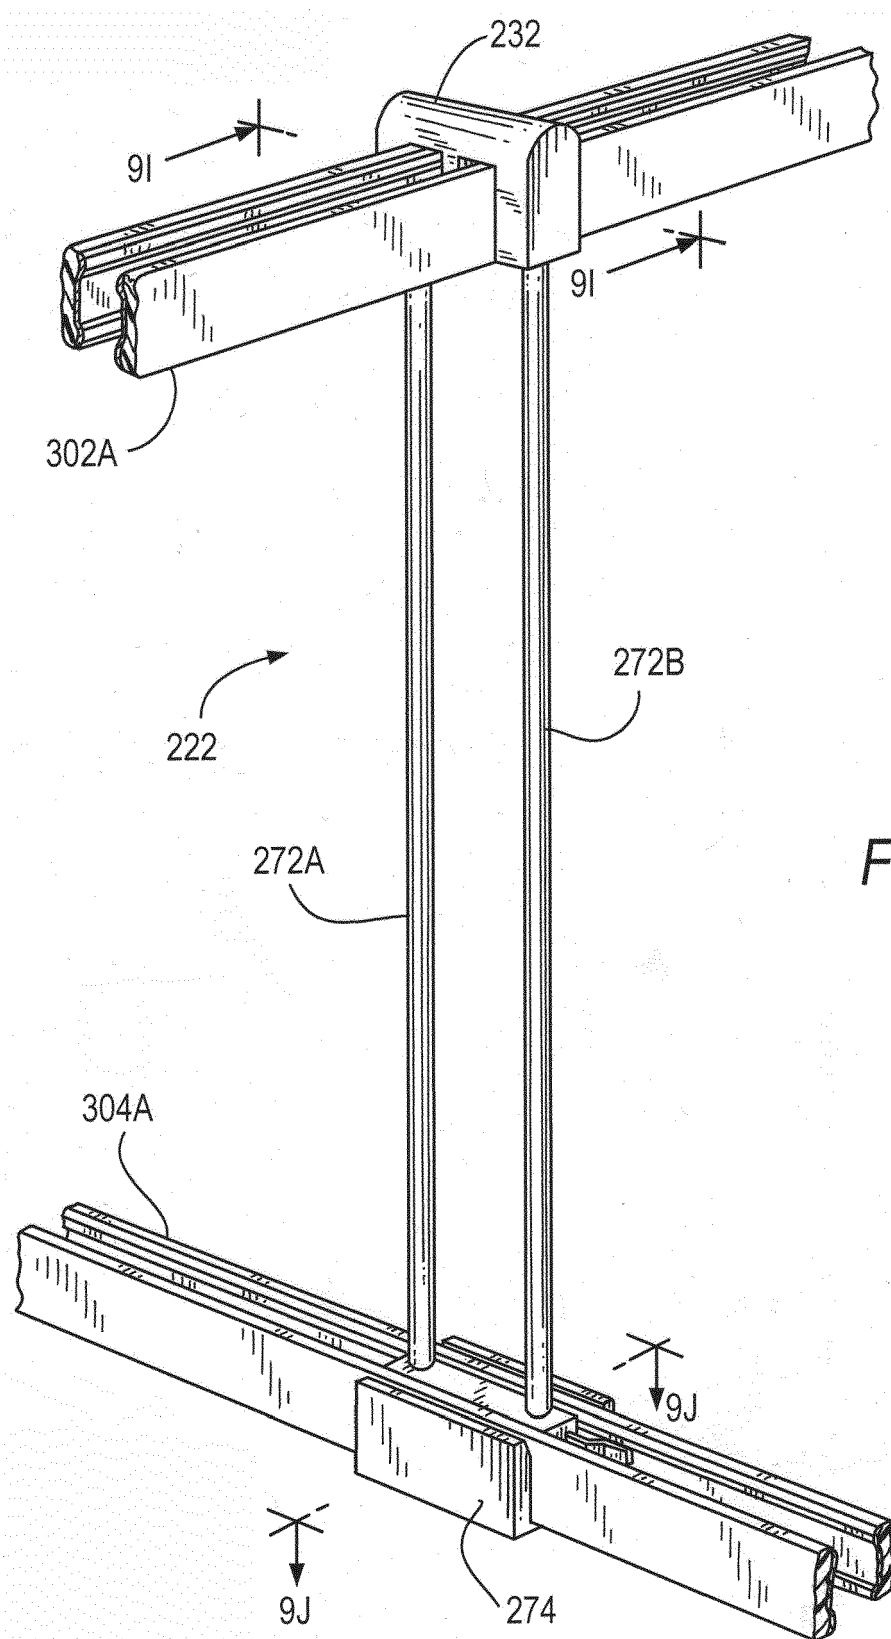
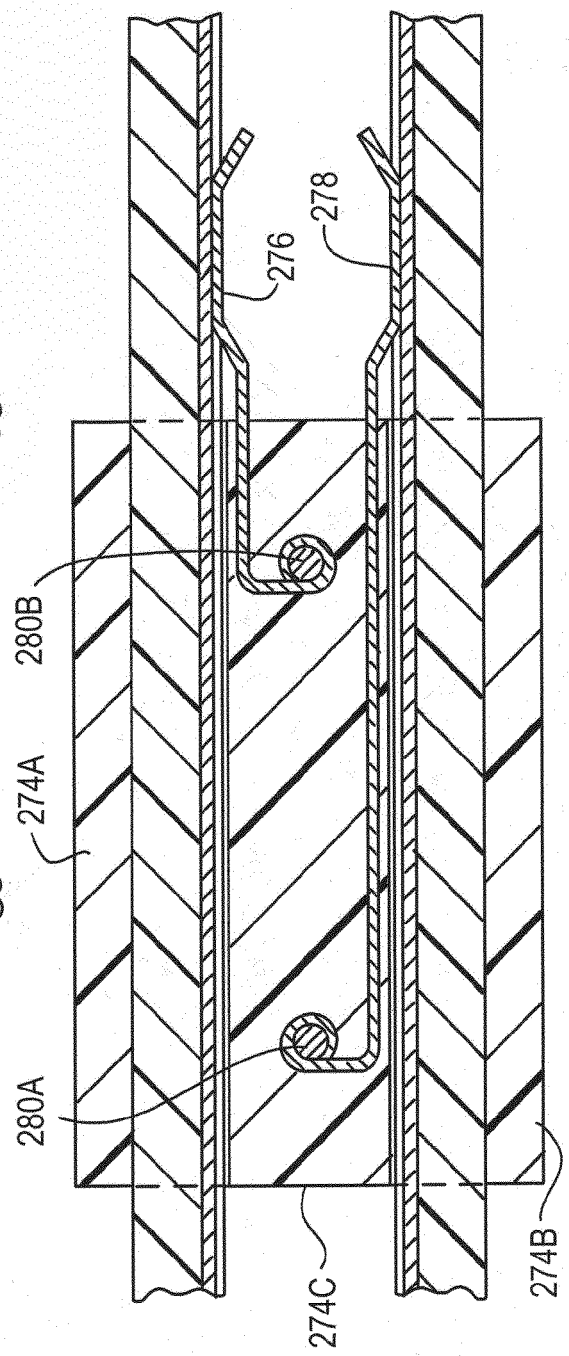
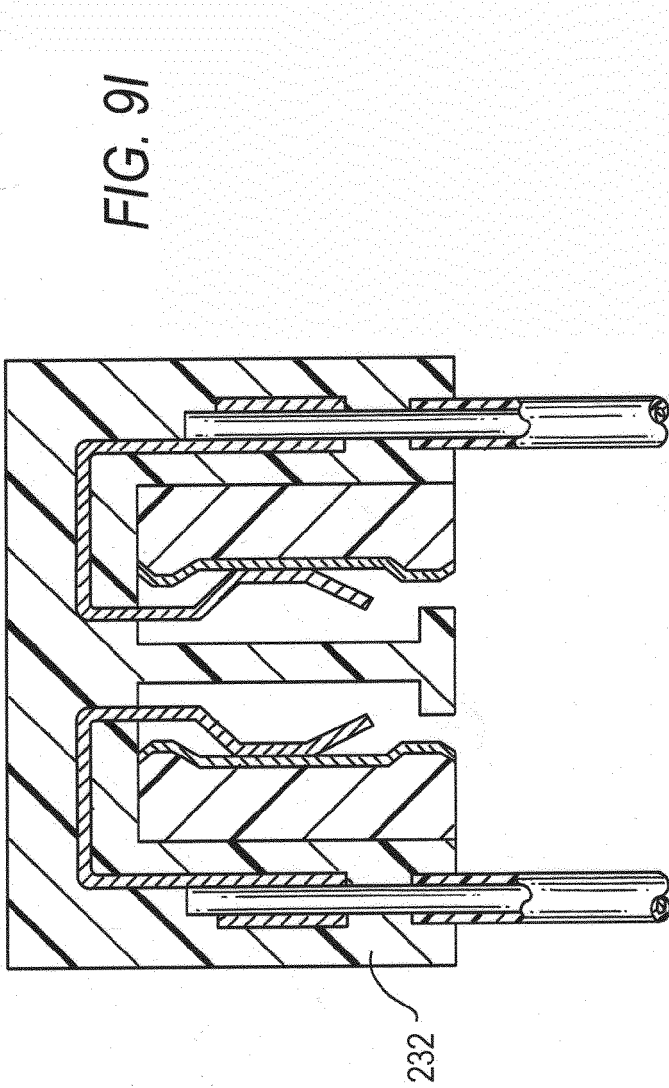


FIG. 9H



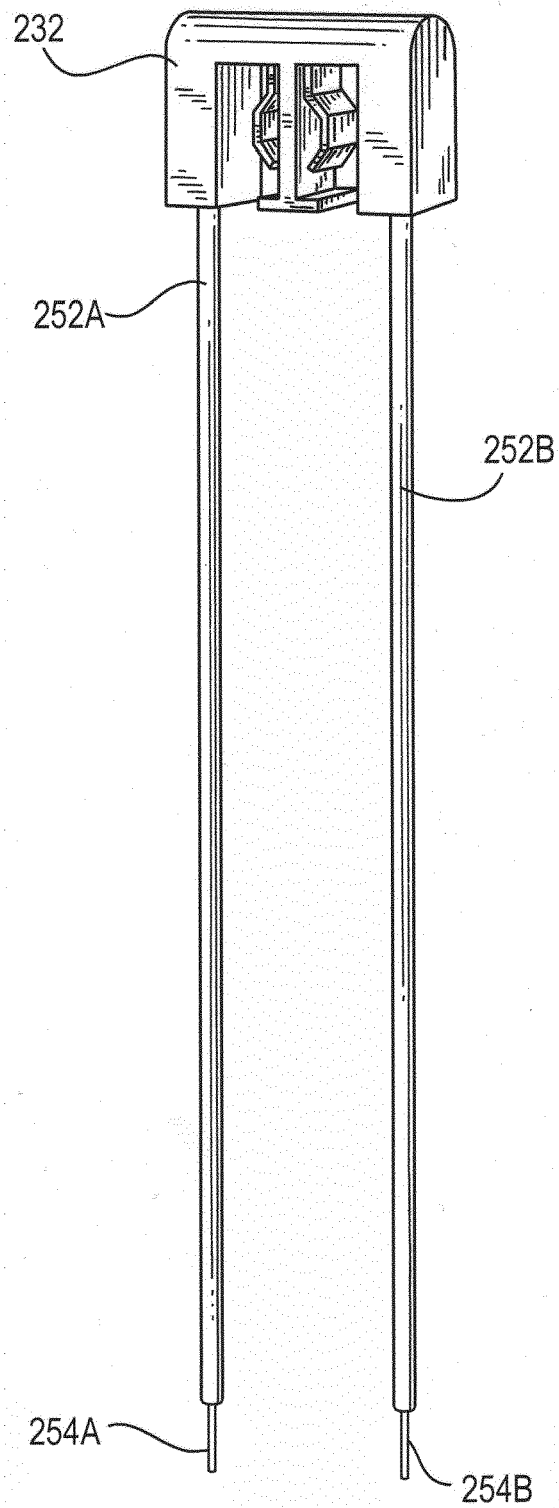
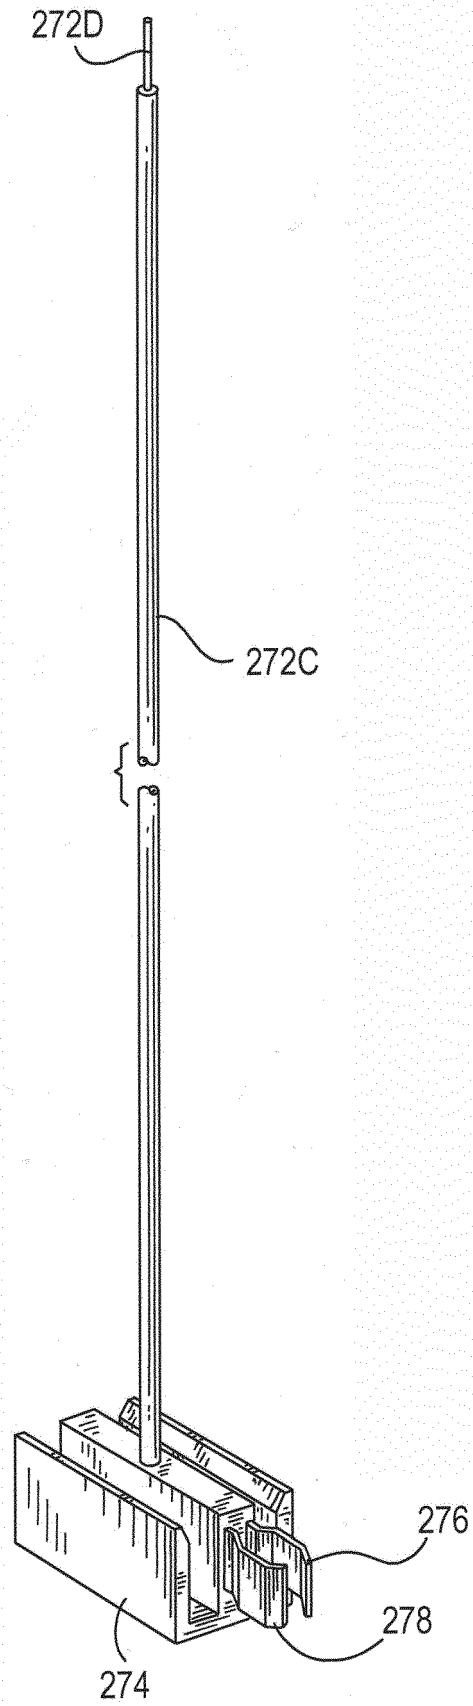


FIG. 10

FIG. 11



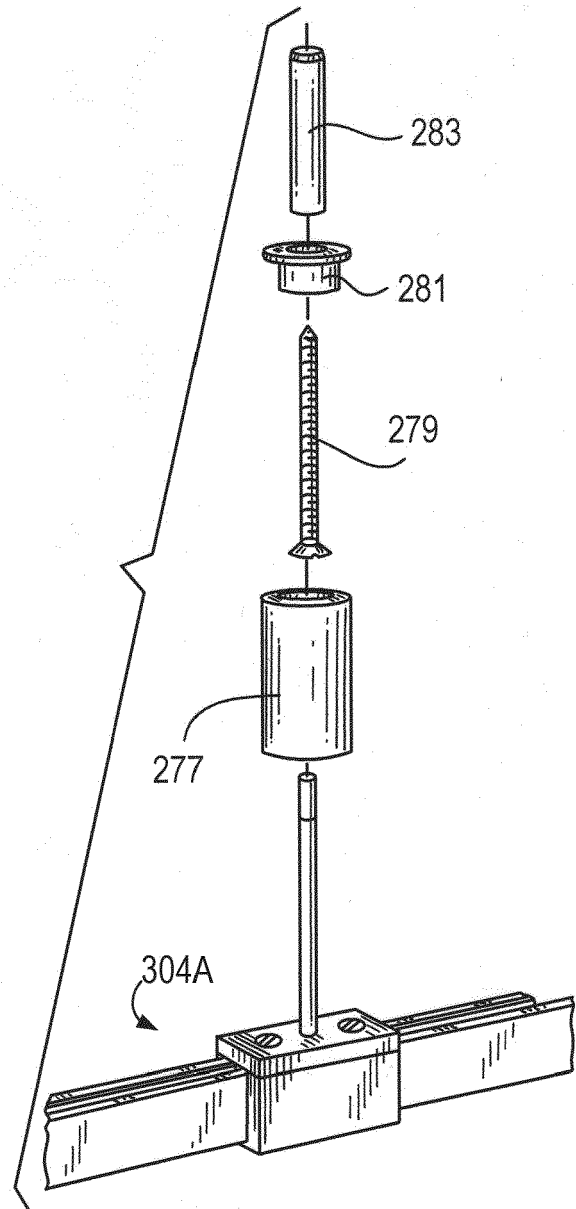
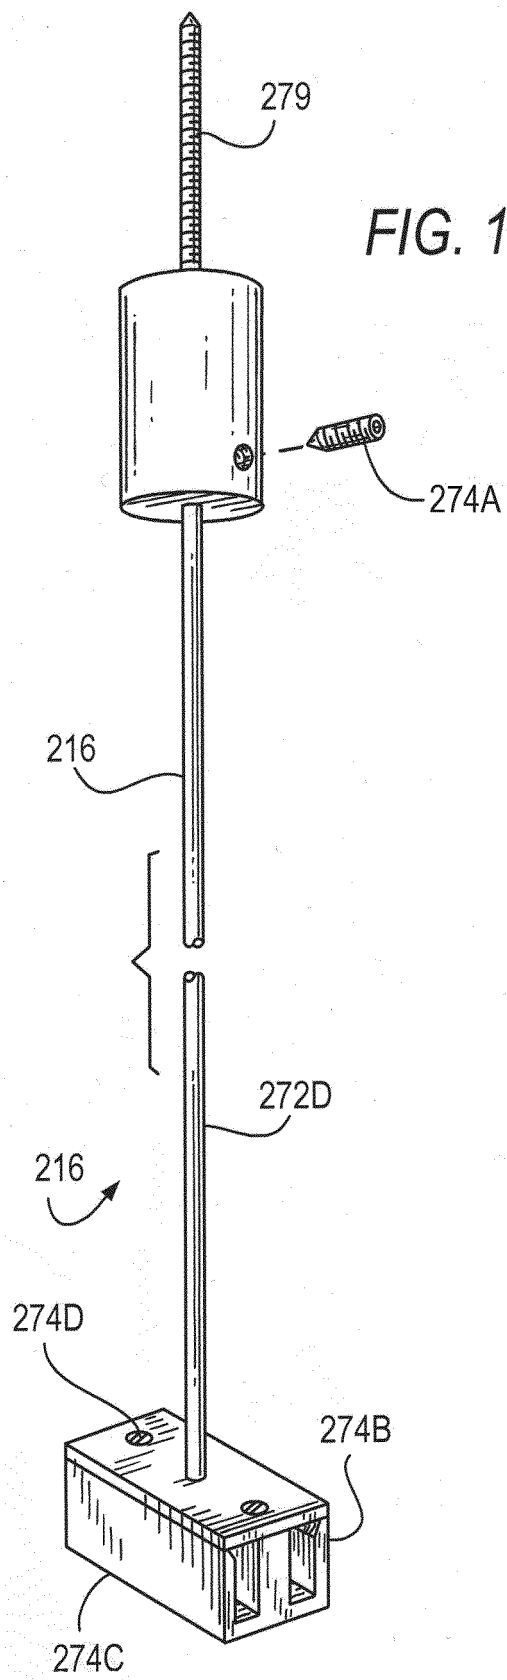
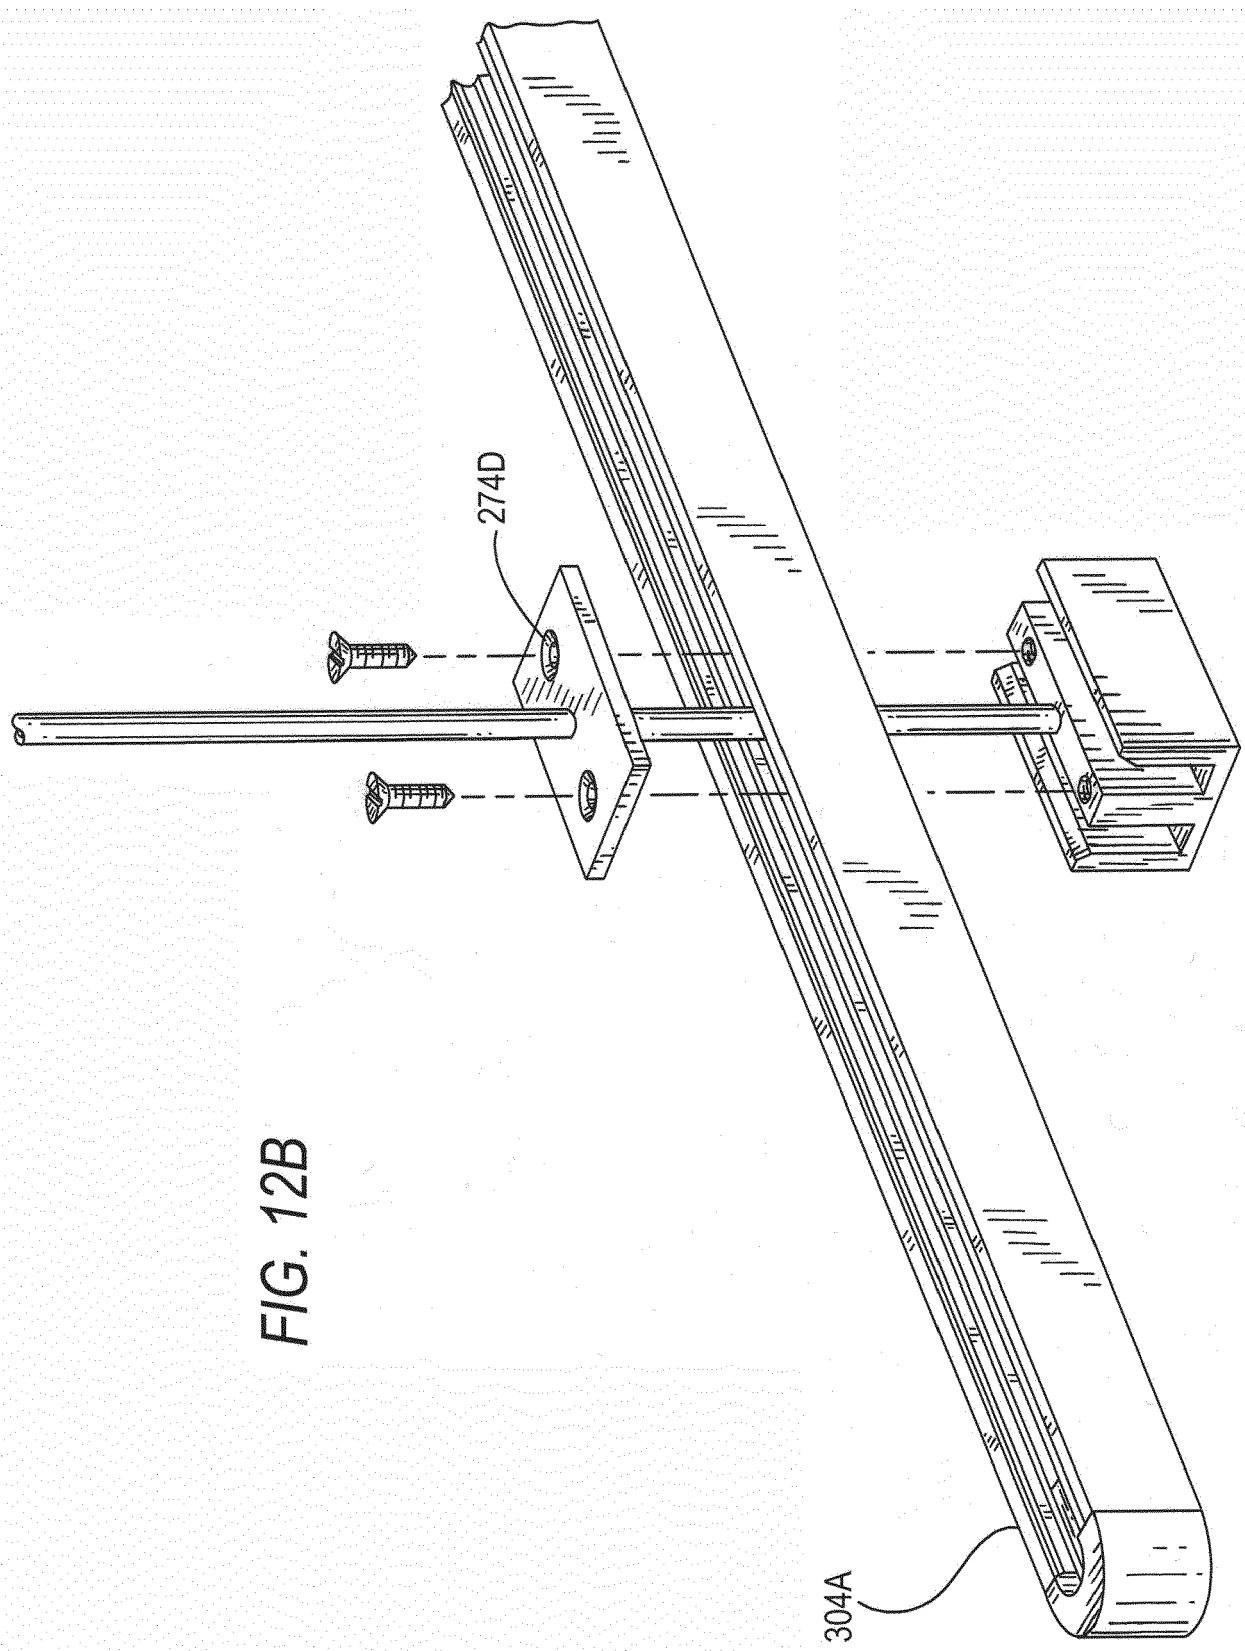


FIG. 12C



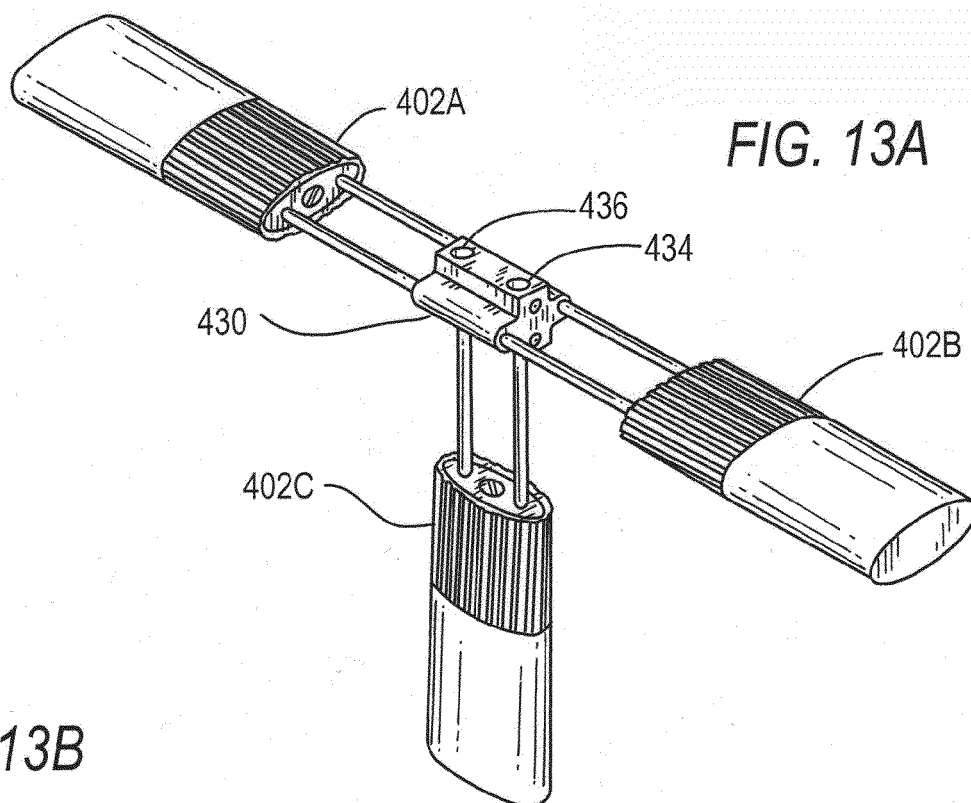
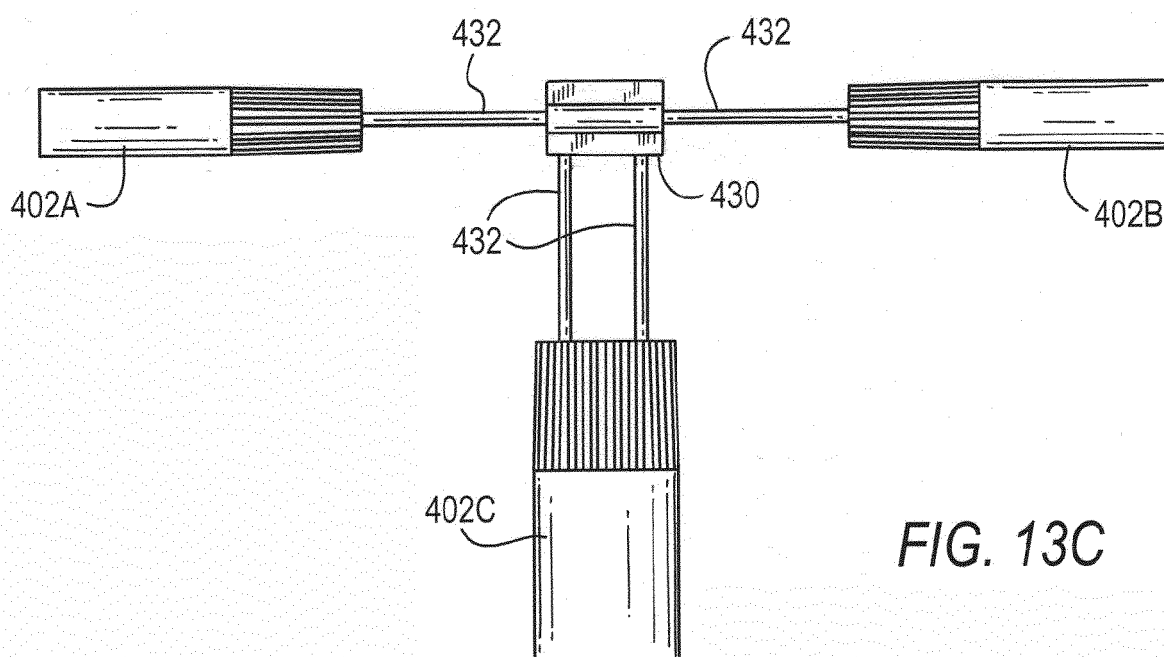
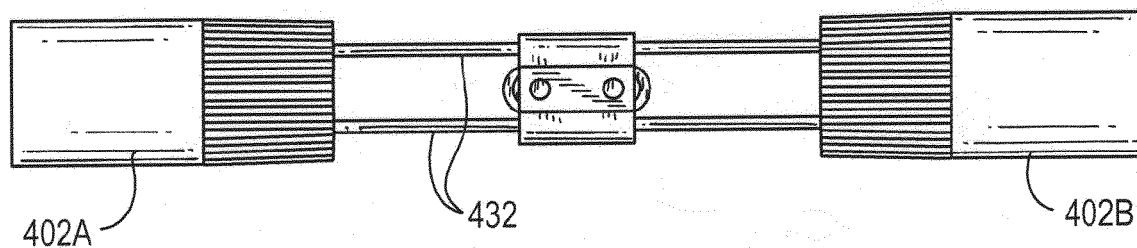


FIG. 13B



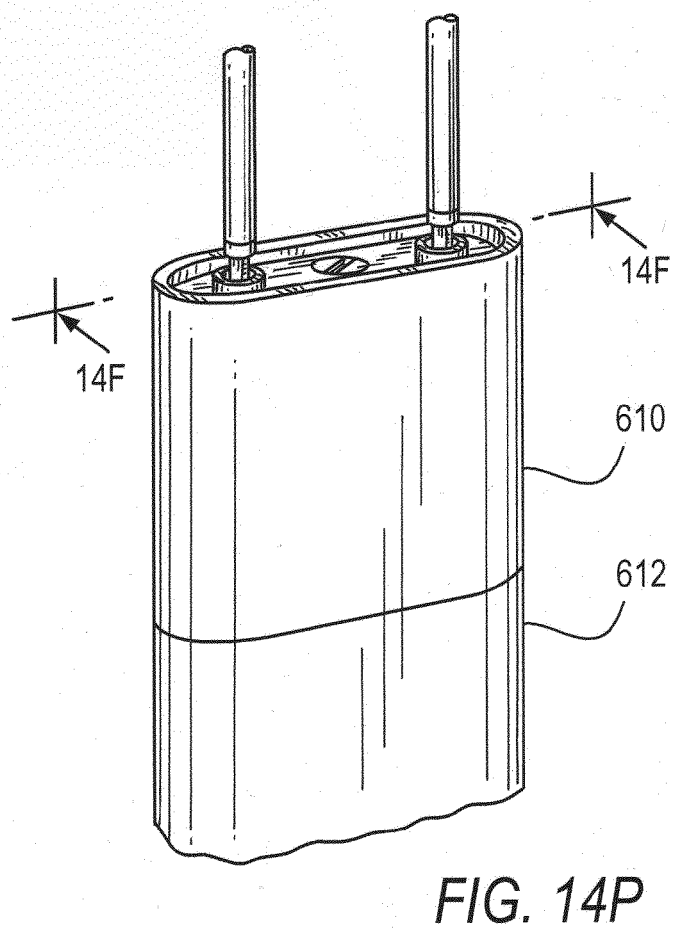
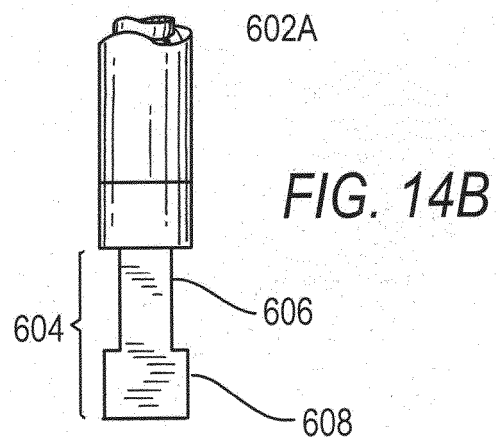
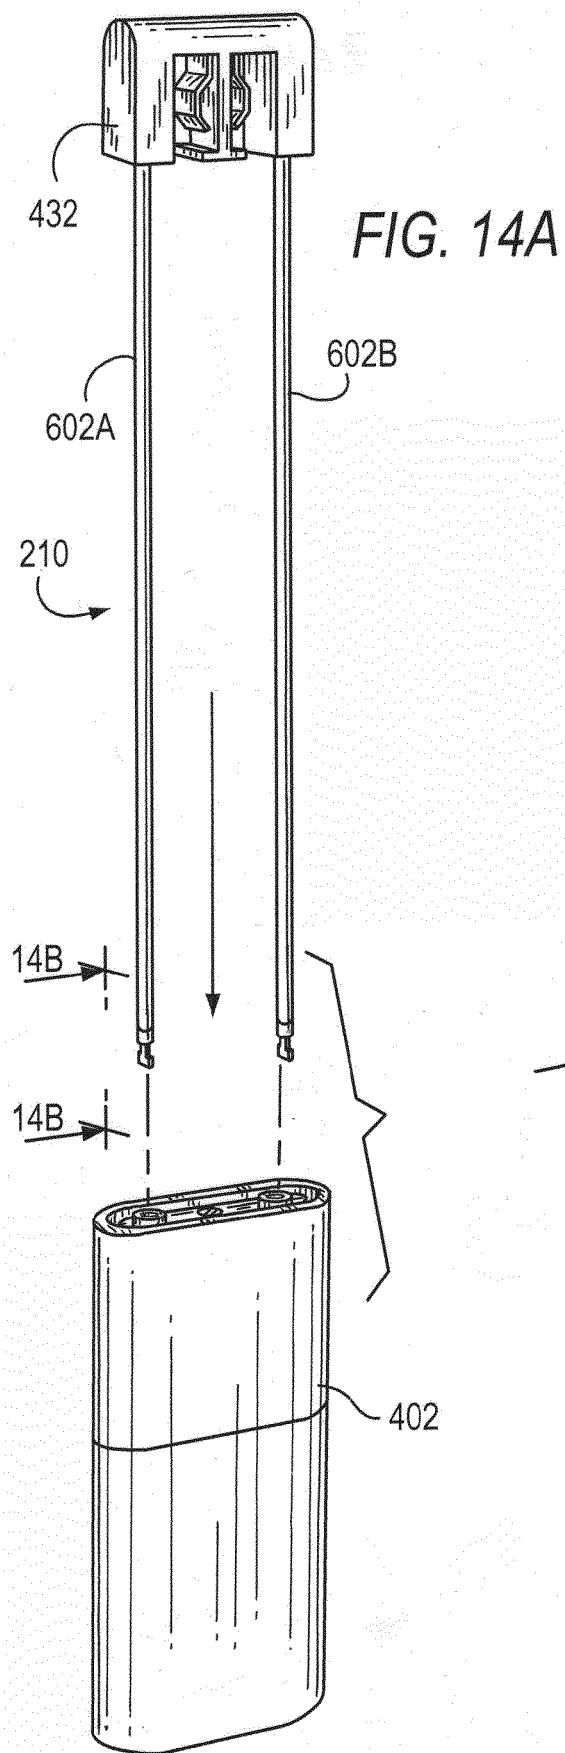


FIG. 14C

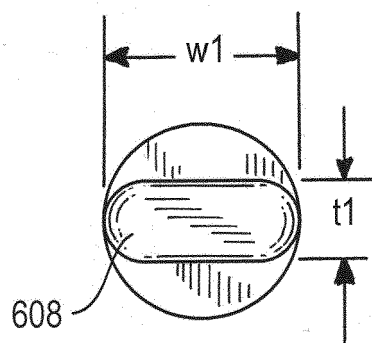
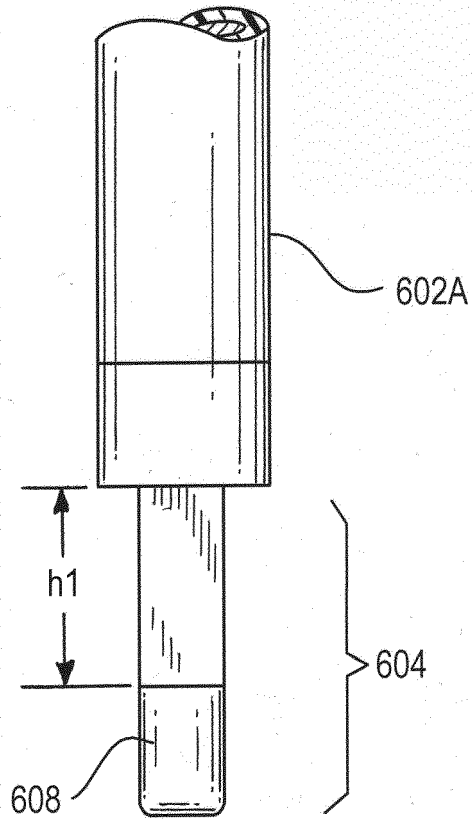


FIG. 14D

FIG. 14F

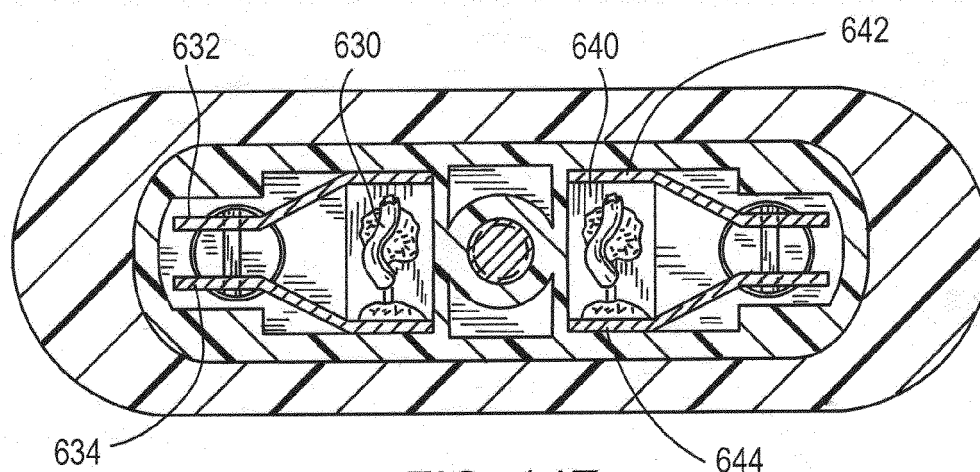
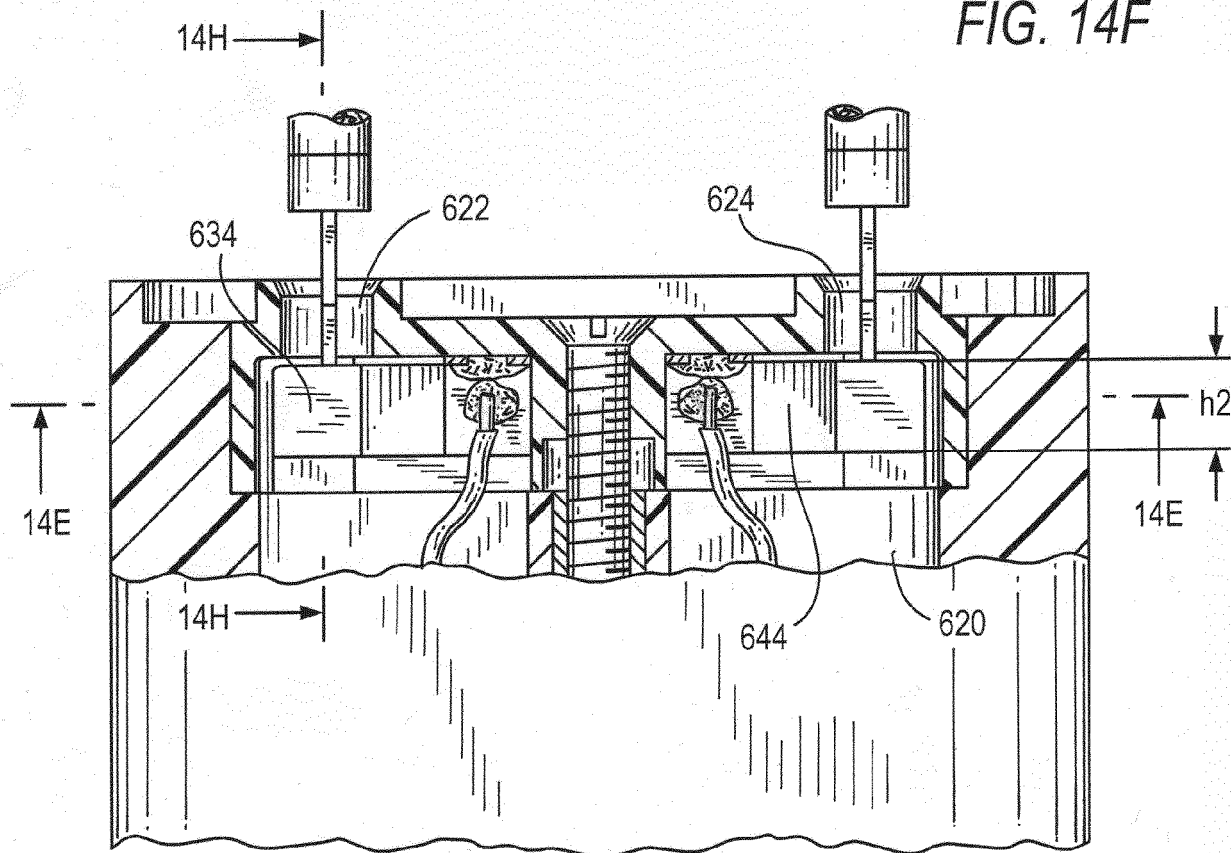
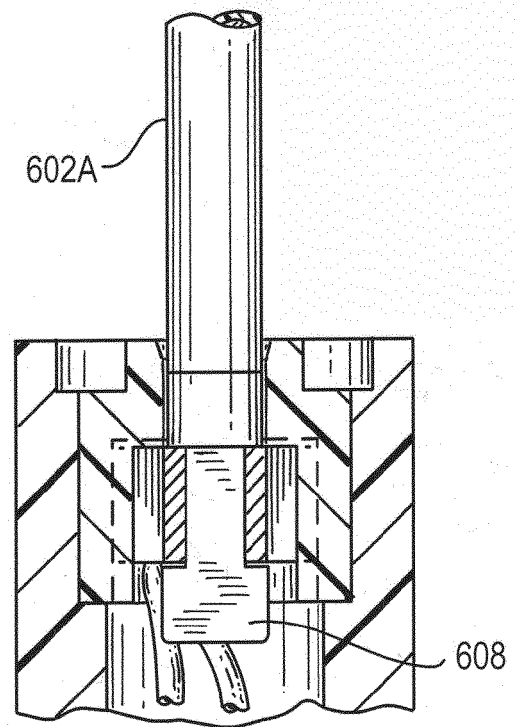
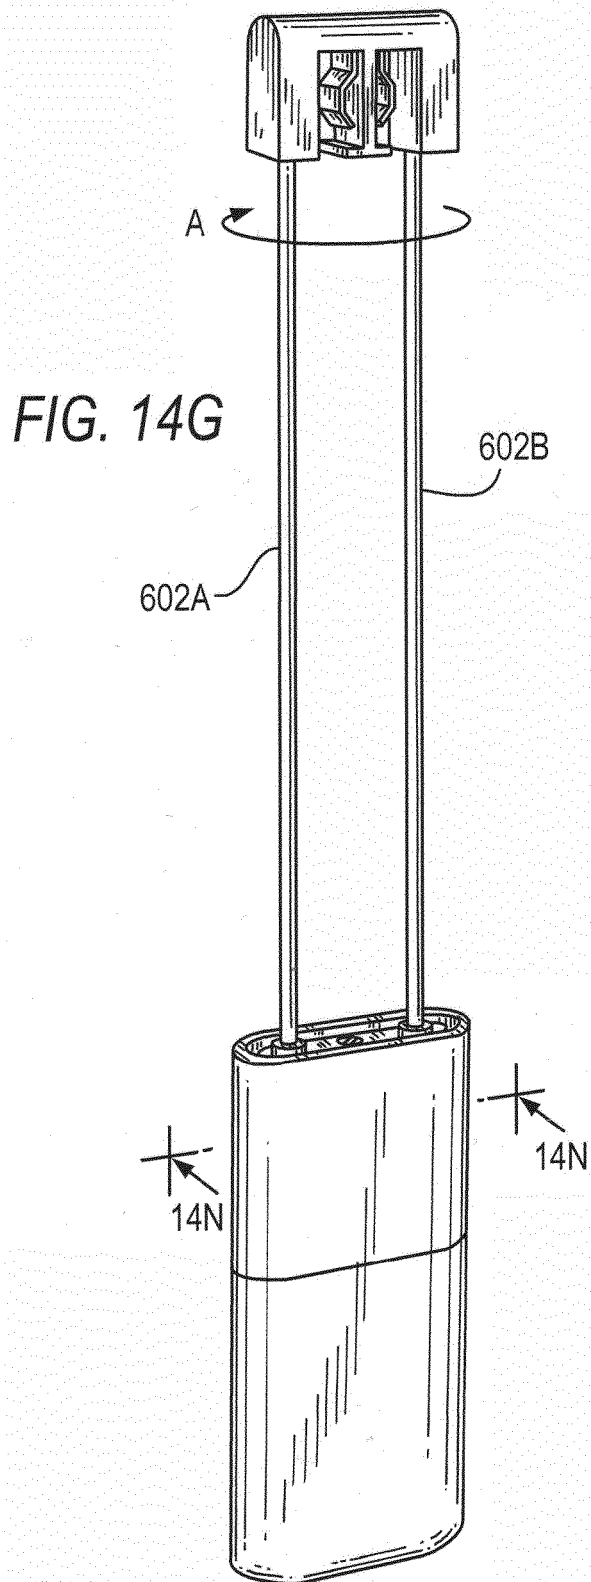


FIG. 14E



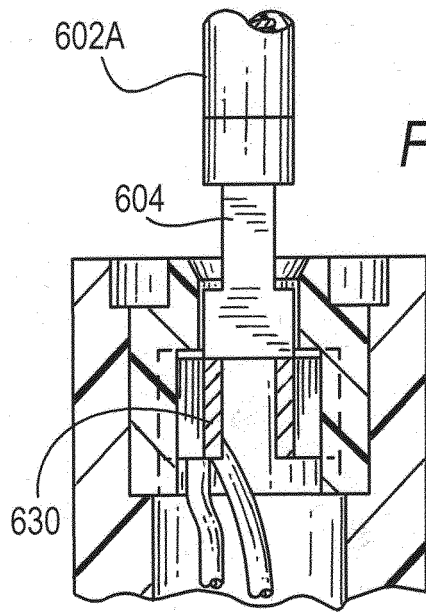


FIG. 14H






FIG. 14L

FIG. 14K

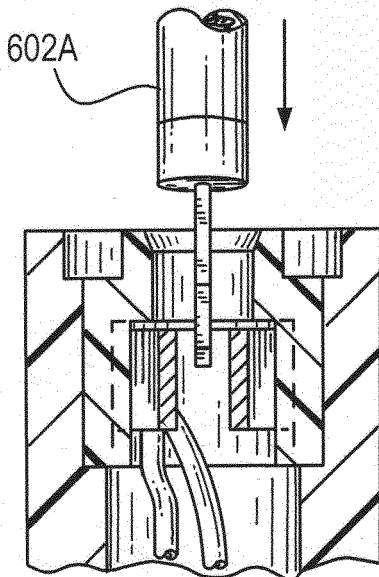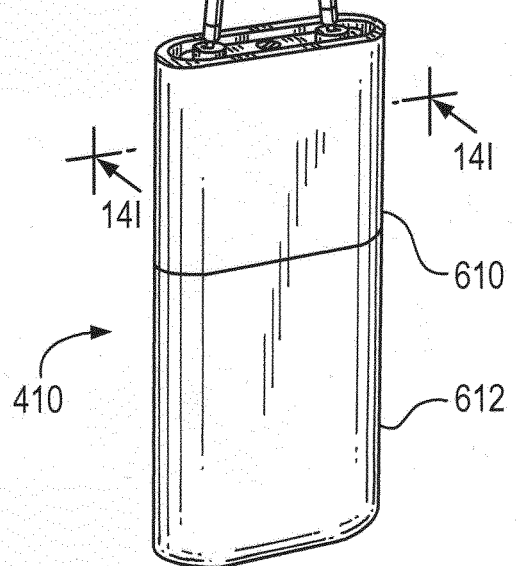

410



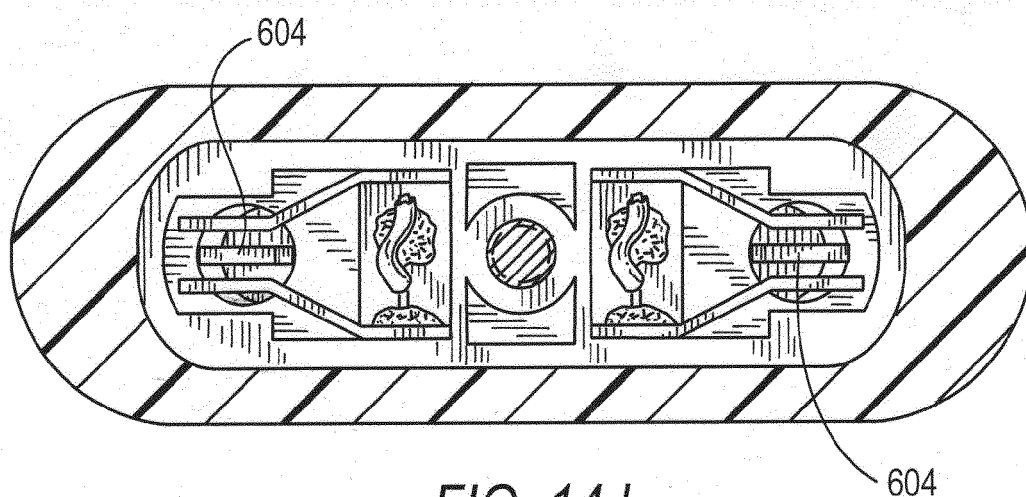
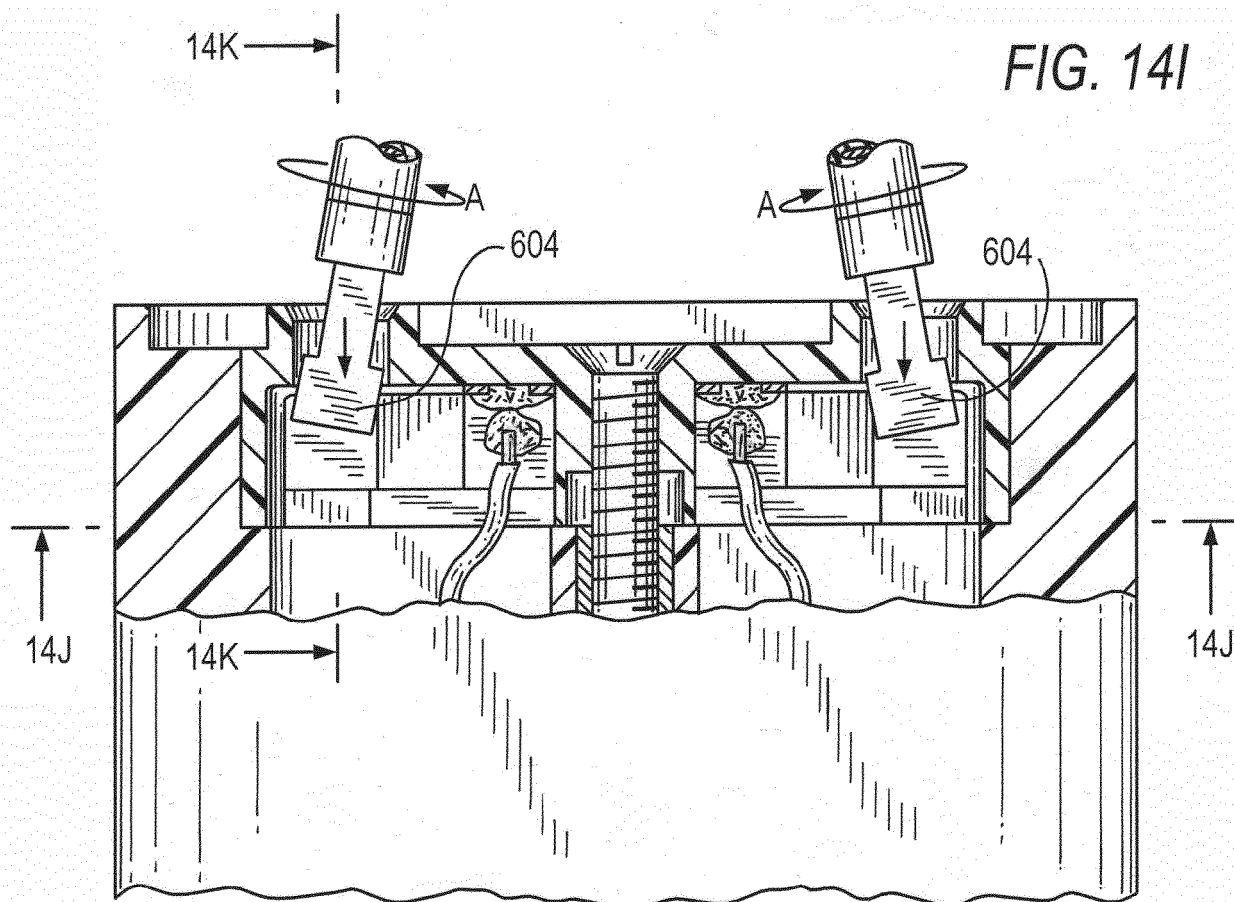


FIG. 14N

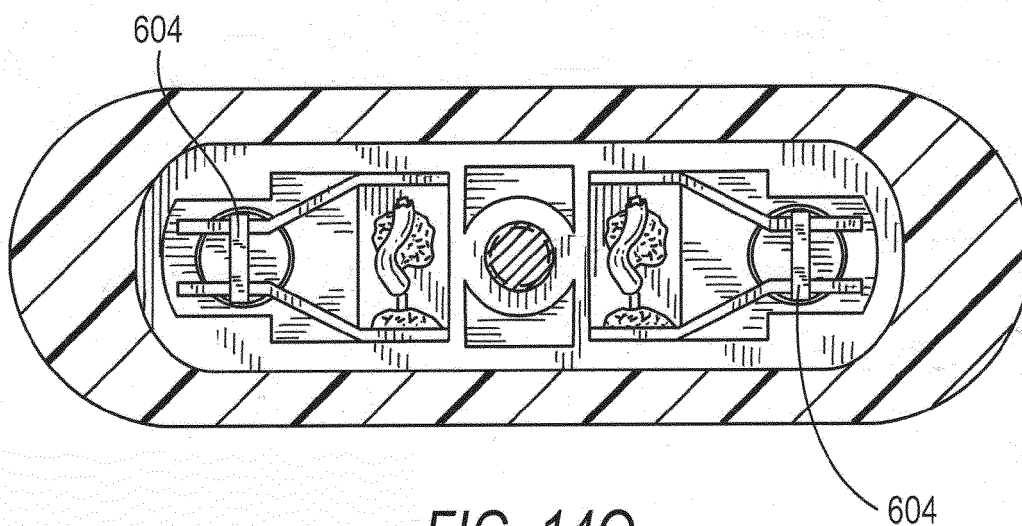
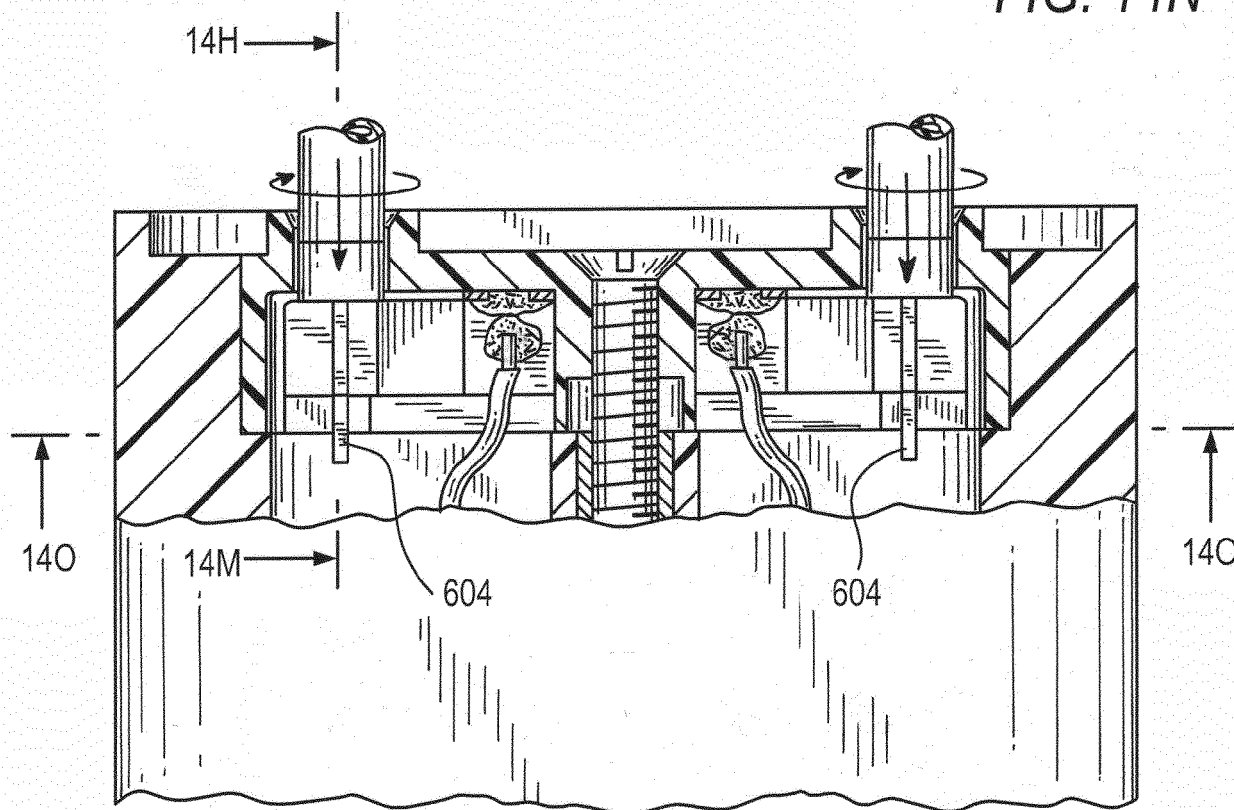


FIG. 14O

**PARTIAL EUROPEAN SEARCH REPORT**

Application Number

under Rule 62a and/or 63 of the European Patent Convention.
This report shall be considered, for the purposes of
subsequent proceedings, as the European search report

EP 17 15 0686

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2012/257388 A1 (BRACHER TODD [US] ET AL) 11 October 2012 (2012-10-11) * paragraphs [0036], [0037], [0039], [0057] - [0059] * * figures 15, 16 *	1-7	INV. F21V21/008 F21V21/116 F21V21/104 F21V21/35 F21S8/06
X	----- CN 200 986 123 Y (OU BINGWEN [CN]) 5 December 2007 (2007-12-05) * figure 1 *	1-3,5,6,8 9	
A	----- FR 608 016 A (TRIBOT-LASPIÈRE) 13 July 1926 (1926-07-13) * figure 1 *	1	
A	----- US 2015/198311 A1 (O'BRIEN AARON [US] ET AL) 16 July 2015 (2015-07-16) * paragraphs [0034], [0036] * * figures 1, 16 *	1,8	
A	----- US 2004/005798 A1 (LIN MICHAEL [CN]) 8 January 2004 (2004-01-08) * figure 1 *	1,8	
	-----		TECHNICAL FIELDS SEARCHED (IPC)
			F21V F21S

INCOMPLETE SEARCH

The Search Division considers that the present application, or one or more of its claims, does/do not comply with the EPC so that only a partial search (R.62a, 63) has been carried out.

Claims searched completely :

Claims searched incompletely :

Claims not searched :

Reason for the limitation of the search:

see sheet C

1

EPO FORM 1503 03 82 (P04E07)

Place of search	Date of completion of the search	Examiner
The Hague	15 June 2017	Allen, Katie
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document		

**INCOMPLETE SEARCH
SHEET C**

Application Number

EP 17 15 0686

5

Claim(s) completely searchable:
1-9

10

Claim(s) not searched:
10-12

Reason for the limitation of the search:

15

Multiple independent claims (Rule 62a): Independent claims 1, 10, 11, 12.
Only claims 1-9 were searched, as requested by the applicant.

20

25

30

35

40

45

50

55

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 15 0686

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-06-2017

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012257388 A1	11-10-2012	CN 102410480 A	11-04-2012
		CN 104214621 A	17-12-2014
		CN 202195381 U	18-04-2012
		EP 2511600 A2	17-10-2012
		HK 1168890 A1	31-07-2015
		HK 1203594 A1	30-10-2015
		US 2012257388 A1	11-10-2012

CN 200986123 Y	05-12-2007	NONE	

FR 608016 A	13-07-1926	NONE	

US 2015198311 A1	16-07-2015	NONE	

US 2004005798 A1	08-01-2004	NONE	
