



(11) **EP 3 207 202 B2**

(12) **NEW EUROPEAN PATENT SPECIFICATION**
After opposition procedure

(45) Date of publication and mention
of the opposition decision:
06.12.2023 Bulletin 2023/49

(45) Mention of the grant of the patent:
30.01.2019 Bulletin 2019/05

(21) Application number: **15778667.4**

(22) Date of filing: **12.10.2015**

(51) International Patent Classification (IPC):
E06B 3/663^(2006.01)

(52) Cooperative Patent Classification (CPC):
E06B 3/66319

(86) International application number:
PCT/EP2015/073536

(87) International publication number:
WO 2016/058977 (21.04.2016 Gazette 2016/16)

(54) **A PLASTIC SPACER COMPRISING A LAYER WITH OVERLAPPING SEGMENTS OF A
SUBSTANTIALLY GAS-IMPERMEABLE MATERIAL**

PLASTISCHER ABSTANDHALTER MIT EINER SCHICHT MIT ÜBERLAPPENDEN SEGMENTEN
EINES IM WESENTLICHEN GASUNDURCHLÄSSIGEN MATERIALS

ÉLÉMENT D'ÉCARTEMENT EN PLASTIQUE COMPRENANT UNE COUCHE AVEC
CHEVAUCHEMENT DES SEGMENTS D'UN MATÉRIAU SENSIBLEMENT IMPERMÉABLE AUX GAZ

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **14.10.2014 EP 14188807**

(43) Date of publication of application:
23.08.2017 Bulletin 2017/34

(73) Proprietor: **ROLLTECH A/S
9800 Hjørring (DK)**

(72) Inventors:
• **KNUDSEN, Lars
DK-9000 Aalborg (DK)**
• **PEDERSEN, Peter
DK-9800 Hjørring (DK)**

(74) Representative: **Chas. Hude A/S
Langebrogade 3B
1411 Copenhagen K (DK)**

(56) References cited:
**EP-A1- 1 428 657 WO-A1-2012/100961
WO-A1-2013/104507 AU-A1- 2012 365 511**

EP 3 207 202 B2

Description

[0001] A plastic spacer comprising a layer with overlapping segments of a substantially gas-impermeable material.

[FIELD OF THE INVENTION]

[0002] The present invention relates to a spacer for creating a spacing between glass panes. The present invention further relates to a method of manufacturing a spacer and a window comprising glass panes being mutually spaced by a spacer.

[BACKGROUND]

[0003] It is well known to provide spacers in order to define the spacing between the panes of isolating glazings consisting of a plurality of parallel glass panes spaced by an isolating cavity.

[0004] A plurality of such spacers made of different materials and in different shapes is known in the art. Spacers made by roll forming of a metal foil are widely used in the art and considered one of the preferred alternatives. This is because of their stability and their low gas diffusion properties.

[0005] Insulating Glass Units (IG units) having a plurality of glass panes are made by automatic manufacturing machines. Spacers are automatically bent to the desired size and shape and are arranged between two neighboring glass panes. Spacers made of metal foils can be easily bent and will remain in the bent position.

[0006] Furthermore, spacers made of metal foils have a high resistance against diffusion of gases and moisture penetration. Within the space between the neighboring glass panes, a gas is arranged, for instance argon, having good isolating properties. In order to avoid any loss of gas, the spacers delimiting the cavity need to be resistant against diffusion of such gaseous elements. Further, an advantage with metal spacers is that a good connection can be obtained between the glazing panes and the spacers due to glue being a good binder to both glass and metal.

[0007] However, known spacers, which are exclusively made of metal such as aluminum and galvanized steel, also have some disadvantages. Due to a relatively high heat conductivity of metal, spacers made of a metal still have a heat conductivity which may be too high under certain circumstances.

[0008] To reduce the heat conductivity, using plastic material for forming such spacers is possible. Plastic material has, however, relatively high gas diffusion as compared to metal. Further, it is difficult to obtain a good binding between the plastic spacers and the glazing panes which may result in the spacer losing connection to the glazing panes over time. In order to solve this problem, a metal foil layer can be added to the plastic body and such a spacer is e.g. shown in EP 852 280.

[0009] When adding foil to the surface of a spacer, the foil is added to cover both the lower surface as well as at least part of the side surface. This is done by adding a foil to the lower surface and then bending the foil upwards on each side. This bending of the foil can result in a weakening of the foil properties, whereby e.g. the argon gas between the pane layers may diffuse through such weak points.

[0010] Further, when shaping spacers for glazing panes, the spacers are normally bent e.g. in four corners to obtain the squared shape of a pane. This bending of spacers made from plastic with a foil layer is problematic since the bending of the spacer could result in cracks in the thin foil layer, whereby properties of the profile is weakened at least in the corners and e.g. the argon gas between the pane layers diffuses through such cracks. Such a spacer is e.g. shown in AU 2012/365 511. In order to avoid this cracking, the profile shape could be obtained by interconnecting a series of straight pieces via corner elements. Disadvantages of this are that production time and complexity are increased and further, corner elements in a spacer profile for a glass pane weakens the properties of the profile.

[GENERAL DESCRIPTION]

[0011] In accordance with the invention, there is provided a spacer according to claim 1.

[0012] Throughout this application when referring to segments, segments are to be understood as pieces of material having dimensions extending in at least one direction and typically comprising several particles of material. The segments could e.g. be flakes of material such as glass flakes, metal flakes or similar flakes of gas-impermeable material.

[0013] The layer comprises multiple overlapping segments of a substantially gas-impermeable material. By letting the segments overlap, it is ensured that gas-impermeability of the spacer is significantly increased. Further, the overlapping of segments results in that a spacer with such a layer can be bent without compromising the gas-impermeability. When bending a spacer in corners to correspond to the shape of a glass pane, then the segments in the layer will still overlap, whereby gas-impermeability is maintained in the corners. Further, the overlapping ensures that a foil with such overlapping segments can be mounted across corners without compromising gas-impermeability.

[0014] The layer is a foil layer comprising said segments. Thereby, the segments can be integrated in the foil, and the foil with segments can be made as a separate process.

[0015] In an embodiment, the segments of substantially gas-impermeable material comprises glass. Glass has similar gas-impermeable characteristics as the glass panes resulting in a good insulation.

[0016] In an embodiment, the layer comprises multiple sub layers of multiple overlapping segments of a sub-

stantially gas-impermeable material. Thereby, the gas-impermeability is further enhanced and by further adding other types of layers e.g. between the multiple sub layers, specific properties can be obtained.

[0017] In an embodiment, a layer of polymeric material is present between a first and a second of said sub layers of multiple overlapping segments of a substantially gas-impermeable material. Thereby, the polymeric material, which could be a glue or another substance, further closes any gaps, which could be present between segments, and this enhances the gas-impermeability of the layer further.

[0018] In an embodiment, the layer with gas-impermeable characteristics comprises multiple sub layers with a top sub layer contacting the spacer, and wherein at least the outermost sub layer comprises multiple overlapping segments of a substantially gas-impermeable material. Further, by adding segments to the outermost surface, segments could be chosen which further enhance the bonding properties of the outer surface of the spacer. For instance, if glass segments are added to the outermost surface of the spacer, then the main part of the outer surface of the spacer comprises glass and thereby, the connection between spacer and panes is a glass to glass connection, whereby a good bonding is possible since a material optimised for bonding glass can be used.

[0019] Further, the invention relates to a method of producing a spacer according to the above, wherein said method comprises a step of adding a layer comprising multiple overlapping segments of a substantially gas-impermeable material.

[0020] Further, the invention relates to a window comprising glass panes being mutually spaced by a spacer according to the above.

[BRIEF DESCRIPTION OF DRAWINGS]

[0021] The invention is explained in detail below with reference to the drawings, in which

Fig. 1 illustrates a cross section of a spacer according to the present invention,

Fig. 2 illustrates a cross section of a spacer according to the present invention positioned between glass panes,

Figs. 3A and 3B are illustrations of a layer with overlapping elements seen from the side and the top, respectively,

Figs. 4A, 4B, 4C illustrate bends in connection with a spacer and the nature of the segment layer when positioned across such bends,

Figs. 5A, 5B, 5C, 5D illustrate sub layers in a layer with gas-impermeable characteristics positioned on the surface of a spacer.

[DETAILED DESCRIPTION OF DRAWINGS]

[0022] Figure 1 shows a cross section of a spacer for creating a space between glass panes according to the invention. The spacer comprises a base body 100 which could be made by plastic, e.g. as a glass fibre reinforced polymeric base body 100. The base body comprises two parallel plate contact surfaces 101, 103 which make contact with the glass panes 105, 107. In one embodiment, the spacer is a fibreglass reinforced polymeric base.

[0023] The pane contact surfaces 103, 105 are connected between an outer bonding surface 109 and an inner surface 110, and two angled connection surfaces 111, 113 are arranged between the bonding surfaces 103 and 105. Preferably, connecting surfaces 111, 113 extend at an angle α typically being between 30 and 60 degrees relative to the bonding surface 109. The angled shape of the first connection surface 111 and the second connecting surface 113 improves the stability of the entire system, when glass panes have been mounted to the base body 100 and allow, as shown in Figure 2, a better adhesion and isolation of the spacer when mounted between glass panes.

[0024] On the bonding surface 109, a layer 115 is attached. The layer has gas-impermeable characteristics, whereby gas diffusion through such a layer is at least reduced and could in one embodiment comprise multiple overlapping segments of a substantially gas-impermeable material. In one embodiment, the layer could be attached to the base body 100 with PUR hot melt glue. Alternative methods of attaching a layer could be by adding a foil with a layer which is melted and then stiffened for attachment to the spacer.

[0025] In one embodiment, the segments of impermeable material could be glass segments, but alternative embodiments could be ceramic segments or other materials having a low gas-permeability.

[0026] Figure 2 shows a cross section of a spacer according to the present invention positioned between glass panes. The spacer comprising the base body 100 and the layer 115 is positioned between a first pane 105 and a second pane 107. In the illustrated embodiment, the layer 115 is positioned on the bonding surface 109 as well as on the connecting surfaces 111 and 113. Further, the layer continues at least partly upwards along the bonding surfaces 101 and 103, e.g. 2/3 of the height of the bonding surfaces. An adhesive layer is positioned between the contact surfaces 101, 103 of the spacer and the glass panes 105, 107. In an embodiment, this adhesive layer could comprise be butyl. The bonding between the bonding surfaces 101 and 103 and the panes is mainly to remove or reduce gas leak between the bonding surfaces 101, 103, 105, 107 and typically, butyl is used as a bonding agent to ensure this. By letting the layer, e.g. a foil layer, continue at least partly upwards along the bonding surfaces 101 and 103, the end point of the added layer is also covered by bonding agent, and this minimises the risk of gas leaks below the layer between the spac-

er surface and the layer.

[0027] An insulating layer 201 is positioned in the space below the spacer and further ensures that the entire pane-spacer construction is mechanically stable and further, the layer 115 as well as an outer insulating layer 201 isolate the inner space 203 between the panes and reduce the heat transfer from the base body 100 into the inner space 203.

[0028] In the illustrated embodiment, the panes 105 and 107 have the same dimensions and thicknesses. Typically, drying means are positioned in the space 205 inside the base body.

[0029] The drying means may be incorporated both within the central cavity of the base body 100 or in the material of the base body 100. The inner surface 110 of the base body comprises small openings or pores 102 allowing gas exchange with the inner space 203.

[0030] Figs. 3A and 3B are illustrations of a layer with overlapping elements seen from the side and the top, respectively. In figure 3A, a side view of a layer of segments is illustrated, and it can be seen how the segments overlap each other, e.g. by looking at segments 301 and 303. In figure 3B, a top view of a layer of segments is illustrated, and it can be seen how the segments overlap each other, e.g. by looking at segments 301 and 303. The segments could be glass segments, such as ceramic segments, SiO_x segments or similar. The segments should be in a material being substantially gas-impermeable in such a way that it reduces the gas diffusion through the spacer at least significantly. The segments in the layer could also be a combination of segments made from different materials, e.g. to obtain certain properties of the complete layer. In an embodiment, the segments could be made from metal. Figures 3A and 3B are for illustrating the segments in the layer and more specifically to illustrate both how they overlap and how that they are positioned in a layer. The distance between segments as illustrated in figure 3A is much smaller than illustrated, where they could even touch each other to avoid gas leaking between segments. Further the segments are smaller than illustrated in figure 3B. In one embodiment, the segments could be positioned in a plastic substance.

[0031] Figs. 4A, 4B, 4C illustrate bends in connection with a spacer and the nature of the segment layer when positioned across such bends. In figure 4A, overlapping segments are illustrated, where the segments are in a relaxed layer in I, wherein the same segments are in a stretched layer in II. From this illustration, it can be seen that due to the overlapping of the segments, the overlapping is maintained when stretched. Since the segments are of a substantially gas-impermeable material, the overlapping further ensures that gas cannot pass through the layer between the segments.

[0032] The stretching occurs due the mounting of the layer across an edge of the profile, e.g. such as the edges of the spacer shown in B1, B2, B3 and B4. Alternatively, the stretching occurs when bending a spacer, where foil

has been mounted, e.g. to obtain the shape of panes to be separated by the spacer. In figure 4C, a spacer, which has been shaped to be positioned between panes, is illustrated, where the spacer has been bent in each corner C1, C2, C3 and C4 for positioning between square shaped panes.

[0033] Figs. 5A, 5B, 5C, 5D illustrate sub layers in a layer with gas-impermeable characteristics positioned on the surface of a spacer.

[0034] Fig. 5A illustrates an embodiment of the layer mounted on the surface 501 of a spacer. The layer comprises a first sub layer 503 of overlapping segments, then a sub layer of polymeric material 505 and finally another sub layer of overlapping segments 503. By adding a polymeric material between two segment layers, e.g. as a glue, any openings in the segment layer will be filled with polymeric material and thereby further enhance the insulation properties of the segment sub layers. It is further advantageous to end with a segment layer with e.g. glass segments since this surface is the surface that will be contacting the glue for mounting the panes to the profile and by having a glass material at the surface to be connected to glass panes, a glue can be chosen having strong glass to glass capabilities. It is not two different materials that have to be connected which can result in a weak connection.

[0035] Fig. 5B illustrates an embodiment of the layer mounted on the surface 501 of a spacer. The layer comprises a first sub layer 507 of PET and a second sub layer 503 of overlapping segments. Thereby, the PET layer carries the segments and is mounted to the spacer surface afterwards.

[0036] Fig. 5C illustrates an embodiment of the layer mounted on the surface 501 of a spacer. The layer comprises a first sub layer 507 of PET and a second sub layer 503 of overlapping segments and finally a third sub layer 507 of PET. Thereby, the third PET sub layer protects the overlapping segments ensuring that the segments are not worn out during handling of the spacer with the layers. A further layer of either aluminum or glass could be added to ensure better connection properties of the spacer to the panes.

[0037] Fig. 5D illustrates an embodiment of the layer mounted on the surface 501 of a spacer. The layer comprises a first sub layer 507 of PET and a second sub layer 503 of overlapping segments, a third sub layer of polymeric material 505, a fourth sub layer 503 of overlapping segments, a fifth sub layer 507 of PET and finally, a sixth sub layer 503 of overlapping segments.

Claims

1. A spacer for creating a spacing between glass panes, wherein said spacer is made from a plastic material, said spacer being elongated and comprising two side surfaces as well as a top surface and a bottom surface, and wherein at least to the bottom

surface of said spacer a layer with gas-impermeable characteristics has been added **characterised in that** said added layer is a foil layer comprising multiple overlapping segments of a substantially gas-impermeable material extending in at least one direction, such as flakes.

2. A spacer according to claim 1, wherein said segments of substantially gas-impermeable material comprises glass.
3. A spacer according to claim 1, wherein said layer comprises multiple sub layers of multiple overlapping segments of a substantially gas-impermeable material.
4. A spacer according to claim 3, wherein a layer of polymeric material is present between a first and a second of said sub layers of multiple overlapping segments of a substantially gas-impermeable material
5. A spacer according to claims 1-4, wherein said layer with gas-impermeable characteristics comprises multiple sub layers with a top sub layer contacting the spacer, and wherein at least the outermost sub layer comprises multiple overlapping segments of a substantially gas-impermeable material.
6. A method of producing a spacer according to claims 1-5, wherein said method comprises a step of adding a layer comprising multiple overlapping segments of a substantially gas-impermeable material.
7. A window comprising glass panes being mutually spaced by a spacer according to any of the claims 1-5.

Patentansprüche

1. Ein Abstandhalter zum Herstellen eines Abstands zwischen Glasscheiben, wobei der Abstandhalter aus einem Plastikmaterial gemacht ist, wobei der Abstandhalter länglich ist und zwei Seitenoberflächen sowie eine obere Oberfläche und eine untere Oberfläche umfasst und wobei mindestens auf die untere Oberfläche des Abstandshalters eine Schicht mit gasundurchlässigen Eigenschaften hinzugefügt ist, dadurch charakterisiert, dass die hinzugefügte Schicht eine Folienschicht ist, die mehrere überlappende Segmente eines im Wesentlichen gasundurchlässigen Materials umfasst, die sich in mindestens eine Richtung erstrecken, wie etwa Flocken.
2. Ein Abstandhalter gemäß Anspruch 1, wobei die Segmente aus im Wesentlichen gasundurchlässigem Material Glas umfassen.

3. Ein Abstandhalter gemäß Anspruch 1, wobei die Schicht mehrere Unterschichten von mehreren überlappenden Segmenten eines im Wesentlichen gasundurchlässigen Materials umfasst.
4. Ein Abstandhalter gemäß Anspruch 3, wobei eine Schicht aus Polymermaterial zwischen einer ersten und einer zweiten der Unterschichten von mehreren überlappenden Segmenten eines im Wesentlichen gasundurchlässigen Materials vorhanden ist.
5. Ein Abstandhalter gemäß den Ansprüchen 1-4, wobei die Schicht mit gasundurchlässigen Eigenschaften mehrere Unterschichten umfasst, mit einer oberen Unterschicht, die den Abstandhalter berührt, und wobei mindestens die äußerste Unterschicht mehrere überlappende Segmente eines im Wesentlichen gasundurchlässigen Materials umfasst.
6. Ein Verfahren zur Herstellung eines Abstandshalters gemäß den Ansprüchen 1-5, wobei das Verfahren einen Schritt des Hinzufügens einer Schicht, die mehrere überlappende Segmente eines im Wesentlichen gasundurchlässigen Materials umfasst, umfasst.
7. Ein Fenster, umfassend Glasscheiben, die voneinander durch einen Abstandhalter gemäß einem der Ansprüche 1-5 auf Abstand gehalten werden.

Revendications

1. Élément d'écartement pour créer un espacement entre des panneaux en verre, dans lequel ledit élément d'écartement est constitué de matériau plastique, ledit élément d'écartement étant de forme allongée et comprenant deux surfaces latérales ainsi qu'une surface supérieure et une surface inférieure, et dans lequel une couche ayant des caractéristiques d'imperméabilité aux gaz a été ajoutée au moins sur la surface inférieure dudit élément d'écartement, **caractérisé en ce que** ladite couche ajoutée est une couche en feuille comprenant plusieurs segments en chevauchement d'un matériau essentiellement imperméable aux gaz s'étendant dans au moins une direction, tels que des paillettes.
2. Élément d'écartement selon la revendication 1, dans lequel lesdits segments de matériau essentiellement imperméable aux gaz comprennent du verre.
3. Élément d'écartement selon la revendication 1, dans lequel ladite couche comprend plusieurs sous-couche de plusieurs segments en chevauchement d'un matériau essentiellement imperméable aux gaz.
4. Élément d'écartement selon la revendication 3, dans

lequel une couche de matériau polymère est présente entre une première et une deuxième desdites sous-couches de plusieurs segments en chevauchement d'un matériau essentiellement imperméable aux gaz.

5

5. Élément d'écartement selon les revendications 1 à 4, dans lequel ladite couche ayant des caractéristiques d'imperméabilité aux gaz comprend plusieurs sous-couches ayant une sous-couche supérieure en contact avec l'élément d'écartement, et dans lequel au moins la sous-couche la plus à l'extérieur comprend plusieurs segments en chevauchement d'un matériau essentiellement imperméable aux gaz.
- 10
- 15
6. Procédé de production d'un élément d'écartement selon les revendications 1 à 5, dans lequel ledit procédé comprend une étape d'ajout d'une couche comprenant plusieurs segments en chevauchement d'un matériau essentiellement imperméable aux gaz.
- 20
- 25
7. Fenêtre comprenant des panneaux de verre qui sont espacés l'un de l'autre par un élément d'écartement selon l'une quelconque des revendications 1 à 5.

30

35

40

45

50

55

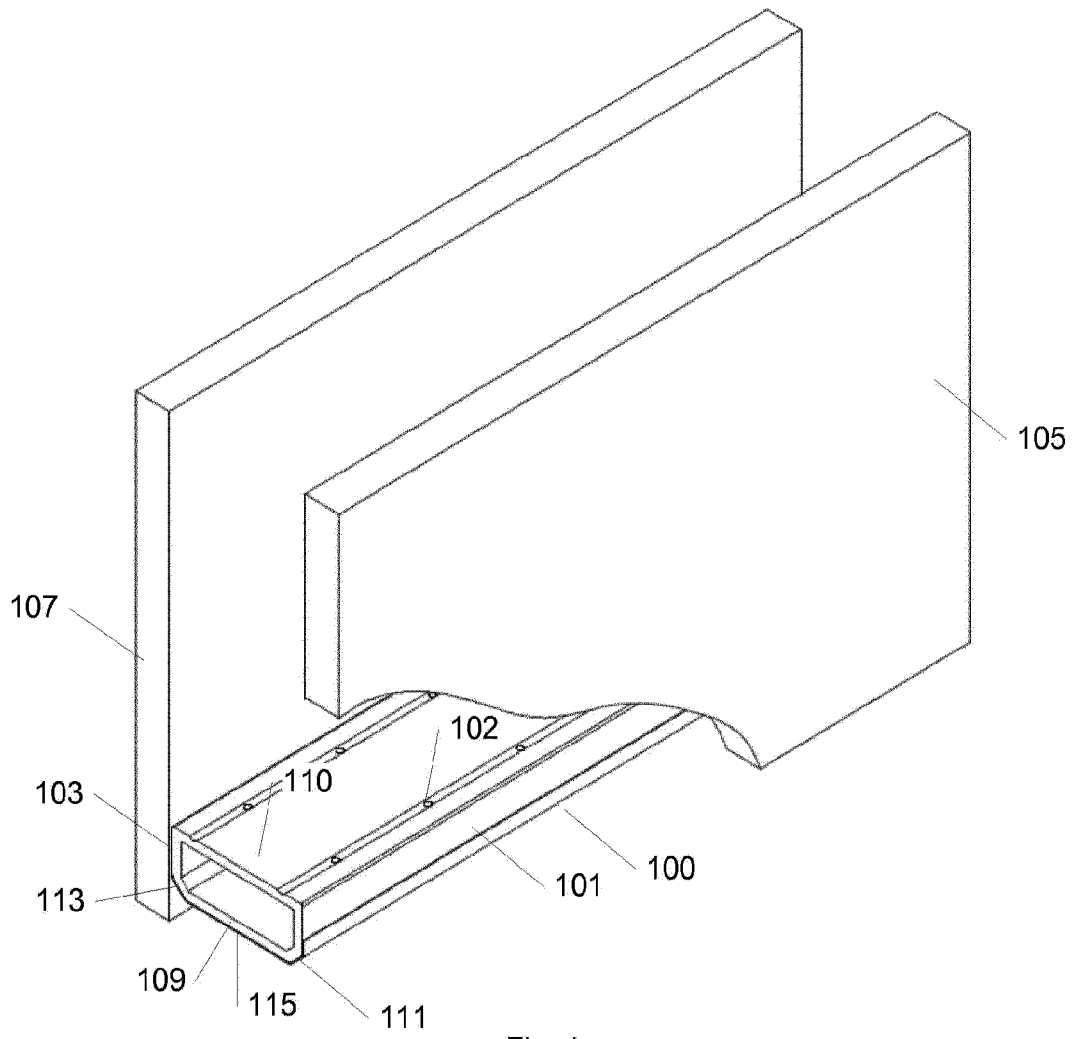


Fig. 1

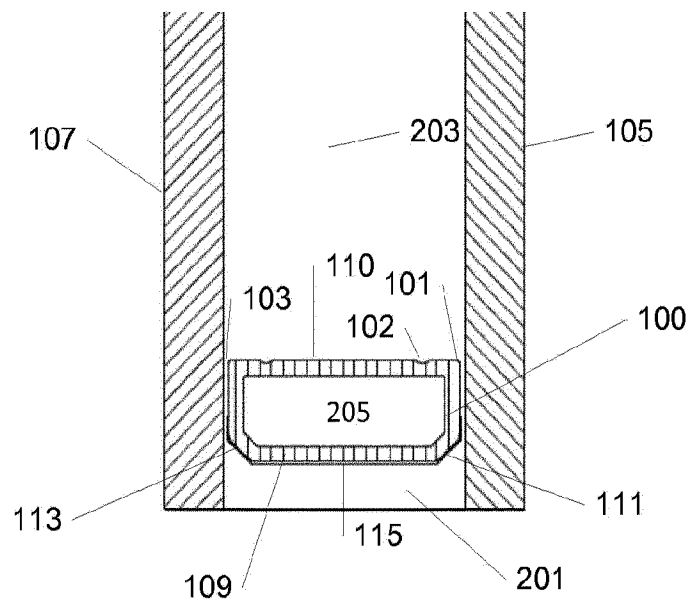


Fig. 2

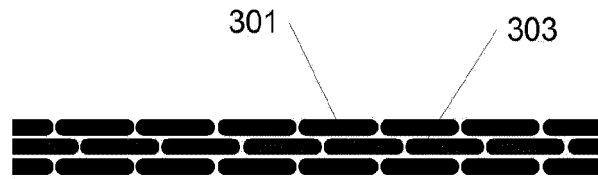


Fig. 3A

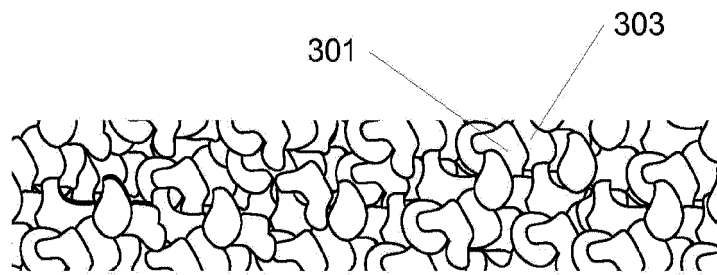


Fig. 3B

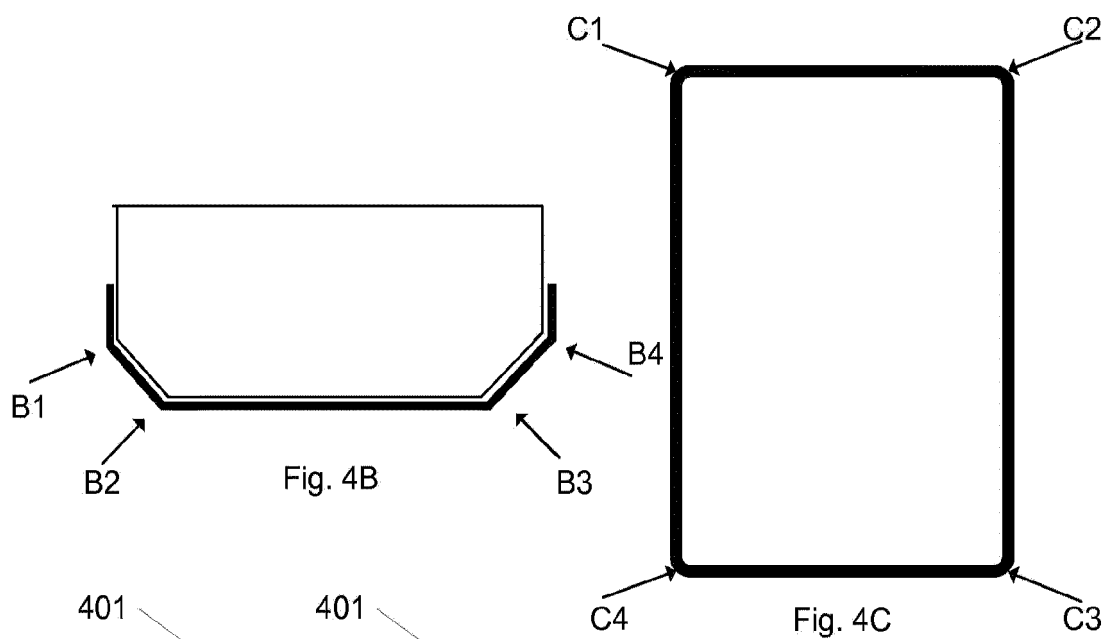


Fig. 4B

Fig. 4C

Fig. 4A



Fig. 5A



Fig. 5B

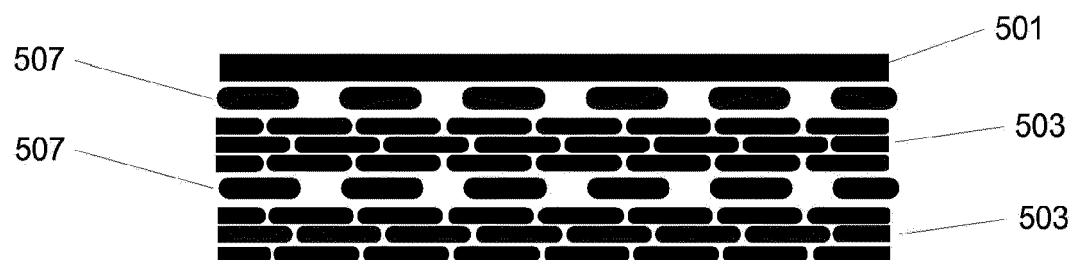


Fig. 5C



Fig. 5D

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 852280 A [0008]
- AU 2012365511 [0010]