



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
27.09.2017 Bulletin 2017/39

(51) Int Cl.:
F24F 13/24 (2006.01) **F24F 13/28** (2006.01)
F24D 19/00 (2006.01) **F24F 13/02** (2006.01)
F24F 13/06 (2006.01) **F24F 13/08** (2006.01)

(21) Application number: **16162162.8**

(22) Date of filing: **24.03.2016**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Sigarth AB**
330 33 Hillerstorp (SE)


(72) Inventor: **THORN, Håkan**
57015 Holsbybrunn (SE)

(74) Representative: **Bergenstråhle Group AB**
P.O. Box 17704
118 93 Stockholm (SE)

(54) **VENTILATION UNIT**

(57) A device in a ventilation unit (7), comprises an air intake (3), a duct (5), and a filter (6). The filter (6) is arranged after the duct (5) as seen in a direction of an

airflow from the intake (3). A plate (10) is arranged between the duct (5) and the filter (6) approximately transversal to the direction of the airflow.

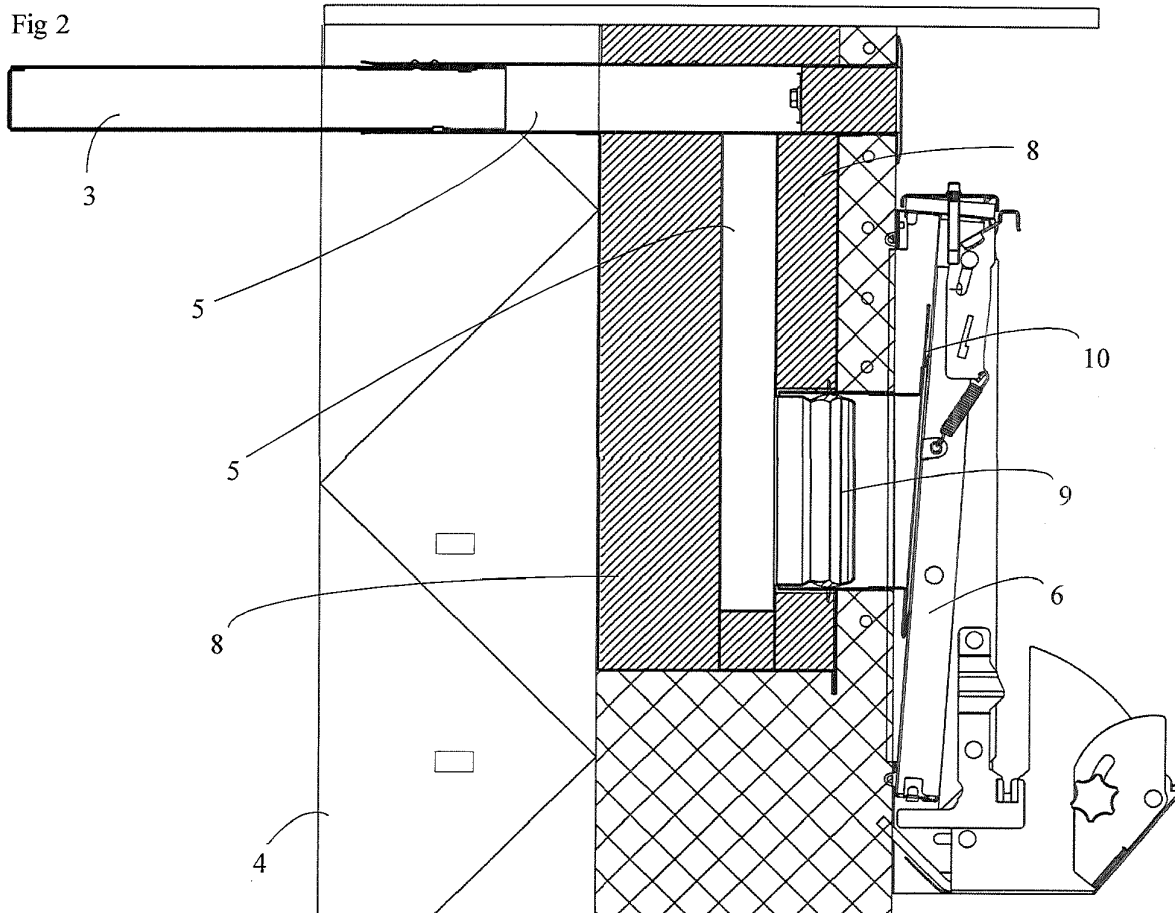

Description**TECHNICAL FIELD**

[0001] The present invention relates to a device in a ventilation unit, comprising an air intake, a duct, and a filter, arranged after the duct as seen in a direction of an airflow from the inlet.

BACKGROUND ART

[0002] Ventilation units in connection with radiators are well known, e. g. from WO0031474A1. Air is drawn from an air intake, and is intended to pass via a radiator into a room, the device comprising a supply air filter, in order to keep dust and pollution from entering into the room with the outside air.

[0003] In order to provide an efficient ventilation and particularly easy intake of supply air in a mechanical air extraction system, without causing chilly draughts in cold seasons, it is evidently necessary to heat the incoming air.

[0004] The required heating is provided by the above-mentioned radiator, and the supply air is hence conducted into the radiator. When the supply air has been heated by the radiator, it will rise by convection, and it will mix with the rest of the air present in the room. A typical flow of air through an intake could amount to 8-10 litres per second.

[0005] The air filter will generally not give rise to a great drop in pressure in the airflow. In order to provide a large filter area for contact with the air supply, while the filter still fits into a fairly compact housing in or close to the radiator, the filter is often pleated, with a large number of valleys and ridges.

[0006] A problem with the present ventilation units is that the air passes through only a limited part of the filter directly in front of a duct leading the air to the filter. Dust, pollen and other pollution particles will be concentrated to that part of the filter, and the filter is not used in an optimal way. In many cases the filter will have to be cleaned or exchanged more often, in order to maintain a high quality of the filtered air, than if all of the filter had been used for filtering the air.

[0007] A general concern in ventilation units is also a desire to reduce noise, both external noise, such as traffic noise, and noise arising from the units itself, e. g. from the air flow.

[0008] Another concern is the desire to maintain a high sense of comfort to the inhabitants of the room, by avoiding a sense of draft from the ventilation.

PROBLEM STRUCTURE

[0009] It is hence an object of the present invention to provide a ventilation unit where the filter is utilized in a more efficient way, while the noise and draft are kept at a minimum level.

SOLUTION

[0010] The object of the invention is attained if the device intimated above is characterized in that a plate is arranged between the duct and the filter approximately transversal to the direction of the airflow.

BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWINGS

[0011] The present invention will now be described in greater detail hereinbelow, with reference to the accompanying drawings. In the accompanying drawings:

Fig. 1 is a schematic view showing the principle of a ventilation system for a room;

Fig. 2 is a section through the the ventilation unit with a device according to the invention;

Fig. 3 is a front view of the filter according to the invention; and

Fig. 4 is a sectional view of the duct and a plate included in the invention.

DESCRIPTION OF PREFERRED EMBODIMENT

[0012] In Fig. 1 a room 1 with a mechanical ventilation system is shown in principle. The ventilation system includes an exhaust fan 2, which draws air from the room 1. The exhaust fan 2 may include a device for recovery of heat, although that is not an object of the present invention.

[0013] The exhaust fan 2 reduces the air pressure inside the room 1, thus causing fresh air to enter from the outside through the air intake 3 in a wall 4. The air intake 3 may include one or more ducts 5, in various configurations, directing an air flow towards a filter 6 in a ventilation unit 7. From the filter 6, the air flow is led through a radiator, which has been omitted from the drawings, for the sake of clarity. The air will be heated in the radiator and will enter the room at a comfortable temperature.

[0014] Fig. 2 discloses the ventilation unit 7 in greater detail, with a series of interconnected ducts 5 directing the airflow towards the filter 6. The ducts 5 are embedded in an insulation material 8, e. g. mineral wool or glass wool. The insulation material 8 serves not only to reduce an undesired heat transfer through the wall 4, but it will also reduce the noise from the air flow and noise from the outside.

[0015] At the end of the series of ducts 5, there is a socket 9, to which a plate 10 is attached. The plate 10 is formed from any airtight material, which is durable and easy to clean. In a preferred embodiment, the plate 10 is made of metal, but other materials such as plastics, glass, or rubber are possible alternatives.

[0016] The plate 10 is positioned adjacent to the filter

6, either in direct contact with the filter 6 or at a short distance therefrom. In a preferred embodiment the distance between the plate 10 and the filter 6 is approximately 2.5 mm. The distance may be greater, but is limited by the internal dimensions of the ventilation unit 7.

[0017] The airflow from the duct 5 exits from the socket 9 reaches the surface of the plate 10. The airflow will then be deflected and spread out approximately radially towards the edges of the plate 10. The airflow will be directed along the surface of the filter 6, and will gradually move through the filter 6. The motion of the airflow along the filter 6 will result in that the airflow is spread out over a larger area, and the filter 6 will be better utilized. Dust, pollution, and other particles will be filtered by a larger filter area, resulting in a lower contamination per area unit of the filter 6.

[0018] Fig 3. shows a front view of the filter 6 in the ventilation unit 7. The approximate positions of the socket 9 and of the plate 10 have been indicated, although their respective positions are on the farther side of the filter 6. The diameter of the plate 10 is larger than the diameter of the socket 9 in the preferred embodiment, in order to ensure a sufficient spreading of the airflow over the filter area.

[0019] As the filter 6 is pleated in a preferred embodiment, the filter 6 will not be completely blocked by the plate 10. The plate 10 will at most only come in contact with the outer ends of the ridges of the filter 6, thereby allowing a part of the airflow to enter into the valleys between the ridges where the filter is more or less covered by the plate 10. Hence air will pass through the filter 6 even in the area behind the plate 10.

[0020] The section from the side of the socket 9 and the plate 10 in Fig. 4, shows the fastening clips 11 for fastening the plate 10 at the outer end of the socket 9. The fastening clips 11 are metal bands that are attached to one side of the plate, preferably by welding. The ends of the metal bands are crimped in order to mesh with corresponding indentations or grooves 12. The plate 10 is slightly angled in relation to the socket 9 in order to be approximately parallel with the filter 6, which is also arranged with an angle to a vertical plane. As the clips 11 are slightly resilient, the plate 10 may be removed for cleaning and then remounted again.

[0021] Apart from the better utilization of the filter 6, another advantage of the deflection of the airflow is that the speed of the filtered airflow will be lowered. Since the volume of the airflow is constant, but the filter area which is actively filtering the airflow is significantly larger than without the plate 10, the air will move into the radiator and further into the room at a lower speed than without the plate 10. The sense of a draft from the ventilation unit will be greatly reduced. Also the lower speed of the airflow through the radiator will allow for a better heating of the air. An improved heating of the air will result in a supply air temperature which will be more pleasant.

[0022] Further advantages are that the plate 10 limits the airflow in case of sudden gusts of wind into the intake.

This reduces both the risk of sudden drafts in the room as well as noise from the wind. The need for a separate flow limiting equipment is hence eliminated. Also, there is a general noise reduction by up to 3 dB by the provision of the plate 10.

ALTERNATIVE EMBODIMENTS

[0023] The above described device for a ventilation unit may be varied concerning the materials used or the dimensions and proportions shown in the drawings, as long as the same or similar objectives of the invention are attained.

[0024] The fastening of the plate on the socket could be varied with a number of different releasable fastening means that are already known in the art.

Claims

1. Device in a ventilation unit (7), comprising an air intake (3), a duct (5), and a filter (6), arranged after the duct (5) as seen in a direction of an airflow from the intake (3), **characterized in that** a plate (10) is arranged between the duct (5) and the filter (6) approximately transversal to the direction of the airflow.
2. Device according to claim 1, **characterized in that** the plate (10) is larger than the cross-section of the duct (5).
3. Device according to claim 1 or 2, **characterized in that** the plate (10) is attached to a socket (9) at the open end of the duct (5), allowing the airflow to pass over the surface of the plate (10) and past its edges towards the filter (6).
4. Device according to claim 3, **characterized in that** the plate (10) is releasably attached to the socket (9).
5. Device according to any of claims 1 to 4, **characterized in that** the filter (6) is pleated.
6. Device according to claim 5, **characterized in that** the plate (10) is arranged in contact with the filter (6).

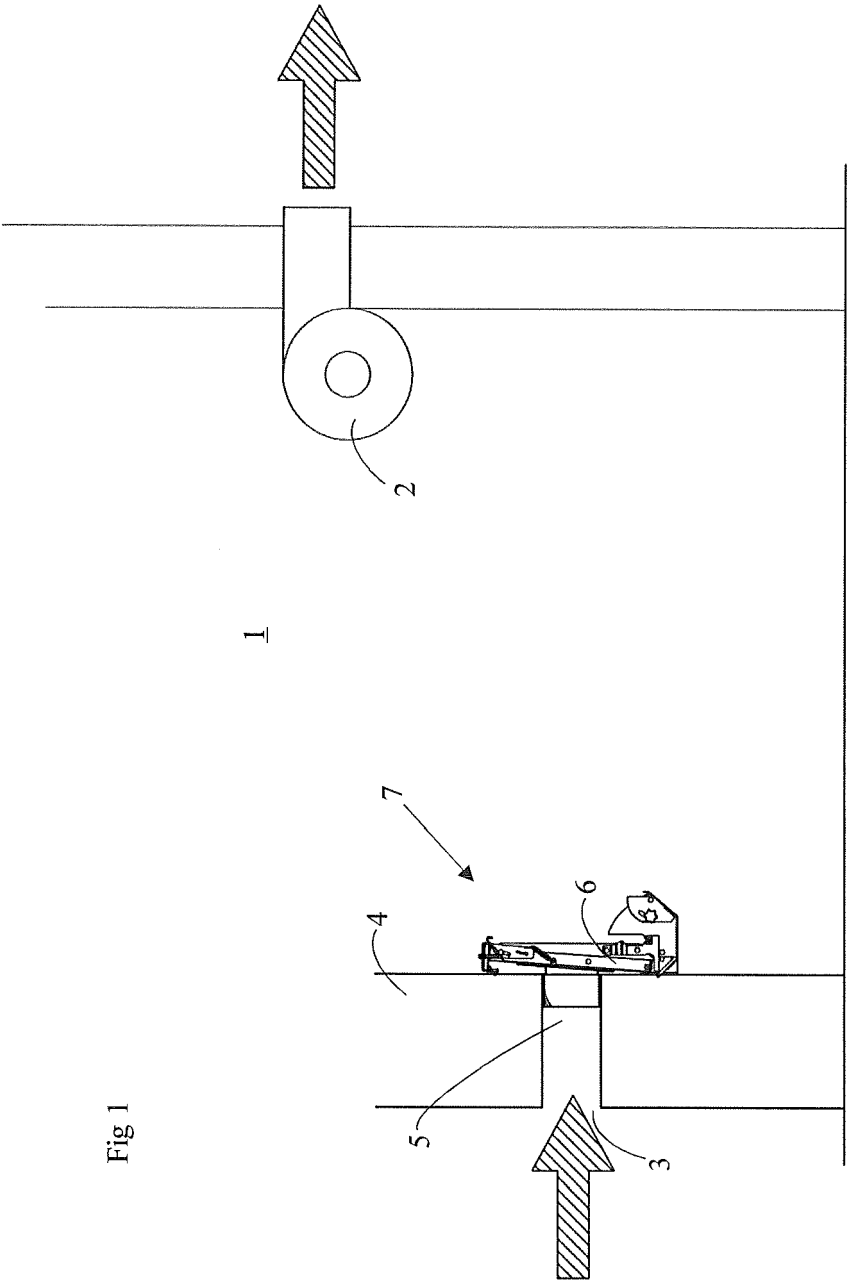
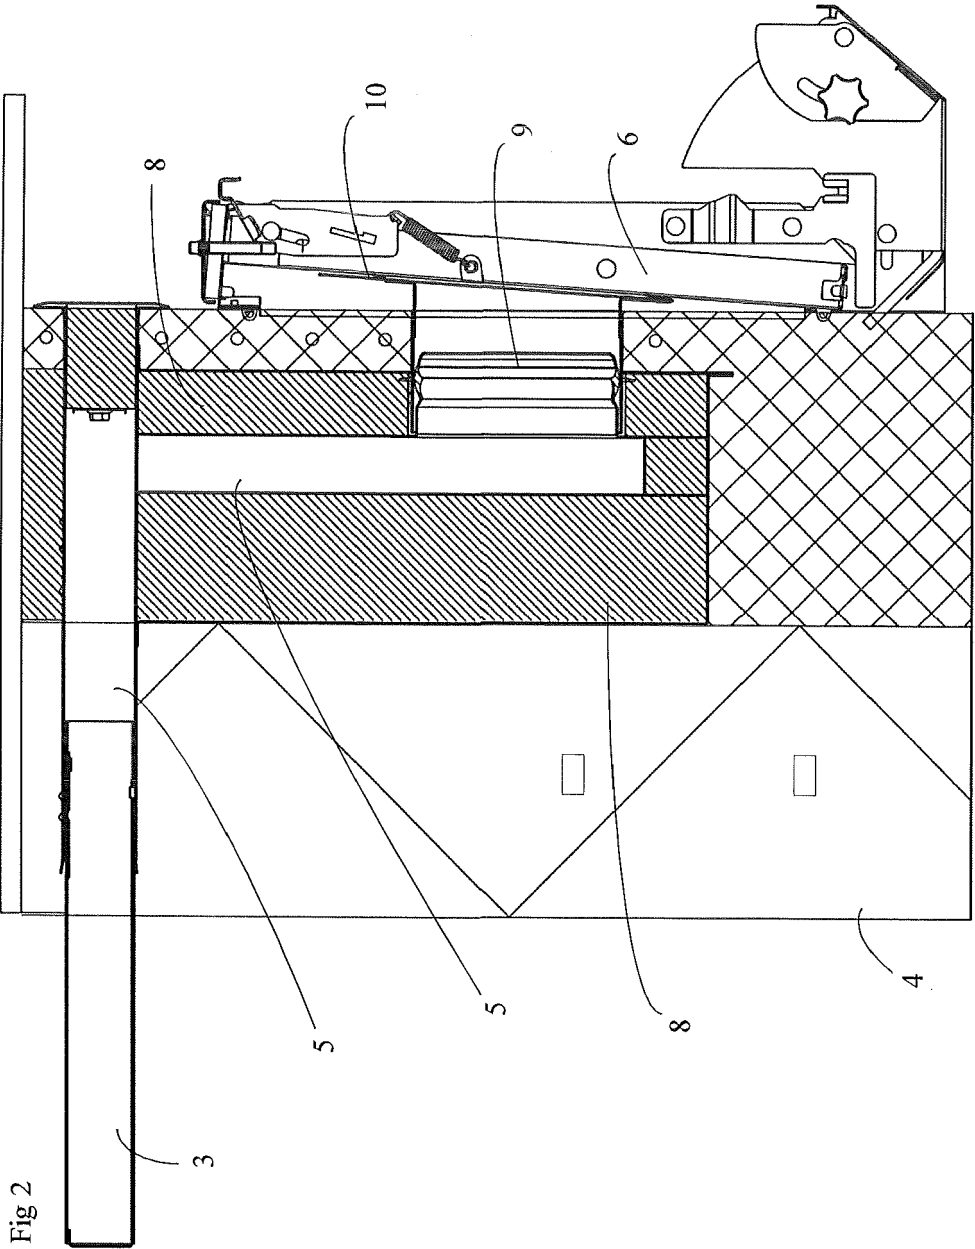


Fig 1




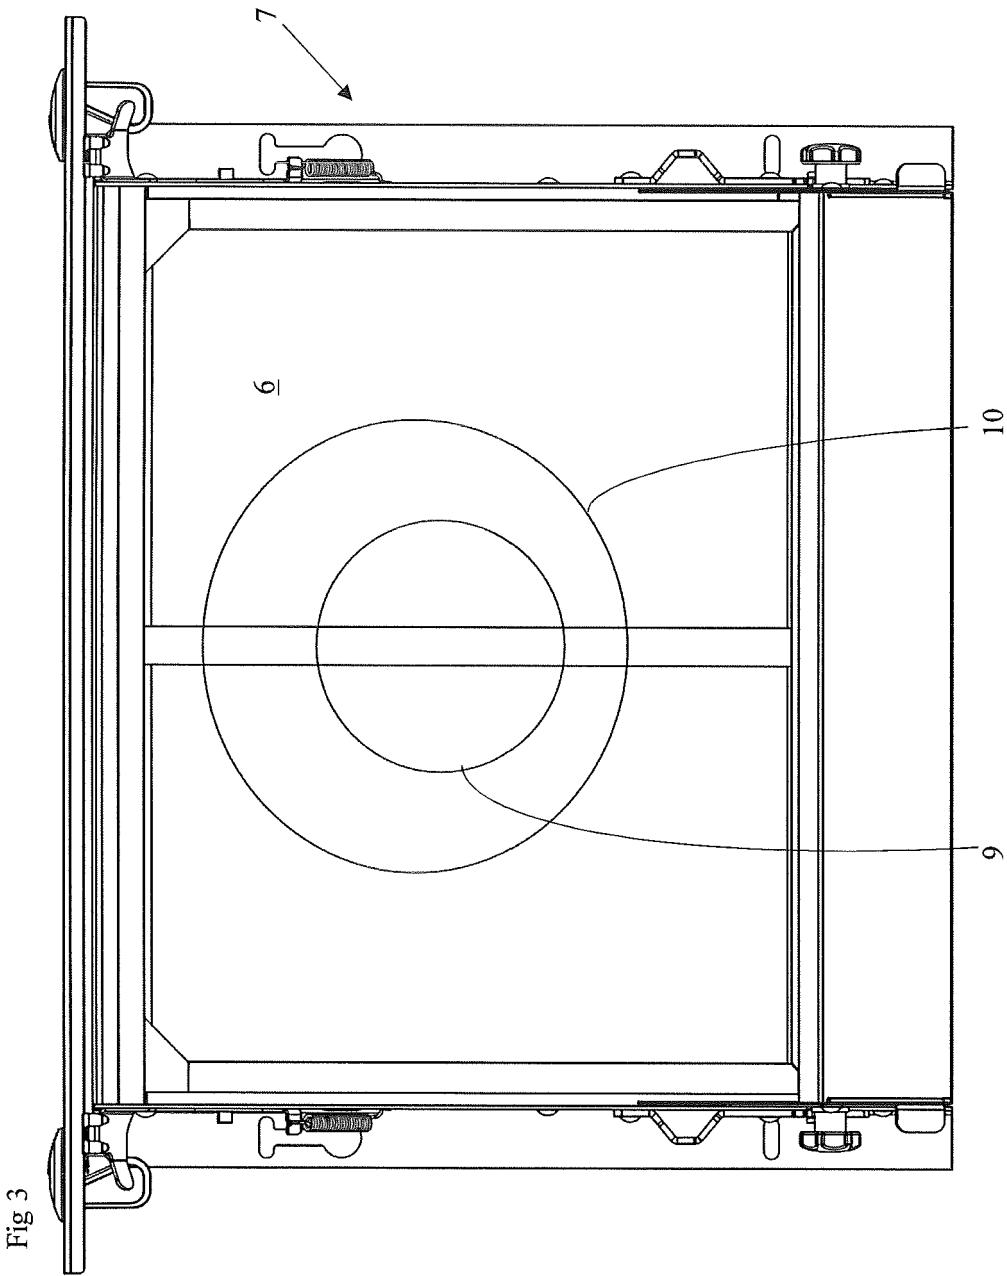


Fig 4



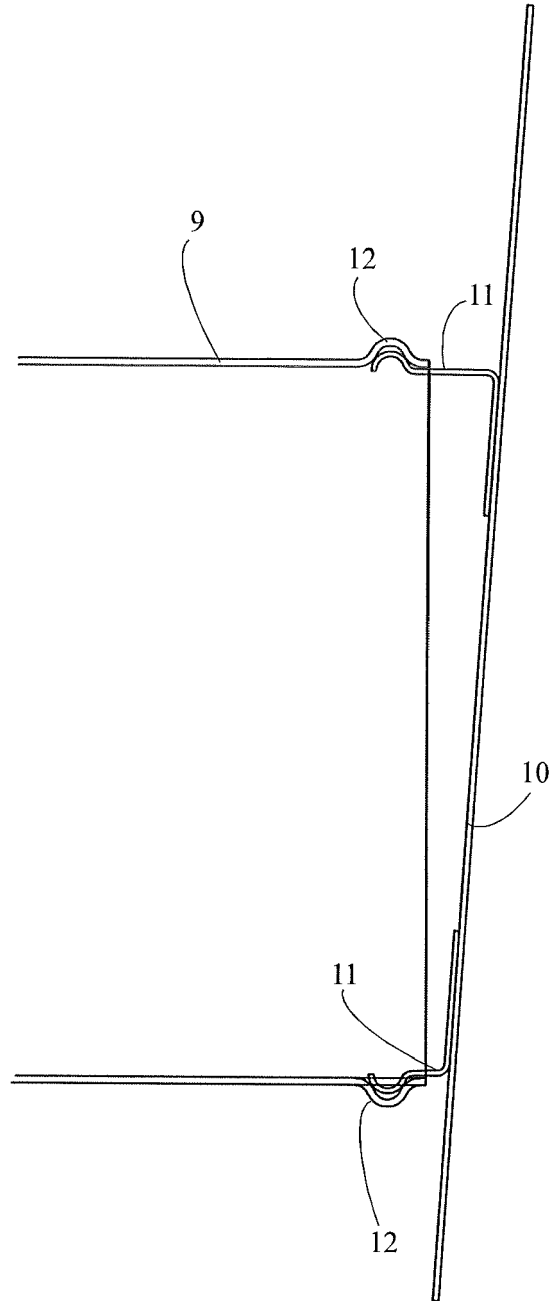

EUROPEAN SEARCH REPORT

Application Number
EP 16 16 2162

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	DE 36 32 268 A1 (LATERNSEER ALOIS [DE]) 7 April 1988 (1988-04-07) * abstract; figure 1 *	1-6	INV. F24F13/24 F24F13/28 F24D19/00 F24F13/02 F24F13/06 F24F13/08
X	WO 2015/122832 A1 (LINDAB AB [SE]) 20 August 2015 (2015-08-20) * figure 3E *	1	
X	JP 2010 249368 A (TOSHIBA CARRIER CORP) 4 November 2010 (2010-11-04) * abstract; figure 6 *	1	
X	GB 2 464 746 A (MARINE SYSTEMS TECHNOLOGY LTD [GB]) 28 April 2010 (2010-04-28) * page 4, line 6 - page 4, line 8; figure 1 *	1	
A	DE 12 15 527 B (GUSTAV KULL) 28 April 1966 (1966-04-28) * figures 1,2,3,5,9-11 *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			F24F F24D
Place of search		Date of completion of the search	Examiner
Munich		2 September 2016	Decking, Oliver
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 16 2162

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-09-2016

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3632268 A1	07-04-1988	NONE	
WO 2015122832 A1	20-08-2015	SE 1450147 A1 WO 2015122831 A1 WO 2015122832 A1	12-08-2015 20-08-2015 20-08-2015
JP 2010249368 A	04-11-2010	JP 5404146 B2 JP 2010249368 A	29-01-2014 04-11-2010
GB 2464746 A	28-04-2010	GB 2464746 A WO 2010046707 A1	28-04-2010 29-04-2010
DE 1215527 B	28-04-1966	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 0031474 A1 [0002]