



(12) **EUROPEAN PATENT APPLICATION**  
published in accordance with Art. 153(4) EPC

(43) Date of publication:  
**27.09.2017 Bulletin 2017/39**

(51) Int Cl.:  
**H01Q 15/14 (2006.01) H01Q 3/32 (2006.01)**

(21) Application number: **15859582.7**

(86) International application number:  
**PCT/CN2015/094084**

(22) Date of filing: **09.11.2015**

(87) International publication number:  
**WO 2016/074593 (19.05.2016 Gazette 2016/20)**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**MA MD**

(71) Applicant: **Li, Zi-meng**  
**Dongguan, Guangdong 523000 (CN)**

(72) Inventor: **SLEDKOV, Victor**  
**Wellington 6006 (NZ)**

(74) Representative: **Sach, Greg Robert et al**  
**Ubostr. 34h**  
**81245 München (DE)**

(30) Priority: **11.11.2014 CN 201410630629**

(54) **BAFFLE BOARD FOR BASE STATION ANTENNA AND BASE STATION ANTENNA ARRAY STRUCTURE**

(57) Disclosed are a baffle board for a base station antenna and a base station antenna array structure. A main body of the baffle board in the present application is a single-layer or a multi-layer baffle board cavity, at least one phase shifter cavity is provided in each layer of the baffle board cavity, each layer of the baffle board cavity is internally provided with a guide groove and a clamping position respectively, the phase shifter cavity is used for accommodating a phase shifter component, and the guide groove, the clamping position and a hole

position are used for fixing a corresponding component of the phase shifter, so that a movable insulating dielectric piece of the phase shifter can move in the guide groove. According to the baffle board in the present application, the phase shifter cavity and the baffle board are designed as an integrated structure, so that the consistency is high, welding is used little, assembly is easy, the assembly time is short, the production efficiency is high, few raw materials are used, and the cost is low.

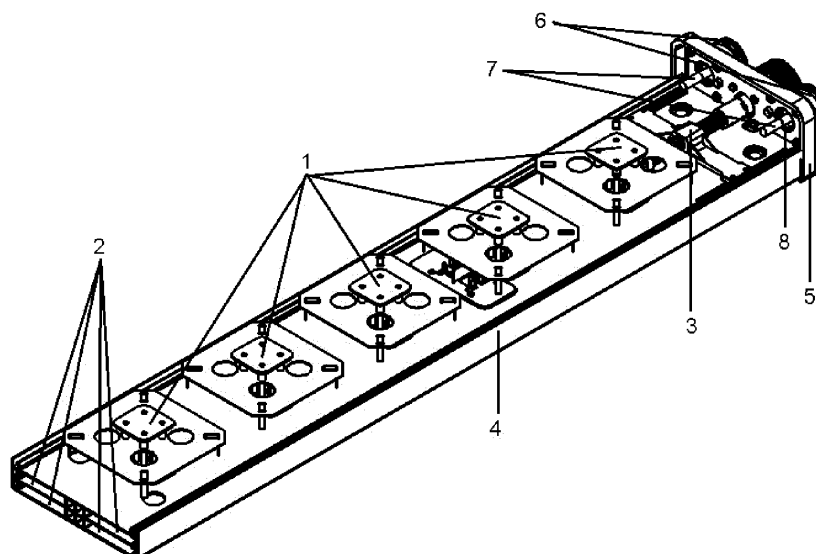


FIG. 1

## Description

### TECHNICAL FIELD

**[0001]** This application relates to base station antenna technology for mobile communications, particularly a type of reflecting plate designed for base station antenna and base station array structure designed for the reflecting plate.

### BACKGROUND OF THE TECHNOLOGY

**[0002]** With the rapid development of modern mobile communications, more requirements are raised for base station antennas, particularly for bandwidth characteristics and miniaturization. Downsizing in antennas becomes more demanding due to the great density of networks and public increasing sensitivity towards electromagnetic wave pollution. In addition, such engineering factors as wind resistance and convenience for installation also require reduction in size of antennas.

**[0003]** A base station antenna is made up primarily of reflecting plate, drive mechanism, radiation unit and feed network, the reflecting plate having the ability to improve electromagnetic wave characteristics, particularly beam characteristics, thus being a significant part of the base station antenna playing a major role in forming directional diagram. Generally, the bigger reflecting plate gives better ratio performance but narrower beam width. A base plate of conventional directional antennas is required to be about 1/4 wavelength bigger than the radiation device, which means it is rather big in overall size. For example, one kind of reflecting plate is designed with a horizontal tilting plate corresponding to multi-resonant frequencies wherein operating bandwidth is wide and consistency of directional diagram quite satisfactory, which yet results in big-size antenna. The other kind is a horizontal plate relatively small in size, but the antenna is still quite large due to such components as phase shifter and drive mechanism. To a base station antenna, structure of the reflecting plate influences structure of the antenna, similarly, the size determines the size.

**[0004]** In conclusion, many elements affect miniaturization of a base station antenna, such as height of radiation device, structure of phase shifter, drive mechanism, reflecting plate and the whole unit, structure of the reflecting plate particularly. A new type of antenna structure is therefore in pressing need to deal with the issue of miniaturization.

### CONTENT OF THE INVENTION

**[0005]** This application aims at providing an improved reflecting plate and the related base station antenna array to solve the problem that the existing reflecting plate cannot meet the needs of dimension reduction, the following technical solution adopted for the purpose. A type of reflecting plate for base station antennas is disclosed

in this application, primarily comprising single- or multi-layer reflector chamber, the inside of each layer placed with at least one phase shift cavity, guide groove and projection, the phase shift cavity for holding components of the phase shifter, while guide groove and projection for fixing them, allowing removable dielectric insulation medium of the phase shifter to move within the guide groove.

**[0006]** It should be noted that radiation device of a conventional reflecting plate is arranged on one side of the plate, one or more phase shifters on the other whose installation needs an independent hollow box stabilized on the plate by supporting pillars, resulting in great thickness of the base station antenna array. The drive mechanism of the phase shifter is also positioned on this side higher than the phase shift cavity supporting the plate, further increasing the thickness of the antenna. The reflecting plate in this application differs from the conventional plate mostly in that it is integrated with the phase shift cavity and the drive mechanism to form an integrative cavity structure, the radiation device placed on one side of the plate, the drive mechanism on the same side concealed in the reflector chamber wherein slide dielectric medium of the phase shifter is installed and pulled by a rod, to function beam adjustment of the antenna. No component is on the other side of the reflecting plate, greatly reducing the overall thickness of the antenna. The dimension of the antenna can be reduced partly because of this array structure.

**[0007]** It should also be noted that in order to coordinate the structure claimed in this application and meet the demand of miniaturization, a highly integrated strip line feed network is specially developed to replace the existing base station antenna which uses cables to connect different components and needs many coaxial cables to connect the radiation device with the phase shift, and the phase shift with the phase shift. Consequently, cables of different lengths must be produced and the accuracy must be guaranteed. During installation the correct ones must be picked from the many different cables and soldered to the right positions respectively, quality of welding machine having to be guaranteed as well, the greatest disadvantage of this design lying in that there are too many sorts of cables of different lengths and too many soldering points each of which is uncontrollable during manufacturing process. Each sort of coaxial cable has appropriate bending radius, for example, the common 141 cable has a minimum bending radius of 40mm. A buffer zone must be planned for the soldering junctions to protect coaxial cables, and minimal bending radius must be planned when winding section lines, which design takes up too much space.

**[0008]** The phase shifter can be placed inside the reflecting chamber and the thickness of the base station antenna can be reduced is crucially because cables are replaced by strip lines occupying less space which together with the phase shifter can be held in the reflector chamber, thus reducing size of the base station antenna.

Another advantage of strip lines lies in less welding, easy installation plus fewer solder joints, as well as decreasing intermodulation during production, boosting first pass yield and improving consistency of stationary waves. Besides, wastage rate of strip lines is lower, which benefits the base station antenna array as claimed in this application.

**[0009]** Dimension of the antenna is reduced thanks to the use of a new kind of radiation device whose height and the reflecting plate's is less than  $0.15\lambda$  in center frequency, while that of a common radiation device is about  $0.25\lambda$ . The radiation device as claimed in this application can help reduce width of the reflecting plate, for example, a reflecting plate is usually 160mm in width for a 1695MHz-2690MHz base station antenna, but it becomes 120mm if applying the  $0.15\lambda$  radiation device. Normally an electrically adjustable base station antenna has cross-sectional area of  $90 \times 160 \text{ mm} = 14400 \text{ mm}^2$  when working under the 1695-2690MHz ultra wideband, but it turns  $60 \times 120 \text{ mm} = 7200 \text{ mm}^2$  in that of this application. Contrast tests show that this antenna which is 50% smaller than a large-size traditional one has equal or improved electrical performance index.

**[0010]** Preferably, both sides of the reflecting plate surface are designed with slender slots parallel and inter-linked to all layers of the guide groove for easy connection between the phase shifter and the related drive mechanism.

**[0011]** Preferably, fastener holes are designed on the reflecting plate surface to fixedly connect the radiation device.

**[0012]** Preferably, each layer of the chamber on both sides of the central axis of the reflecting plate contains symmetrical square cavities extending along the length of the plate, parallel to the guide grooves and for handling input and output ports of the phase shifter. Correspondingly the plate surface has rectangular orifices for feed cables to pass through and metal side walls between for isolating polarizations and restraining mutual coupling.

**[0013]** This application also discloses a type of base station antenna array comprising the reflecting plate, adapter plate, radiation device, phase shifter and drive mechanism as claimed in this application, the adapter plate fixed on one end of the reflecting plate in an integrative structure; the radiation device placed on the plate surface; the phase shifter placed in the phase shift cavity, fixed by the guide groove and projection; the drive mechanism placed on the reflecting plate surface, its sliding would guide the phase shifter to move within the guide groove.

**[0014]** Preferably, the drive mechanism consists of drive shaft support, drive shaft and rotating plate, the drive shaft fixed on the reflecting plate surface, one end fixed on the drive shaft support, the other end on the adapter plate, the rotating carriage connected to the drive shaft along which it can move. Specifically, the drive shaft support is embedded in the reflector chamber, the drive shaft implanted in the reflecting plate, one end fixed on

the drive shaft support, the other end on the adapter plate, the rotating carriage connected to the drive shaft along which it can exploit a reciprocating motion, and designed with two pillars on both ends to drag the dielectric components of the phase shifter.

**[0015]** Preferably, both ends of the rotating plate are fixedly connected to the phase shifter located in the reflector chamber through the slender slot placed on the reflecting plate surface.

**[0016]** Preferably, a nonmetallic dielectric film is placed between the radiation device and the reflecting plate surface to avoid passive intermodulation.

**[0017]** The phase shifter consists of slide dielectric block, dielectric slot, rod, dielectric substrate and metal strip lines, the rod placed in the guide groove, the slide dielectric block connected to the dielectric slot embedded in the projection, convenient for the rod to pull the phase shifter to glide accurately within the guide groove. The dielectric substrate is fixed on the phase shift cavity to support the metal strip lines

**[0018]** Preferably, plus end closure and joints fixedly connected on the adaptor plate.

**[0019]** Benefit of this application: the phase shift cavity and the reflecting plate as claimed in this application are designed in an integrative structure, having good consistency, less welding and simple assembly, costing less time and fewer raw materials, thus achieving high efficiency and low cost, simplifying the production of antennas.

**[0020]** A new type of antenna array is presented in this application wherein the phase shifter cavity and the reflecting plate are of an integrative structure to decrease components and soldering, thus with easy installation, high efficiency and low cost. The antenna can be reduced by  $1/3$  in thickness, for example, a common 1695-2690MHz antenna is 90mm, while that claimed in this application is 60mm, or even 45mm.

**[0021]** The highly integrated beamforming network designed with no cables in this application wherein feed network among the array elements for connecting the antenna arrays has no cables but strip lines integrating in the feed network, with fewer soldering points than any other base station antennas, directivity index of the antenna has good consistency, enhanced manufacturability, and fewer soldering points to reduce chance of affecting antenna intermodulation. Existing designs utilize large numbers of coaxial cables causing too many soldering points and too much instability.

**[0022]** Feed network of electrically adjustable antenna is complicated, so existing base station antenna companies utilize large numbers of coaxial cables in antenna designs, which cause too many soldering points and too complicated antenna arrangement, requiring large numbers of workers during the antenna production, leaving great difficulty to realize automation. The product as claimed in this application is highly integrated, therefore the entire production process can be automated, all soldering and installing jobs finished completely by robots.

The outcome is production efficiency would be raised by over 5 times compared with that of traditional antenna companies. Owing to the high integration characteristics, consistency of the antennas produced is enhanced and rejection ratio is decreased.

## DESCRIPTION OF THE DRAWINGS

### [0023]

FIG. 1 illustrates the base station antenna array according to one embodiment of this application, comprising a group of radiation devices, phase shifter, drive mechanism, reflecting plate, end closure and joints.

FIG. 2 illustrates specifics of the bottom structure of the base station antenna array according to the embodiment of this application, mainly comprising a group of radiation devices, phase shifter, drive mechanism, reflecting plate, end closure and joints.

FIG. 3 illustrates specifics of top structure of the base station antenna array according to the embodiment of this application, comprising a reflecting plate, phase shift cavity, installation.

FIG. 4 illustrates specifics related to the interior of the phase shifter of the base station antenna array according to the embodiment of this application, comprising a dielectric block and strip lines.

FIG. 5 illustrates the base station antenna array according to another embodiment of this application, comprising a monolayer reflecting plate, a phase shifter, a drive mechanism, a reflecting plate, end closure and joints.

FIG. 6 illustrates variants of the reflecting plate in this application.

## DETAILED DESCRIPTION OF EMBODIMENTS

**[0024]** The reflecting plate and related elements of the new base station antenna array includes the integrative mono- or multi-layer reflector chambers, wherein the phase shifter plus the guide groove and projection are settled to guide and limit the corresponding components of the phase shifter. The radiation device is settled on central axis of the reflecting plate surface, pedestal of the radiation device equipped with holes, the corresponding reflecting plate also equipped with holes. Each radiation device is fixedly fastened on the reflecting plate surface by several rivets or fasteners. Similarly, there are holes on the phase shifter corresponding to the reflecting plate surface and the pedestal of the radiation device, so when fastening the radiation device, the phase shifter is fastened at the same time. The phase shift cavity is in

an integrative structure with the reflecting plate surface on which single pair or double pair of edges is employed, each pair of edges parallel to each other and corresponding to the two edges symmetrically positioned along the central axis. A slender slot is configured nearby parallel to the edge of the reflecting plate surface. The shift phase drive mechanism on the reflecting plate would lead, via a thread screw, the slide carriage which is connected to the phase shift components by fasteners to exploit straightline reciprocating motion in the slender slot. The phase shifter can adjust the beams in the vertical plane when the slide carriage is exploiting straightline reciprocating motion. There are symmetrical square cavities on both sides of the reflecting plate central axis. There are rectangular orifices on the reflecting plate, under the radiation device, to connect the radiation device feed cable to the input port of the phase shifter. There is metal side wall between the rectangular orifices for the purpose of isolating polarizations and restraining mutual coupling. The input connector is positioned at bottom of the antenna and securely fixed on the adaptor plate which is securely fixed on the reflecting plate and connects antenna stand by fasteners. The reflecting plate surface is designed with signal input ports to which coaxial cables of the joint are soldered. In addition, a shield plate is designed among the radiation device to restrain mutual coupling.

**[0025]** The reflecting plate and the phase shift cavity are of an integrative structure, by metal extrusion, or non-metallic material pultrusion and plating metal on the surface afterwards, or by 3D printing. The reflector chamber can be composed of single-, double- or multi-layer cavities, and can be composed of overlying single-layer cavities by riveting or soldering. The reflecting plate structure comprises a traditional single-layer reflecting plate overlying with single- or multi-layer phase shift cavity by means of riveting or soldering, each cavity divided into several sub-cavities in accordance with the design. The reflecting chamber is positioned with guide groove and projection. There are symmetrical small cavities on both sides of the reflecting plate central axis. The reflecting plate surface has side edge, and one end of the reflecting plate surface is designed with slender groove.

**[0026]** The feed network is of non-cable, the drive mechanism settled on the reflector surface, the joint input cable on the reflector surface and the input port on the reflector surface. The input port has input conductor, between which and the reflecting plate is settled with a non-metallic dielectric film, and among the input ports is settled with metal isolation plate. The radiation device is fixedly settled on the reflecting plate, between the pedestal of the radiation device and the reflecting plate is equipped with a nonmetallic dielectric film, among the radiation device is equipped with metal isolation plate which is fixedly settled on the reflecting plate, and between the metal isolation plate and the reflecting plate is equipped with a nonmetallic dielectric film. The isolation plate can be made of a nonmetallic film coated with metal.

There are holes on the reflecting plate under the pedestal of the radiation device, and among the holes are metal side walls. The height of the radiation device and the reflecting surface is less than  $0.15\lambda$  in center frequency. Top of the radiation device is conductor sheet supported by insulation medium, around it are even-distributed conductor bars.

**[0027]** The following embodiments in combination with the figures are provided to assist in further stating this application. The following embodiments are used merely for understanding and stating this application, but should not be interpreted as a limitation to this application.

#### EMBODIMENT ONE

**[0028]** The base station antenna array structure is shown in FIGS. 1-4, as shown in FIG. 1, comprising a group of radiation devices 1, phase shifters 2, a drive mechanism 3, a reflecting plate 4, an end closure 5, joints 6, cables 7, an adaptor plate 8. The reflecting plate 4 is smaller than existing antenna reflecting plates. As can be seen from the FIGS, the reflecting plate 4 is designed to be an integrative structure of double-layer cavity, inside each of which is positioned with a phase shifter 2 whose design responds to the cavity. The group of radiation devices 1 is fixedly positioned on the reflecting plate by fasteners 11. The drive mechanism 3 is positioned on the antenna reflecting plate surface in order to save space of the back of the antenna and reduce the thickness of the antenna as a result. The adaptor plate 8, made from die-cast zinc-aluminum alloys, is positioned inside the cavity and fixedly positioned on the reflecting plate by fasteners 8a which connect a bracket for installing and adjusting. The end closure 5 and the joints 6 are fixedly positioned on the adaptor plate 8, and one end of each of the cable 7 is soldered to the joint, the other end soldered to the input port of the antenna, and cables 7 are on the reflecting plate.

**[0029]** FIG. 2 shows bottom of the base station antenna array structure, comprising the whole drive mechanism 3, end closure 5, joints 6, cables 7 and adaptor plate 8. Drive mechanism 3 is positioned on the reflecting plate surface, drive shaft support 3a holding one end of drive shaft 3b on reflecting plate 4, the other end passing through adaptor plate 8 and concentric hole 3e on end closure 5, and being concentric with them. Rotating carriage 3c is in cooperation with drive shaft 3b. There are small holes 3d on both ends of rotating carriage 3c, and on the reflecting plate near the ends of rotating carriage 3c there are slender grooves 4a which are parallel to the central axis of the reflecting plate. Center of small hole 3d coincide with center of the slender groove, and the hole on the phase shifter slide screw coincide with the center of small hole 3d and center of slender groove 4a, so that rotating carriage 3c can correlates with the phase shifter by just using fasteners. When rotating carriage 3c moves back and forth in slender groove 4a, phase shifter 2 can adjust the slanting angle of the directivity diagram

related to the vertical plane of the antenna.

**[0030]** FIG. 3 shows top of the base station antenna array structure, comprising the radiation device 1, phase shifter 2 and reflecting plate 4 which is of double-layer cavity. 4e is the guide groove of the reflecting plate, and 4d is projection. The slide bar in phase shifter 2 would slide in guide groove 4e and projection 4d. Guide groove 4e guides in the vertical direction and projection 4d limits space in the horizontal direction. Square cavities 4c are distributed on both sides along the central axis of the reflecting plate, and are where the input port of the phase shifter is positioned, and restrain mutual coupling. Holes 4b are fastener holes, through which adjusting bracket of the antenna can be fixedly positioned. Fasteners 11a help to fix radiation device 1 onto reflecting plate 4, between which and pedestal 1a of the radiation device is planned with a nonmetallic dielectric film 12a which can prevent passive intermodulation.

**[0031]** FIG. 4 shows the internal part of phase shifter 2 of the base station antenna, comprising slide dielectric block 2a, throttle 2c, dielectric block guide groove 2b, dielectric substrate 2d, metal strip line 2e. Throttle 2c is positioned in guide groove 4e of the reflecting plate, and projection 4d is positioned in dielectric block guide groove 2b, so that the slide bar of the phase shifter can slide back and forth accurately. Dielectric medium 2d supports metal strip line 2e, and fasteners 11a fixedly holds dielectric substrate 2d.

#### EMBODIMENT TWO

**[0032]** The base station antenna array as claimed in this application as shown in FIG. 5, adopting single-layer cavity structure. Other designs are exactly the same with that illustrated in embodiment one, so the description will not be repeated again here.

**[0033]** In this embodiment, the antenna would be smaller in size due to the utilization of single-layer cavity structure.

#### EMBODIMENT THREE

**[0034]** This is a further study on the reflecting plate structure based on embodiment one and two, and the result reflects, as FIG. 6, the reflecting plate can be designed as single-, double- or multilayer structure according to different needs. Projection can be positioned on the reflecting plate surface in accordance with the installation of the drive mechanism to help the drive mechanism to slide accurately.

**[0035]** Respecting to the reflecting plate and the corresponding base station antenna array structure as claimed in this application, the phase shift cavity is designed to be an integrative structure with the reflecting plate, characterized in good consistency, few soldering, easy installing, high efficiency, and costing fewer raw materials, thus low-cost. In addition, in the base station antenna array structure, the adaptor plate is designed to be

an integrative structure with the reflecting plate, which also decrease soldering points and is easy to assemble. This technology can be used to antennas of any other frequency, therefore the above is just a preferred implementation of this application, imposing no restrictions to the technical range related to this application. Technical personnel in this field can make some modifications inspired by this technical proposal. Any modification or equivalent change to the above embodiments according to the essence of this technology is within this claimed technical proposal.

## Claims

1. A reflecting plate for base station antennas **characterized in that** its main body is single- or multi-layer reflector chamber, the inside of each comprising at least one phase shift cavity in an integrative structure with the reflecting plate. Each layer of the reflector chamber for holding its related components is placed with guide groove and projection designed to fasten and limit the phase shift components, enabling the removable dielectric insulation medium to move within the guide groove.
2. The reflecting plate of claim 1, wherein both sides of the plate surface are placed with slender grooves parallel and connected to the guide groove for easy connection between the phase shifter and the related drive mechanism.
3. The reflecting plate of claim 1 wherein fastener holes are designed on the reflecting plate surface to fixedly connect the radiation device and fasten the phase shifter substrate at the same time.
4. The reflecting plate of claim 1 wherein each layer of the chamber on both sides of the central axis of the reflecting plate contains symmetrical square cavities extending along the length of the plate, parallel to the guide grooves and for handling input and output ports of the phase shifter. Correspondingly the plate surface has rectangular orifices for feed cables to pass through and metal side walls between for isolating polarizations and restraining mutual coupling.
5. A type of base station antenna array comprising the reflecting plate according to claims 1 to 4, adapter plate, radiation device, phase shifter and drive mechanism, the adapter plate fixed on one end of the reflecting plate in an integrative structure; the radiation device placed on the plate surface; the phase shifter placed in the phase shift cavity, fixed by the guide groove and projection; the drive mechanism placed on the reflecting plate surface, its sliding would guide the phase shifter to move within the guide groove.
6. The base station antenna array of claim 5 wherein the drive mechanism consists of drive shaft support, drive shaft and rotating plate, the drive shaft support embedded in the reflector chamber, the drive shaft implanted in the reflecting plate, one end fixed on the drive shaft support, the other end on the adapter plate, the rotating carriage connected to the drive shaft along which it can exploit a reciprocating motion, and designed with two pillars on both ends to drag the dielectric components of the phase shifter.
7. The base station antenna array of claim 6 wherein both ends of the rotating plate are fixedly connected to the phase shifter inside the reflecting chamber via the slender slot on the reflecting plate surface.
8. The base station antenna array of claim 5 wherein a nonmetallic dielectric film is placed between the radiation device and the reflecting plate surface to avoid passive intermodulation.
9. The base station antenna array of claim 5 wherein the phase shifter consists of slide dielectric block, dielectric slot, rod, dielectric substrate and metal strip lines, the rod placed in the guide groove, the slide dielectric block connected to the dielectric slot embedded in the projection, convenient for the rod to pull the phase shifter to glide accurately within the guide groove. The dielectric substrate is fixed on the phase shift cavity to support the metal strip lines.
10. The base station antenna array of claim 5 wherein the antenna reflecting plate and the phase shift cavity are formed in an integrative structure.

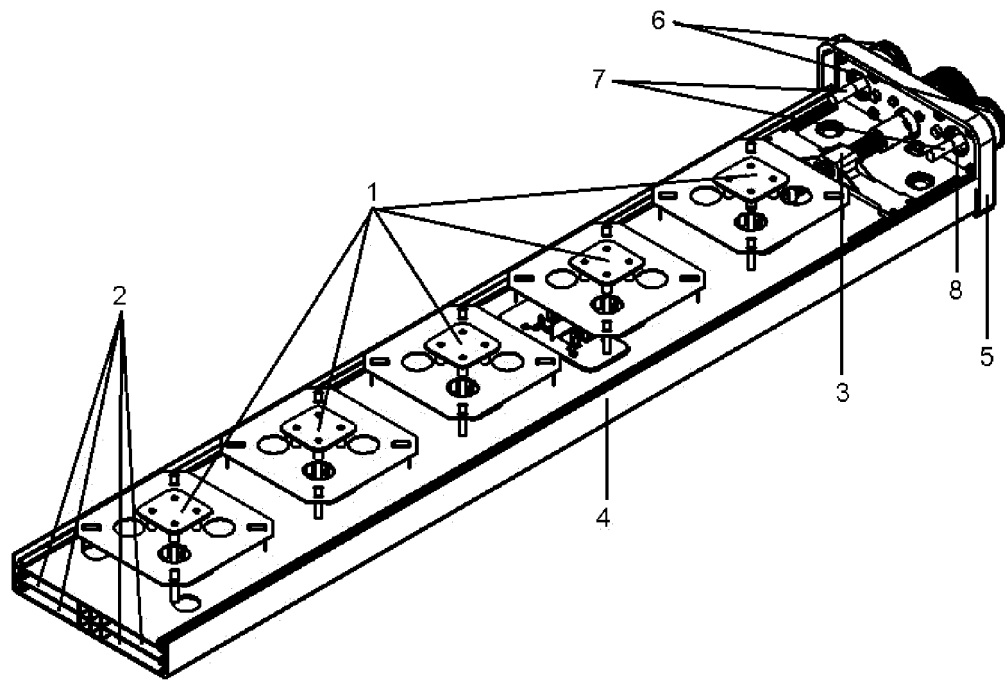


FIG. 1

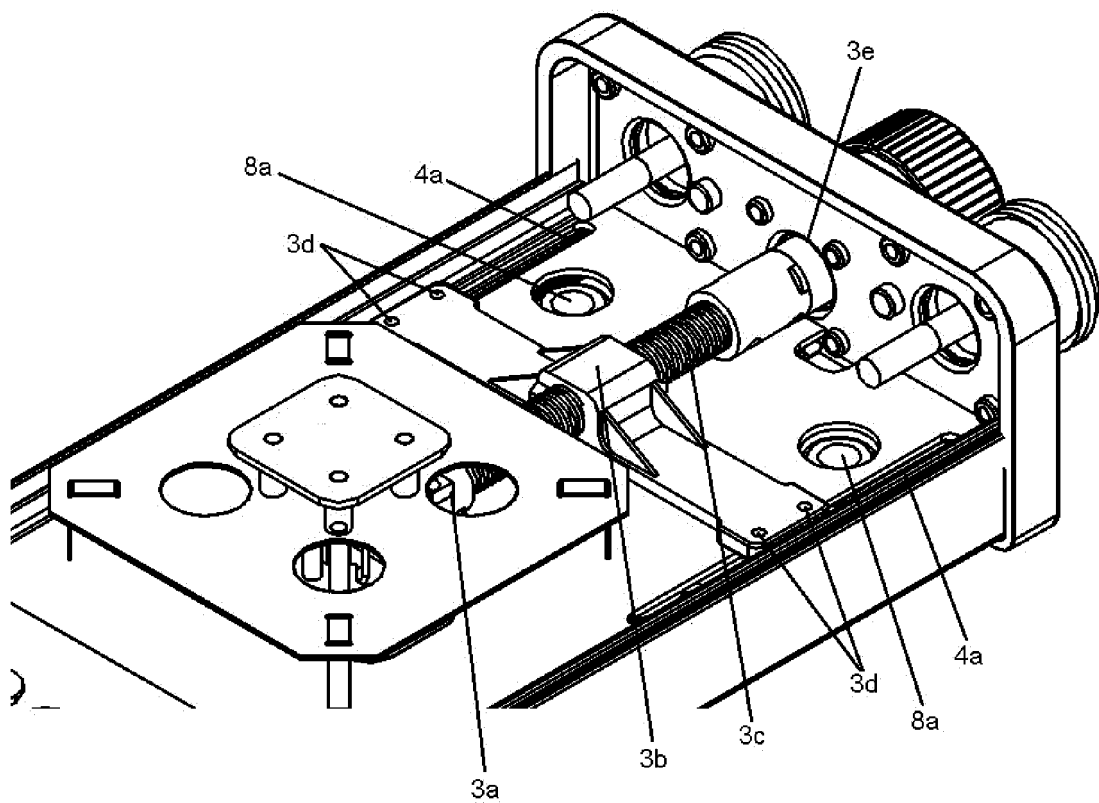


FIG. 2

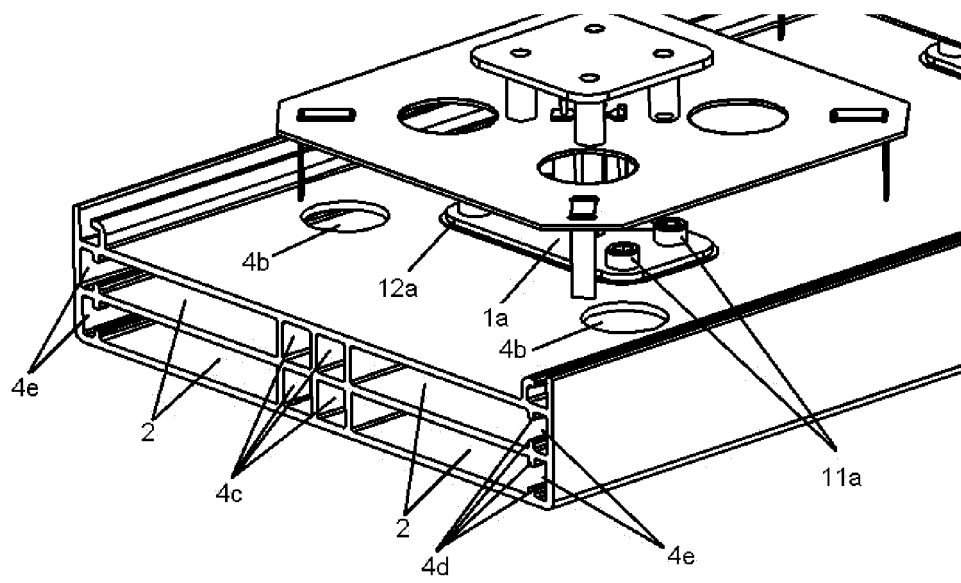


FIG. 3



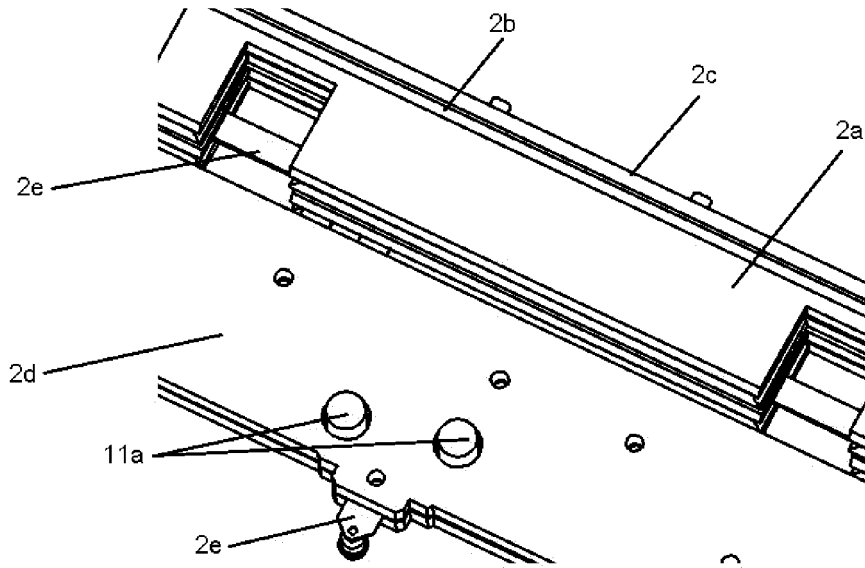


FIG. 4

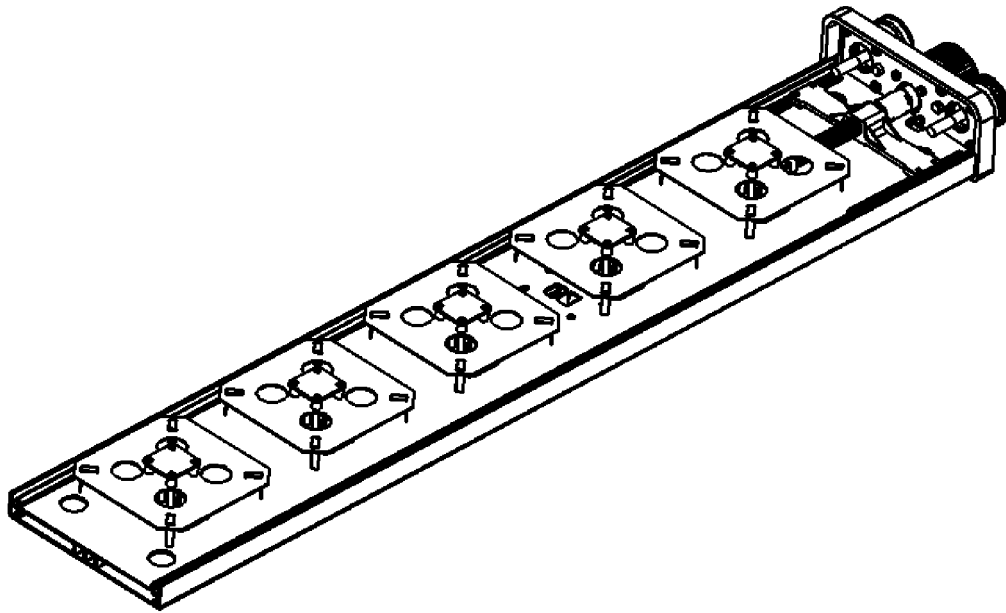


FIG. 5

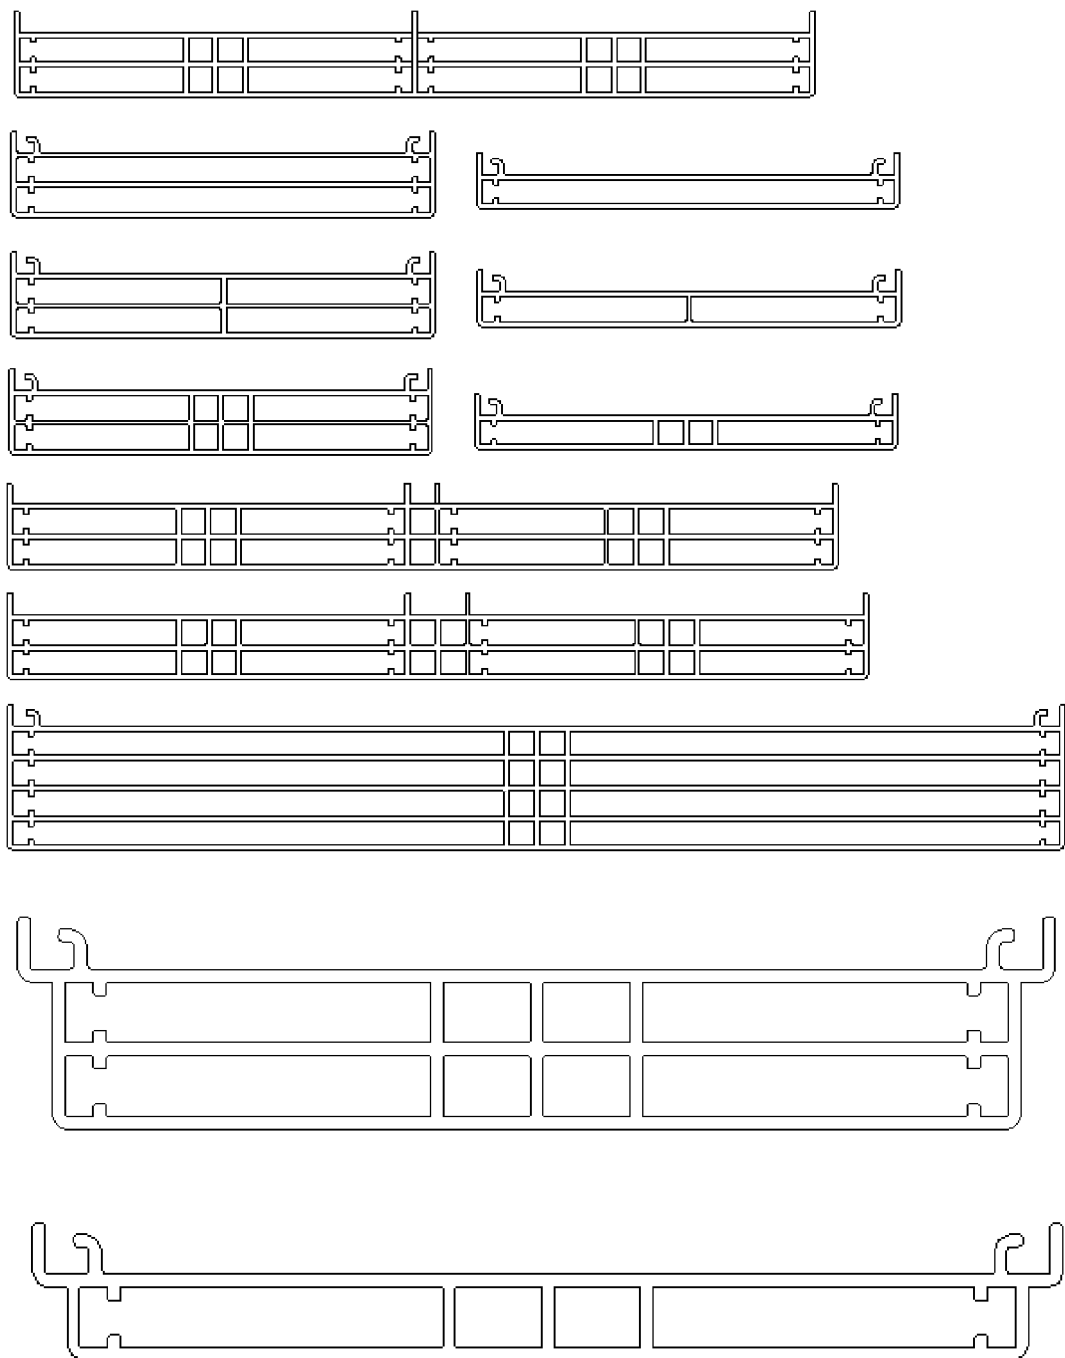


FIG. 6

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/094084

## A. CLASSIFICATION OF SUBJECT MATTER

H01Q 15/14 (2006.01) i; H01Q 3/32 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNTXT, CNABS, CNKI, WPI, WOTXT, EPTXT, USTXT, CATXT, SGTXT: reflective plate, transmission, inclined angle, space, phase shift, base station, ANTENNA, REFLECT+, SHIFT+, ADJUSTABLE, CAVITY, CHAMBER, HOLLOW, INTERLAYER

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 104466426 A (LI, Zimeng), 25 March 2015 (25.03.2015), claims 1-10	1-10
A	WO 2011026034 A2 (ANDREW LLC et al.), 03 March 2011 (03.03.2011), the whole document	1-10
A	CN 102377024 A (DONGGUAN HUISU ANTENNA TECHNOLOGY CO., LTD.), 14 March 2012 (14.03.2012), the whole document	1-10
A	CN 102077419 A (SPX CORPORATION), 25 May 2011 (25.05.2011), the whole document	1-10
A	CN 1231527 A (ANDREW CO.), 13 October 1999 (13.10.1999), the whole document	1-10

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search 25 January 2016 (25.01.2016)	Date of mailing of the international search report 16 February 2016 (16.02.2016)
Name and mailing address of the ISA/CN: State Intellectual Property Office of the P. R. China No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088, China Facsimile No.: (86-10) 62019451	Authorized officer <b>FENG, Xuemin</b> Telephone No.: (86-10) 62411481

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.

**PCT/CN2015/094084**

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 104466426 A	25 March 2015	None	
WO 2011026034 A2	03 March 2011	WO 2011026034 A3	19 November 2015
		US 2012280882 A1	08 November 2012
CN 102377024 A	14 March 2012	None	
CN 102077419 A	25 May 2011	EP 2272131 A1	12 January 2011
		EP 2272131 A4	07 March 2012
		US 8115696 B2	14 February 2012
		AP 201005477 D0	31 December 2010
		CA 2722451 A1	29 October 2009
		RU 2010147909 A	27 May 2012
		KR 20110010097 A	31 January 2011
		WO 2009132358 A1	29 October 2009
		US 2010134374 A1	03 June 2010
		BR PI0910684 A2	29 September 2015
CN 1231527 A	13 October 1999	BR 9900064 A	09 May 2000
		GB 2333400 A	21 July 1999
		GB 2333400 B	13 November 2002
		US 6072439 A	06 June 2000
		GB 9900664 D0	03 March 1999
		DE 19901179 A1	22 July 1999
		CN 1154201 C	16 June 2004

Form PCT/ISA/210 (patent family annex) (July 2009)