

(19)



(11)

**EP 3 233 520 B2**

(12)

**NEW EUROPEAN PATENT SPECIFICATION**

After opposition procedure

(45) Date of publication and mention of the opposition decision:  
**30.10.2024 Bulletin 2024/44**

(51) International Patent Classification (IPC):  
**B60B 1/06** <sup>(2006.01)</sup>      **B60B 7/00** <sup>(2006.01)</sup>  
**B60B 3/04** <sup>(2006.01)</sup>      **B60B 3/10** <sup>(2006.01)</sup>  
**B60B 7/18** <sup>(2006.01)</sup>      **B60B 5/02** <sup>(2006.01)</sup>

(45) Mention of the grant of the patent:  
**24.02.2021 Bulletin 2021/08**

(52) Cooperative Patent Classification (CPC):  
**B60B 1/06; B60B 7/0093; B60B 7/18; B60B 3/04;**  
**B60B 3/10; B60B 5/02; B60B 2900/921**

(21) Application number: **15820098.0**

(86) International application number:  
**PCT/EP2015/080245**

(22) Date of filing: **17.12.2015**

(87) International publication number:  
**WO 2016/097159 (23.06.2016 Gazette 2016/25)**

**(54) HEAT SHIELD STRUCTURE FOR A WHEEL**

WÄRMESCHILDSTRUKTUR FÜR EIN RAD

STRUCTURE DE BOUCLIER THERMIQUE POUR UNE ROUE

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(72) Inventors:  

- **RENNER, Christoph**  
**4824 Gosau (AT)**
- **SCHMITZ, Sebastian**  
**5020 Salzburg (AT)**

(30) Priority: **19.12.2014 CH 19942014**

(74) Representative: **Rentsch Partner AG**  
**Kirchenweg 8**  
**Postfach**  
**8034 Zürich (CH)**

(43) Date of publication of application:  
**25.10.2017 Bulletin 2017/43**

(60) Divisional application:  
**21156745.8 / 3 838 613**  
**23191608.1 / 4 249 285**

(56) References cited:  
**EP-A1- 2 743 095**      **DE-A1- 10 006 400**  
**DE-U1- 29 506 703**      **GB-A- 2 459 372**  
**JP-A- 2010 030 374**      **US-A- 4 900 097**  
**US-A- 5 188 981**      **US-A- 5 277 479**  
**US-A1- 2010 194 179**

(73) Proprietor: **Mubea Carbo Tech GmbH**  
**5020 Salzburg (AT)**

**EP 3 233 520 B2**

## Description

**[0001]** The present invention is directed to a wheel with a heat shield structure, in specific to heat shield structures which can be used for wheels, in particular for wheels made from carbon fiber reinforced plastics suited for motor vehicles and to wheels comprising such heat shield structures.

## BACKGROUND OF THE INVENTION

**[0002]** When braking, kinetic energy of a vehicle is converted into thermal energy, resulting in high temperatures generated by the brake system. In disk brake systems, particularly in carbon-ceramic brakes which are widely used for motor vehicles, operating temperatures up to 1000 °C may occur. While driving, such high temperatures are not critical since both the brake systems and the adjacent wheels are efficiently cooled by the air flowing around the vehicle, respectively around and through the wheels and the brake systems.

**[0003]** However, if a vehicle is braked from high speed and immediately afterwards parked, such active air cooling is missing. Consequently during up to 30 minutes after braking, a significant heat transfer from the hot brake systems to the wheels may occur. Because brake systems are usually not in direct physical contact with the adjacent wheel, this transfer mainly takes place through radiation and convection, while conduction can almost be neglected. As for disk brakes, the distance between the wheel and the brake caliper as well as the brake disk is usually very low and therefore heat transfer by radiation and convection in this area may be very high. Whereas for conventional wheels made from metals such heat transfer is not high enough to induce thermal damage to the wheels, it may become critical for wheels made from other materials, such as fiber reinforced plastics.

**[0004]** DE3224929 was filed 03.07.1982 on behalf of Motor Wheel Corp. USA and describes a vehicle wheel made from a fiber reinforced resin material. A heat barrier plate is provided at the inboard disk face such that in use it prevents heat transfer from the vehicle's hub to the resin disk in order to prevent creeping in the resin disk material in the region of the wheel's mounting bolt holes.

**[0005]** US5538114 was filed 19.12.1994 on behalf of Jay D. White and Ralph W. Larson and shows an insulating wheel mounting system for reduced heat transfer for drum brake systems used in conventional wheels. According to the patent, an insulating ring is formed at the hub region of the wheel, disposed to be clamped against a drum extension attached to a cylindrical main drum. In an alternate embodiment, the drum extension is coated with a thermal insulating material such that a layer of the insulating material is disposed between the wheel's hub region and the drum extension.

**[0006]** US2010194179 was filed 22.01.2010 on behalf of Goodrich Corporation and shows a thermal management composite heat shield which comprises a shield

portion and a dissipation portion. The shield portion may comprise a hot side skin, a conduction layer, an insulation layer, and a cool side skin. The dissipation portion may comprise a fin array. Heat absorbed by the shield portion is partially or fully conducted to the dissipation portion for transfer to the ambient environment. According to the published application, the thermal management system may be e.g. be used for aircraft and automotive wheels.

**[0007]** WO2009130229 was filed 21.04.2009 on behalf of Zircotec Limited and discloses a layer of magnesium zirconate to be applied on a carbon fiber reinforced plastic material in order to obtain good resistance to abrasion and other mechanical damage. The publication also mentions that such a layer is also resistant to corrosion and chemical attack and has good thermal resistance forming a thermal barrier to protect the carbon fiber reinforced plastic material.

**[0008]** Further examples of single-layered heatshields known from the prior art are US5277479, US4900097, DE10006400 or JP2010030374.

## SUMMARY OF THE INVENTION

**[0009]** In order to obtain wheels with a low total mass and a low moment of inertia, fiber reinforced plastics comprising e.g. carbon fibers or glass fibers, may be used for rims and wheel centers. Within the context of the present invention "wheel center" should be understood as to include any type of wheel center, such as spoke structures - respectively wheel spiders - or wheel disks. According to another approach, only the rim may be made from a fiber reinforced plastic, while the wheel center is made from a metal - or vice versa. Such types of wheels may also be referred to as "hybrid wheels".

**[0010]** Unfortunately carbon fiber reinforced plastics - which from a structural mechanical point of view offer great potential for obtaining lightweight wheels and therefore are widely used - have only a very limited resistance to heat and at the same time a relatively high thermal conductivity. In specific, many matrices used in combination with carbon fiber reinforced plastics are characterized by a fairly limited resistance to heat. This makes wheels comprising fiber reinforced plastics prone to thermal damage as induced by brake systems of vehicles. Therefore efficient protection from the thermal energy emitted by brake systems is needed, in particular for wheels comprising carbon fiber reinforced plastics.

**[0011]** Although from the prior art several systems to reduce heat transfer from a brake system to a wheel are known, all these systems require additional components which have to be arranged between the brake system (respectively suspension) and the wheel. For many vehicles this is not feasible as the space between wheel and suspension is very limited and thus the systems known from the prior art cannot be applied.

**[0012]** One object of the present invention therefore is to provide a wheel with a heat shield structure which offers efficient thermal shielding for wheels made at least

partially from fiber reinforced plastics and which does not require significant additional space in the region between wheel, brake system and suspension. As a consequence, wheels equipped with heat shield structures according to the invention are suitable for a large range of vehicles without prior modification of the vehicles' suspensions and/or brake systems.

**[0013]** Therefore for wheels comprising a base structure that is at least partially made from a fiber reinforced plastic, a special heat shield structure is arranged on a wheel's base structure and is at least partially covering the base structure at least in the critical areas. Thus the flux of thermal energy into the wheel can be reduced and the deposition of thermal energy can be controlled and distributed, such that hot spots, which would lead to thermal damage, can be prevented. Thus the heat shield structure becomes an integral part of the wheel, allowing a controlled dissipation of thermal energy using the structure of the wheel.

**[0014]** If appropriate, the heat shield structure may comprise at least one heat reflecting layer. Such a layer reflects radiant heat more than it absorbs it. Thus such a layer decreases the flux of thermal energy from the brake system to the wheel, if compared to a wheel without a reflecting layer. Such a layer may be made from a metal, such as e.g. gold or aluminum.

**[0015]** The heat shield structure comprises at least one low thermal conductive layer that may serve as a thermal barrier. Such a layer may be made e.g. from a continuum plastic (e.g. aramide, polyamide) and/or a porous plastic and/or a fiber reinforced plastic and/or a continuum ceramic material and/or a fiber reinforced ceramic material and/or a porous ceramic material.

**[0016]** Depending on the application, good results may be obtained if the at least one low thermal conductive layer is made from a fiber reinforced plastic containing aramide fibers and/or stone fibers (e.g. basalt) and/or glass fibers which may be embedded in a heat-resistant matrix.

**[0017]** The heat shield structure comprises at least one high thermal conductive layer. Such a layer is used in order to enhance the distribution of thermal energy over a larger area and hence avoid energy concentration, respectively supercritical hot spots that would lead to damage of the subjacent base structure.

**[0018]** Good results may be obtained if a high thermal conductive layer is arranged between a heat reflecting layer and a low thermal conductive layer - the heat reflecting layer being on an outer face of a wheel. Such intermediate layers may be used in order to disperse locally applied thermal energy very efficiently over a larger area and hence to avoid local accumulation of heat which may lead to damage of the subjacent structure.

**[0019]** A high thermal conductive layer may e.g. comprise a metal sheet, metal foil, a metal mesh (grid) or a metal fabric. Alternatively or in addition also sheets, foils, meshes/grids and fabrics made from other materials. Good results may be obtained if materials with a relatively

high thermal conductivity are used.

**[0020]** Good results may also be obtained if the high thermal conductive layer also serves as a load bearing structure and hence as a mechanically reinforcing element for the heat shield structure and/or the subjacent base structure.

**[0021]** If appropriate, a heat shield structure may be at least partially embedded in the base structure. Thus the shape (outer geometry) of a wheel will only be insignificantly altered by the presence of a heat shield structure.

**[0022]** A heat shield according to the present invention may be used for wheels that are suitable for motor vehicles (e.g. cars, motorbikes) but is not limited to such vehicles and therefore may also be used for example for aircraft.

**[0023]** A heat shield structure according to the invention will typically be applied at those regions of a wheel which are in the vicinity of the brake disk and/or caliper. However it may also extend to other regions, such as in order to dissipate the deposited thermal energy by distributing it over a larger area. Thus local heat concentration can be omitted and heat transfer out of the wheel by convection and/or thermal radiation can be increased.

**[0024]** Good results may be obtained if a heat shielding structure is arranged in the hub region and/or on the rest of the wheel center and/or on the rim.

**[0025]** It is clear that the present invention may also be used in combination with other systems that prevent supercritical heat transfer between a brake system and a wheel, such as additional heat shields or active cooling systems.

**[0026]** In addition, the present invention is lot limited to be used in combination with disk brake systems, but may also be used in combination with virtually any other type of brake system, such as e.g. drum brake systems.

**[0027]** Furthermore it is also clear that the present invention is not only limited to wheels made from carbon fibers reinforced plastics, but may also be used for wheels made from other materials that suffer from similar problems regarding heat resistance.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0028]** The herein described invention will be more fully understood from the detailed description of the given herein below and the accompanying drawings, which should not be considered as limiting to the invention described in the appended claims.

Fig. 1 shows a wheel with a disk brake and a caliper in a frontal view;

Fig. 2 shows the wheel of Fig. 2 in a perspective view from the back;

Fig. 3

shows the wheel of Fig. 2 in a perspective view from the back, part of the wheel being clipped for illustrative purposes;

Fig. 4 shows a wheel center and a heat shield structure in a perspective view;

Fig. 5 shows a rim and a heat shield structure in a perspective view, the wheel being partially clipped for illustrative purposes;

Fig. 6 shows a configuration not covered by the claims of a heat shield structure arranged on a base structure;

Fig. 7 shows a configuration not covered by the claims of a heat shield structure arranged on a base structure;

Fig. 8 shows a configuration not covered by the claims of a heat shield structure arranged on a base structure;

Fig. 9 shows a configuration not covered by the claims of a heat shield structure arranged on a base structure;

Fig. 10 shows a configuration not covered by the claims of a heat shield structure arranged on a base structure;

Fig. 11 shows an embodiment of the invention with a heat shield structure arranged on a base structure.

## DETAILED DESCRIPTION OF THE INVENTION

[0029] The foregoing summary, as well as the following detailed description of the preferred embodiments, is better understood when read in conjunction with the appended drawings. For the purpose of illustrating the invention, an embodiment that is presently preferred, in which like numerals represent similar parts throughout the several views of the drawings, it being understood, however, that the invention is not limited to the specific methods and instrumentalities disclosed.

[0030] **Figures 1 to 3** show an embodiment of a wheel 1 together with a disk brake system, comprising a brake disk 6 which is aligned with a caliper 7. Other parts of the wheel suspension have been omitted for illustrative purposes. The wheel 1 of the embodiment shown is made from a fiber reinforced plastic. It comprises a wheel center 2 with several spokes 3 that connect a central hub 4 with a peripheral rim 5, which is designed in order to receive a tire (not shown). As indicated in **Figure 3** by dotted circles, the distance between the brake disk 6 and the

spokes 3, the hub 4 and the rim 5 is at some locations relatively small. The same holds true for the distance between the caliper 7 and the spokes 3, respectively the rim 5. This particularly holds true for the protuberances of the caliper 7, where e.g. the pistons for the brake pads (not shown) are arranged. Hence these regions of the wheel 1 are prone to thermal damage due to the heat dissipated by the disk brake system during and after braking.

[0031] Therefore, according to the present invention, these regions of the wheel 1 may be provided by heat shield structures, as shown in **Figures 4 and 5**. **Figure 4** shows a wheel center 2 which is thermally shielded by a heat shield structure 8 that is positioned on the wheel's surface that is in critical proximity to the disk brake system (not shown). In the embodiment shown, the region adjacent to the hub 4 as well as parts of the spokes 3, may be protected by such a heat shield that is presently preferred, in which like numerals represent similar parts throughout the several views of the drawings, it being understood, however, that the invention is not limited to the specific methods and instrumentalities disclosed.

[0032] **Figures 1 to 3** show an embodiment of a wheel 1 together with a disk brake system, comprising a brake disk 6 which is aligned with a caliper 7. Other parts of the wheel suspension have been omitted for illustrative purposes. The wheel 1 of the embodiment shown is made from a fiber reinforced plastic. It comprises a wheel center 2 with several spokes 3 that connect a central hub 4 with a peripheral rim 5, which is designed in order to receive a tire (not shown). As indicated in **Figure 3** by dotted circles, the distance between the brake disk 6 and the spokes 3, the hub 4 and the rim 5 is at some locations relatively small. The same holds true for the distance between the caliper 7 and the spokes 3, respectively the rim 5. This particularly holds true for the protuberances of the caliper 7, where e.g. the pistons for the brake pads (not shown) are arranged. Hence these regions of the wheel 1 are prone to thermal damage due to the heat dissipated by the disk brake system during and after braking.

[0033] Therefore, according to the present invention, these regions of the wheel 1 may be provided by heat shield structures, as shown in **Figures 4 and 5**. **Figure 4** shows a wheel center 2 which is thermally shielded by a heat shield structure 8 that is positioned on the wheel's surface that is in critical proximity to the disk brake system (not shown). In the embodiment shown, the region adjacent to the hub 4 as well as parts of the spokes 3, may be protected by such a heat shield structure 8. As shown in **Figure 5**, also the inner (centripetal) surface of the rim 5 may be thermally shielded by such heat shield structures 8.

[0034] **Figures 6 to 11** show different variations of heat shield structure 8 which may be used in order to protect a subjacent base structure 11 from thermal damage. The variations according to **Figures 6 to 10** are not covered by the wording of the independent claim. **Figure 6** shows

a first variation of a heat shield structure 8 comprising a heat reflecting layer 9 which is arranged on the surface of a base structure 11 which is made from a fiber reinforced plastic. The heat reflecting layer 9 comprises a layer that is made from a material which reflects radiant heat more than it absorbs it. Suitable materials may be metals, as e.g. aluminum or gold. of heat shield structure 8 may be applied as some type of coating for the base structure 11 .

[0035] Figure 7 shows another variation of a heat shield structure 8, comprising a low thermal conductive layer 10 that is embedded in the base structure 11. The heat shield structure 8 itself has a high heat resistance and protects the base structure 11, which in contrast may be made from a relatively thermosensitive material, such as a carbon fiber reinforced plastic, from thermal damage. Such a type of low thermal conductive layer 10 prevents that heat input on the surface is conducted into the solid. As the heat shield structure 8 is embedded in the base structure 11, the outer shape, respectively geometry, of the wheel 1 is not affected by the presence of the heat shield structure 8.

[0036] Figure 8 shows another variation of a heat shield structure 8 which comprises a heat reflecting layer 9 and a subjacent low thermal conductive layer 10 that is embedded in the base structure 10. Hence using such a variation of a heat shield structure 8 allows combining the concept of minimizing heat deposition on the surface of the structure with the concept of minimizing heat transfer to the subjacent thermosensitive base structure 11.

[0037] As shown in Figures 9 and 10, in a variation of the invention a heat reflecting layer 9 and a low thermal conductive layer 10 may also both be embedded in the base structure 11. As indicated in Figure 9, in some variations of the invention a heat reflecting layer 9 may be embedded in a low thermal conductive layer 10 without being in direct physical contact with the base structure to be protected from thermal damage. Therefore the heat reflecting layer 9 may even be heated up to high temperatures without inducing damage to the base structure 11. In the variation shown in Figure 10 a heat reflecting layer 9 is embedded in the base structure 11 while fully covering the subjacent low thermal conductive layer 10. Such a variation may e.g. be used for application where thermal deposition is very localized and the heat reflecting layer 9 serves also to distribute the deposited thermal energy to a larger area and decrease by thermal radiation and convection. Figure 11 shows a variation according to the invention with a heat shield structure 8 which comprises a high thermal conductive layer 12 which is embedded in a low thermal conductive layer 10 in order to improve distribution of thermal energy over a larger area. The heat shield structure 8 shown in Figure 11 further comprises a heat reflecting layer 9.

## NUMBERS

[0038]

- |    |                                  |
|----|----------------------------------|
| 1  | Wheel                            |
| 2  | Wheel center                     |
| 3  | Spoke                            |
| 4  | Hub                              |
| 5  | 5 Rim                            |
| 6  | 6 Brake disk                     |
| 7  | 7 Caliper                        |
| 8  | 8 Heat shield structure          |
| 9  | 9 Heat reflecting layer          |
| 10 | 10 Low thermal conductive layer  |
| 11 | 11 Base structure                |
| 12 | 12 High thermal conductive layer |

## 15 Claims

1. A wheel (1) usable for a car or a motorbike,
  - a. the wheel (1) comprising a base structure (11) that is at least partially made from a composite material and a heat shield structure (8), wherein
  - b. the heat shield structure (8) is arranged on the base structure (11) and is at least partially covering the base structure (11) and
  - characterized in that**
  - c. the heat shield structure (8) comprises at least one low thermal conductive layer (10) and **in that**
  - d. the heat shield structure (8) additionally comprises at least one high thermal conductive layer (12) and
  - e. optionally at least one heat reflecting layer (9).
2. The wheel (1) according to claim 1, **wherein** the at least one heat reflecting layer (9) is made from a metal or a ceramic material.
3. The wheel (1) according to any of the preceding claims, **wherein** the at least one low thermal conductive layer (10) is made from a continuum plastic and/or a porous plastic and/or a fiber reinforced plastic and/or a continuum ceramic material and/or a fiber reinforced ceramic material and/or a porous ceramic material.
4. The wheel (1) according to any of the preceding claims, **wherein** the at least one high thermal conductive layer (12) is made from a metal sheet and/or a metal foil and/or a metal mesh and/or a metal fabric.
5. The wheel (1) according to any of the preceding claims, **wherein** the heat shield structure (8) is at least partially embedded in the base structure (11).
6. The wheel (1) according to any of claims 1 to 4, **wherein** the heat shield structure (8) is arranged on the surface of the base structure (11).

7. The wheel (1) according to any of the previous claims, **wherein** the heat shield structure (8) is arranged in the hub region (4) and/or on the other parts of the wheel center (2) and/or on the rim (5).


### Patentansprüche

1. Ein Rad (1), das für ein Auto oder ein Motorrad geeignet ist, wobei
- das Rad (1) eine Grundstruktur (11) umfasst, die zumindest teilweise aus einem Verbundmaterial besteht, und eine Hitzeschildstruktur (8) umfasst, wobei
  - die Hitzeschildstruktur (8) an der Grundstruktur (11) angeordnet ist und die Grundstruktur (11) zumindest teilweise bedeckt und **dadurch gekennzeichnet, dass**
  - die Hitzeschildstruktur (8) mindestens eine schwach wärmeleitende Schicht (10) umfasst und **dass**
  - die Hitzeschildstruktur (8) zusätzlich mindestens eine stark wärmeleitende Schicht (12) umfasst und
  - optional mindestens eine wärmereflektierende Schicht (9) umfasst.
2. Rad (1) nach Anspruch 1, **wobei** die mindestens eine wärmereflektierende Schicht (9) aus einem Metall oder einem Keramikmaterial hergestellt ist.
3. Rad (1) nach einem der vorhergehenden Ansprüche, **wobei** die mindestens eine schwach wärmeleitende Schicht (10) aus einem Kontinuums-Kunststoff und/oder einem porösen Kunststoff und/oder einem faserverstärkten Kunststoff und/oder einem Kontinuums-Keramikmaterial und/oder einem faserverstärkten Keramikmaterial und/oder einem porösen Keramikmaterial besteht.
4. Rad (1) nach einem der vorhergehenden Ansprüche, **wobei** die mindestens eine stark wärmeleitende Schicht (12) aus einem Metallblech und/oder einer Metallfolie und/oder einem Metallgitter und/oder einem Metallgewebe besteht.
5. Rad (1) nach einem der vorhergehenden Ansprüche, **wobei** die Hitzeschildstruktur (8) zumindest teilweise in die Grundstruktur (11) eingebettet ist.
6. Rad (1) nach einem der Ansprüche 1 bis 4, **wobei** die Hitzeschildstruktur (8) auf der Oberfläche der Grundstruktur (11) angeordnet ist.
7. Rad (1) nach einem der vorhergehenden Ansprüche, **wobei** die Hitzeschildstruktur (8) im Nabenbereich (4) und/oder an den anderen Teilen der Rad-


mitte (2) und/oder an der Felge (5) angeordnet ist.

### Revendications


1. Une roue (1) utilisable pour une voiture ou une moto,
- la roue (1) comprenant une structure de base (11) qui est au moins partiellement fabriquée à matériau composite et une structure à bouclier thermique (8), dans laquelle
  - la structure à bouclier thermique (8) est disposée sur la structure de base (11) et recouvrant au moins partiellement la structure de base (11) et
- caractérisé en ce que**
- la structure à bouclier thermique (8) comprend au moins une couche conductrice thermal basse (10) et **en ce que**
  - la structure à bouclier thermique (8) comprend en outre au moins une couche conductrice thermal haute (12) et
  - optionnellement au moins une couche réfléchissant la chaleur (9).
2. Roue (1) selon la revendication 1, **dans laquelle** la au moins une couche réfléchissant la chaleur (9) est fabriquée à un métal ou un matériau céramique.
3. Roue (1) selon l'une quelconque des revendications précédentes, **dans laquelle** la au moins une couche conductrice thermal basse (10) est fabriquée à un plastique continuum et/ou un plastique poreux et/ou un plastique renforcé aux fibres et/ou un matériau céramique continuum et/ou un matériau céramique continu et/ou un matériau céramique poreux renforcé aux fibres.
4. Roue (1) selon l'une quelconque des revendications précédentes, **dans laquelle** la au moins une couche conductrice thermal haute (12) est fabriquée à un feuillard métallique et/ou un film métallique et/ou une maille métallique et/ou un tissu métallique.
5. Roue (1) selon l'une quelconque des revendications précédentes, **dans laquelle** la structure à bouclier thermique (8) est au moins partiellement encadrée dans la structure de base (11).
6. Roue (1) selon l'une des revendications 1 à 4, **dans laquelle** la structure à bouclier thermique (8) est disposée sur la surface de la structure de base (11).
7. La roue (1) selon l'une quelconque des revendications précédentes, **dans laquelle** la structure à bouclier thermique (8) est disposée dans la zone de moyeu de roue (4) et/ou sur les autres pièces du centre de la roue (2) et/ou sur la jante (5).

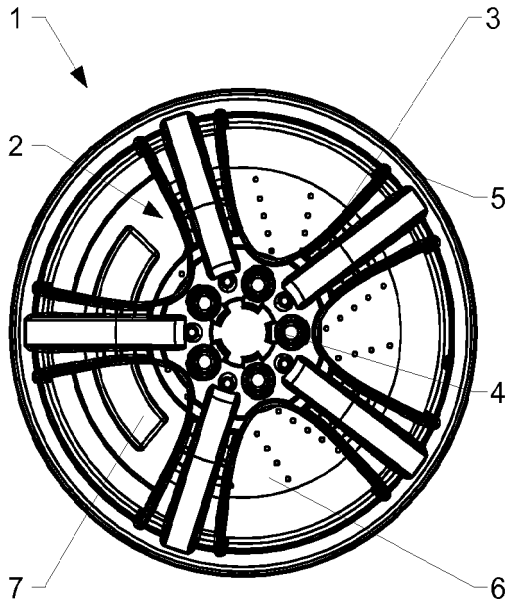


**Fig. 1**

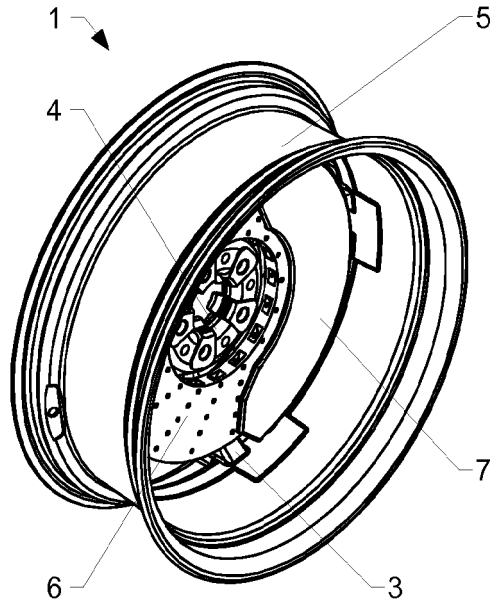


**Fig. 2**

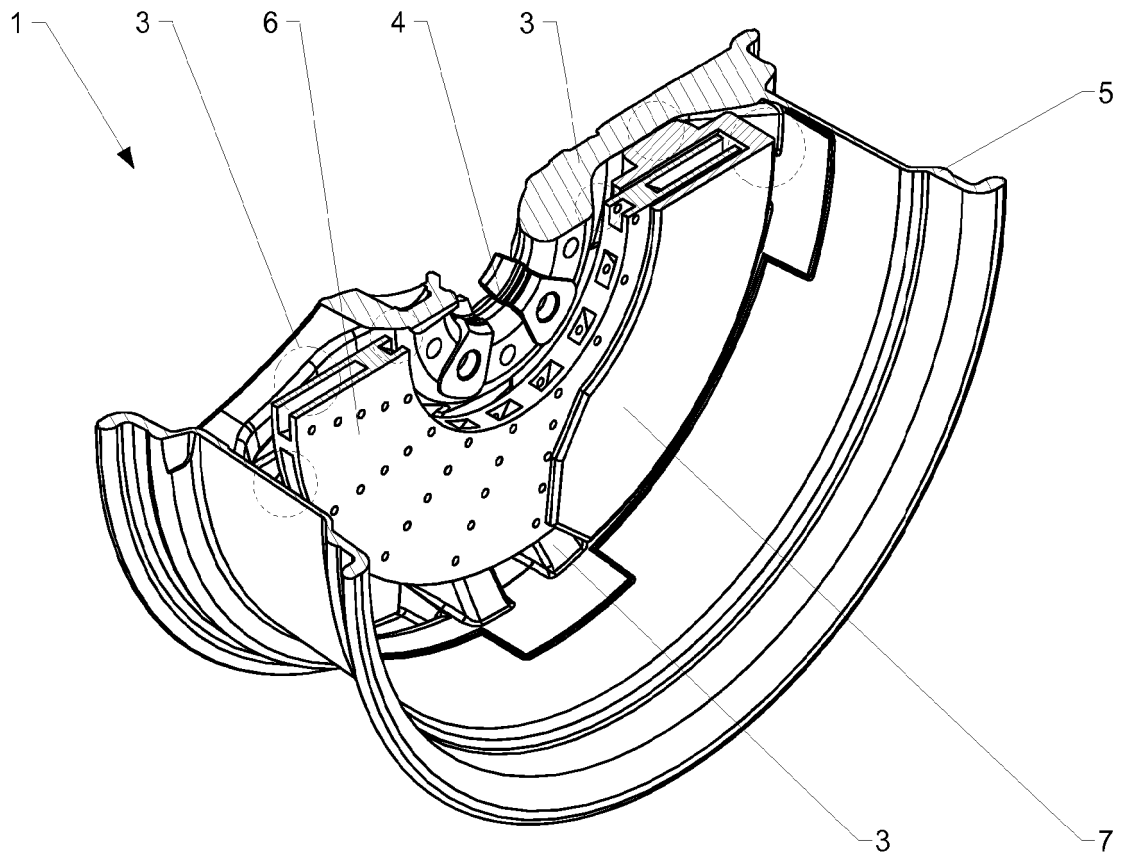


**Fig. 3**

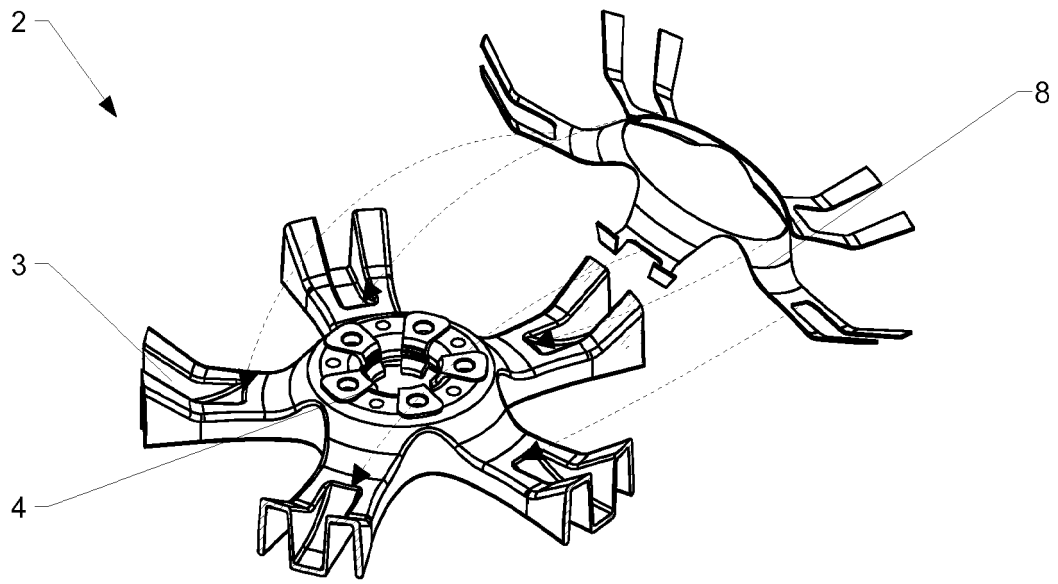


**Fig. 4**

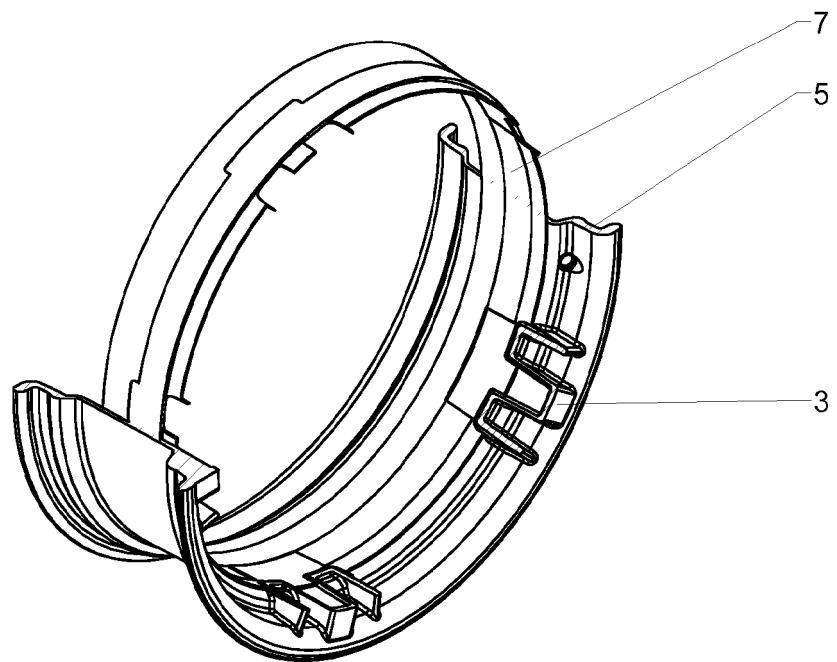


**Fig. 5**

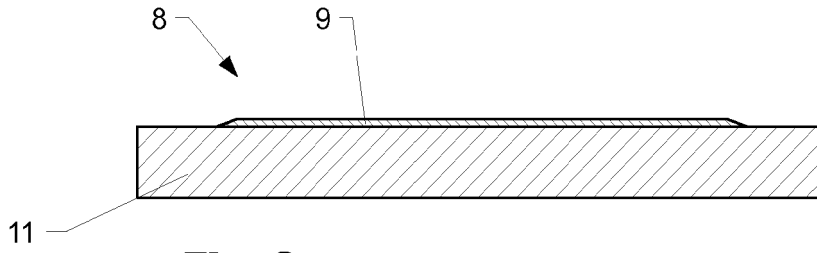


**Fig. 6**

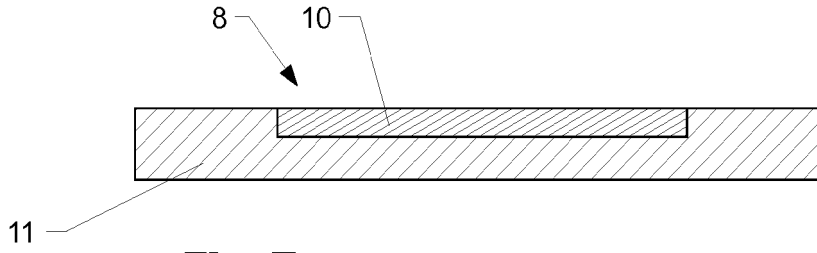


**Fig. 7**

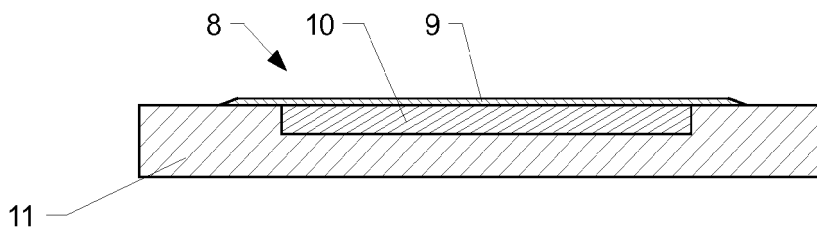


**Fig. 8**

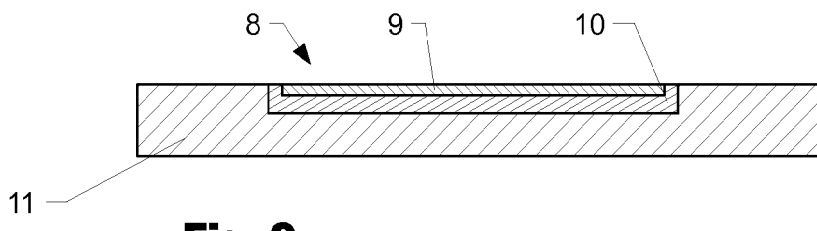

**Fig. 9**

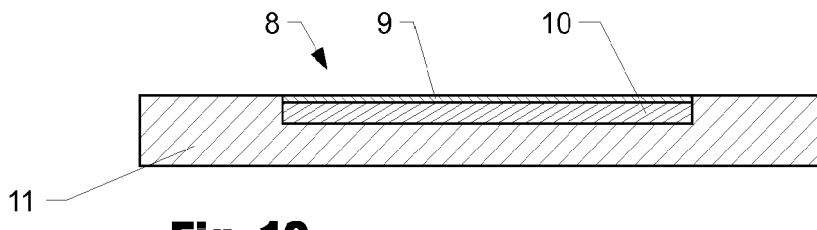

**Fig. 10**

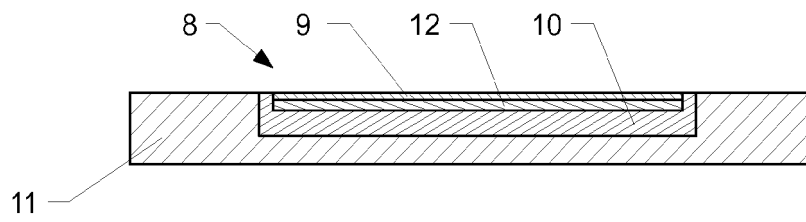

**Fig. 11**

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- DE 3224929 [0004]
- US 5538114 A [0005]
- US 2010194179 A [0006]
- WO 2009130229 A [0007]
- US 5277479 A [0008]
- US 4900097 A [0008]
- DE 10006400 [0008]
- JP 2010030374 B [0008]