



(11) **EP 3 237 275 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Claims EN 12

(51) Int Cl.:
B63B 25/16 ^(2006.01) **B63B 73/70** ^(2020.01)

(86) International application number:
PCT/IB2015/060015

(48) Corrigendum issued on:
20.10.2021 Bulletin 2021/42

(87) International publication number:
WO 2016/108177 (07.07.2016 Gazette 2016/27)

(45) Date of publication and mention of the grant of the patent:
30.06.2021 Bulletin 2021/26

(21) Application number: **15875344.2**

(22) Date of filing: **28.12.2015**

(54) **GAS HYDRATE TRANSPORTATION AND STORAGE SYSTEM AND METHOD**

GASHYDRATTRANSPORT-, SPEICHERSYSTEM UND -VERFAHREN

SYSTÈME DE TRANSPORT ET DE STOCKAGE D'HYDRATES DE GAZ ET PROCÉDÉ ASSOCIÉ

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(56) References cited:
WO-A1-03/006308 **WO-A2-2013/171523**
JP-U- H0 577 318 **KR-A- 20110 072 523**
KR-A- 20110 072 523 **KR-A- 20140 063 261**
US-A- 3 593 354 **US-A- 5 058 357**
US-A1- 2005 194 299 **US-A1- 2005 194 299**
US-A1- 2010 062 094 **US-A1- 2010 205 859**
US-A1- 2014 203 471 **US-B1- 6 170 425**

(30) Priority: **28.12.2014 US 201462097101 P**

(43) Date of publication of application:
01.11.2017 Bulletin 2017/44

• **Gregor Rehder ET AL: "Methane Hydrate Pellet Transport Using the Self-Preservation Effect: A Techno-Economic Analysis", Energies, vol. 5, no. 7, 1 January 2012 (2012-01-01), pages 2499-2523, XP055591680, DOI: 10.3390/en5072499**

(73) Proprietor: **Fishler, Yehoshua**
60850 Shoham (IL)

(72) Inventor: **Fishler, Yehoshua**
60850 Shoham (IL)

(74) Representative: **Zech, Stefan Markus**
Meissner Bolte Patentanwälte
Rechtsanwälte Partnerschaft mbB
Postfach 86 06 24
81633 München (DE)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 237 275 B9

Description**FIELD AND BACKGROUND OF THE INVENTION**

[0001] The present invention, in some embodiments thereof, relates to gaseous fluids in general, and more particularly, but not exclusively, to a marine vessel, a container and method for transporting and storing gas hydrates.

[0002] For decades, storage and transport of natural gas has been problematic and expensive, preventing the exploitation of many small and medium-sized natural gas fields. Generally, the gas is transported over pipelines to a processing plant where the gas is liquefied and stored as liquefied natural gas (LNG) or compressed and stored as compressed natural gas (CNG). Distribution of the LNG and CNG from the processing plant is then generally done by sea vessels and/or land vehicles specially adapted to contain the gas in its respective form.

[0003] In an attempt to overcome the high costs and transportation difficulties associated with natural gas transport and storage and promote the exploitation of small and medium-sized natural gas fields, a relatively recent trend is to promote the use of clathrate technology. This involves converting the natural gas into natural gas hydrates (NGH) which may be processed as hydrate slurry or further processed into other forms, including hydrate pellets, and may provide an economical option for both storing and transporting natural gas and other gases as an alternative to liquefying or compression.

[0004] Clathrates are non-stoichiometric crystalline compounds consisting of at least two molecular species, where one species physically entraps the others within a cage-like structure. The species forming the cage-like structure is commonly referred to as the host, while the caged component is commonly referred to as the guest. When the cage-like structure is made up of water molecules bonded together, the crystalline compounds formed are known as clathrate hydrates or gas hydrates.

[0005] In gas hydrates, the host-lattice is created by water molecules connected together through hydrogen bonding. The guest molecule is held in place inside cavities of the hydrogen-bonded water molecules, and the lattice is stabilized by van der Waals forces between host and guest molecules without chemical bonding between the host-lattice and guest molecule. The host-lattice is thermodynamically unstable without the presence of a guest molecule in the cavity, and without the support of the trapped molecules, the lattice structure of gas hydrates will collapse into conventional ice crystal structures or liquid water. Most low molecular weight gases, including O₂, H₂, N₂, CO₂, CH₄, H₂S, Ar, Kr, and Xe as well as some higher hydrocarbons and freons, will form hydrates at suitable temperatures and pressures.

[0006] Use of NGH as a substitute for LNG and CNG generally involves three stages; production, transportation, and regasification. Some examples of systems and methods for producing gas hydrates and gas hydrate

slurry and for regasification are disclosed in US Patent Application Publication No. US 2011/0217210 to Katoh et al., WIPO International Publication WO 2015/087268 to Sangwai, US Patent No. 8,334,418 to Osegovic et al., and US Patent No. 8,354,565 to Brown et al. Some examples of systems and methods for transporting the gas hydrate in marine vessels are disclosed in "Frozen Hydrate for Transport of Natural Gas", Gudmundsson, J.S. and Borrehaug, A., Proceedings, 2nd International Conference Natural Gas Hydrates, June 2 - 6, 1996, Toulouse, pp. 415 - 422; Japanese Patent Application No. 2004-070249, "Gas-Hydrate Transportation Vessel", to Ichiji et al.; and Japanese Patent Application No. 2002-089098, " Gas Hydrate Pellet Transport Ship", to Ichiji et al.

[0007] JP H05 77318 U shows a marine vessel with a structure made from ice.

SUMMARY OF THE INVENTION

[0008] There is provided, in accordance with an embodiment of the present invention, a marine vessel to transport natural gas hydrates (NGH), the marine vessel including a hull formed from solid NGH, a skeletal structure to support the hull, and a sealing liner to envelop the interior and exterior of the hull for sealing for gas, water and thermal.

[0009] There is further provided, in accordance with an embodiment of the present invention, a container to transport natural gas hydrates (NGH) including a block of solid NGH, a skeletal structure to support the block, and a barrier layer to envelop the exterior of the block for sealing to gas, water and thermal.

[0010] There is provided, in accordance with an embodiment of the present invention, a method of fabricating a marine vessel and/or a container for transporting and storing natural gas hydrates (NGH), the method including preparing a mold, placing a skin layer in the mold, assembling a skeletal structure in the mold, preparing a NGH slurry, and pouring the NGH slurry into the mold, and solidifying the NGH slurry into a frozen solid block.

[0011] Other embodiments of the present invention will become apparent from the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Some embodiments of the invention are herein described, by way of example only, with reference to the accompanying drawings. Details shown are for exemplary purposes and serve to provide a discussion of embodiments of the invention. The description and the drawings may be apparent to those skilled in the art how embodiments of the invention may be practiced.

Figure 1 schematically illustrates an exemplary NGH marine vessel including a solid NGH hull, according to an embodiment of the present invention;

Figure 2 schematically illustrates an exemplary NGH marine vessel including a solid NGH container hull, according to an embodiment of the present invention;

Figure 3 schematically illustrates a cross-section of an exemplary solid NGH hull, according to an embodiment of the present invention;

Figure 4 schematically illustrates a cross-section of an exemplary solid NGH hull, according to some embodiments of the present invention;

Figure 5A schematically illustrates a cross-section of an exemplary NGH hull assembled from solid NGH containers and including an enveloping exterior skin layer, according to an embodiment of the present invention;

Figure 5B schematically illustrates a perspective view of a typical rectangular-shaped solid NGH container, according to embodiments of the present invention;

Figure 5C schematically illustrates a cross-sectional view of the rectangular-shaped solid NGH container, according to embodiments of the present invention;

Figure 5D schematically illustrates a cross-sectional view of a solid NGH container shaped to form a side of the NGH container hull, according to an embodiment of the present invention;

Figure 5E schematically illustrates a cross-sectional view of a solid NGH container shaped to form the bow of the solid NGH container hull, according to an embodiment of the present invention;

Figure 6 is a flow chart of an exemplary method of producing a solid NGH hull and a NGH marine vessel operative to transport and store solid NGH, according to an embodiment of the present invention; and

Figure 7 is a flow chart of an exemplary method of producing a solid NGH container for assembling a NGH container hull and a NGH marine vessel operative to transport and store solid NGH, according to an embodiment of the present invention.

DETAILED DESCRIPTION

[0013] Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not necessarily limited in its application to the details of construction and the arrangement of the components and/or methods set forth in the following description and/or illustrated in the drawings. The invention is capable of other embodiments or of being practiced or

carried out in various ways.

[0014] The main cost associated with the transportation of NGH is the purchase and the operation of marine vessels, whether self-propelled or towable, used for transporting the NGH. A disadvantage in transporting NGH compared to LNG is that NGH contains approximately between 5-7 tons of water for each ton of NG, while LNG contains only natural gas. The additional weight associated with NGH requires both larger marine vessels and more fuel costs for transport compared to LNG. Consequently, NGH vessels may be required to transport between 6 to 8 times the weight that LNG vessels must transport for the same revenue shipment. Thus, the increased weight of transporting NGH may require use of larger vessels and/or more vessels for transporting the same amount of gas as transported by LNG vessels, which may make negatively affect the economic feasibility when compared to LNG.

[0015] Applicant has realized that present system and methods for transporting NGH suffer from several drawbacks, among them the previously mentioned disadvantage of requiring either larger transportation vessels and/or more vessels compared with that required for LNG transport. Other drawbacks include the economic effect of having to return these larger and/or numerous transportation vessels empty to the NGH production facility following delivery of the NGH.

[0016] Applicant has realized that the drawbacks associated with transporting NGH may be overcome by using a marine vessel partially manufactured from the NGH which is to be transported, and which may be assembled at the NGH production facility. This NGH vessel may be designed so that, when the NGH is regasified at the regasification facility, the non-NGH parts of the vessel which remain may be dismantled and sent from the regasification facility to the production facility for reuse in a new vessel. As may be clearly appreciated, this new NGH vessel may be substantially advantageous over existing NGH vessels as the size of the vessel may be smaller compared to those presently known in the art since the transported NGH forms part of the vessel. Furthermore, the dismantled non-NGH parts may be shipped back to the production facility, inclusively using commercial transport means, for example inside marine transport containers, providing for a substantial savings compared to returning an empty NGH vessel.

[0017] In some embodiments of the present invention, the hull of the marine vessel may be constructed from solid NGH reinforced by non-NGH structural elements and covered by a skin layer which is hermetic to liquids and gases and may also be thermally insulating. The non-NGH structural elements may serve to provide structural rigidity to the hull. They may additionally serve to transport a cooling fluid and/or a pressurized gas used to maintain the NGH in a solid state, which may also include a frozen solid state. The skin layer may serve to assist in preserving the NGH in its solid state and to prevent gas evaporation and flaring during construction of

the vessel and during transport. This skin layer may also serve as an envelope to contain the natural gas produced during the regasification process. Optionally, the solid NGH hull and/or the solid NGH containers, including the non-NGH components and the skin layer, may be buoyant in water, including seawater.

[0018] In some embodiments of the present invention, the solid NGH hull may be integrally formed at the production facility as a single component inside a hull-shaped forming mold or may be assembled from a number of solid hull sections which may be joined together to form the solid NGH hull. In some embodiments, the solid NGH container hull may be assembled from a plurality of solid NGH containers which are joined together. These solid NGH containers may each be individually formed at the production facility inside container forming molds which may include the shape of the section of the hull which each container will occupy.

[0019] In some embodiments of the present invention, the forming mold may be incorporated and assembled with the non-NGH structural elements which may form part of the solid NGH hull or of the solid NGH containers. The form may also be fitted with the skin layer which will be used to cover the solid hull's outer surface area or the outer surface area of the solid NGH containers. Optionally, the skin layer may also be used to cover an inner surface area of the solid NGH hull. For convenience hereinafter, the forming mold assembled with the structural elements and the skin layer may be referred to as "assembled mold".

[0020] In some embodiments of the present invention, the solid NGH hull or the solid NGH containers may be formed underwater in the production facility, for example, by sinking the assembled mold in seawater and filling it with the seawater. Sinking the mold in the seawater may be advantageous as the underwater hydrostatic pressure may be utilized for producing or preserving the solid NGH. Natural gas may then be introduced into the assembled mold to form NGH slurry, which may then be subjected to cooling and/or pressure underwater to transform it into the solid NGH. Optionally, an additive such as sand, clay, wood (e.g. wood fibers, sawdust, etc.), hemp, or other materials suitable for increasing among other qualities the resistance to thermal conduction and to thermal inertia of the solid NGH, and to increase its structural characteristics including the structural stable rigidity, may be introduced into the slurry. The additives may be introduced in the form of pellets, although not limited to use of pellets, and may also include use of phase changing materials (PCM). Once formed, the solid NGH hull or the solid NGH containers may be stored underwater by lashing (anchoring) it to the sea bed or by adding weights to the sunken body to create a negative buoyancy state until the marine vessel is ready to be assembled or, following assembly, until the solid NGH is ready to be regasified. When ready for use, the solid NGH hull or the solid NGH containers may be detached from the form and allowed to float to the surface of the water. Alterna-

tively, the assembled mold may be above ground and the solid NGH hull and/or solid NGH containers formed above ground.

[0021] In some embodiments, the solid NGH hull and the solid NGH container hull are suitable for use on any type of marine vessel intended for transporting the NGH. These may include self-propelled marine vessels as well as towable marine vessels, including ships and barges. The hulls may be fitted with appropriate systems, equipment, machinery, and accessories for allowing proper vessel operation, including engines and navigation equipment and systems if the vessel is self-propelled, and including cooling equipment and/or pressurizing equipment to maintain the NGH in its solid state. Preferably, these systems, equipment, machinery and accessories will be dismantlable to components sized to be transportable on commercial-size trucks and other overland transportation vessels, including tractor-trailers and transport vehicles which may conform to Incoterm rules and/or guidelines.

[0022] Reference is now made to Figure 1 which schematically illustrates an exemplary NGH marine vessel 100 including a solid NGH hull 102, according to an embodiment of the present invention. Solid NGH hull 102 may be integrally formed as a single component inside a hull-shaped forming mold (not shown), or alternatively may be fabricated in separate sections which may be joined together.

[0023] NGH marine vessel 100 may include a self-propelled vessel such as a ship as shown in the figure, but may otherwise include any other type of self-propelled marine vessel or towable vessel such as, for example, a barge or a towable cargo vessel. NGH hull 102 may extend from bow 106 to stern 108, all of which may be formed from solid NGH 104. Alternatively, NGH hull 102 may include solid NGH 104 along a portion of its length, with bow 106 and/or stern 108 being fabricated from a non-NGH material, for example, from steel as is common practice in most marine vessels.

[0024] NGH hull 102 may include skin layer 110 which may assist in preserving NGH 104 in its solid state and which may also serve to prevent gas evaporation and flaring of the solid NGH 104. Skin layer 110 may also serve to prevent water from coming into contact with solid NGH 104 and may provide thermal insulation. Skin layer 110 may additionally serve as a container to prevent gas from escaping during regasification of solid NGH 104. Skin layer 110 may include materials known in the art and may include a single liner material suitable to provide the required liquid and gas hermetic sealing, and thermal insulation, or may combine a number of liners and/or materials the combination of which may provide the required characteristics. Skin layer 110 may include a relative smooth finish or be treated with a smoothing primer to reduce friction between the vessel and the sea during transport.

[0025] NGH vessel 100 may be equipped with equipment, machinery, and accessories and components

which may be mounted onto the NGH hull 102 following fabrication of the hull as part of a vessel assembly process in the NGH production facility, and which may be dismantled from the vessel prior to, or following, regasification of solid NGH 104. These may include structural elements used to provide structural integrity to NGH hull 102, systems which may be used to propel and navigate the vessel, and systems which may be used to maintain NGH 104 in its solid state, dismantlable structures (e.g. living quarters) among others.

[0026] Reference is now made to Figure 2 which schematically illustrates an exemplary NGH marine vessel 200 including a solid NGH container hull 202, according to an embodiment of the present invention. Solid NGH container hull 202 may be assembled from NGH containers 205 with solid NGH 204, each container formed inside a container-forming mold (not shown).

[0027] Similarly to NGH marine vessel 100, NGH marine vessel 200 may include any type of self-propelled marine vessel or towable vessel. Solid NGH container hull 502 may extend from bow 206 to stern 208 and may include solid NGH containers 205 connected to one another with each container optionally shaped to match the contour of the hull according to its position in the hull. Each NGH container 205 may include structural elements (not shown) to provide structural rigidity to the container itself and overall to NGH container hull 202. Similarly to NGH marine vessel 100, in an alternative embodiment, NGH containers 205 may be used along a portion of the length of the hull, with bow 206 and/or stern 208 being fabricated from non-NGH materials such as steel. A more complete description of NGH container 205 is provided further on below with reference to Figures 5A - 5E. Similarly to NGH vessel 100, NGH hull 202 may include an skin layer 210 functionally similar skin layer 110.

[0028] Similarly to NGH vessel 100, NGH vessel 200 may be equipped with equipment, machinery, and accessories and components which may be mounted onto NGH container hull 202 following assembly of the hull as part of a vessel assembly process in the NGH production facility, and which may be dismantled from the vessel prior to, or following, regasification of solid NGH 204. These may include the structural elements used to provide structural integrity to solid NGH container 205, systems which may be used to propel and navigate the vessel, and systems which may be used to maintain solid NGH 204 in its solid state, dismantlable structures (e.g. living quarters) among others.

[0029] Reference is now made to Figure 3 which schematically illustrates a cross-section of an exemplary solid NGH hull 302 in a marine vessel 100, according to an embodiment of the present invention. Optionally, NGH hull 302 may be formed in separate sections which are joined together. NGH hull 302 may include solid NGH 304, a skeletal structure 313, NGH additives 316, and skin layer 310.

[0030] Solid NGH 304 may occupy the whole interior

volume of NGH hull 302, or alternatively a major portion of the volume, and may be produced by solidifying a NGH slurry using methods known in the art for forming the slurry and for further converting the slurry into a solid.

5 Optionally, the solid may be in a frozen state. Included in solid NGH 304 may be additives 316 which may be added to the slurry prior and which may serve to increase among other qualities the resistance to thermal conduction and to thermal inertia of the solid NGH and also to increase its structural characteristics including its structural stable rigidity. Additives 316 may include any combination of sand, clay, wood, hemp, or other materials including PCMs, and may be provided as a grain or any other suitable shape, including encapsulated in pellets.

10

15 NGH hull 302 may be enveloped by skin layer 310, which may be similar to skin layer 110 previously described with reference to Figure 1. Skeletal structure 313 may provide structural rigidity to NGH hull 302 and may include any combination of non-NGH vertical structural elements 312, non-NGH diagonal structural elements 312A, and non-NGH horizontal structural elements 314A and 314B. Skeletal structure 313 may include a truss structure which may be wholly or partially embedded in solid NGH 304 with structural elements 312, 312A, 314A and/or 314B acting as structural members supporting the truss. Structural elements 312, 312A, 314A and/or 314B may include pipes (steel or other suitable metal or material) of a suitable diameter and wall thickness to provide the required structural rigidity, some of which, or all of which, may include a hollow core through which a cooling fluid may flow along the length of the pipes to assist in keeping the NGH in a solid state if cooling is required. Structural elements 312, 312A, 314A and 314B may be interconnected so as to allow the cooling fluid to flow through some, alternatively through all, of the pipes if cooling is required. Alternatively, structural elements 312, 312A, 314A and/or 314B may include any other type of suitable structural element which may serve to provide the required structural rigidity and which may be fitted with means to transport the cooling fluid if required. Skeletal structure 313 may be dismantlable so that structural elements 312, 312A, 314A and 314B may be individually removed from NGH hull 302 following regasification. The individual structural elements may be optionally shipped using overland and/or marine commercial transport means to a destination other than the regasification facility, and may include reshipping back to the production facility for use in the building of a new marine vessel.

[0031] Reference is now made to Figure 4 which schematically illustrates a cross-section of an exemplary solid NGH hull 402 in a marine vessel 100, according to some embodiments of the present invention. Optionally, solid NGH hull 402 may be formed in separate sections which are joined together. NGH hull 402 may include solid NGH 404, a skeletal structure 413, NGH additives 416, skin layer 410, and an inner skin layer 410A.

[0032] Solid NGH hull 402 may resemble NGH hull 302 modified so that solid NGH 404 does not occupy a major

portion (or the whole) of the interior volume of the hull as in NGH hull 302 rather a strip or band proximal to the sides of the hull, as shown in Figure 4. Consequently, skeletal structure 413, which may include any combination of non-NGH vertical structural element 412, non-NGH diagonal structural element 412A and non-NGH horizontal structural elements 414A and 414B and which may be functionally similar to skeletal structure 313, may have a limited number of structural elements embedded in solid NGH 404. Additionally or alternatively, non-structural cooling pipes may be included within solid NGH 404 to assist cooling the solid NGH as required. Similarly to skeletal structure 313, skeletal structure 413 may also be dismantable and structural elements 412, 412A, 414A and 414B reusable in a new marine vessel.

[0033] Skin layer 410 may be functionally similar to skin layer 310 in Figure 3. Inner skin layer 410A may envelop solid NGH 404 from within the interior volume of solid NGH hull 402, and may be functionally similar to skin layer 410 with the exception that the hydrophobic and friction-reducing characteristics of the outer insulation skin layer may not necessarily be required in skin layer 410A.

[0034] Reference is now made to Figure 5A which schematically illustrates a cross-section of an exemplary solid NGH container hull 502 in marine vessel 200 including solid NGH containers 505, 507 and 509, and skin layer 510, according to an embodiment of the present invention. Reference is also made to Figures 5B and 5C which schematically illustrate a perspective view and a cross-sectional view of a typical rectangular-shaped solid NGH container 505, and to Figures 5D - 5E which schematically illustrate cross-sections of contoured solid NGH containers 507 and 509 corresponding to a shape of solid NGH container hull 502, according to embodiments of the present invention.

[0035] NGH containers 505, 507 and 509 may include solid NGH 504, a skeletal structure 513, additives 516, and a barrier layer 511 enveloping the NGH containers. NGH containers 505, 507, and 509 may be mounted one on top of the other, and side by side, inside NGH hull 502 to form a rigid structure which may support the hull. This mounting configuration may resemble that of commercial containers mounted on marine vessels. NGH container 505 may be sized to be transported with solid NGH 504 using known commercial overland transport vehicles, containers, and transport platforms, and may include those conforming to Incoterm rules and/or guidelines, among other.

[0036] Solid NGH 504 may be produced as a rectangular solid NGH block using techniques known in the art, as previously described with reference to solid NGH 304. NGH 504 may include additives 516 which may be similar to additives 316. Barrier layer 511 may be functionally similar to skin layer 510.

[0037] Skeletal structure 513, similarly to skeletal structure 313, may include a truss structure which may be embedded in the solid NGH and/or may be peripher-

ally located along the edges of the solid NGH block, and may serve to support the block and to provide structural rigidity to NGH container hull 502 when all NGH containers are assembled in place within the hull. In solid NGH container 505, Non-NGH vertical structural elements 512, non-NGH diagonal structural elements 512A, and non-NGH horizontal structural elements 514A and 514B may be functionally similar to structural elements 312, 314A and 314B, respectively, and may include pipes through which cooling fluid may flow through all or some of the structural elements. Figure 5B illustrates an exemplary structural pipe 514B with a hollow core 515 through which the cooling fluid may flow. In solid NGH container 507, a non-structural element 517 is shaped to conform to the contour of a side of NGH container hull 502 in the section of the hull where the container is to be positioned. Similarly in NGH container 509, non-structural elements 519 are shaped to conform to the contour of the bottom of NGH container hull 502.

[0038] Reference is now made to Figure 6 which is a flow chart of an exemplary method of producing a solid NGH hull and a NGH marine vessel operative to transport and store solid NGH, according to an embodiment of the present invention. Optionally, the NGH hull may be formed in separate sections which are joined together. The skilled person may appreciate that the exemplary method shown and described herein below may be practiced with modifications, which may include more or less steps and/or a different sequence of steps. For convenience, the method is described with reference to the embodiment of the present invention shown in Figure 3, although the skilled person may readily appreciate that the method may be similarly practiced with other embodiments of the present invention.

[0039] At 600, a mold contoured to the shape of solid NGH hull 302 is prepared. Optionally, several molds contoured to the shape of different sections of solid NGH hull 302 are prepared, the different sections to be joined together in a later step of the method to form a single hull.

[0040] At 602, skin layer 310 is placed inside the mold following the contour of NGH hull 302. Insulating skin layer 310 may serve as an envelope to contain the NGH when poured into the mold, as described in the following steps.

[0041] At 604, skeletal structure 313 and other required structural elements are assembled inside the mold enveloped by insulating skin layer 310. The assembled mold may be submerged in water, for example, in sea water. Alternatively, the assembled mold may be partially submerged in water, or left on dry land. In the water, the mold may be held in place by anchoring or by use of weights.

[0042] At 606, a NGH slurry is prepared using known techniques. Additives 316 are added to the slurry.

[0043] At 608, the NGH slurry with the additives is poured into the insulating skin layer 310 inside the mold, in the required quantity according to the volume of NGH to be transported.

[0044] At 610, the slurry is solidified to form solid NGH 304 in the shape of NGH hull 302. Optionally, the solid NGH 304 is in the shape of the different sections of NGH hull 302 which are formed and are to be joined together to form a single hull. Known techniques may be used to form the solid NGH 304, and may include use of pressure and/or cooling, including freezing. Pressurization may include the use of pressurizing equipment and/or water depth pressure when submerged in water and may range from, but not be limited to 0 - 100 bars. Cooling may include use of cooling equipment and cooling temperature may range from, but not be limited to 0° - minus 50°C. NGH hull 302 may be left submerged in water, stored inside the mold once formed until needed. Alternatively, the mold may be removed under water and NGH hull 302 may remain stored under water as required. Alternatively, NGH hull may be left on dry land either inside or outside the mold. Pressurization and/or cooling may be maintained while submerged or outside of the water.

[0045] At 612, NGH hull 302 is released for use. Optionally, NGH hull 302 is released in different sections if formed as different sections which are to be joined together to form the single hull. If submerged in water, the buoyancy of the hull will cause it to float to the water surface when released. NGH hull 302 may then be moved to a dry dock for assembling NGH marine vessel 100. If on dry land, NGH hull 302 may be transported to the dry dock for marine vessel assembly. Alternatively, assembly on dry land may not require use of the dry dock.

[0046] At 614, NGH marine vessel 100 is assembled. Optionally, the different hull sections are joined together if separately formed. Marine vessel 100 may be a self-propelled marine vessel or a towable vessel. Dismantable propulsion and navigation systems, dismantable structures, and other removable equipment, accessories, and components, as applicable depending on whether the vessel is self-propelled or towable, may be fitted onto NGH hull 302. Optionally, bow 106 and stern 108 (see Figure 1) may be attached to NGH hull 302.

[0047] At 616, NGH marine vessel 100 travels to its destination which may be a regasification facility. Alternatively, NGH marine vessel 100 may travel to a NGH storage depot. Optionally, the storage depot may be located in the regasification facility.

[0048] At 618, in an optional step, NGH hull 302 is to be stored in a storage depot until regasification is required. Prior to storing NGH hull 302, dismantable systems and structures, and removable equipment, accessories and components, all of which may have been fixed to the hull during assembly of marine vessel 100 in step 614 may be removed. The storage depot may be under water, where the NG hull 302 may be submerged in water (e.g. seawater) and solid NG 304 may be maintained in its solid state by use of pressure and/or cooling as previously described in step 610, as applicable. Optionally, the underwater storage depot may be on the seabed. NG hull 302 may be held in place in the underwater storage depot by means of anchoring or use of weights. Alternatively,

the underwater storage depot may be replaced by a dry land storage depot.

[0049] At 620, NG hull 302 may be regasified in the regasification facility. If following from step 618, the hull may be released from underwater and allowed to float to the water surface and transported to the regasification facility (if the underwater storage depot is not in the regasification facility). If following from step 616, the dismantling process described in step 618 may be performed in the regasification facility. Known techniques for regasification may be used.

[0050] At 622, the gas produced during regasification and contained inside the enveloping outer insulating skin layer 310 is extracted for distribution.

[0051] At 624, once all the gas is removed, all non-NGH components including skeletal structure 313 and other structural components may be disassembled and the structural elements (312, 314A and 314B) individually arranged for shipping. Some, or optionally all, of the non-NGH components may be reshipped to the production facility for fabricating a new NGH hull 302 and a new NGH marine vessel 100. Shipping may optionally be done using commercially-available overland and marine transport means.

[0052] Reference is now made to Figure 7 which is a flow chart of an exemplary method of producing a NGH container for assembling a NGH container hull and a NGH marine vessel operative to transport and store NGH, according to an embodiment of the present invention. The skilled person may appreciate that the exemplary method shown and described herein below may be practiced with modifications, which may include more or less steps and/or a different sequence of steps. For convenience, the method is described with reference to the embodiment of the present invention shown in Figures 5A - 5E, although the skilled person may readily appreciate that the method may be similarly practiced with other embodiments of the present invention.

[0053] At 700, a mold contoured to the shape of solid NGH container 505 is prepared. Optionally molds contoured to the shapes of NGH containers 507 and 509 are also prepared.

[0054] At 702, barrier 511 is placed inside the mold following the contour of solid NGH container 505 (optionally also containers 507 and 509). Barrier 511 may serve as an envelope to contain the NGH slurry when poured into the mold, as described in the following steps.

[0055] At 704, skeletal structure 513 and other required structural elements are assembled inside the mold enveloped by barrier 511. The assembled mold may be submerged in water, for example, in sea water. Alternatively, the assembled mold may be partially submerged in water, or left on dry land.

[0056] At 706, a NGH slurry is prepared using known techniques. Additives 516 are added to the slurry.

[0057] At 708, the NGH slurry with the additives is poured into the barrier 511 inside the mold, in the required quantity according to the volume of NGH to be transport-

ed inside NGH container 505 (optionally also containers 507 and 509).

[0058] At 710, the slurry is solidified to form solid NGH 504. Known techniques may be used to form the solid NGH 504, and may include use of pressure and/or cooling. Pressurization may include the use of pressurizing equipment and/or water depth pressure when submerged in water and may range from, but not be limited to 0 - 100 bars. Cooling may include use of cooling equipment and cooling temperature may range from, but not be limited to 0° - minus 50°C. NGH container 505 (optionally also containers 507 and 509) may be left submerged in water, stored inside the mold once formed until needed. Alternatively, the mold may be removed under water and the NGH containers may remain stored under water as required. Alternatively, the NGH containers may be left on dry land either inside or outside the mold. Whether submerged or outside of the water, cooling is maintained.

[0059] At 712, NGH container 505 (optionally containers 507 and 509) is released for use. If submerged in water, the buoyancy of the container will cause it to float to the water surface when released. The NGH container may then be moved to a dry dock for assembling NGH container hull 502 and NGH marine vessel 200. If on dry land, NGH container 505 (optionally containers 507 and 509) may be transported to the dry dock for marine vessel assembly. Optionally, the assembly may be done without a dry dock.

[0060] At 714, NGH container hull 502 and NGH marine vessel 200 is assembled. Marine vessel 200 may be a self-propelled marine vessel or a towable vessel. Dismantable propulsion and navigation systems, dismantable structures, and other removable equipment, accessories, and components, as applicable depending on whether the vessel is self-propelled or towable, may be fitted onto NGH container hull 502 following assembly. NGH container hull 502 may be assembled by arranging the NGH containers one on top of the other and side by side, and enveloping the stacked configuration in skin layer 510. Optionally, bow 206 and stern 208 (see Figure 2) may be attached to NGH container hull 502. Methods known in the art may be used to mechanically attach NGH container 505 (optionally containers 507 and 509) to one another.

[0061] At 716, NGH marine vessel 200 travels to its destination which may be a regasification facility. Alternatively, NGH marine vessel 200 may travel to a NGH storage depot. Optionally, the storage depot may be located in the regasification facility.

[0062] At 718, in an optional step, NGH container 505 (optionally also containers 507 and 509) is to be stored in a storage depot until regasification is required. Prior to storing the NGH containers, dismantable systems and structures, and removable equipment, accessories and components, all of which may have been fixed to the hull during assembly of NGH hull 502 and marine vessel 200 in step 714 may be removed. NGH container hull 502

may also be dismantled to allow individual access to each container. The storage depot may be under water, where the NG containers may be submerged in water (e.g. sea-water) and solid NG 504 may be maintained in its solid state by use of pressure and/or cooling as previously described in step 710, as applicable. Alternatively, the underwater storage depot may be replaced by a dry land storage depot. Optionally, NGH container hull 502 is not dismantled and all NGH containers are stored together in the hull.

[0063] At 720, NG container 505 (optionally also containers 507 and 509) may be regasified in the regasification facility. If following from step 718, the container (optionally the hull) may be released from underwater and allowed to float to the water surface and transported to the regasification facility (if the underwater storage depot is not in the regasification facility). If following from step 716, the dismantling process described in step 618 may be performed in the regasification facility. Known techniques for regasification may be used.

[0064] At 722, the gas produced during regasification and contained inside the enveloping insulation layer 511 is extracted for distribution.

[0065] At 724, once all the gas is removed, all non-NGH components including skeletal structure 513 and other structural components may be disassembled and the structural elements (512, 514A and 514B) individually arranged for shipping. Some, or optionally all, of the non-NGH components may be reshipped to the production facility for fabricating new NGH containers, a new NGH hull 502 and a new NGH marine vessel 200. Shipping may optionally be done using commercially-available overland and marine transport means.

[0066] The foregoing description and illustrations of the embodiments of the invention has been presented for the purposes of illustration. It is not intended to be exhaustive or to limit the invention to the above description in any form.

[0067] Any term that has been defined above and used in the claims, should to be interpreted according to this definition.

[0068] The reference numbers in the claims are not a part of the claims, but rather used for facilitating the reading thereof. These reference numbers should not be interpreted as limiting the claims in any form.

Claims

1. A marine vessel (100, 200) to transport natural gas hydrates (NGH) comprising:
 - a hull (102, 202),
 - a skeletal structure (313, 413) to support said hull (102, 202), and
 - a sealing liner (110, 210) to envelop the interior and the exterior of said hull for:

- a. sealing to gas and
b. sealing to water and
c. insulating to thermal,
- wherein said hull (102, 202) is formed from solid NGH (104, 204).
2. A marine vessel (100, 200) according to claim 1, wherein said hull (102, 202) comprises solid additives (316) like any one of sand, clay, wood, hemp, and phase changing materials.
3. A marine vessel (100, 200) according to claim 1, wherein said hull comprises sections of solid NGH.
4. A marine vessel (100, 200) according to claim 1, wherein the skeletal structure is configured to circulate a cooling fluid.
5. A marine vessel (100, 200) according to claim 1, wherein said hull (102, 202) is comprised from a plurality of containers (205) comprising said solid NGH.
6. A marine vessel (100) according to claim 1, wherein the vessel is one of a self-propelled vessel or one of a towable vessel.
7. A method of fabricating a marine vessel (100) according to claim 1 and/or fabricating a container (505, 507, according to claim 11 for transporting and for storage of natural gas as hydrates (NGH), the method comprising:
- preparing a mold;
placing a skin layer (310) in said mold (110);
assembling a skeletal structure (313, 413) in said mold;
preparing NGH slurry;
pouring said NGH slurry into said mold;
and solidifying said NGH slurry into a frozen solid block.
8. A method according to claim 7, further comprising one or more of:
- a. solidifying said NGH slurry into a section of a hull of the marine vessel
b. submerging said mold in water.
9. A method according to claims 8, further comprising, storage of said solid NGH comprising one or more of:
- b. storage submerged in water
c. storage out of the water.
10. A method according to claim 8, further comprising dismantling part of said marine structure for supply and shipping, and further gas dissociation from hydrate at place of commodity destination, while maintaining the rest of the solid NGH in said storage for later use.
11. A container (505, 507, 509) to transport natural gas hydrates (NGH), said container (505, 507, 509) being formed from a block of solid NGH and comprising:
- a skeletal structure (513) to support said solid NGH block, and
a barrier layer (511) to envelop the exterior of said solid NGH block for:
- a. sealing to gas and
b. sealing to water and
c. insulating to thermal.
12. A container (505, 507, 509) according to claim 11 wherein said container comprises solid additives like any one of sand, clay, wood, hemp, and phase changing materials.
13. A container (505, 507, 509) according to claim 11, wherein the skeletal structure is configured to circulate cooling fluid.
14. A container (505, 507, 509) according to claim 11, wherein said container is transportable by one or more of:
- a. on a marine vessel
b. on a commercial overland transport vehicle
c. is suitable when accumulated with multiple containers to form a hull of a marine vessel.

Patentansprüche

1. Wasserfahrzeug (100, 200) um Erdgashydrate (NGH) zu transportieren, aufweisend:
- einen Rumpf (102, 202)
eine skelettartige Struktur (313, 413) um besagten Rumpf (102, 202) zu tragen und
ein Dichtungsschicht (110, 210) um das Innere und Äußere des Rumpfes zu umhüllen, zum:
- a. Abdichten gegen Gas und
b. Abdichten gegen Wasser und
c. Isolieren gegen Wärme,
- wobei der Rumpf (102, 202) aus festen NGH (104, 204) gebildet ist
2. Wasserfahrzeug (100, 200) nach Anspruch 1, wobei der Rumpf (102, 202) feste Zusatzstoffe (316) wie Einen aus Sand, Ton, Holz, Hanf und phasenwechselnde Materialien aufweist.

3. Wasserfahrzeug (100, 200) nach Anspruch 1, wobei der Rumpf Abschnitte von festen NGH umfasst.
4. Wasserfahrzeug (100, 200) nach Anspruch 1, wobei die skelettartige Struktur dazu ausgestaltet ist, dass ein Kühlfluid zirkulieren zu lassen.
5. Wasserfahrzeug (100, 200) nach Anspruch 1, wobei der Rumpf (102, 202) eine Vielzahl von Behältern (205) umfasst, die festes NGH enthalten.
6. Wasserfahrzeug (100) nach Anspruch 1, wobei das Wasserfahrzeug entweder ein selbstangetriebenes oder ein schleppbares Wasserfahrzeug ist.
7. Verfahren zum Herstellen eines Wasserfahrzeugs (100) nach Anspruch 1 und/oder zum Herstellung eines Behälters (505, 507) nach Anspruch 11 zum Transportieren und zur Lagerung von natürlicher Gas als Hydrate (NGH), wobei das Verfahren Folgendes umfasst:

Bereitstellen einer Form;
Platzieren einer Außenschicht (310) in der Form (110);
Montieren einer skelettartigen Struktur (313, 413) in der Form;
Bereitstellen einer NGH-Aufschlammung;
Gießen der NGH-Aufschlammung in die Form und Verfestigen der NGH-Aufschlammung zu einem gefrorenen festen Block.

8. Verfahren nach Anspruch 7, ferner umfassend einen oder mehrere von folgenden Schritten:
- a. Verfestigen der NGH-Aufschlammung zu einem Abschnitt eines Rumpfes des Wasserfahrzeugs
b. Eintauchen der Form in Wasser.
9. Verfahren nach Anspruch 8, ferner umfassend die Lagerung des festen NGH, umfassend einen oder mehrere von folgenden Schritten:
- a. Lagerung eingetaucht im Wasser
c. Lagerung außerhalb des Wassers.
10. Verfahren nach Anspruch 8, ferner umfassend das Demontieren eines Teils der marinen Struktur für die Lieferung und den Transport und die weitere Gasdissoziation aus dem Hydrat am Bestimmungsort der Ware, während der verbleibende Rest des festen NGH in dem Lager für eine spätere Verwendung aufbewahrt wird.
11. Behälter (505, 507, 509) zum Transportieren von Erdgashydraten (NGH), wobei der Behälter (505, 507, 509) aus einem Block aus festem NGH gebildet

ist und Folgendes aufweist: eine skelettartige Struktur (513), um den festen NGH-Block zu tragen, und eine Sperrschicht (511) zum Umhüllen der Außenseite des festen NGH-Blocks zum :

- a. Abdichten gegen Gas und
b. Abdichten gegen Wasser und
c. Isolieren gegen Wärme.

12. Behälter (505, 507, 509) nach Anspruch 11, wobei der Behälter feste Zusatzstoffe wie Eisen aus Sand, Ton, Holz, Hanf und phasenverändernde Materialien enthält.
13. Behälter (505, 507, 509) nach Anspruch 11, wobei die skelettartige Struktur dazu ausgestaltet ist, dass Kühlfüssigkeit zirkulieren zu lassen.
14. Behälter (505, 507, 509) nach Anspruch 11, wobei der Behälter durch eines oder mehrere der folgenden Gegenstände transportierbar ist:

- a. auf einem Wasserfahrzeug
b. auf einem kommerziellen Landtransportfahrzeug
c. geeignet, wenn mit mehreren Containern zusammengesetzt, einen Rumpf eines Seeschiffes zu bilden.

Revendications

1. Navire maritime (100, 200) pour transporter des hydrates de gaz naturel (NGH) comprenant : une coque (102, 202), une structure squelettique (313, 413) pour supporter ladite coque (102, 202), et un revêtement d'étanchéité (110, 210) pour envelopper l'intérieur et l'extérieur de ladite coque pour :
- a. l'étanchéité au gaz et
b. l'étanchéité à l'eau et
c. isolant à thermique,
- dans lequel ladite Coque (102, 202) est formée de NGH solides (104, 204).
2. Navire maritime (102, 200) selon la revendication 1, dans lequel ladite coque (102, 202) comprend des additifs solides (316) come l'un des éléments suivants de le sable, l'argile, le bois, le chanvre et les matériaux à changement de phase.
3. Navire maritime (100, 200) selon la revendication 1, dans lequel ladite coque comprend des sections de NGH solide.
4. Navire maritime (100, 200) selon la revendication 1, dans lequel la structure squelettique est configurée

- pour faire circuler un fluide de refroidissement.
5. Navire maritime (100, 200) selon la revendication 1, dans lequel ladite coque (102, 202) est comprenant d'une ledit pluralité de conteneurs (205) comprenant ledit NGH solide. 5
6. Navire maritime (100) selon la revendication 1, dans lequel le navire est un navire autopropulsé ou un navire remorquable. 10
7. Méthode de fabrication d'un vaisseau maritime (100) selon la revendication 1 et/ou de fabrication d'un conteneur (505, 507,) selon la revendication 11 pour transport et pour le stockage de gaz naturel sous forme d'hydrates (NGH), le procédé comprenant :
- préparer un moule ;
 placer une couche extérieure (310) dans ledit moule (110) ;
 assembler une structure squelettique (313, 413) dans ledit moule ;
 préparer une boue de NGH ;
 verser ladite boue de NGH dans ledit moule ;
 et la solidification de ladite boue de NGH en un bloc solide congelé. 20 25
8. Méthode selon la revendication 7, comprenant en outre un ou plusieurs des éléments suivants : 30
- a. solidifier ladite boue de NGH dans une section d'une coque du navire maritime
 b. immerger ledit moule dans l'eau. 35
9. Méthode selon la revendication 8, comprenant en outre le stockage dudit NGH solide. comprenant un ou plusieurs des éléments suivants :
- a. stockage immergé dans l'eau 40
 b. stockage hors de l'eau.
10. Méthode selon la revendication 8, comprenant en outre le démantèlement d'une partie dudit système maritime structure pour l'approvisionnement et le transport et dissociation ultérieure du gaz de l'hydrate sur place de destination des produits de base, tout en maintenant le reste du NGH solide dans ledit stockage pour une utilisation ultérieure 45 50
11. Conteneur (505, 507, 509) pour transporter des hydrates de gaz naturel (NGH), ledit conteneur (505, 507, 509) étant formé à partir d'un bloc de NGH solide et comprenant : une structure squelettique (513) pour supporter ledit bloc NGH solide, et une couche barrière (511) pour envelopper l'extérieur dudit bloc NGH solide pour 55
- a. l'étanchéité au gaz et
 b. l'étanchéité à l'eau et
 c. isolant à thermique.
12. Conteneur (505, 507, 509) selon la revendication 11, dans lequel ledit conteneur comprend des additifs solides comme l'un des éléments suivants de le sable, l'argile, le bois, le chanvre et les matériaux à changement de phase.
13. Conteneur (505, 507, 509) selon la revendication 11, dans lequel la structure squelettique est configuré pour faire circuler un fluide de refroidissement.
14. Conteneur (505, 507, 509) selon la revendication 11, dans lequel ledit conteneur est transportable par un ou plusieurs des moyens suivants :
- a. sur un navire de mer
 b. sur un véhicule commercial de transport terrestre
 c. convient lorsqu'il est accumulé avec plusieurs conteneurs pour former la coque d'un navire.

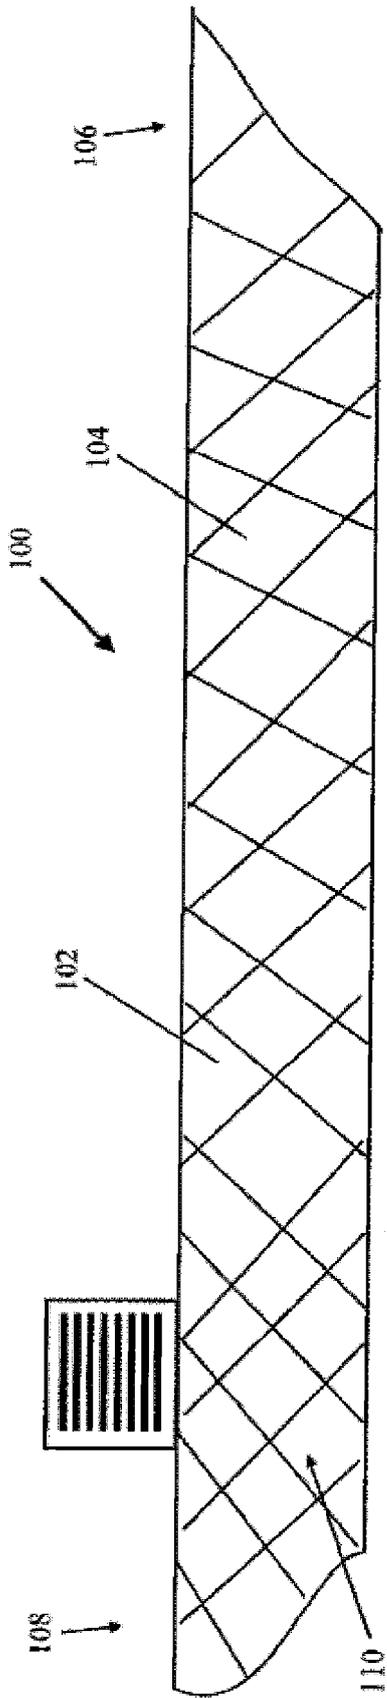


FIGURE 1

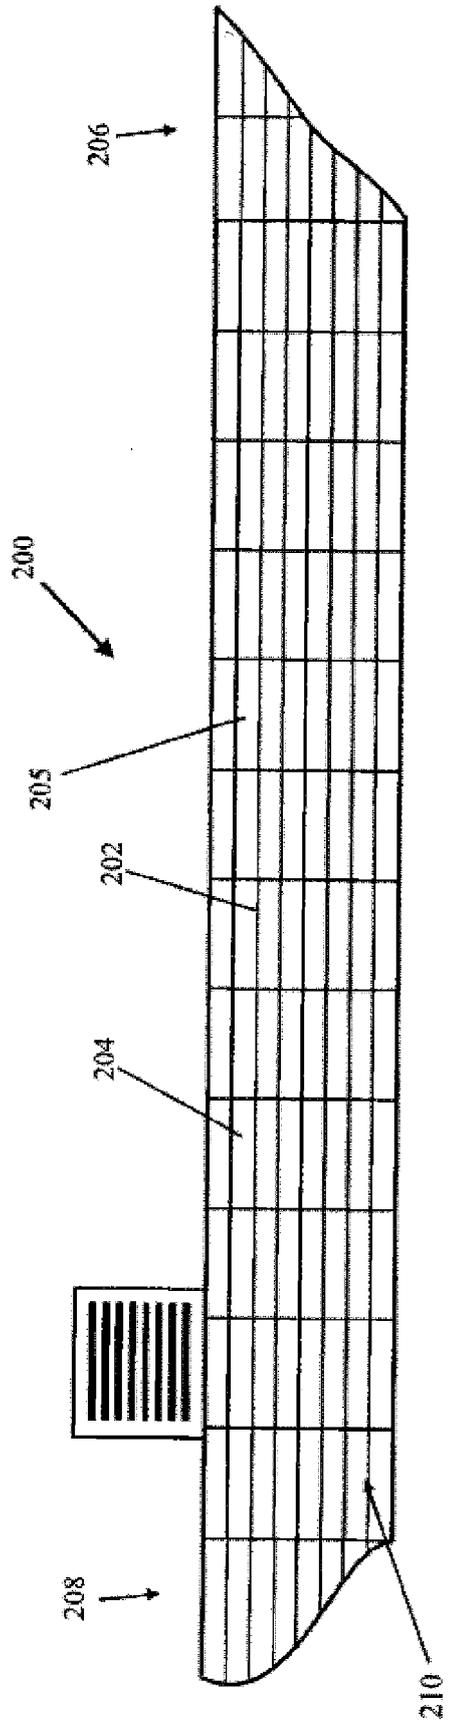


FIGURE 2

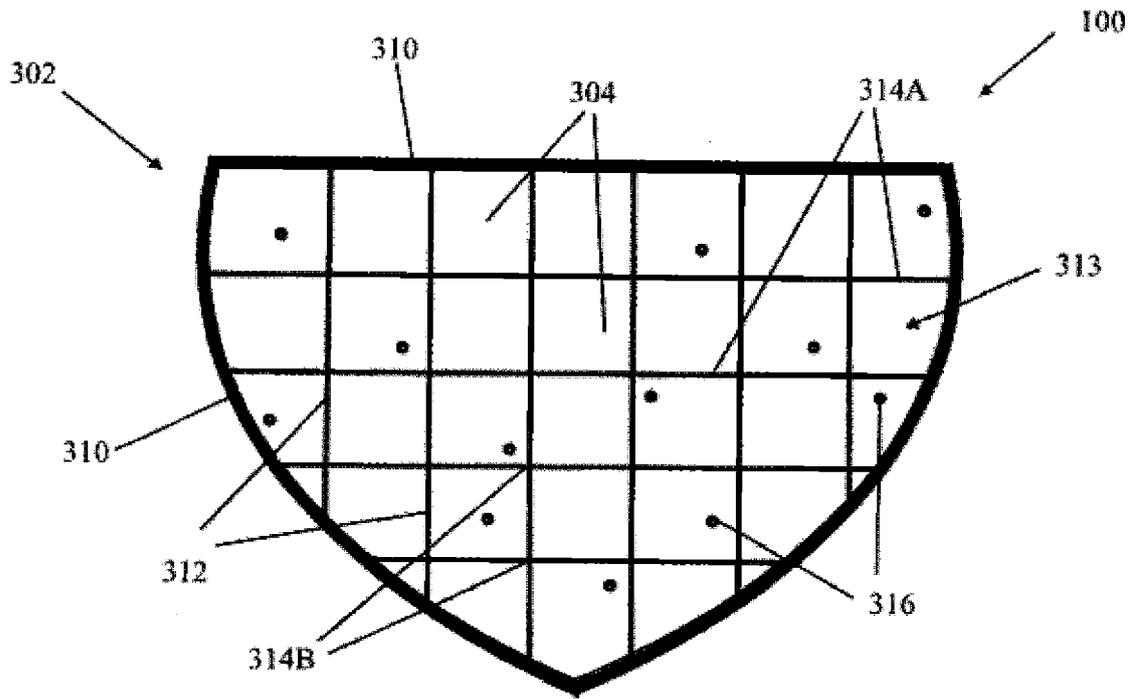


FIGURE 3

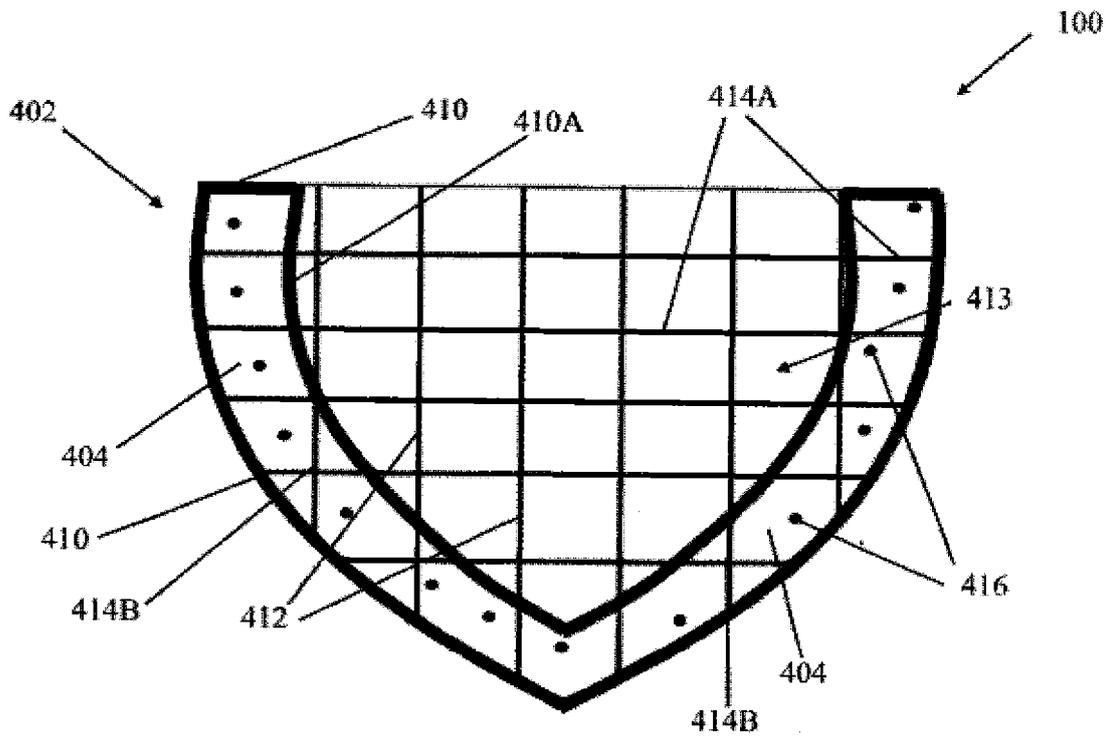


FIGURE 4

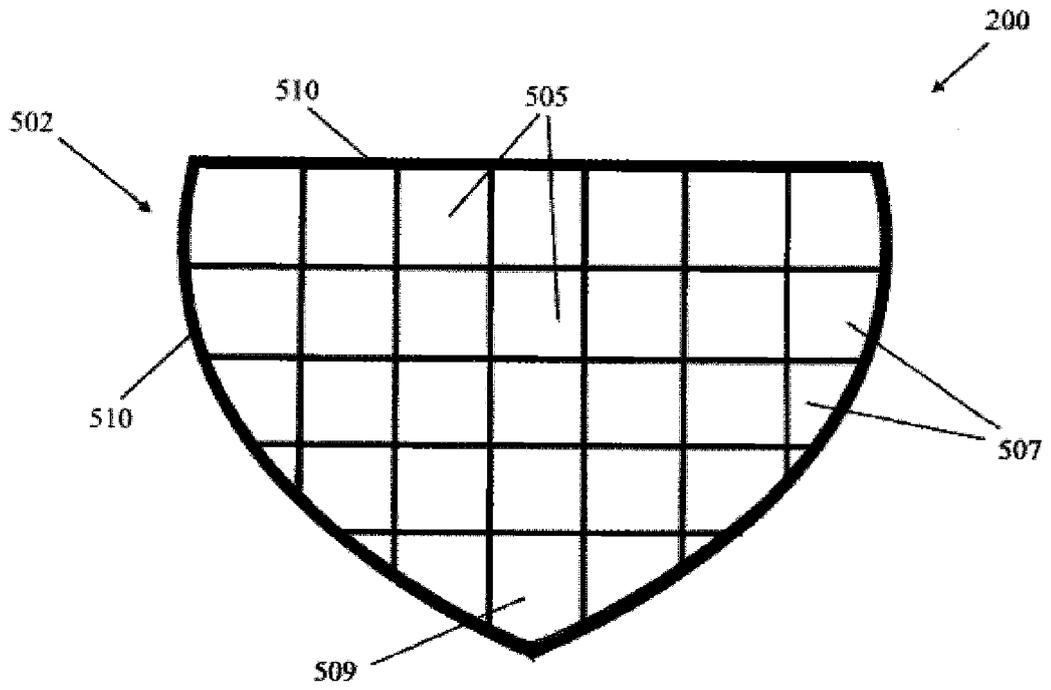


FIGURE 5A

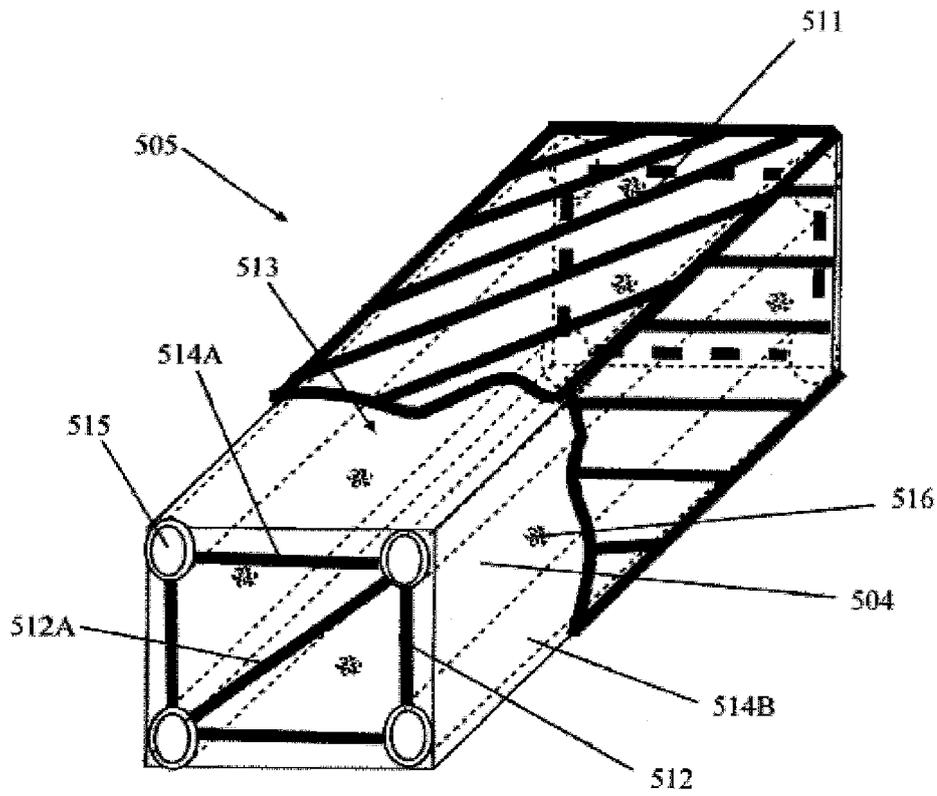


FIGURE 5B

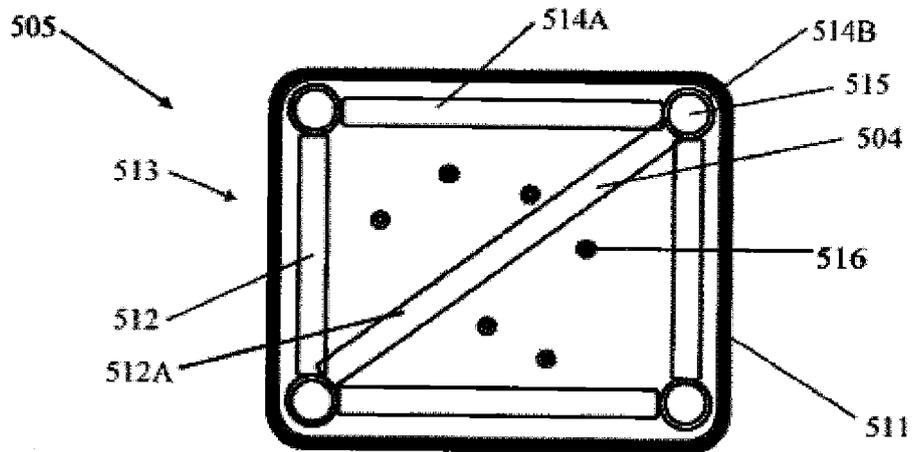


FIGURE 5C

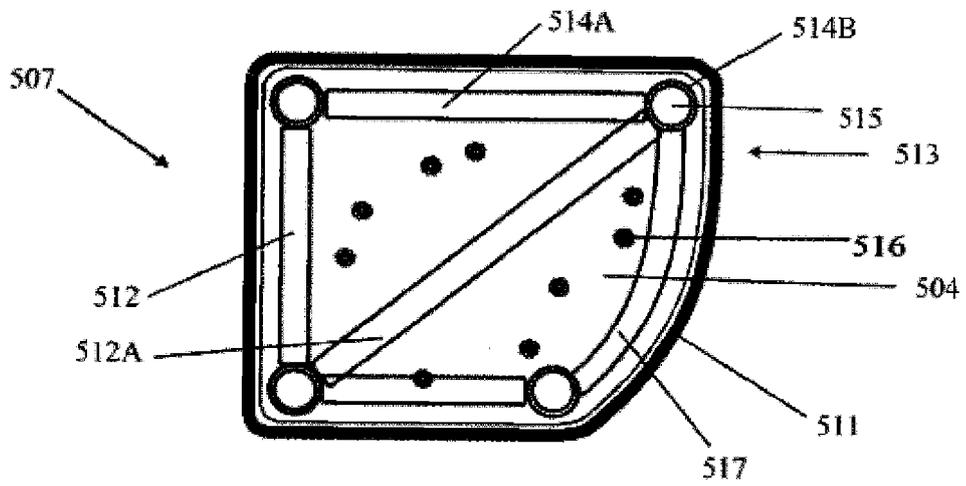


FIGURE 5D

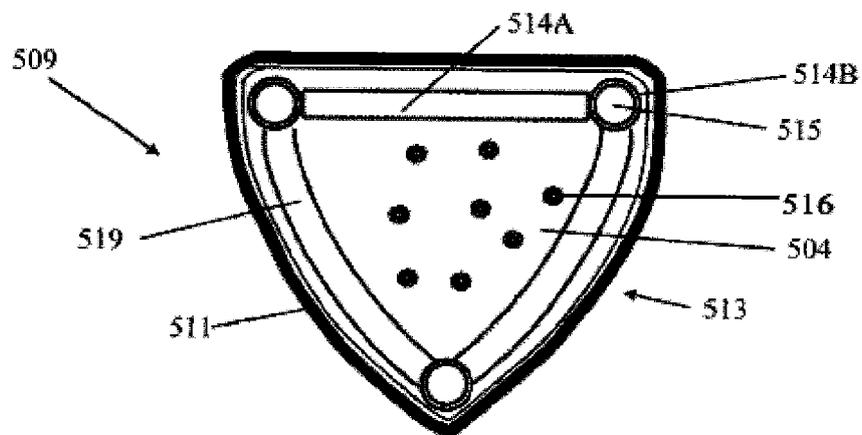


FIGURE 5E

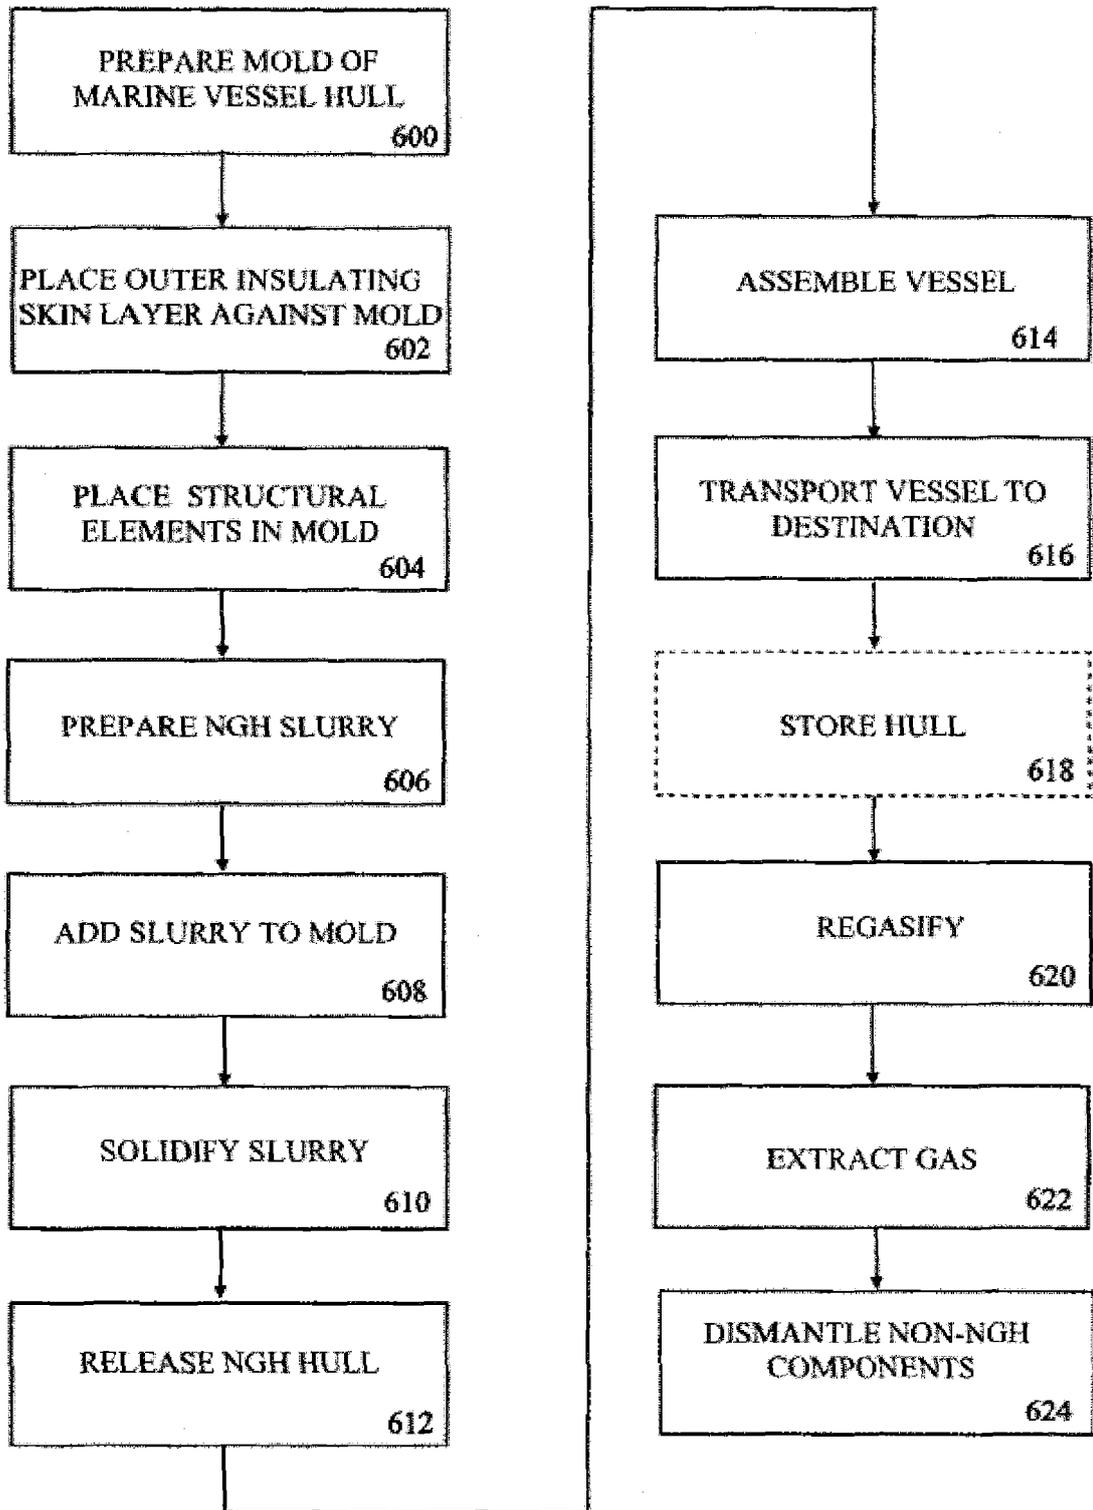


FIGURE 6

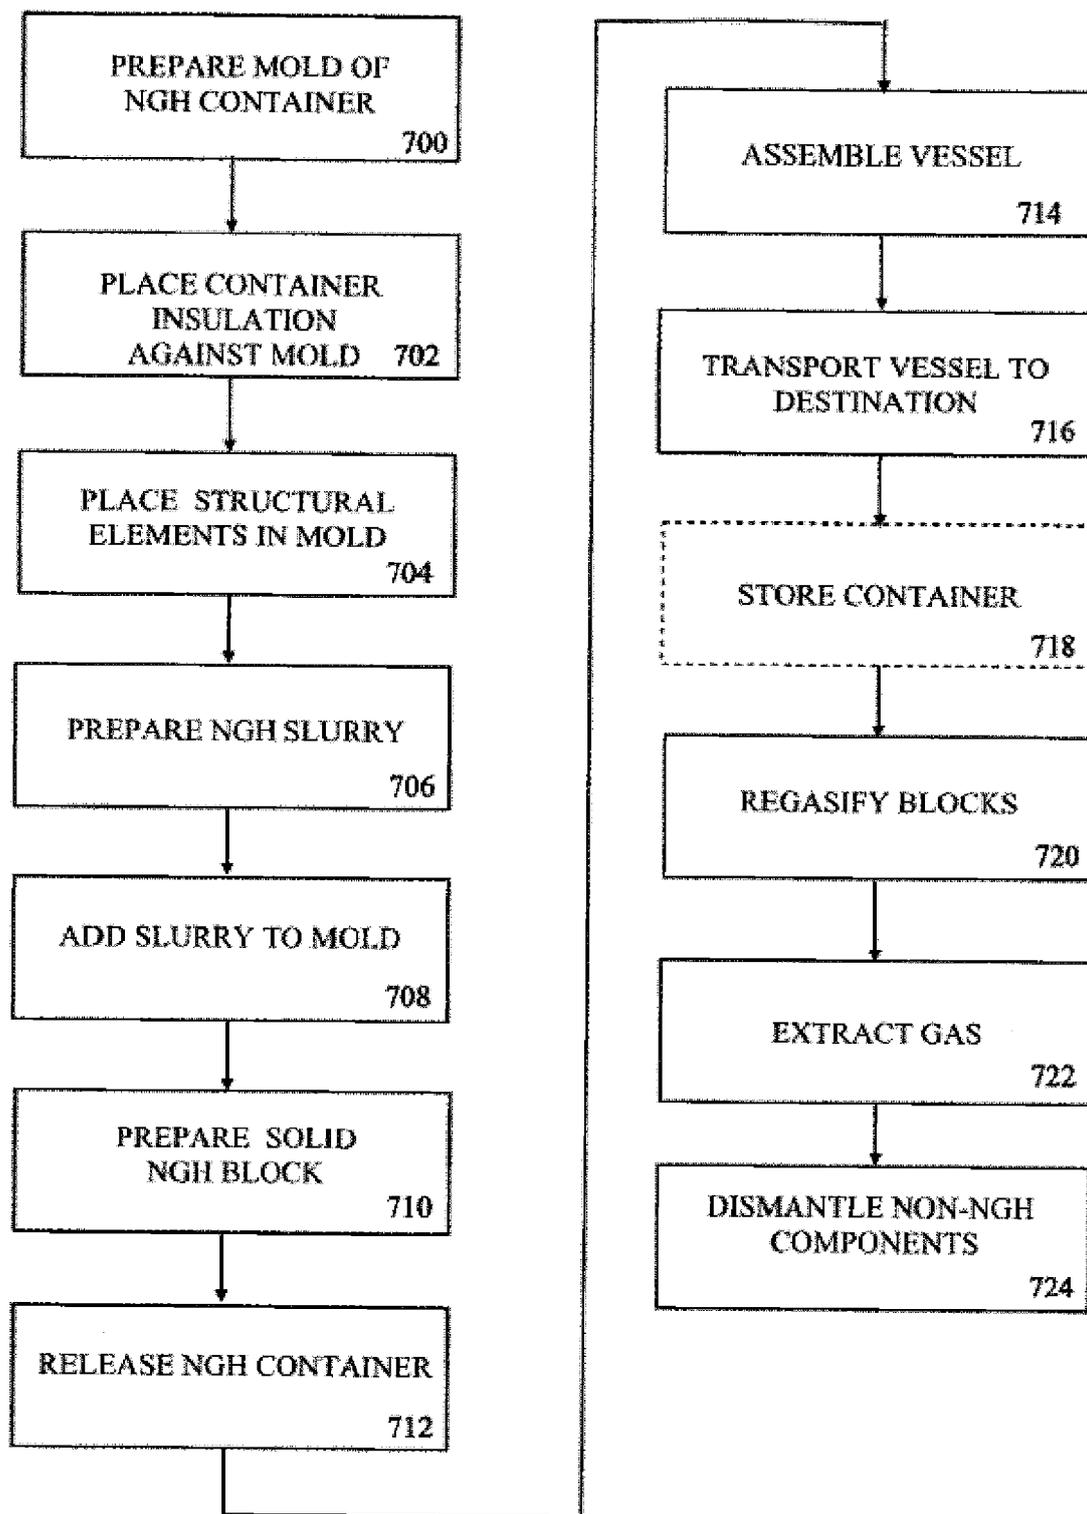


FIGURE 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20110217210 A, Katoh [0006]
- WO 2015087268 A, Sangwai [0006]
- US 8334418 B, Osegovic [0006]
- US 8354565 B, Brown [0006]
- JP 2004070249 A [0006]
- JP 2002089098 A [0006]
- JP H0577318 B [0007]

Non-patent literature cited in the description

- **GUDMUNDSSON, J.S. ; BORREHAUG, A.** Frozen Hydrate for Transport of Natural Gas. *Proceedings, 2nd International Conference Natural Gas Hydrates*, 02 June 1996, 415-422 [0006]