



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
15.11.2017 Bulletin 2017/46

(51) Int Cl.:
B25C 1/00 (2006.01) B25C 1/06 (2006.01)

(21) Application number: **17161063.7**

(22) Date of filing: **15.03.2017**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(72) Inventors:
• **Pelletier, Thomas**
Wallingford, CT Connecticut 06492 (US)
• **LAI, Rachel**
Changhua (TW)
• **YIP, Daniel**
Changua (TW)

(30) Priority: **15.03.2016 TW 105107842**

(74) Representative: **SBD IPAdmin**
210 Bath Road
Slough, Berkshire SL1 3YD (GB)

(71) Applicant: **Stanley Black & Decker, Inc.**
New Britain, CT 06053 (US)

(54) **SAFETY DEVICE FOR TACKERS**

(57) A safety device for tackers includes a safety slide (30) slidably connected to the outlet (11) of the tack-er and the safety slide (30) has a stop (35) protruding from the inside thereof. A rod (20) has one end which contacts the stop (35) and the other end of the rod (20) has a plastic tip (23) connected thereto. An ignition spring (40) is connected between the plastic tip (23) and a safety switch (50). A recovery spring (25) is connected to another position of the rod (20) to position the rod (20). The safety slide (30) is slidably connected to grooves of the tacker. When the safety slide (30) contacts against an object to be stapled, the rod (20) is pushed by the stop (35) and activates the ignition spring (40) to activate the safety switch (50) so as to reduce the impact of the rod (20) and the safety switch (50).

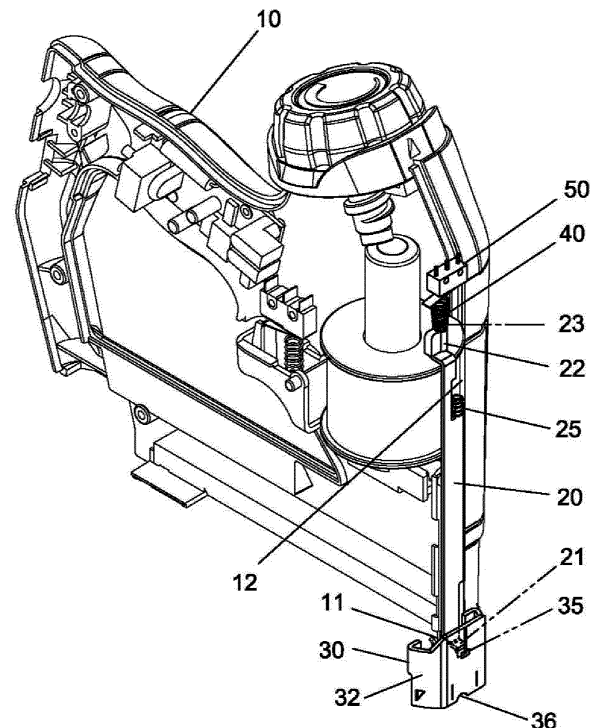


FIG. 2

Description

[0001] The present invention relates to a safety device for a tacker.

[0002] The conventional power tacker is disclosed in Figs. 5 to 8, and generally comprises body 70 with an operation path 71 defined therein. A safety device 80 includes a rod 81 which is movably received in the operation path 71 and has a first end extending beyond an outlet 72 of the body 70 of the tacker. The first end is used to contact against an object to be stapled. A recovery spring 82 is connected to mediate portion of the rod 81 and positioned in a space 73 in the body 70 so as to provide a resilient recovery force to allow the rod to move back to its initial position. A plastic member 83 is connected to a second end of the rod 81 and has an extension 84 which is an inclined part. The inclined extension 84 is used to touch or activate a contact plate 91 of a safety switch 90. When the user pushes the first end of the rod 81 against the object to be stapled, the rod 81 is pushed backward and the extension 84 pushes the contact plate 91 of the safety switch 90 to send a signal to let one staple to be stapled to the object.

[0003] However, the extension 84 is usually made by plastic which may become fragile or deformed after a period of time of use, and this may not precisely activate the safety switch 90.

[0004] Besides, when the object to be stapled is thin and which means that the displacement of movement of the rod 81 cannot move the extension a sufficient distance to effectively activate the contact plate 91 of the safety switch 90 as shown in Fig. 7. Therefore, the stapling action may fail.

[0005] Furthermore, the conventional rod 81 does not have a proper index portion at the first end thereof so that the user may not notice that the stapling position is not at the desired position. This happens frequently when stapling a cable, and the sheath of the cable is broken.

[0006] After each stapling action, the rod 81 returns quickly and the extension 84 may hit the contact plate 91 of the safety switch 90 and even damage the safety switch 90.

[0007] The present invention intends to provide a safety device for a tacker, and includes an ignition spring connected to the tip on the rod so as to precisely contact the safety switch and to eliminate the shortcomings mentioned above.

[0008] The present invention relates to a safety device for a tacker, and comprises a body having an outlet at the front end thereof, and an operation path is defined in the body and communicates with the outlet so as to receive a rod therein. The rod has a contact portion formed at the first end thereof, and a connection portion is formed at the mediate portion of the rod. A recovery spring is mounted to the connection portion to provide a recovery force to the rod. A seat is formed at the second end of the rod and has a (preferably plastic) tip extending therefrom.

[0009] A safety slide is a U-shaped plate and has two wings. The safety slide is slidably mounted to the front end of the body and located corresponding to the outlet of the body. The safety slide has a bottom edge formed at the distal end thereof. An index portion is formed at the safety slide. A stop extends from the bottom of the safety slide and is located corresponding to the contact portion of the rod. When the safety slide is slid, the stop contacts the contact portion and drives the rod to be retracted into the body. An ignition spring is mounted to the plastic tip of the seat. A safety switch is located in the body and has a contact plate extending therefrom. The contact plate is pushed by the ignition spring to send a stapling signal when the rod is retracted back into the body.

[0010] Preferably, the index portion includes a side index portion on each of the two wings of the safety slide.

[0011] Preferably, the index portion includes a front index portion on the top of the safety slide.

[0012] Preferably, a notch is defined in the bottom edge of the safety slide.

[0013] Preferably, the plastic tip is located at the distal end of the seat and movable with the rod in the axial direction of the rod.

[0014] Preferably, the contact plate of the safety switch is pushed by the ignition spring.

[0015] The present invention provides the recovery spring and the ignition spring, the two springs absorb impact so that the rod does not hit the safety switch hard-ly.

[0016] The contact plate of the safety switch is pushed by the ignition spring so that even if the object to be stapled is thin, the contact plate can be activated by the ignition spring.

[0017] The user can check the position that the staples will be stapled on the object by the side and front index portions. The notch of the safety slide ensures that the cable to be stapled is secured.

[0018] The following description describes the accompanying drawings which show, for purposes of illustration, a preferred embodiment in accordance with the present invention.

Fig. 1 shows the rod, the safety slide, and the safety switch of the safety device of the present invention; Fig. 2 is a perspective view to show the safety device of the present invention installed in a tacker; Fig. 3 shows that the rod is pushed against an object to be stapled and the rod is pushed backward; Fig. 4 shows that a cable to be stapled is positioned by the notch of the safety slide of the present invention; Fig. 5 shows a conventional safety device installed in a tacker; Fig. 6 illustrates that the rod of the conventional safety device is about to contact against an object to be stapled; Fig. 7 illustrates that the rod of the conventional safe-

ty device contacts a thin object to be stapled, and Fig. 8 illustrates that the rod of the conventional safety device begins to move toward contacts against the object to be stapled.

[0019] Referring to Figs. 1 and 2, the safety device of the present invention comprises a body 10 having an outlet 11 defined through the front end thereof, and an operation path 12 is defined in the body 10 and communicates with the outlet 11. A rod 20 is movably located in the operation path 12 and has a contact portion 21 formed at the first end thereof. A seat 22 is formed at the second end of the rod 20 and has a plastic tip 23 extending therefrom. A recessed area is defined in one side of the mediate portion of the rod 20 and a connection portion 24 is formed at the recessed area. The connection portion 24 extends along the axial direction of the rod 20. A recovery spring 25 is mounted to the connection portion 24 to provide a recovery force to the rod 20.

[0020] A safety slide 30 is a U-shaped plate 31 and has two wings 32 extending from two sides thereof. The safety slide 30 is slidably mounted to the front end of the body 10 and located corresponding to the outlet 11 of the body 10. The safety slide 30 has a bottom edge 33 formed at the distal end thereof so as to contact against an object to be stapled. A notch 36 is defined in the bottom edge 33 of the safety slide 30 so as to secure a cable "L" as shown in Fig. 4 to be stapled. The shape and size of the notch 36 can be varied according to the cable "L" to be secured. An index portion 34 formed at the safety slide 30. The index portion 34 includes a side index portion 341 on each of the two wings 32 of the safety slide 30, and a front index portion 342 on the top of the safety slide 30. A stop 35 extends from the bottom of the safety slide 30 and is located corresponding to the contact portion 21 of the rod 20. An ignition spring 40 is mounted to the plastic tip 23 of the seat 22. The plastic tip 23 is located at the distal end of the seat 22 and movable with the rod 20 in the axial direction of the rod 20. A safety switch 50 is located in the body 10 and has a contact plate 51 extending therefrom. The contact plate 51 is pushed by the ignition spring 40 to send a stapling signal to the related electrical means of the tacker when the rod 20 is retracted back into the body 10. It is noted that the contact plate 51 of the safety switch 50 is pushed by the ignition spring 40 which is moved along the axial direction of the rod 20.

[0021] As shown in Fig. 3, when the tacker is used to staple an object, the safety slide 30 is pushed against the object and slid upward, the stop 35 contacts the contact portion 21 and drives the rod 20 to be retracted into the body 10. The rod 20 moves backward and the ignition spring 40 is movable with the rod 20 and activates the contact plate 51 of the safety switch 50 so that a stapling signal is sent and the staple is ejected.

[0022] The ignition spring 40 is compressible so that when it touches the contact plate 51 of the safety switch 50, the compression of the ignition spring 40 absorbs a certain level of impact applied to the safety switch 50.

This feature also prevent the plastic tip 23 from being damaged. The ignition spring 40 pushes the contact plate 51 along the axial direction of the rod 20 so that even if the object is thin, the safety switch 50 is activated properly.

[0023] The present invention provides the recovery spring 25 and the ignition spring 40, the two springs 25, 40 absorb impact so that the rod 20 does not hit the safety switch 50 hardly.

[0024] The user can check the position that the staples will be stapled on the object by the side and front index portions 341, 342 to prevent incorrectly stapling. The notch 36 of the safety slide 30 ensures that the cable "L" to be stapled is secured.

[0025] While we have shown and described the embodiment in accordance with the present invention, it should be clear to those skilled in the art that further embodiments may be made without departing from the scope of the present invention.

Claims

1. A safety device for a tacker, comprising:

a body having an outlet defined through a front end thereof, and an operation path defined in the body and communicating with the outlet;
a rod movably located in the operation path and having a contact portion formed at a first end thereof, a connection portion formed at a mediate portion of the rod, a recovery spring mounted to the connection portion to provide a recovery force to the rod, and a seat formed at a second end of the rod and having a tip extending therefrom;
a safety slide being a generally U-shaped plate having two wings, each of which extends from a side thereof, the safety slide slidably mounted to the front end of the body and located corresponding to the outlet of the body, the safety slide having a bottom edge formed at a distal end thereof, an index portion formed at the safety slide, a stop extending from a bottom of the safety slide and located corresponding to the contact portion of the rod, arranged such that when the safety slide is slid, the stop contacts the contact portion and drives the rod to be retracted into the body;
an ignition spring mounted to the tip of the seat, and
a safety switch located in the body and having a contact plate extending therefrom, the contact plate arranged to be pushed by the ignition spring to send a stapling signal when the rod is retracted back into the body.

2. The safety device for a tacker as claimed in claim 1,

wherein the index portion includes a side index portion on each of the two wings of the safety slide.

3. The safety device for a tacker as claimed in claim 1 or claim 2, wherein the index portion includes a front index portion on a top of the safety slide. 5
4. The safety device for a tacker as claimed in any preceding claim, wherein a notch is defined in the bottom edge of the safety slide. 10
5. The safety device for a tacker as claimed in any preceding claim, wherein the tip is located at a distal end of the seat and is movable with the rod in an axial direction of the rod. 15
6. The safety device for a tacker as claimed in any preceding claim, wherein the tip is a plastic tip.
7. The safety device for a tacker as claimed in any preceding claim, wherein the contact plate of the safety switch is arranged to be pushed by the ignition spring which is arranged to be moved along an axial direction of the rod. 20

25

30

35

40

45

50

55

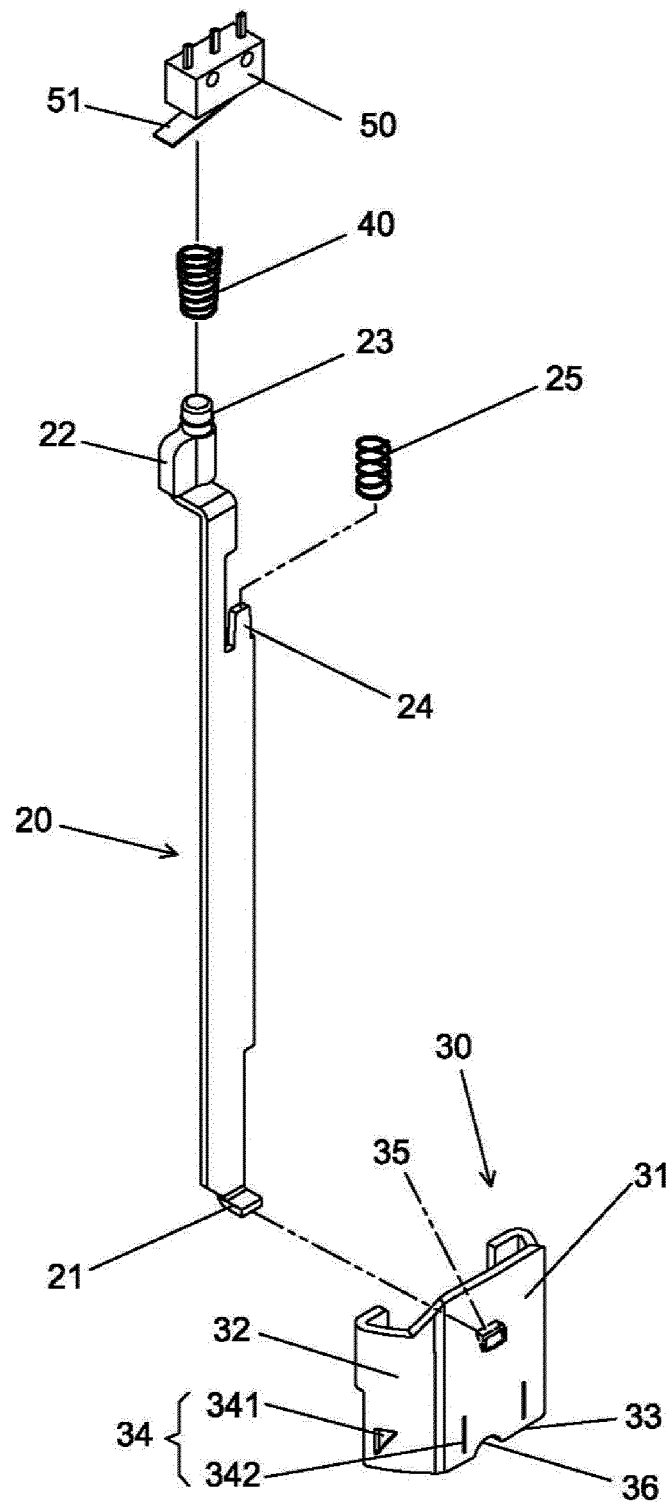


FIG. 1

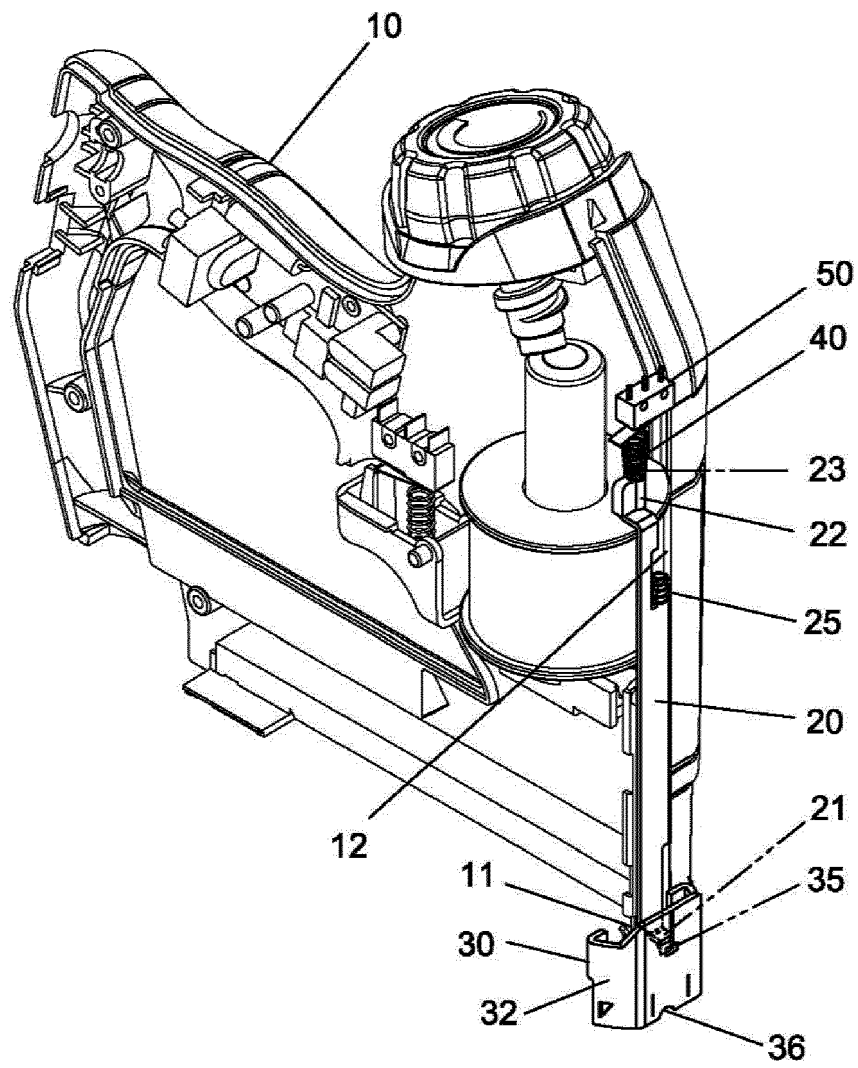


FIG. 2

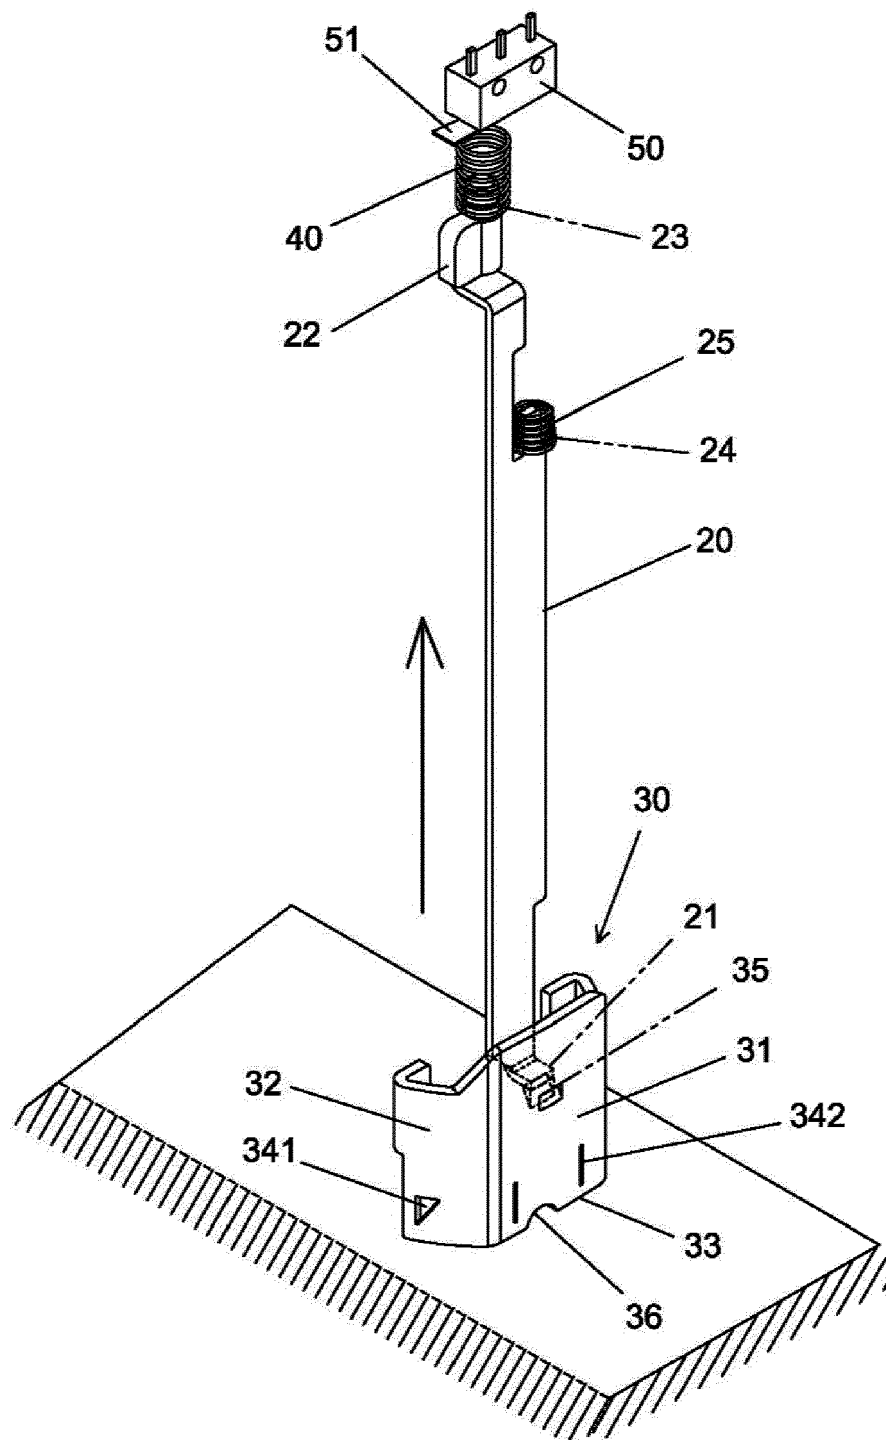


FIG. 3

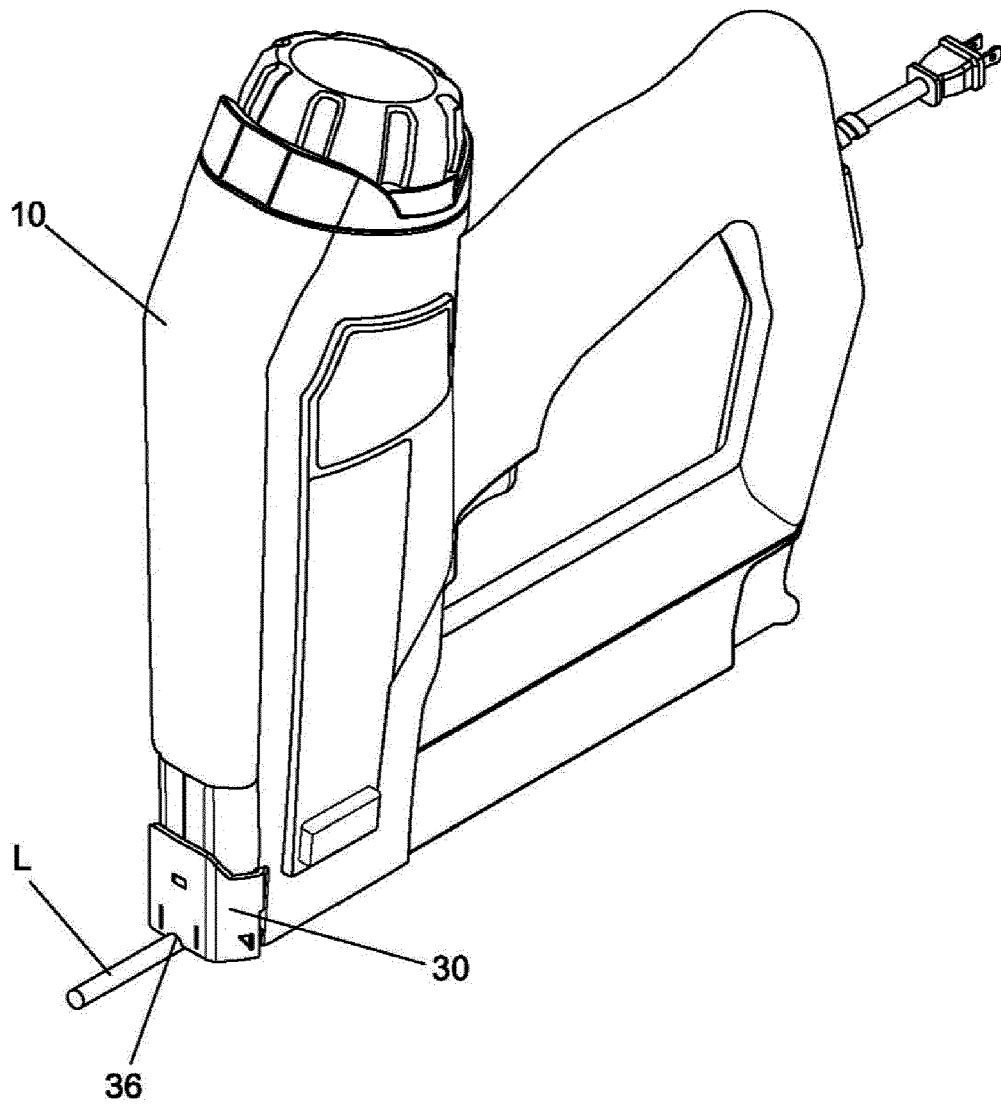


FIG. 4

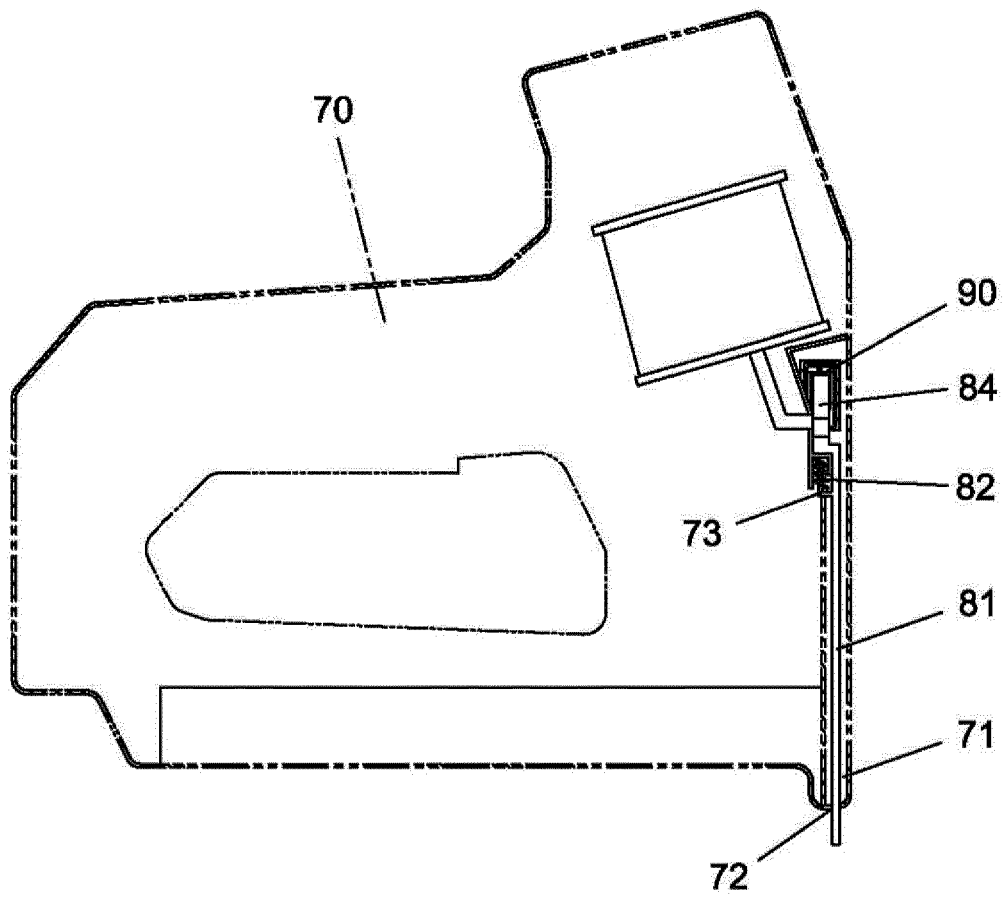


FIG. 5

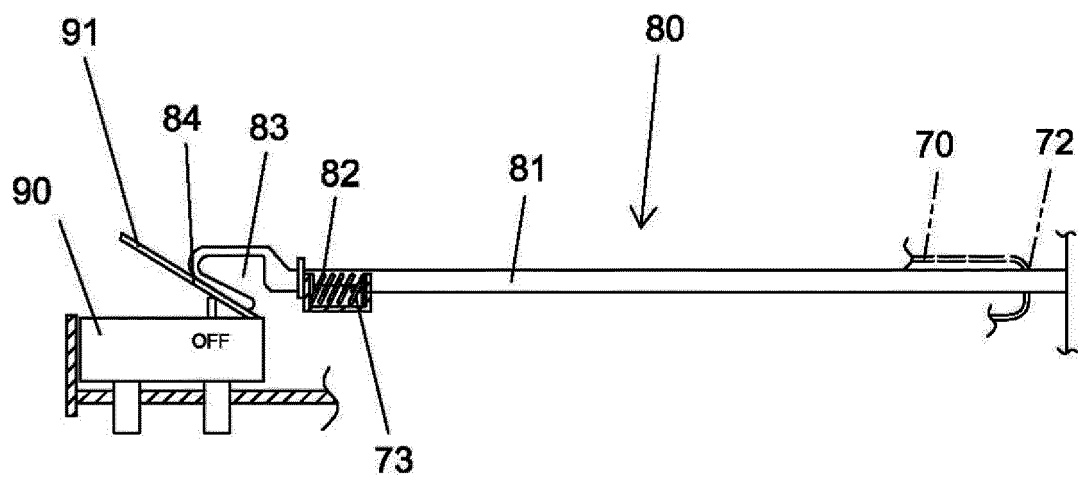


FIG. 6

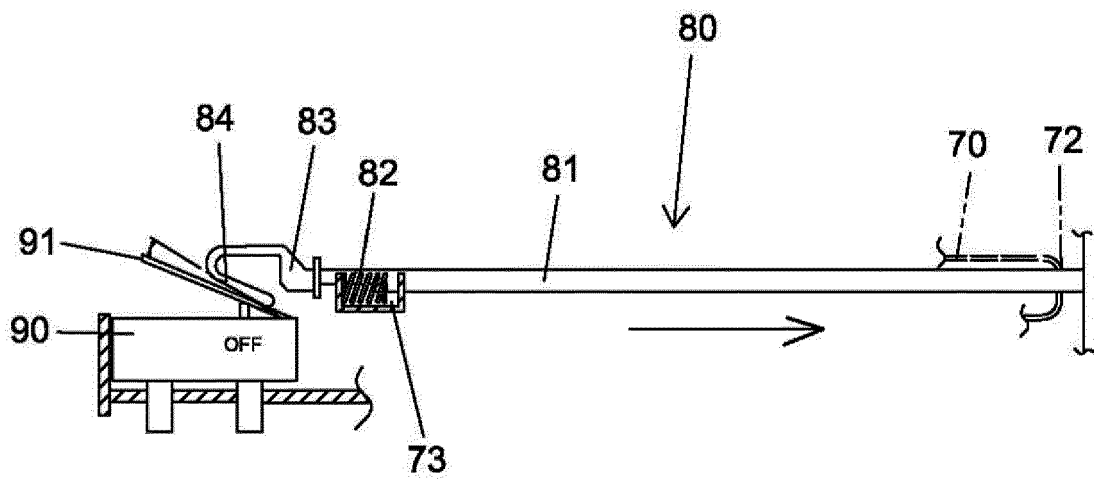


FIG. 7

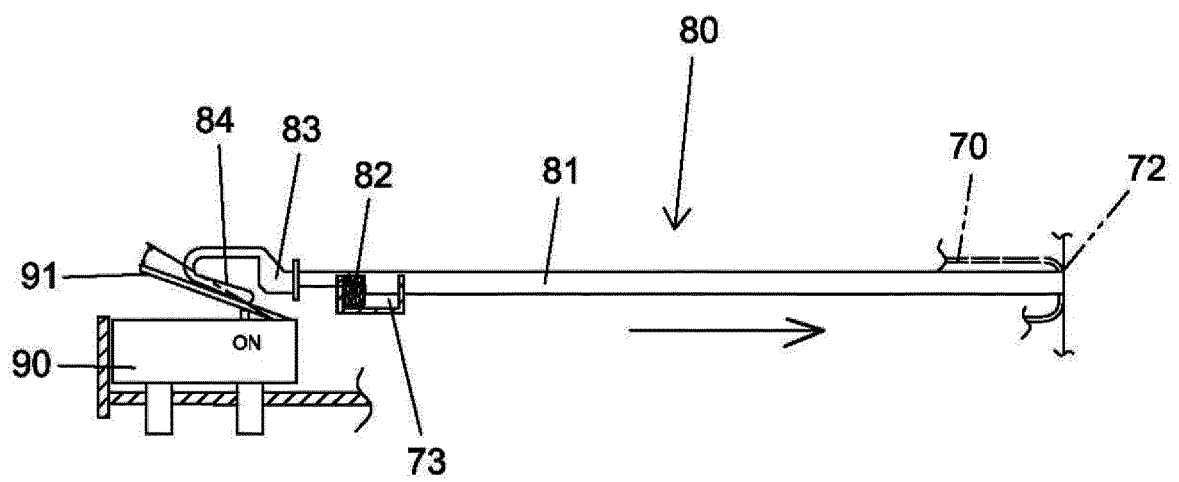


FIG. 8



EUROPEAN SEARCH REPORT

Application Number
EP 17 16 1063

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 8 322 006 B1 (KODI JON R [US]) 4 December 2012 (2012-12-04) * column 1, line 15 - line 17 * * column 4, line 29 - column 8, line 42 * * figures *	1-7	INV. B25C1/00 B25C1/06
A	US 2008/017689 A1 (SIMONELLI DAVID [US] ET AL) 24 January 2008 (2008-01-24) * paragraph [0003] * * paragraph [0016] - paragraph [0041] * * paragraph [0272] - paragraph [0276] * * figures *	1-7	
A	DE 297 11 755 U1 (CHEN TON YI [TW]) 4 September 1997 (1997-09-04) * page 2 - page 3 * * figures *	1-7	
A	DE 44 42 657 A1 (MAX CO LTD [JP]) 8 June 1995 (1995-06-08) * column 1, line 6 - line 11 * * column 3, line 46 - column 7, line 41 * * figures *	1-7	TECHNICAL FIELDS SEARCHED (IPC) B25C
A	US 2007/090149 A1 (SEGURA RICARDO [US] ET AL) 26 April 2007 (2007-04-26) * paragraph [0001] * * paragraph [0013] - paragraph [0022] * * figures *	1-7	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 27 September 2017	Examiner van Woerden, N
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 16 1063

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-09-2017

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 8322006	B1	04-12-2012	NONE
US 2008017689	A1	24-01-2008	EP 2077931 A2 15-07-2009
		US 2008017689 A1	24-01-2008
		US 2008041914 A1	21-02-2008
		US 2008048000 A1	28-02-2008
		WO 2007142997 A2	13-12-2007
DE 29711755	U1	04-09-1997	NONE
DE 4442657	A1	08-06-1995	DE 4442657 A1 08-06-1995
		GB 2284377 A	07-06-1995
		JP 2568736 Y2	15-04-1998
		JP H0733575 U	20-06-1995
		US 5605268 A	25-02-1997
US 2007090149	A1	26-04-2007	AU 2006306685 A1 03-05-2007
		CA 2626936 A1	03-05-2007
		EP 1945407 A1	23-07-2008
		JP 5080484 B2	21-11-2012
		JP 2009512565 A	26-03-2009
		NZ 567666 A	30-06-2011
		TW I315241 B	01-10-2009
		US 2007090149 A1	26-04-2007
		WO 2007050237 A1	03-05-2007