



(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 2 (W2 B1)
Corrections, see
Claims DE
Claims EN
Claims FR

(51) Int Cl.:
B65D 75/58 (2006.01)

(86) International application number:
PCT/GB2016/051752

(87) International publication number:
WO 2016/198905 (15.12.2016 Gazette 2016/50)

(48) Corrigendum issued on:
19.02.2020 Bulletin 2020/08

(45) Date of publication and mention
of the grant of the patent:
14.08.2019 Bulletin 2019/33

(21) Application number: **16731252.9**

(22) Date of filing: **13.06.2016**

(54) **RECLOSABLE FLAP DEVICE**

WIEDERVERSCHLIESSBARE KLAPPENVORRICHTUNG

DISPOSITIF DE RABAT REFERMABLE

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **12.06.2015 GB 201510378**
22.12.2015 GB 201522698

(43) Date of publication of application:
20.12.2017 Bulletin 2017/51

(60) Divisional application:
19191357.3

(73) Proprietor: **OPM Advance Limited**
Leeds, Yorkshire LS12 6TG (GB)

(72) Inventors:
• **BELL, Ian David Michael**
Leeds
Yorkshire LS12 6TG (GB)
• **ELLISON, Christopher John**
Leeds
Yorkshire LS12 6TG (GB)

(74) Representative: **Yeadon IP Limited**
Nexus
Discovery Way
Leeds LS2 3AA (GB)

(56) References cited:
EP-A1- 2 202 176 WO-A1-2011/001580
WO-A1-2015/056061 JP-A- 2013 159 365

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to reclosable or resealable flaps such as are used, for instance, on packets of moist wipes ("wet wipes"). These packets are designed to retain the moisture of the wipes by sealing the package when not in use, but to allow easy opening and closing of the flap to allow access to a hole in the package material through which one or more moist wipes can be drawn. To this end, the flap generally has a tacky adhesive along the outer part of its lower surface, sticking to the package wall or film surrounding the hole, but allowing the user to pull the flap away from the package film. One edge of the flap will generally be permanently stuck to the package to act as a hinge.

[0002] One desirable feature of such a flap is that, once opened, it falls under its own weight so that it lies folded away from the opening and does not interfere with the wipes being removed. A design that aims to provide a reliable hinge is shown in EP 2202176 A1 by Prime Label & Screen, Inc. Here a resealable label flap is made of two main layers, a thicker base layer 28 and a top layer 30, in the form of a rectangle. In practice, the base layer may itself be made of two or more layers, for instance to ease the application of the resealable adhesive. The rectangle is cut around three edges inside its circumference to form a flap portion, the fourth end forming a hinge. This hinge is constituted by slitting the lower layer but not the upper layer, so that the flap portion hinges about the upper layer where it bridges the slit. The region of the rectangle outside the cut forms a frame which remains stuck to the package.

[0003] In practice it is not easy to handle the assembly after the subsequent cut has been made through both layers so as to define the outline of the flap portion. The present invention aims to provide a flap that is easier to manufacture and also more reliable.

[0004] Another construction, using composite layers and intending to solve the problem of the flap undesirably returning to cover the opening while one is trying to extract a wipe, is shown in WO 2011/003068 by Unicharm Corporation. The flap is formed by two main layers, a thinner layer on top of a thick layer, the thin layer extending beyond one side of the lower layer and being fixed to the package by a strong adhesive. The construction appears not to solve the problem of the flap flipping back, because a transverse slit is formed in the upper layer over most of its transverse extent, so as to weaken the restoring force.

[0005] The present invention is defined in one aspect in claim 1 and is generally directed to a resealable flap device in the form of a sheet for applying to or incorporating in packaging, comprising:

- a base or lower layer of flexible material; and
- an upper layer of stiff material;

base and upper layers each having a layer of adhesive on their lower face, the adhesive on the upper layer bonding this layer to the lower layer;

wherein the sheet is cut through both layers to outline a flap portion, but leaving an edge uncut in a hinge region; and

the upper layer of the flap portion is not present on the outer part of the sheet beyond the line of the hinge region.

[0006] Because the region of the flap portion behind the hinge line has only the single lower layer, the lower layer at that line, or in its vicinity, forms the desired hinge, being much less stiff - say two to ten times - than the composite of the two layers, in terms of Young's Modulus.

[0007] In general, the upper layer in the frame portion (i.e. the outside region surrounding the flap portion) will also end approximately in line with the hinge, though it may extend beyond it to a greater or lesser extent for added stability.

[0008] A tab may be formed on the end of the flap portion remote from the hinge in the usual way, to make it easier for the user to lift the flap. Preferably there is no adhesive on the underside of the tab, or any adhesive present is covered or neutralised, but the remainder of the flap portion generally has a tacky adhesive for resealable sticking to the package.

[0009] The lower layer may be of a tough but flexible polymer such as polypropylene (PP), about 50 μm thick, the upper layer of the same or, preferably, a different material, such as polystyrene (PS) or PET, and preferably at least two or three times as thick, preferably at least 150 μm thick. The two are laminated using a suitable adhesive such as acrylic-based adhesive, and the reclosure adhesive under the base layer can be any usual adhesive for this purpose.

[0010] The flap may be generally rectangular, rounded, elliptical, oval or ogival in shape, though the hinge will generally be a straight line. The "north-south" direction of the flap, i.e. the direction in the plane in which the flap opens and closes, will be termed the "longitudinal" direction, the perpendicular direction in the plane of the flap (when closed) being termed "transverse". The "front" of the flap is that edge or end picked up by the user to open the flap.

[0011] In a further aspect, a resealable flap device in the form of a sheet for applying to or incorporating in packaging comprises a layer of flexible material, the layer being cut through to outline a flap portion, but leaving an edge uncut in a hinge region;

wherein the layer continues rearwardly and incorporates a second flap portion having a slot by which a product may be suspended when the flap device is fixed to the product.

[0012] The device is easy to manufacture because the upper layer can be formed by selective removal of parts of the upper layer to form the hinge region. This can be done, for instance, by cutting through the upper layer only and then removing the unwanted portion of the upper layer. In addition, printing a blocking agent to prevent

adhesion between base and upper layers in certain areas may be helpful. Also, although the top surface of the laminate is not entirely smooth (because of the local absence of the top layer at the base of the hinge), this presents no practical (nor aesthetic) difficulty and it does not interfere with manufacture of the flap device itself, nor with assembly as it is applied to the pack.

[0013] It is to be understood that the upper and/or lower layers may be printed upon, for example for the purpose of colouring or shading the device, or to apply a logo or graphic or other printed material such as instructions or advertising material.

[0014] Print may be applied to one or both of an upper and lower side of the lower layer, and/or to one or both of an upper and lower side of the upper layer. Print may be applied before adhesive is applied to a layer, in which case the presence of the print typically does not adversely affect subsequent bonding of the layer to another surface. Alternatively print may be applied to all or a selected portion of an area of a surface of the upper or lower layers after a layer of adhesive has been applied to the surface. The presence of the layer of print on the adhesive essentially reduces or inhibits substantially entirely the ability of the adhesive in that area to cause the layer to stick to a surface that is subsequently brought into contact with the printed area.

[0015] This feature may be useful in some embodiments. For example, in embodiments having a tab formed on the end of the flap portion remote from the hinge, to make it easier for the user to lift the flap as described above, adhesive applied to the lower surface of the lower layer in order to allow the lower layer to be bonded to packaging may be printed upon in the region of the tab in order to prevent the tab from sticking to the packaging.

[0016] It is to be understood that, in addition or instead, the lower surface of the lower layer may be printed upon before adhesive is applied to that layer. In that case, it is typically the case that the adhesive will permit the printed (and any non-printed) regions of the lower layer to be bonded to the packaging to which the device is applied.

[0017] In addition or instead, the upper surface of the lower layer may be printed upon. In the case that a layer of adhesive is applied to the upper surface of the lower layer after printing upon the upper surface, the upper layer may subsequently be bonded to the lower layer even in regions in which print has been applied to the lower layer. However, if it is desired not to allow bonding of the upper and lower layers in certain regions, print may be applied to the adhesive after it has been applied to the upper surface of the lower layer or lower surface of the upper layer, to prevent adhesion in the printed areas.

[0018] If the upper and lower layers are both transparent, printed material on the lower layer or lower surface of the upper layer will be visible through the upper layer, and lower layer in the case of printing on the lower surface of the lower layer.

[0019] Within the scope of this application it is express-

ly intended that the various aspects, embodiments, examples and alternatives set out in the preceding paragraphs, in the claims and/or in the following description and drawings, and in particular the individual features thereof, may be taken independently or in any combination. That is, all embodiments and/or features of any embodiment can be combined in any way and/or combination, unless such features are incompatible. The applicant reserves the right to change any originally filed claim or file any new claim accordingly, including the right to amend any originally filed claim to depend from and/or incorporate any feature of any other claim although not originally claimed in that manner.

[0020] For the avoidance of doubt, it is to be understood that features described with respect to one aspect of the invention may be included within any other aspect of the invention, alone or in appropriate combination with one or more other features.

[0021] For a better understanding of the invention, embodiments will now be described with reference to the attached drawings, in which:

Figure 1 is a view of a strip of flap devices ready to be applied to packages;

Figure 2 is a cross-section of part of one such flap device as applied to a package;

Figure 3 is a cross-section of part of one such flap device in the open condition;

Figure 4 is a 3D schematic view of a flap device applied to a package, the device being shown with the flap portion in the open (deployed) condition, allowing access to contents of the package;

Figure 5 is an alternative embodiment in which the device incorporates a loop for hanging a package;

Figure 6 shows the flap device applied to a package, in the deployed configuration;

Figure 7 is a series of schematic sections illustrating the construction of the embodiment;

Figure 8 is an exploded view in plan of the layers of the embodiment, and

Figure 9 is a flow chart of a typical manufacturing method.

[0022] Figure 1 shows a composite picture of three different versions of flap devices or "label flaps" in accordance with the invention, before their application to the packaging for which they are destined. That is, they are still mounted on a release or backing layer 2. All have

the same basic features. The individual label flaps or flap devices 10 are arranged in rows on a release layer 1. Each has a generally rectangular shape, out of which, by a cut 15, is cut a flap portion 14, leaving a surrounding frame 12, which is in fact composed of two pieces each of a "mutton chop" shape.

[0023] The cut extends only over three sides of the rectangle, leaving a hinge 18, forming the rear end of the flap in the longitudinal direction, i.e. the direction in which the flap is opened and closed. At the side or front end opposite the hinge is a protruding nose acting as a tab 20 when the device is in use.

[0024] The label flap is in two main layers, though other layers, such as adhesives, may be present also. The lower layer is present over all the area of the label flap as shown, while the upper layer of the flap portion, in accordance with the invention, is not present behind or beyond the hinge - in the upper region of the drawing as presented, forming a single-layer rear region 25, which is to remain attached to the package.

[0025] It may be noted that hinge line 18 of each flap is in the direction of feed of the roll on which the laminate materials are handled. As is known, a laminate material when released from the roll has a tendency to curl in the circumferential direction of the roll. In some known types of flap this can lead to the flap tending to reclose rather than stay open; the design shown does not suffer from this defect. It may further be noted that in this embodiment the flap is wider than long, further reducing any tendency to curl in the longitudinal direction.

[0026] This relationship is evident from the very schematic **Figure 2** where a flap device is removed from the release film and applied to a package. Figure 2 shows a section along the dogleg line 2-2 in Figure 1. Here the lower 30 and upper 40 layers are visible. The upper layer 40 is generally thicker, in this embodiment 175µm thick, and made of PET. This material has excellent rigidity properties: that is, it retains its flat shape after repeated uses. It adheres to the 50µm-thick lower layer 30 of PP over most of its extent, including either side of the cut 15, which passes through both layers at 45 and 35 respectively. Only in the region beyond the hinge is the label flap formed by the lower layer 30 only. This means that the cut-out flap portion 14, consisting of both upper and lower layers, is free to pivot about the weaker single-layer hinge region 18. Moreover, it is found that the flap, once opened, will lie back against the packaging and after use is easy to close again.

[0027] Also shown in Figure 2, though in dashed lines only, is the foil 100 of the package to which the label flap is applied. To this end the lower layer 30 has a layer of adhesive on its underside, not shown. As can be seen, the flap 14 covers the hole 102 from which moist wipes, or other contents, are to be extracted, while the hinge 18 is a short distance to the side of the hole. In fact, the hole will usually be made by the user on first use of the package, the outline of the hole being defined by a weak perforation which is then torn open by the attachment of the

foil to the flap portion, as shown.

[0028] **Figure 3** is a cross-sectional view of a flap device 10 with the flap 14 in the open condition, leaving the frame 12 in place. The drawing is likewise very schematic and does not represent actual thicknesses. **Figure 4** is a corresponding 3D view showing the flap applied to the foil 100 of a package containing moist wipes. The contents of the package are accessed through the hole or aperture 102 formed in the foil 100 that forms a wall of the package.

[0029] Returning to Figure 1, further advantageous features may be noted. First, at two points along the cut 15 defining the flap, the cut is interrupted to form small ties 16. These keep the frame and flap portion together after the flap assembly is removed from the release layer and before it is applied to the package. They can, however, be easily broken by the user on first use of the flap, and they also act as a tamper-check mechanism.

[0030] Secondly, the cut 15, which passes through both layers to form the flap portion 14, is also present in the lower layer for a short distance past the point where the upper layer stops. It can be seen that on each side of the flap, or near each end of the hinge 18, a tightly curved cut 17 continues, curving round with a radius of a few mm, starting from the transversely directed line at the rear end of the cut that forms the flap. The cut goes first toward the rear edge (upper in the diagram), then outwardly towards the side edge, then slightly back towards the tab (front) edge. It is known as a "peel break" and its function is to stop a tear in the lower layer if the user opens the flap 14 too enthusiastically: in these circumstances the tear is directed round and does not continue to the rear edge of the lower layer (which would lift the flap off entirely). The peel break construction also has the advantage that a short strip of the lower-layer-only area lifts up and contributes to the flexibility of the hinge.

[0031] In use, the user takes hold of the tab 20, which has no adhesive or where the effect of the adhesive is nullified, and pulls it up. This pulling force overcomes the tacky adhesive between the lower layer 30 and the package, though not at the area defined by perforations in the package, where instead the flap lifts the area to form the hole 102. The ties 16 between flap and frame are also broken.

[0032] The opening action continues until the flap has lifted along the entire cut line shown as a thick line in Figure 1. The curve towards the rear, away from the hinge line, enables the hinge region 18 of the flap to lift from the substrate and form a tube of the material of the lower layer, having a relatively large radius, i.e. several times (at least twice) the thickness of the layer. This tube is visible from the side in Figure 3. Theoretically the cut could be a score that tears on first use. This large radius allows the flap to lie back with only a very small restoring force, much less than the weight of the flap.

[0033] The continuing cuts 17 could in theory just go straight back towards the rear edge, but it is better if they

curve round as described above, to mitigate the risk of tearing though the entire flap device. The longitudinal extent of the curve might be, say, a third to a half of the longitudinal extent of the flap device behind the flap proper.

[0034] To make the laminate flap device, the lower layer has an adhesive-blocking layer applied over the hinge/rear area 25; such a blocking layer may also be applied to the underside of the tab area 20 of the upper layer. Adhesive is then spread over the lower layer and the upper layer is stuck to the lower. A first cut, through the top layer only, is made along the hinge line (and the ends of the frame 12) and the resulting separated rear part of the top layer (uppermost in Figure 1) is removed. The flap/frame shape is then cut through both layers, along with the peel breaks. When ready, the flap device is removed from the backing and applied to a package.

[0035] The variations shown in Figure 1 will be explained as follows. The top row shows flap portions rounded at the base (i.e. near the hinge 18), the frame continuing for a short distance to surround the flap portion, but not as far as the edge of the lower layer - in fact about the same distance as, or slightly more than, the rearward extent of the curved cut 17. The middle row shows a version where the base of the flap is square, with the peel breaks starting some way in along this base; the cut in the lower layer therefore extends some way in along the hinge line towards the centre. In this embodiment, unlike the first, the frame does not continue towards the rear edge of the lower layer beyond the line of the hinge 18. In the third row the curved cut 15 continues in the lower layer past the square end 18 of the upper layer, so that one could say the hinge is distributed over a certain longitudinal extent of the single-layer portion 25.

[0036] Figure 5 shows a variant in which the rear region 25' of the flap device extends further back in the longitudinal direction, forming a rear section 50, and a second flap-type area 14' formed by retaining a portion of the upper layer 40. The flap is defined by a similar cut 15' through both layers, with the tear-stop curves 17' and hinge region 18' back-to-back, as it were, with that of the package flap 14, and has an adhesive-free tab 20'. It is somewhat more squat in shape than the flap proper 14, and in addition the flap part 14' has a transverse slot 52. This slot, known as a "Euroslot", is used for hanging the package when the closure device has been applied to a package. The upper layer used for the hanging portion will probably be a portion of the same layer as is used for the flap, but it could be formed separately. The slot could of course have a different shape, or just be a simple hole or even a hook.

[0037] Figure 6 shows a perspective view of the label flap applied to a package, and with the flap 14 and the hanger flap 14' both deployed. This is how the package would appear in use. In a shop the flap 14 would be shut but the package would be suspended by the hanger flap 14'.

[0038] In accordance with further aspects of the inven-

tion, the integral hanger flap does not have to have the same layer construction as here shown, but could have the layers inverted, or a weakness formed for the hinge line or lines in a different way, such as by partial cutting or scoring.

[0039] Figure 7 shows some schematic sections illustrating the upper and lower layers 40, 30 as before, but also the adhesive layers 80. One adhesive layer 80 sticks together the upper and lower layers of the label flap, and the other sticks the label flap to the package 100. They can be the same or different adhesives. Diagrams (a) and (b) show the manufacturing step where the section 25' of upper layer 30 is removed, following the cutting step forming the outline of the flap 14 and enabled by the presence of a silicone release layer 110. This leaves the single-layer area 25 of the label flap, including the hinge regions for the flap 14 and hanger flap 14'. (The package 100 is also shown, though it would not actually be present during the manufacturing process). The adhesive-kill layers 82 underneath the tabs 20 and 20' are also visible. Diagrams (c) and (d) show the label flap in use undeployed and deployed.

[0040] Figure 8 shows a plan view, separated into the component layers, of the embodiment of Figure 5. This shows how the silicone release layer 110 corresponds to the shape of the cut and removed portions 25' of the upper layer.

[0041] Finally, Figure 9 shows a typical sequence of steps in the manufacturing process. First, the roll of backing layer and lower layer (with its layer of adhesive) is fed and the two layers are separated. The adhesive kill layer 82 is applied to the lower layer (Step S1). Then the lower layer is reunited with the backing and the laminate turned over (S2). The silicone release coating 110 is then printed on the base or lower layer 30, with any logos etc. (S3, S4). Then the stiff top layer 40 is laminated onto the lower layer at step S5. The hinge/rear area 25 is cut out and removed, and any final print applied (S6, S7). Finally the flap outline is cut, including the tear stops 17 and the tab 20. The individual flap devices can then be applied to packages as required.

[0042] It will be appreciated that, while the embodiments described are envisaged for moist wipes, they could be applied to any packaging where a sealing flap is required.

[0043] Throughout the description and claims of this specification, the words "comprise" and "contain" and variations of the words, for example "comprising" and "comprises", means "including but not limited to", and is not intended to (and does not) exclude other moieties, additives, components, integers or steps.

[0044] Throughout the description and claims of this specification, the singular encompasses the plural unless the context otherwise requires. In particular, where the indefinite article is used, the specification is to be understood as contemplating plurality as well as singularity, unless the context requires otherwise.

Claims

Claims for the following Contracting State(s): AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GR, HR, HU, IE, IS, IT, LI, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR

1. A resealable flap device in the form of a sheet for applying to or incorporating in packaging (100), comprising:

- a lower layer (30) of material, having an adhesive layer (80) on its lower side; and
- an upper layer (40) of material, bonded to the lower layer;

wherein the sheet is cut (15) through both layers to outline a flap portion (14), the cut leaving an edge intact in a hinge region (18) at the rear of the flap, behind which is a rear region (25) of the flap device;

characterised in that

the lower layer is of flexible material while the upper layer is of stiff material, and the upper layer of the flap portion is not present in the rear region (25) beyond the line of the hinge region (18).

2. A resealable flap device according to claim 1, in which the cut (15) also forms a frame (12) around the flap portion (14), at least on its two sides.
3. A resealable flap device according to claim 2, in which the frame (12) extends a distance rearwardly beyond the hinge line (18), but not as far as the edge of the lower layer (30).
4. A resealable flap device according to claim 2 or 3, further including two tie portions (16) interrupting the cut (15) and connecting the flap portion (14) to the frame (12).
5. A resealable flap device according to any preceding claim, in which the cut (15) continues in the lower layer (30) rearwardly beyond the hinge line (18).

6. A resealable flap device according to claim 5, in which the continuing cut curves round (17) towards the lateral sides of the flap device so as to inhibit unwanted tearing of the lower layer when the flap is opened.

7. A resealable flap device according to any preceding claim, in which the lower layer (30) is continuous from front to back over the hinge line (18).

8. A resealable flap device according to any preceding claim, in which the flap portion (14) has at its front end, opposite the hinge region (18), a tab (20) to

facilitate grasping and opening the flap portion.

9. A resealable flap device according to any preceding claim, in which the lower layer (30) is made of PET and is 40-60 μm thick, and the upper layer (40) is made of PPE and is 150-200 μm thick; and/or in which the upper layer is at least twice as stiff as the lower layer.

10. A resealable flap device according to any preceding claim, in which the lower layer (30) continues rearwardly and incorporates a second flap portion (14') defined by a further portion of the upper layer (40), the second flap portion (14') having a slot by which a product may be suspended when the flap device is fixed to the product.

11. A package including a container with a hole (102) for extracting or inserting products, the hole being covered by a resealable flap device according to any preceding claim.

12. A method of making a resealable flap device in the form of a sheet for applying to or incorporating in packaging (100), comprising the following steps:

providing a lower layer (30) of material, having an adhesive layer (80) on its lower side;
bonding an upper layer (40) of material to the lower layer;
cutting through both layers to outline a flap portion (14), the cut (15) leaving an edge intact in a hinge region (18) at the rear of the flap, behind which is the rear region (25) of the flap device.
characterised by the step of removing a portion (25') of the upper layer (40) in a region behind where the hinge region (18) is to be formed, wherein the lower layer is of flexible material while the upper layer is of stiff material.

13. A method according to claim 12, in which the cut (15) continues in the lower layer (30) rearwardly beyond the hinge line (18).

Claims for the following Contracting State(s): GB

1. A resealable flap device in the form of a sheet for applying to or incorporating in packaging (100), comprising:

- a lower layer (30) of material, having an adhesive layer (80) on its lower side; and
- an upper layer (40) of material, bonded to the lower layer;

wherein the sheet is cut (15) through both layers to outline a flap portion (14), the cut leaving an edge

- intact in a hinge region (18) at the rear of the flap, behind which is a rear region (25) of the flap device; **characterised in that** the lower layer is of flexible material while the upper layer is of stiff material, and the upper layer of the flap portion is not present in the rear region (25) beyond the line of the hinge region (18). 5
2. A resealable flap device according to claim 1, in which the cut (15) also forms a frame (12) around the flap portion (14), at least on its two sides. 10
3. A resealable flap device according to claim 2, in which the frame (12) extends a distance rearwardly beyond the hinge line (18), but not as far as the edge of the lower layer (30). 15
4. A resealable flap device according to claim 2 or 3, further including two tie portions (16) interrupting the cut (15) and connecting the flap portion (14) to the frame (12). 20
5. A resealable flap device according to any preceding claim, in which the cut (15) continues in the lower layer (30) rearwardly beyond the hinge line (18). 25
6. A resealable flap device according to any preceding claim, in which the lower layer (30) is continuous from front to back over the hinge line (18). 30
7. A resealable flap device according to any preceding claim, in which the flap portion (14) has at its front end, opposite the hinge region (18), a tab (20) to facilitate grasping and opening the flap portion. 35
8. A resealable flap device according to any preceding claim, in which the lower layer (30) is made of PET and is 40-60 μm thick, and the upper layer (40) is made of PPE and is 150-200 μm thick; and/or in which the upper layer is at least twice as stiff as the lower layer. 40
9. A resealable flap device according to any preceding claim, in which the lower layer (30) continues rearwardly and incorporates a second flap portion (14') defined by a further portion of the upper layer (40), the second flap portion (14') having a slot by which a product may be suspended when the flap device is fixed to the product. 45
10. A package including a container with a hole (102) for extracting or inserting products, the hole being covered by a resealable flap device according to any preceding claim. 50
11. A method of making a resealable flap device in the form of a sheet for applying to or incorporating in packaging (100), comprising the following steps: 55

providing a lower layer (30) of material, having an adhesive layer (80) on its lower side; bonding an upper layer (40) of material to the lower layer; cutting through both layers to outline a flap portion (14), the cut (15) leaving an edge intact in a hinge region (18) at the rear of the flap, behind which is the rear region (25) of the flap device. **characterised by** the step of removing a portion (25') of the upper layer (40) in a region behind where the hinge region (18) is to be formed, wherein the lower layer is of flexible material and the upper layer is of stiff material.

12. A method according to claim 11, in which the cut (15) continues in the lower layer (30) rearwardly beyond the hinge line (18).

20 Patentansprüche

Patentansprüche für folgende(n) Vertragsstaat(en):
AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GR, HR, HU, IE, IS, IT, LI, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR

1. Wiederverschließbare Klappenvorrichtung in Form einer Folie zur Verwendung an oder Einarbeitung in Verpackung (100), umfassend:

- Eine untere Schicht (30) aus Material, das eine Klebschicht (80) auf seiner unteren Seite aufweist; und
- eine obere Schicht (40) aus Material, das an die untere Schicht geklebt ist;

wobei die Folie durch beide Schichten geschnitten (15) wird, um einen Klappenabschnitt (14) zu umreißen, wobei der Schnitt eine Kante in einem Scharnierbereich (18) hinter der Klappe intakt lässt, hinter dem sich ein rückwärtiger Bereich (25) der Klappenvorrichtung befindet; **dadurch gekennzeichnet, dass**

die untere Schicht aus flexiblem Material besteht, während die obere Schicht aus steifem Material besteht, und die obere Schicht des Klappenabschnitts im hinteren Bereich (25) über die Linie des Scharnierbereichs (18) hinaus nicht vorhanden ist.

2. Wiederverschließbare Klappenvorrichtung nach Anspruch 1, in welcher der Schnitt (15) außerdem einen Rahmen (12) um den Klappenabschnitt (14), zumindest an seinen zwei Seiten, formt.
3. Wiederverschließbare Klappenvorrichtung nach Anspruch 2, in welcher sich der Rahmen (12) eine Distanz rückwärtig über die Scharnierlinie (18) hinaus,

aber nicht so weit wie die Kante der unteren Schicht (30) erstreckt.

4. Wiederverschließbare Klappenvorrichtung nach Anspruch 2 oder 3, die ferner zwei Bindeabschnitte (16) einschließen, welche den Schnitt (15) unterbrechen und den Klappenabschnitt (14) mit dem Rahmen (12) verbinden. 5
5. Wiederverschließbare Klappenvorrichtung nach einem vorhergehenden Anspruch, in welcher der Schnitt (15) in der unteren Schicht (30) über die Scharnierlinie (18) hinaus fortführt. 10
6. Wiederverschließbare Klappenvorrichtung nach Anspruch 5, in welcher der fortführende Schnitt eine Kurve beschreibt (17) in Richtung der lateralen Seiten der Klappenvorrichtung, um unerwünschtes Einreißen der unteren Schicht zu hindern, wenn die Klappe geöffnet wird. 15 20
7. Wiederverschließbare Klappenvorrichtung nach einem vorhergehenden Anspruch, in welcher die untere Schicht (30) von vorn nach hinten über die Scharnierlinie (18) fortführt. 25
8. Wiederverschließbare Klappenvorrichtung nach einem vorhergehenden Anspruch, in welcher der Klappenabschnitt (14) an seinem vorderen Ende, gegenüber dem Scharnierbereich (18), eine Lasche (20) aufweist, um das Erfassen und Öffnen des Klappenabschnitts zu erleichtern. 30
9. Wiederverschließbare Klappenvorrichtung nach einem vorhergehenden Anspruch, in welcher die untere Schicht (30) aus PET hergestellt ist und 40-60 µm dick ist, und die obere Schicht (40) aus PPE hergestellt ist und 150-200 µm dick ist; und/oder, in welcher die obere Schicht zumindest zweimal so steif wie die untere Schicht ist. 35 40
10. Wiederverschließbare Klappenvorrichtung nach einem vorhergehenden Anspruch, in welcher die untere Schicht (30) rückwärtig fortführt und einen zweiten Klappenabschnitt (14') inkorporiert, der durch einen weiteren Abschnitt der oberen Schicht (40) definiert ist, wobei der zweite Klappenabschnitt (14') einen Schlitz aufweist mit dem ein Produkt aufgehängt werden kann, wenn die Klappenvorrichtung am Produkt angebracht ist. 45 50
11. Packung, die ein Behältnis mit einem Loch (102) zum Herausziehen oder Einfügen von Produkten einschließt, wobei das Loch von einer wiederverschließbaren Klappenvorrichtung nach einem vorhergehenden Anspruch abgedeckt wird. 55
12. Verfahren zur Herstellung einer

wiederverschließbaren Klappenvorrichtung in Form einer Folie zur Verwendung an oder Einarbeitung in Verpackung (100), die folgenden Schritte umfassend:

Bereitstellen einer unteren Schicht (30) aus Material, das eine Klebschicht (80) auf seiner unteren Seite aufweist;
 Kleben einer oberen Schicht (40) aus Material an die untere Schicht;
 Schneiden durch beide Schichten, um einen Klappenabschnitt (14) zu umreißen, wobei der Schnitt eine Kante in einem Scharnierbereich (18) hinter der Klappe intakt lässt, hinter dem sich ein rückwärtiger Bereich (25) der Klappenvorrichtung befindet;
gekennzeichnet durch den Schritt des Entfernens eines Abschnitts (25') der oberen Schicht (40) in einem Bereich dahinter wo der Scharnierbereich (18) zu formen ist, wobei die untere Schicht aus flexiblem Material ist und die obere Schicht aus steifem Material ist.

13. Verfahren nach Anspruch 12, in welchem der Schnitt (15) in der unteren Schicht (30) rückwärtig über die Scharnierlinie (18) hinaus fortführt.

Patentansprüche für folgende(n) Vertragsstaat(en): GB

1. Wiederverschließbare Klappenvorrichtung in Form einer Folie zur Verwendung an oder Einarbeitung in Verpackung (100), umfassend:
 - Eine untere Schicht (30) aus Material, das eine Klebschicht (80) auf seiner unteren Seite aufweist; und
 - eine obere Schicht (40) aus Material, das an die untere Schicht geklebt ist;

wobei die Folie durch beide Schichten geschnitten (15) wird, um einen Klappenabschnitt (14) zu umreißen, wobei der Schnitt eine Kante in einem Scharnierbereich (18) hinter der Klappe intakt lässt, hinter dem sich ein rückwärtiger Bereich (25) der Klappenvorrichtung befindet; **dadurch gekennzeichnet, dass** die untere Schicht aus flexiblem Material besteht, während die obere Schicht aus steifem Material besteht, und die obere Schicht des Klappenabschnitts im hinteren Bereich (25) über die Linie des Scharnierbereichs (18) hinaus nicht vorhanden ist.
2. Wiederverschließbare Klappenvorrichtung nach Anspruch 1, in welcher der Schnitt (15) außerdem einen Rahmen (12) um den Klappenabschnitt (14), zumindest an seinen zwei Seiten, formt.

3. Wiederverschließbare Klappenvorrichtung nach Anspruch 2, in welcher sich der Rahmen (12) eine Distanz rückwärtig über die Scharnierlinie (18) hinaus, aber nicht so weit wie die Kante der unteren Schicht (30) erstreckt. 5
4. Wiederverschließbare Klappenvorrichtung nach Anspruch 2 oder 3, die ferner zwei Bindeabschnitte (16) einschließen, welche den Schnitt (15) unterbrechen und den Klappenabschnitt (14) mit dem Rahmen (12) verbinden. 10
5. Wiederverschließbare Klappenvorrichtung nach einem vorhergehenden Anspruch, in welcher der Schnitt (15) in der unteren Schicht (30) über die Scharnierlinie (18) hinaus fortführt. 15
6. Wiederverschließbare Klappenvorrichtung nach einem vorhergehenden Anspruch, in welcher die untere Schicht (30) von vorn nach hinten über die Scharnierlinie (18) fortführt. 20
7. Wiederverschließbare Klappenvorrichtung nach einem vorhergehenden Anspruch, in welcher der Klappenabschnitt (14) an seinem vorderen Ende, gegenüber dem Scharnierbereich (18), eine Lasche (20) aufweist, um das Erfassen und Öffnen des Klappenabschnitts zu erleichtern. 25
8. Wiederverschließbare Klappenvorrichtung nach einem vorhergehenden Anspruch, in welcher die untere Schicht (30) aus PET hergestellt ist und 40-60 µm dick ist, und die obere Schicht (40) aus PPE hergestellt ist und 150-200 µm dick ist; und/oder, in welcher die obere Schicht zumindest zweimal so steif wie die untere Schicht ist. 30
9. Wiederverschließbare Klappenvorrichtung nach einem vorhergehenden Anspruch, in welcher die untere Schicht (30) rückwärtig fortführt und einen zweiten Klappenabschnitt (14') inkorporiert, der durch einen weiteren Abschnitt der oberen Schicht (40) definiert ist, wobei der zweite Klappenabschnitt (14') einen Schlitz aufweist mit dem ein Produkt aufgehängt werden kann, wenn die Klappenvorrichtung am Produkt angebracht ist. 35
10. Packung, die ein Behältnis mit einem Loch (102) zum Herausziehen oder Einfügen von Produkten einschließt, wobei das Loch von einer wiederverschließbaren Klappenvorrichtung nach einem vorhergehenden Anspruch abgedeckt wird. 40
11. Verfahren zur Herstellung einer wiederverschließbaren Klappenvorrichtung in Form einer Folie zur Verwendung an oder Einarbeitung in Verpackung (100), die folgenden Schritte umfassend: 45

Bereitstellen einer unteren Schicht (30) aus Material, das eine Klebschicht (80) auf seiner unteren Seite aufweist;
 Kleben einer oberen Schicht (40) aus Material an die untere Schicht;
 Schneiden durch beide Schichten, um einen Klappenabschnitt (14) zu umreißen, wobei der Schnitt eine Kante in einem Scharnierbereich (18) hinter der Klappe intakt lässt, hinter dem sich ein rückwärtiger Bereich (25) der Klappenvorrichtung befindet;
gekennzeichnet durch den Schritt des Entferns eines Abschnitts (25') der oberen Schicht (40) in einem Bereich dahinter wo der Scharnierbereich (18) zu formen ist, wobei die untere Schicht aus flexiblem Material ist und die obere Schicht aus steifem Material ist.

12. Verfahren nach Anspruch 12, in welchem der Schnitt (15) in der unteren Schicht (30) rückwärtig über die Scharnierlinie (18) hinaus fortführt.

Revendications

Revendications pour l'(les) Etat(s) contractant(s) suivant(s): AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GR, HR, HU, IE, IS, IT, LI, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR

1. Un dispositif de rabat refermable sous forme de bande pouvant être appliquée sur un emballage (100) ou incorporée à ce dernier, comprenant :

- une couche de matériau inférieure (30), dont la surface inférieure comprend une couche adhésive (80) ; et
- une couche de matériau supérieure (40) adhérent à la couche inférieure ;

dans lequel les deux couches de la bande sont tranchées (15) de façon à délimiter une partie constituant un rabat (14), la découpe préservant un rebord dans une zone charnière (18) à l'arrière du rabat, derrière laquelle se trouve une zone arrière (25) du dispositif de rabat ; **caractérisé en ce que** la couche inférieure est constituée d'un matériau flexible, tandis que la couche supérieure est constituée d'un matériau rigide, et la couche supérieure de la partie constituant un rabat n'est pas présente dans la zone arrière (25) se trouvant au-delà de la ligne de la zone charnière (18).

2. Un dispositif de rabat refermable selon la revendication 1, dans lequel la découpe (15) forme aussi un cadre (12) autour de la partie constituant un rabat (14), au moins des deux côtés de cette dernière.

3. Un dispositif de rabat refermable selon la revendication 2, dans lequel le cadre (12) s'étend vers l'arrière sur une certaine distance au-delà de la ligne de la charnière (18), sans pour autant atteindre le bord de la couche inférieure (30). 5
4. Un dispositif de rabat refermable selon la revendication 2 ou 3, comprenant par ailleurs deux parties de liaison (16) interrompant la découpe (15) et liant la partie constituant un rabat (14) au cadre (12). 10
5. Un dispositif de rabat refermable selon l'une des revendications précédentes, dans lequel la découpe (15) se poursuit vers l'arrière dans la couche inférieure (30) au-delà de la ligne de la charnière (18). 15
6. Un dispositif de rabat refermable selon la revendication 5, dans lequel la poursuite de la découpe forme une courbe arrondie (17) vers les côtés latéraux du dispositif de rabat de façon à prévenir un déchirement involontaire de la couche inférieure lors de l'ouverture du rabat. 20
7. Un dispositif de rabat refermable selon l'une des revendications précédentes, dans lequel la couche inférieure (30) est continue de l'avant à l'arrière en passant par-dessus de la ligne de la charnière (18). 25
8. Un dispositif de rabat refermable selon l'une des revendications précédentes, dans lequel la partie constituant un rabat (14) comprend au niveau de son extrémité avant, se trouvant à l'opposé de la zone charnière (18), une languette (20) facilitant la préhension et l'ouverture de la partie constituant un rabat. 30
9. Un dispositif de rabat refermable selon l'une des revendications précédentes, dans lequel la couche inférieure (30) est composée de PET d'une épaisseur de 40 à 60 μm , et la couche supérieure (40) est composée de PPE d'une épaisseur de 150 à 200 μm ; et/ou dans lequel la couche supérieure est au moins deux fois plus rigide que la couche inférieure. 40
10. Un dispositif de rabat refermable selon l'une des revendications précédentes, dans lequel la couche inférieure (30) se poursuit vers l'arrière et incorpore une seconde partie de rabat (14') définie par une partie supplémentaire de la couche supérieure (40), la seconde partie de rabat (14') disposant d'une fente par laquelle un produit peut être suspendu lorsque le dispositif de rabat est fixé au produit. 45 50
11. Un emballage comprenant un récipient muni d'un orifice (102) pour l'extraction ou l'insertion de produits, l'orifice étant recouvert d'un dispositif de rabat refermable selon l'une des revendications précédentes. 55

12. Une méthode de production d'un dispositif de rabat refermable sous forme de bande pouvant être appliquée sur un emballage (100) ou incorporée à ce dernier, comprenant les étapes suivantes :

la fourniture d'une couche de matériau inférieure (30), dont la surface inférieure comprend une couche adhésive (80) ;
l'adhérence d'une couche de matériau supérieure (40) à la couche inférieure ;
le tranchage des deux couches de la bande de façon à délimiter une partie constituant un rabat (14), la découpe (15) préservant un rebord dans une zone charnière (18) à l'arrière du rabat, derrière laquelle se trouve la zone arrière (25) du dispositif de rabat.

caractérisée par l'étape de retrait d'une partie (25') de la couche supérieure (40) dans une zone se trouvant derrière l'emplacement auquel la zone charnière (18) doit être formée, dans laquelle la couche inférieure est constituée d'un matériau flexible et la couche supérieure est constituée d'un matériau rigide.

13. Une méthode selon la revendication 12, dans laquelle la découpe (15) se poursuit vers l'arrière dans la couche inférieure (30) au-delà de la ligne de la charnière (18).

Revendications pour l'(les) Etat(s) contractant(s) suivant(s): GB

1. Un dispositif de rabat refermable sous forme de bande pouvant être appliquée sur un emballage (100) ou incorporée à ce dernier, comprenant :

- une couche de matériau inférieure (30), dont la surface inférieure comprend une couche adhésive (80) ; et
- une couche de matériau supérieure (40) adhérent à la couche inférieure ;

dans lequel les deux couches de la bande sont tranchées (15) de façon à délimiter une partie constituant un rabat (14), la découpe préservant un rebord dans une zone charnière (18) à l'arrière du rabat, derrière laquelle se trouve une zone arrière (25) du dispositif de rabat ; **caractérisé en ce que**

la couche inférieure est constituée d'un matériau flexible, tandis que la couche supérieure est constituée d'un matériau rigide, et la couche supérieure de la partie constituant un rabat n'est pas présente dans la zone arrière (25) se trouvant au-delà de la ligne de la zone charnière (18).

2. Un dispositif de rabat refermable selon la revendication 1, dans lequel la découpe (15) forme aussi un

cadre (12) autour de la partie constituant un rabat (14), au moins des deux côtés de cette dernière.

3. Un dispositif de rabat refermable selon la revendication 2, dans lequel le cadre (12) s'étend vers l'arrière sur une certaine distance au-delà de la ligne de la charnière (18), sans pour autant atteindre le bord de la couche inférieure (30). 5
4. Un dispositif de rabat refermable selon la revendication 2 ou 3, comprenant par ailleurs deux parties de liaison (16) interrompant la découpe (15) et liant la partie constituant un rabat (14) au cadre (12). 10
5. Un dispositif de rabat refermable selon l'une des revendications précédentes, dans lequel la découpe (15) se poursuit vers l'arrière dans la couche inférieure (30) au-delà de la ligne de la charnière (18). 15
6. Un dispositif de rabat refermable selon l'une des revendications précédentes, dans lequel la couche inférieure (30) est continue de l'avant à l'arrière en passant par-dessus de la ligne de la charnière (18). 20
7. Un dispositif de rabat refermable selon l'une des revendications précédentes, dans lequel la partie constituant un rabat (14) comprend au niveau de son extrémité avant, se trouvant à l'opposé de la zone charnière (18), une languette (20) facilitant la préhension et l'ouverture de la partie constituant un rabat. 25 30
8. Un dispositif de rabat refermable selon l'une des revendications précédentes, dans lequel la couche inférieure (30) est composée de PET d'une épaisseur de 40 à 60 μm , et la couche supérieure (40) est composée de PPE d'une épaisseur de 150 à 200 μm ; et/ou dans lequel la couche supérieure est au moins deux fois plus rigide que la couche inférieure. 35 40
9. Un dispositif de rabat refermable selon l'une des revendications précédentes, dans lequel la couche inférieure (30) se poursuit vers l'arrière et incorpore une seconde partie de rabat (14') définie par une partie supplémentaire de la couche supérieure (40), la seconde partie de rabat (14') disposant d'une fente par laquelle un produit peut être suspendu lorsque le dispositif de rabat est fixé au produit. 45
10. Un emballage comprenant un récipient muni d'un orifice (102) pour l'extraction ou l'insertion de produits, l'orifice étant recouvert d'un dispositif de rabat refermable selon l'une des revendications précédentes. 50 55
11. Une méthode de production d'un dispositif de rabat refermable sous forme de bande pouvant être appliquée sur un emballage (100) ou incorporée à ce der-

nier, comprenant les étapes suivantes :

la fourniture d'une couche de matériau inférieure (30), dont la surface inférieure comprend une couche adhésive (80) ;
l'adhérence d'une couche de matériau supérieure (40) à la couche inférieure ;
le tranchage des deux couches de la bande de façon à délimiter une partie constituant un rabat (14), la découpe (15) préservant un rebord dans une zone charnière (18) à l'arrière du rabat, derrière laquelle se trouve la zone arrière (25) du dispositif de rabat.
caractérisée par l'étape de retrait d'une partie (25') de la couche supérieure (40) dans une zone se trouvant derrière l'emplacement auquel la zone charnière (18) doit être formée, dans laquelle la couche inférieure est constituée d'un matériau flexible et la couche supérieure est constituée d'un matériau rigide.

12. Une méthode selon la revendication 12, dans laquelle la découpe (15) se poursuit vers l'arrière dans la couche inférieure (30) au-delà de la ligne de la charnière (18).

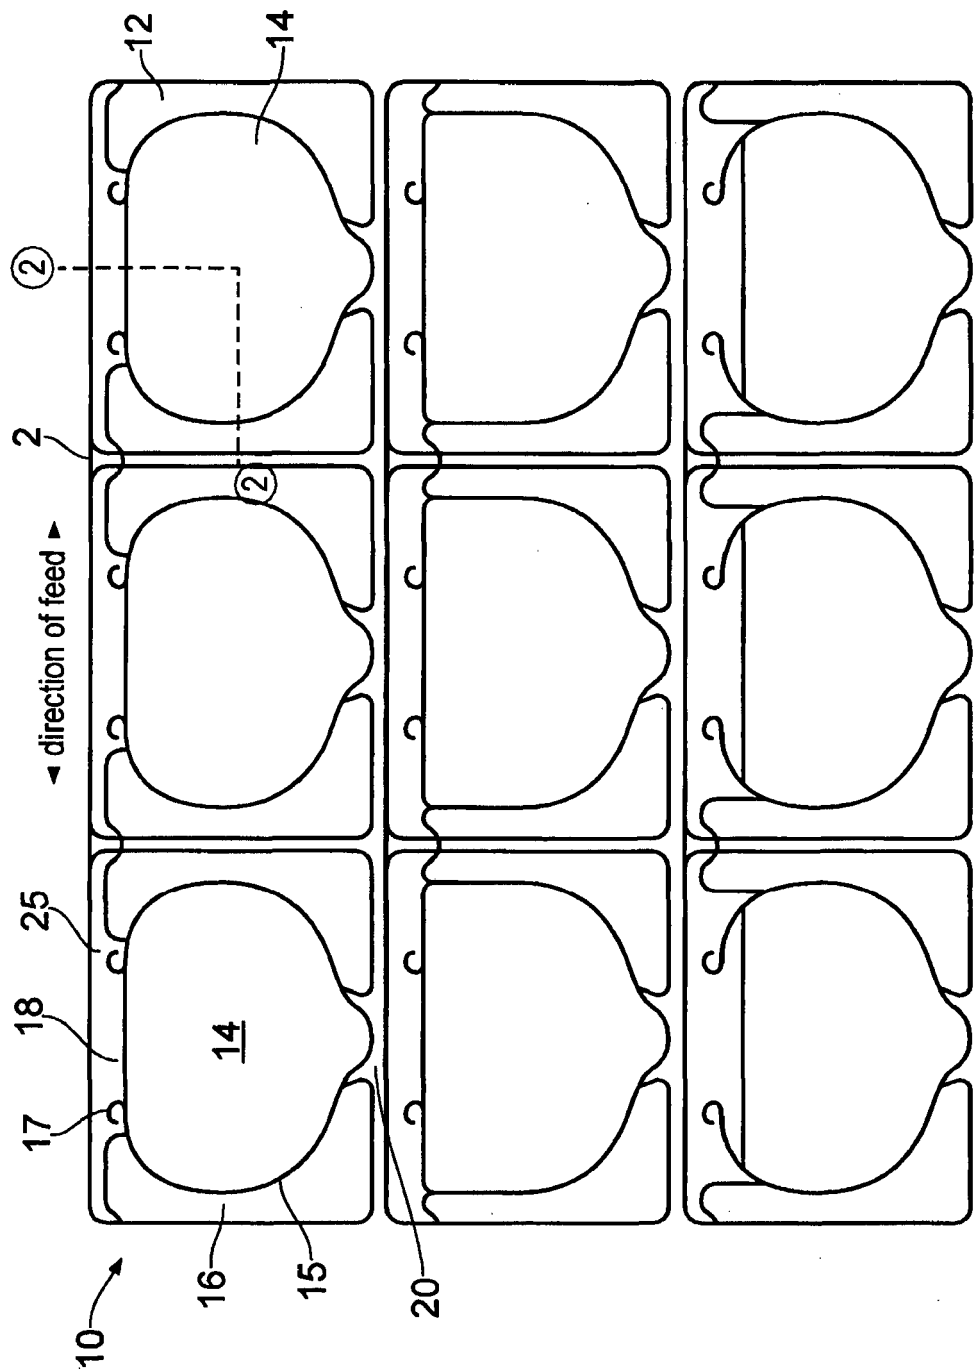


FIG. 1

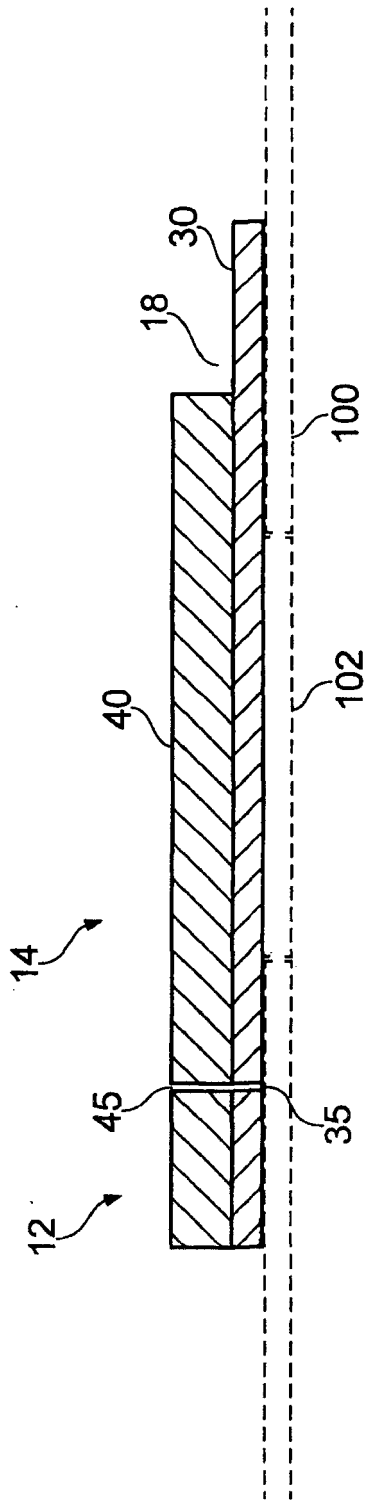


FIG. 2

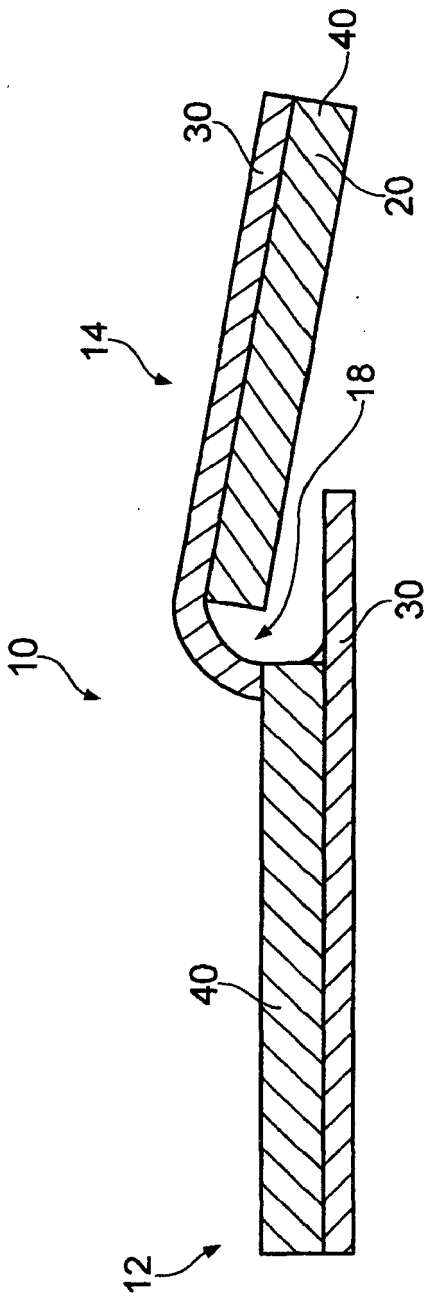


FIG. 3

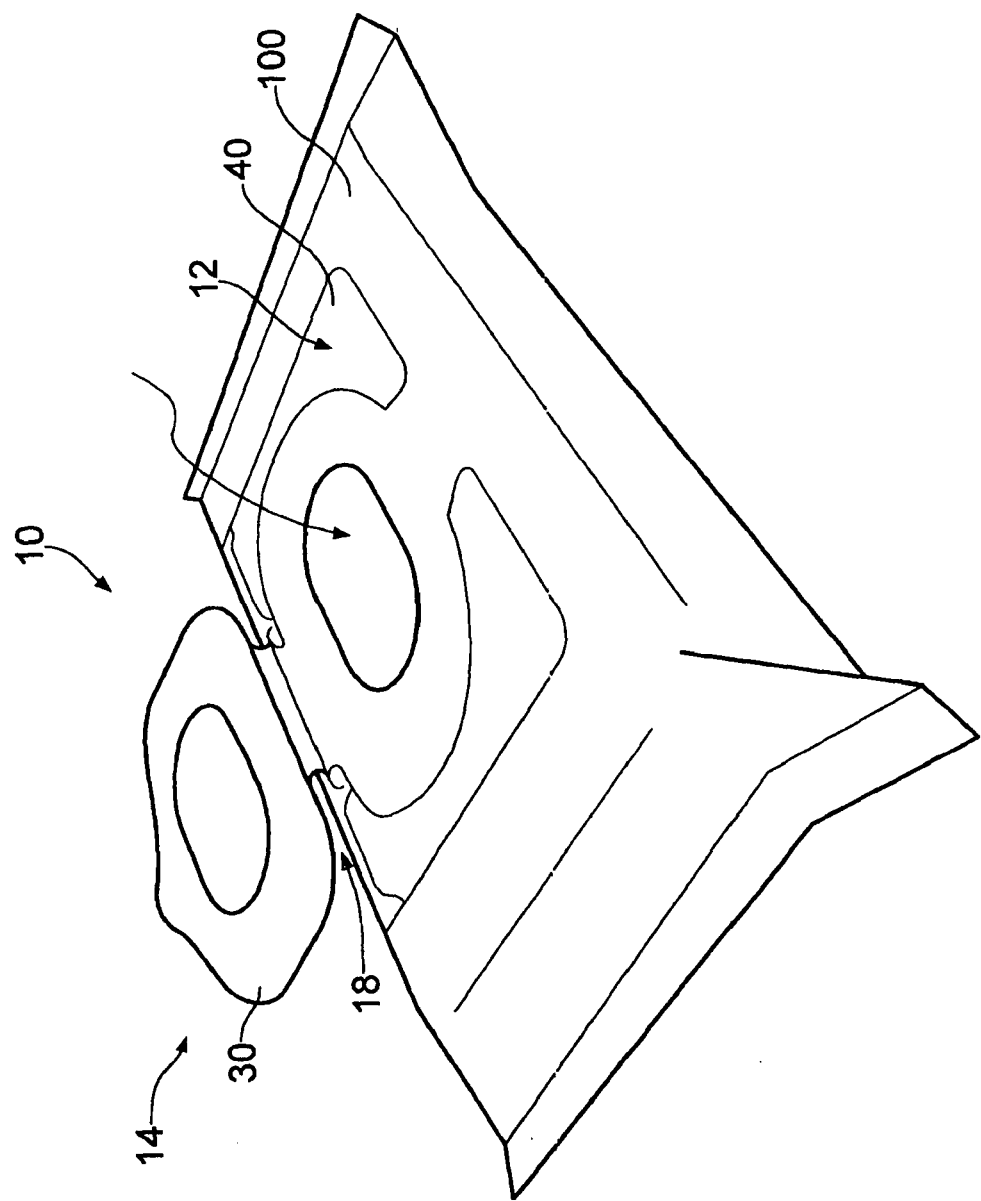


FIG. 4

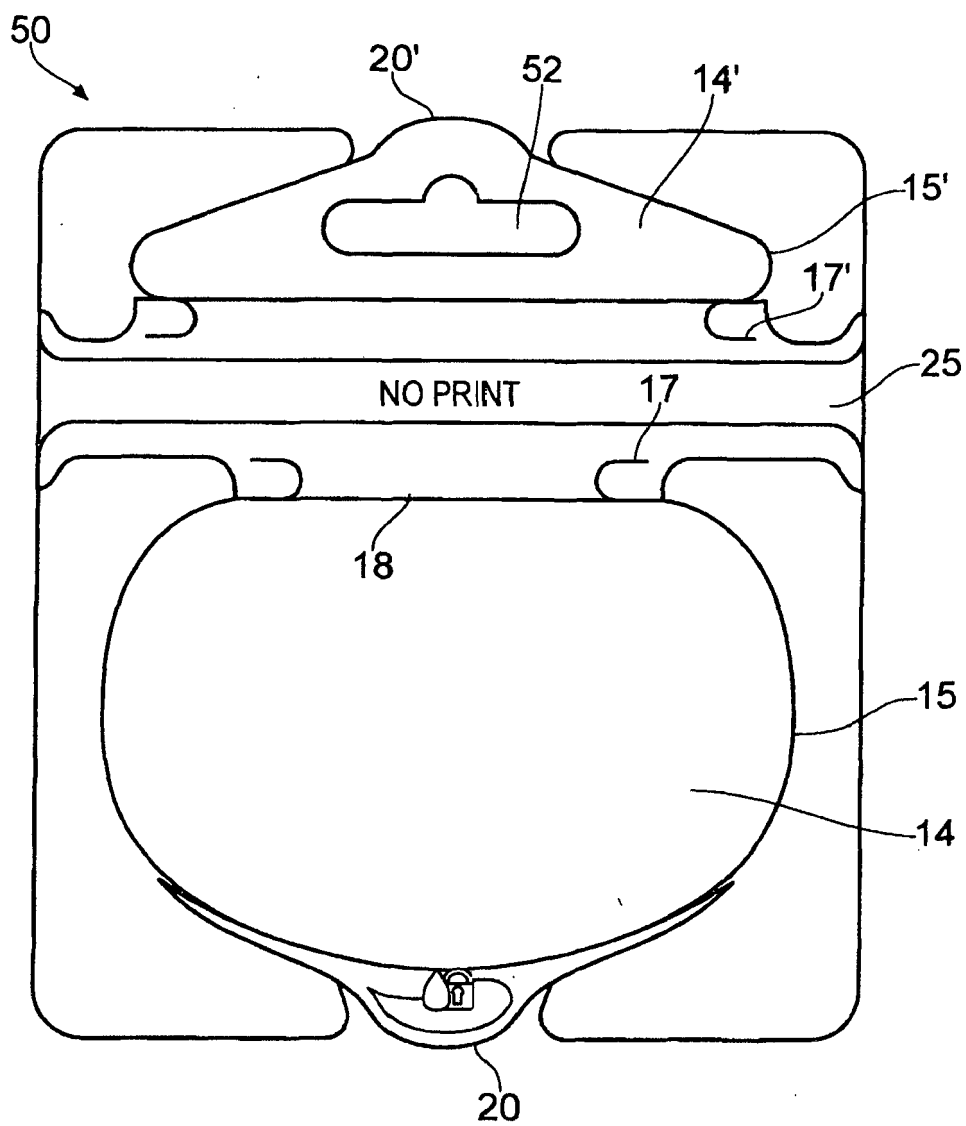


FIG. 5

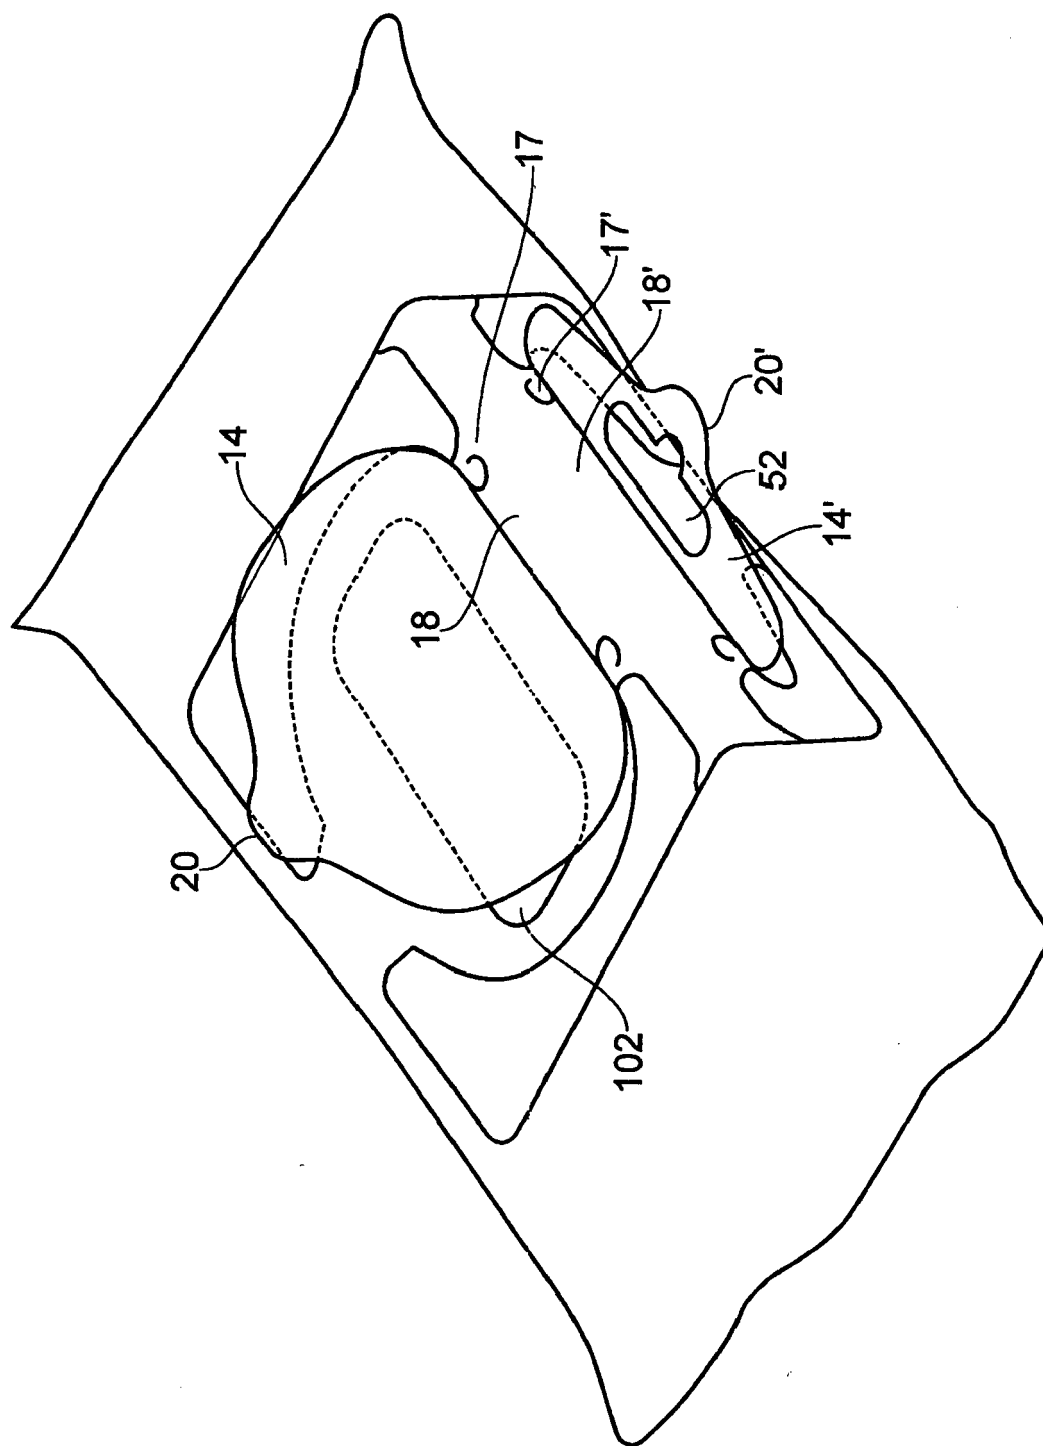


FIG. 6

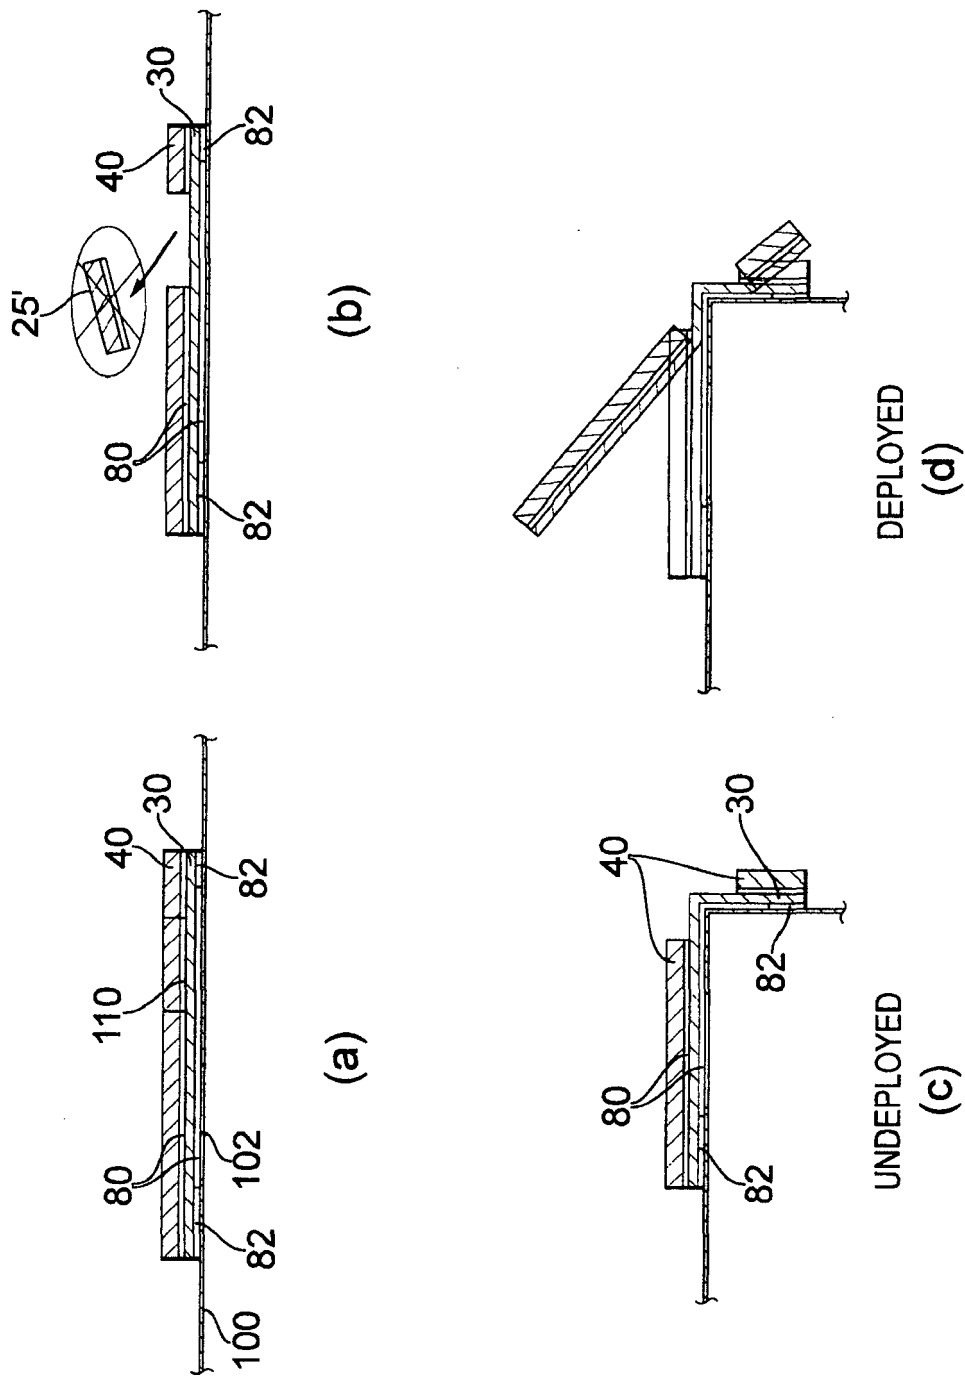


FIG. 7

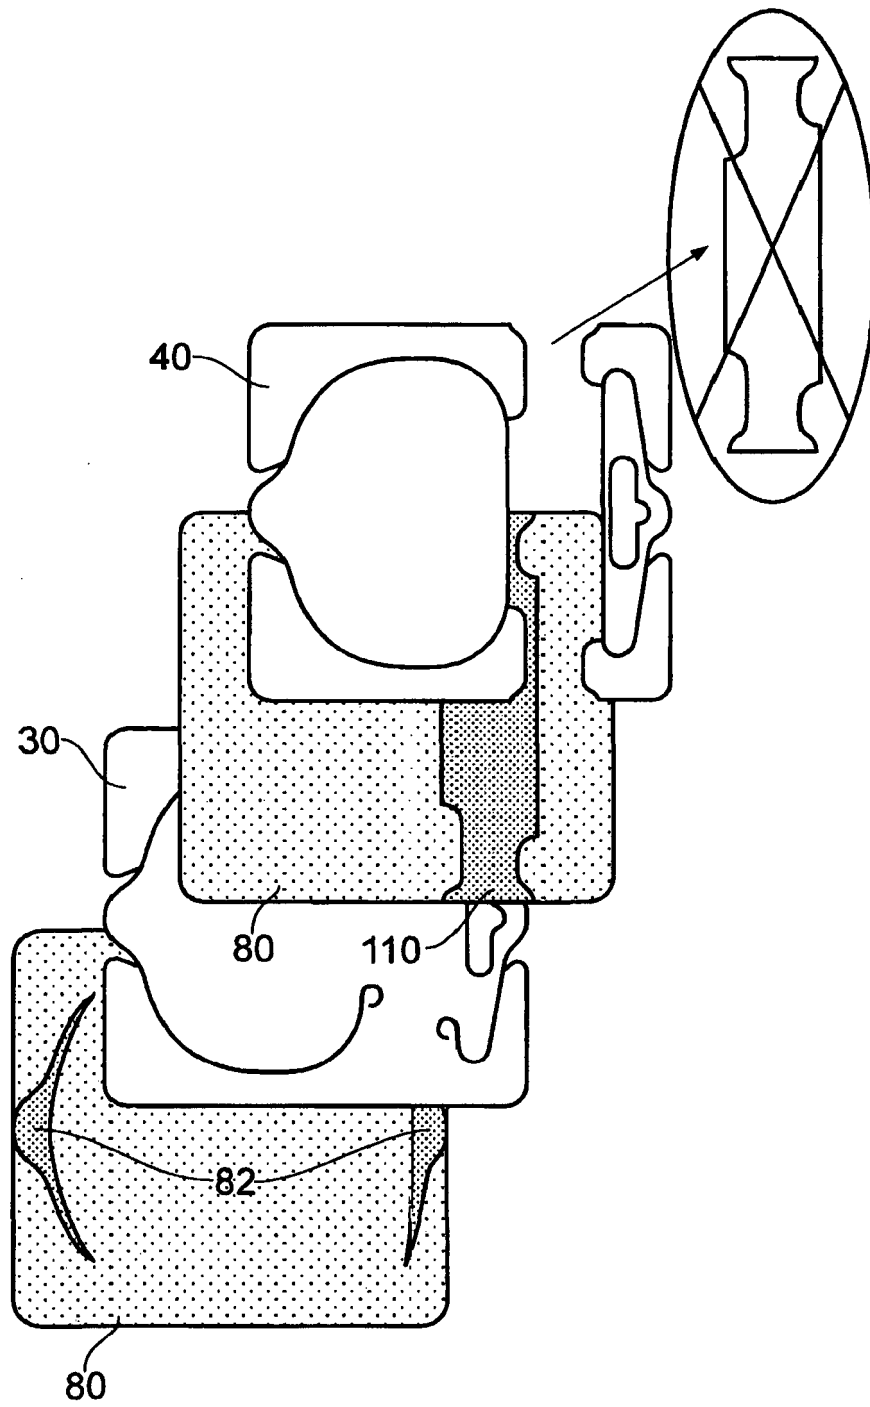


FIG. 8

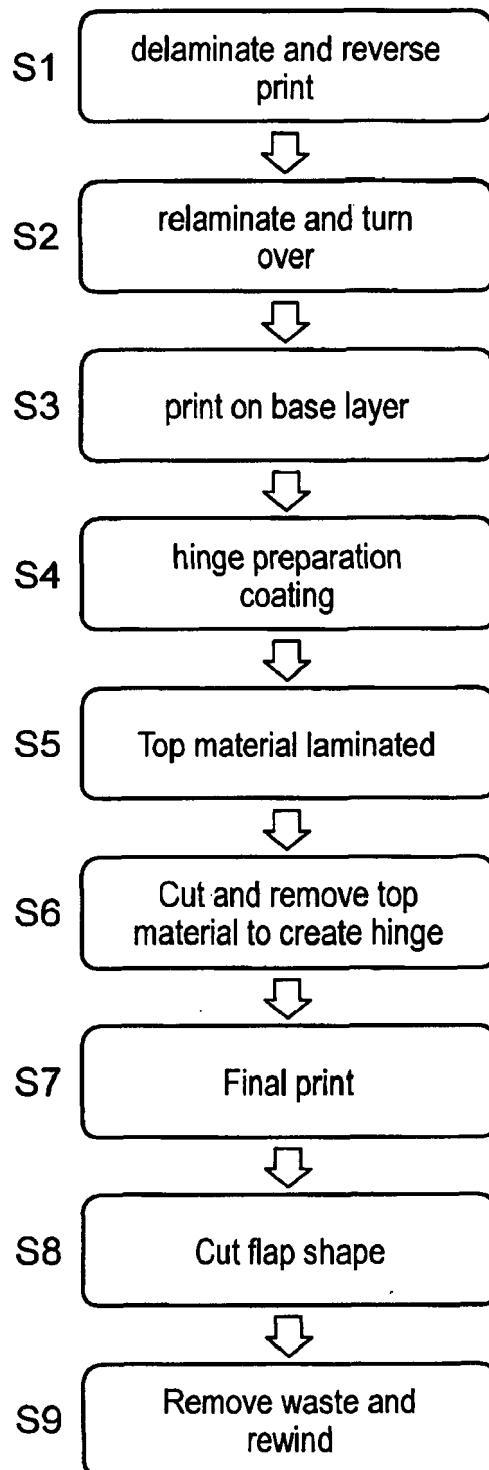


FIG. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2202176 A1 [0002]
- WO 2011003068 A [0004]