(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) **EP 3 257 990 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
20.12.2017 Bulletin 2017/51

(51) Int Cl.:
D05B 13/00 *(2006.01)* ***B65D 88/16*** *(2006.01)*

(21) Application number: **16174949.4**

(22) Date of filing: **17.06.2016**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Codefine S.A.**
1001 Lausanne (CH)

(72) Inventor: **Schinasi, Piero**
1066 Epalinges (CH)

(74) Representative: **Ganguillet, Cyril et al**
ABREMA Agence Brevets & Marques Ganguillet
Avenue du Théâtre 16
P.O. Box 5027
CH-1002 Lausanne (CH)

(54) **METHOD FOR PRODUCTION OF BAGS FOR THE TRANSPORT AND STORAGE OF BULK GOODS OR LIQUIDS, AND BAG OBTAINED ACCORDING TO THE METHOD**

(57) The present invention relates to a method for production of bags for the transport and storage of bulk goods or liquids, wherein use is made of tubular fabric cut into several pieces, which are then assembled together, comprising the steps of:
- providing a tubular fabric;
- flattening said tubular fabric to form a first double-thickness fabric having two opposite sides, respectively an internal side (11a) and an external side (11 b), extending between two flattened edges (12, 14);
- folding-in or pleating at lest one of the flattened edges (12, 14) of said double-thickness fabric (10) to form a gusset (20);
- cutting said tubular fabric into pieces and assembling said pieces to form a bag;
wherein the assembly of two said pieces (10, 10') comprises the steps of:
- assembling the first and second pieces (10, 10') by means of seams (23) formed around or near first to fourth gusset ends (15, 19, 15', 19').

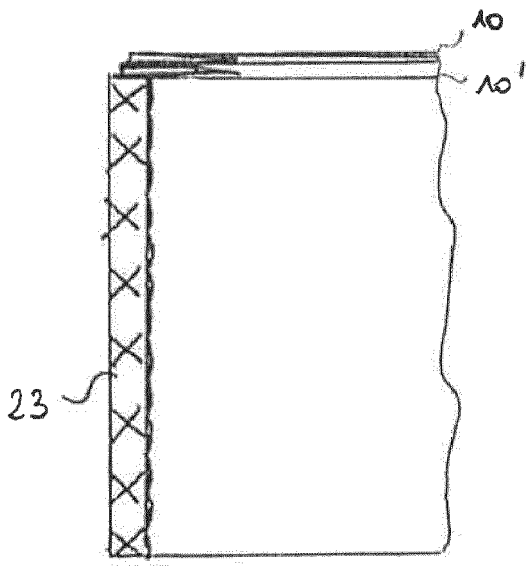


Fig.5

EP 3 257 990 A1

Description

TECHNICAL FIELD

[0001] The present invention relates to a method for production of bags for the transport and storage of bulk goods or liquids, as well as the bag obtained according to the method.

STATE OF THE ART

[0002] Bags for the transport and storage of bulk goods or liquids, which are also known as "big bags", are in general made of fabrics woven from polypropylene, which fabrics may or may not be laminated. The most common method for production of bags of this type consists of sewing together a plurality of pieces of fabric, so as to form a rectangular parallelepiped.

[0003] For this purpose, it is possible to use tubular fabrics produced by means of circular looms, the pieces which are designed to be sewn together to form the bag being constituted by sections of tubular fabric which are flattened to form lengths of flat double-thickness fabric, the width of which is half the circumference of the tube.

[0004] Since pieces of fabric are to be sewn together to form the bag, use is generally made of sewing machines with one needle or two needles, such those described in the patent applications GB-A-2 301 087, JP-A-2004 033548 or JP-A-2005 118400. In the case of machines with two needles, the needles work in parallel, generally at a distance of approximately 0.5 to 1 cm, in order to produce two parallel seams which increase the strength of the assembly. An example of a machine of this type is represented schematically in figure 3 of US 8,950,346 B2. Such machines are however not adapted for producing bags that are used for the storage and transport of powdery goods, because the powder may escape via the sewing holes. US 8,950,346 B2 relates to a method permitting to sew together pieces of fabric without forming sewing holes. This method uses a sewing machine comprising at least two needles operating in line one behind the other in one and the same direction so as to form a seam along a single line. Thus the perforation produced by the first needle is covered by the stitch of the second needle and the perforation produced by the second needle is made through the thread of the stitch made by the first needle, thus filling said perforation with said thread.

[0005] One disadvantage of these known methods is the relative weakness of the assembly due to the fact that stresses applied by the content of a bag are concentrated on the seam line separating two adjacent lateral walls of said bag. This may become particularly problematic in the specific case of big bags with nominal weights of approximately 250 to 3000 kilos. When these bags are completely filled, the seams are subjected to the full weight of the container's content. Therefore, this is a risk that these seams are torn or break.

DISCLOSURE OF THE INVENTION

[0006] The object of the present invention is to propose a method for production of bags for the transport and storage of bulk goods or liquids, which makes it possible in particular to overcome the above-described disadvantages.

[0007] For this purpose, the present invention relates to a method for production of bags for the transport and storage of bulk goods or liquids, wherein use is made of tubular fabric cut into several pieces, which are then assembled together, comprising the steps of:

- providing a tubular fabric;
- flattening said tubular fabric to form a first double-thickness fabric having two opposite sides, respectively an internal side (11a) and an external side (11b), extending between two flattened edges (12, 14);
- folding-in or pleating a first (12) of the flattened edges (12, 14) of said double-thickness fabric (10) to form a first gusset (20), said first gusset (20) being defined by a first oblique section (13) extending between said folded-in flattened edge (12) and a first gusset end (15) positioned on the external side (11b) of the first double-thickness fabric (10) and by a second oblique section (17) extending between said folded-in flattened edge (12) and a second gusset end (19) positioned on the internal side (11 a) of the first double-thickness fabric (10);
- folding-in or pleating the second (14) of the flattened edges (12, 14) in a manner symmetric to said first edge (12),
- cutting said tubular fabric into pieces and assembling said pieces to form a bag,

wherein the assembly of two said pieces (10, 10') comprises the steps of:

- disposing the first and the second pieces (10, 10') such that the external side (11b') of the second piece (10') is in contact with or close to the internal side (11 a) of the first piece (10) and such that the first, second, third and fourth gusset ends (15, 19, 15', 19') of said pieces are substantially aligned;
- assembling the first and second pieces (10, 10') by means of seams (23) formed around or near the first to fourth gusset ends (15, 19, 15', 19')

[0008] The present invention also relates to a bag for the transport and storage of bulk goods or liquids according to claim 2.

[0009] Other important characteristics of the invention are discussed hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The following description is provided by way of

non-limiting example. It relates to the drawing, in which:

- figures 1 and 1 a are respectively perspective and top schematic views of a tubular fabric used for making a bag in accordance with the invention;
- figures 2 and 2a are similar views to figures 1 and 1 a, but illustrating the tubular fabric having been flattened to form a double-thickness fabric;
- figures 3 and 3a are similar views to figures 2 and 2a, but illustrating the double-thickness fabric after the formation of a gusset at its flattened ends;
- figures 4 and 4a are similar views to figures 3 and 3a, but illustrating a pair of double-thickness pieces of fabric having been disposed for their assembling;
- figures 5 and 5a are similar views to figures 4 and 4a, but illustrating partially the pair of double-thickness pieces of fabric after their assembling by means of seams;
- figure 6 is a perspective schematic view of a bag according to the present invention;
- figure 7 is a cross-sectional top view of the bag shown in figure 6.

DETAILED DESCRIPTION OF THE EMBODIMENTS OF THE INVENTION

[0011] The bags according to the invention are made of pieces constituted by sections of tubular fabric flattened so as to form lengths of flat double-thickness fabric, the width of which is half the circumference of the tube. Pieces of fabric of this type can be square or rectangular and form either the bottom or one of the lateral walls of the bag. It is also possible that one piece of fabric is designed to constitute both the bottom of the bag and two opposite lateral walls, two complementary pieces being designed to constitute the two other lateral walls of the bag. In the conventional bag, the assembly of two adjacent pieces of fabric of the bag are carried out by sewing along a single line, which is parallel to the sides of the pieces. Such a configuration is for example illustrated in figures 1 and 2 of US 8,950,346 B2. In this configuration, stresses applied on the bag by its content are transmitted directly to the single line. A deterioration of the seam may thus occur in use, which leads to an imperfect sealing against the powders, and, therefore, to a possible loss of content if the bag contains powders or other similar products.

[0012] To avoid this problem, the essential concept of the production method according to the invention consists to form a gusset at one end of the pieces of fabric and to provide this gusseted end with several connecting lines or areas, said connecting lines or areas being positioned so as to distribute stresses on several portions of the pieces of fabric when they are assembled together.

[0013] The production and assembly of two adjacent pieces of fabric for the formation of a bag according to the invention will be better understood by reference to figures 1 to 5 and 1 a to 5a.

[0014] Referring firstly to figures 1 and 1 a, one starts with a tubular fabric 10 weighing preferably 75 to 125 grams per square meter. The tubular fabric 10 has an appropriate diameter and length which is determined by the desired dimensions of the finished bag.

[0015] Referring to figures 2 and 2a, this tubular fabric 10 is then flattened so as to form a double-thickness fabric having two opposite sides, respectively an internal side 11 a and an external side 11 b, extending between two flattened edges, respectively a left edge 12 and a right edge 14, and two open or cut edges 16, 18.

[0016] Referring to figures 3 and 3a, a gusset 20 is now formed by folded in or pleating the double-thickness fabric 10 at the portion adjacent the left edge 12, said left edge 12 projecting inwards in the fabric 10 to an extent of several cm for example. Gusseting to achieve the gusset 20 may be effected as the tubular fabric 10 is flattened, and may be effected by appropriate shaping tools (not shown) past which the tubular fabric progresses, simultaneously with a gusset 24 at the right edge 14. The gusset 20 is thus defined by a first oblique section 13 extending between the folded-in left edge 12 and a first gusset end 15 positioned on the external side 11 b of the fabric 10 and by a second oblique section 17 extending between said folded-in left edge 12 and a second gusset end 19 positioned on the internal side 11 a of the fabric 10.

[0017] So prepared, the tubular fabric is cut into pieces to be assembled to form a bag.

[0018] Referring to figures 4 and 4a, the piece of fabric 10 of figures 3 and 3a is disposed adjacent to a similar piece of fabric 10'. Said piece of fabric 10' is in particular defined by an internal side 11 a', an external side 11 b', a left edge 12' projecting inwards and a gusset 20' defined by a third oblique section 13' extending between the left edge 12' and a third gusset end 15' positioned on the external side 11b' and by a fourth oblique section 17' extending between said left edge 12' and a fourth gusset end 19' positioned on the internal side 11 a'. The pieces of fabric 10 and 10' may advantageously be disposed such that the external side 11 b' of the piece of fabric 10' is in contact with or close to the internal side 11 a of the piece of fabric 10 and such that the first, second, third and fourth gusset ends 15, 19, 15', 19' are substantially aligned.

[0019] Referring to figures 5 and 5a, the pieces of fabric 10 and 10' are finally assembled together by means of seams 23 formed around or near the first to fourth gusset ends 15, 19, 15', 19'. These seams 23 are properly positioned to connect together the first to fourth oblique sections 13, 17, 13', 17'. Thus configured, the seams 23 permit that stresses applied to the pieces of fabric 10, 10' are distributed on the first to fourth oblique sections 13, 17, 13', 17' and not concentrated only on a single connection line. Thus, a bag formed by a combination of several pieces of fabric assembled in accordance with the method illustrated in figures 1 to 5, respectively 1 a to 5a, may have a better resistance to stress. In particular, several tests have shown that the bags according to the

invention are substantially stronger than the bags produced by a method according to US 8,950,346 B2. Some tests have shown 1.5 time improvements in the resistance at break.

[0020] Figures 6 and 7 illustrate a bag 100 according to a preferred embodiment of the present invention. This bag 100 has a parallelepiped shape and is constituted by four double-thickness pieces of fabric 101 to 104 forming the lateral sides of the bag and one piece of fabric 105 forming the bottom side of the bag. The bag 100 is advantageously equipped with four lifting straps 106 positioned at the four upper corners of the bag, whereto forks of forklifts can fit or penetrate. Each double-thickness piece of fabric 101 to 104 comprises a gusset 20, 20' formed at both of its ends, each gusset being connected to a gusset of an adjacent piece of fabric by seams 23. Thus assembled, the double-thickness fabrics 101 to 104 have the same structure as the fabrics 10, 10' illustrated in figures 5 and 5a.

Claims

1. Method for production of bags for the transport and storage of bulk goods or liquids, wherein use is made of tubular fabric cut into several pieces, which are then assembled together, comprising the steps of:

    - providing a tubular fabric;
    - flattening said tubular fabric to form a first double-thickness fabric having two opposite sides, respectively an internal side (11a) and an external side (11 b), extending between two flattened edges (12, 14);
    - folding-in or pleating a first (12) of the flattened edges (12, 14) of said double-thickness fabric (10) to form a first gusset (20), said first gusset (20) being defined by a first oblique section (13) extending between said folded-in flattened edge (12) and a first gusset end (15) positioned on the external side (11b) of the first double-thickness fabric (10) and by a second oblique section (17) extending between said folded-in flattened edge (12) and a second gusset end (19) positioned on the internal side (11 a) of the first double-thickness fabric (10);
    - folding-in or pleating the second (14) of the flattened edges (12, 14) in a manner symmetric to said first edge (12),
    - cutting said tubular fabric into pieces and assembling said pieces to form a bag,

    wherein the assembly of two said pieces (10, 10') comprises the steps of:

    - disposing the first and the second pieces (10, 10') such that the external side (11 b') of the second piece (10') is in contact with or close to the internal side (11 a) of the first piece (10) and such that the first, second, third and fourth gusset ends (15, 19, 15', 19') of said pieces are substantially aligned;
    - assembling the first and second pieces (10, 10') by means of seams (23) formed around or near the first to fourth gusset ends (15, 19, 15', 19').

2. Bag for the transport and storage of bulk goods or liquids formed by the assembly of several double-thickness pieces of fabric, each piece of fabric (10) having two opposite sides, respectively an internal side (11 a) and an external side (11 b), extending between two edges (12, 14);
wherein each piece of fabric (10) comprises at least one gusset (20), said gusset (20) being defined by a first oblique section (13) extending between one of said flattened edges (12) and a first gusset end (15) positioned on the external side (11b) of the piece of fabric (10) and a second gusset end (19) positioned on the internal side (11 a) of the piece of fabric (10);.
wherein two adjacent pieces of fabric, respectively a first and a second pieces (10, 10'), are assembled such that the external side (11 b') of the second piece (10') is in contact with or close to the internal side (11a) of the first piece (10) and such that the first, second, third and fourth gusset ends (15, 19, 15', 19') of said pieces are substantially aligned;
wherein the first and second pieces (10, 10') are assembled by means of seams (23) formed around or near the first to fourth gusset ends (15, 19, 15', 19').

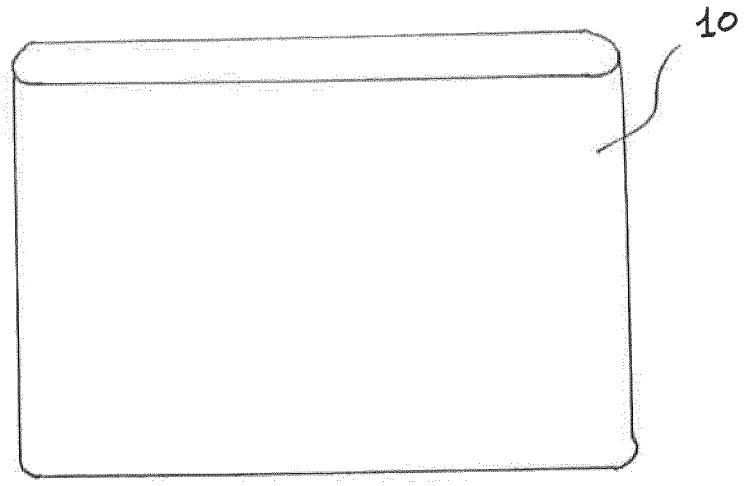


Fig. 1

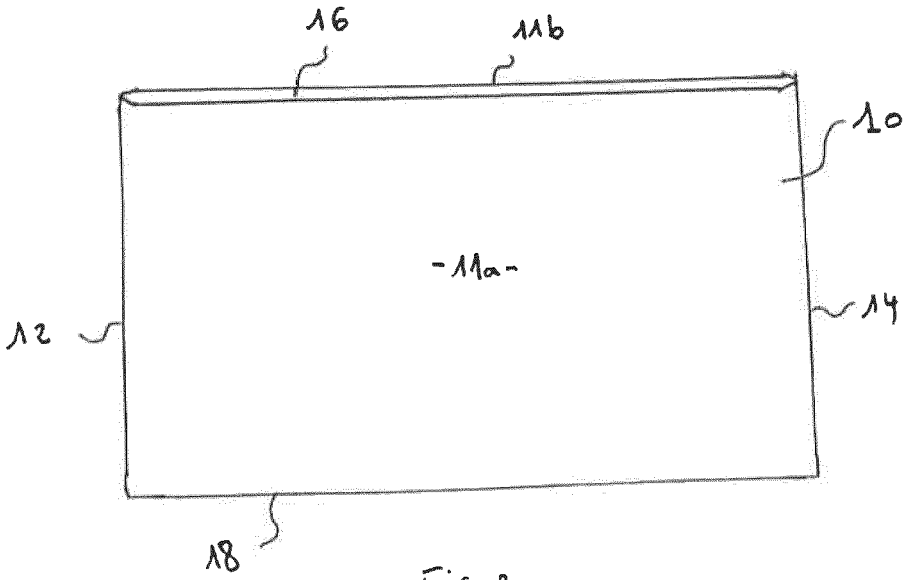


Fig. 2

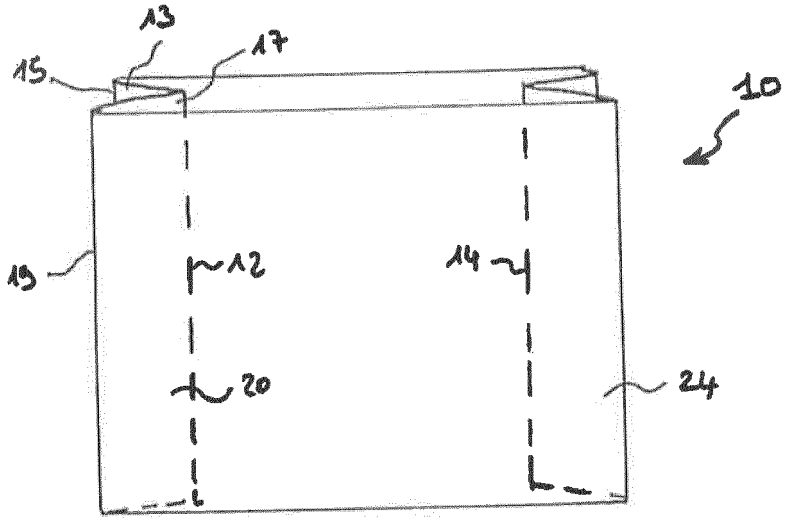


FIG.3

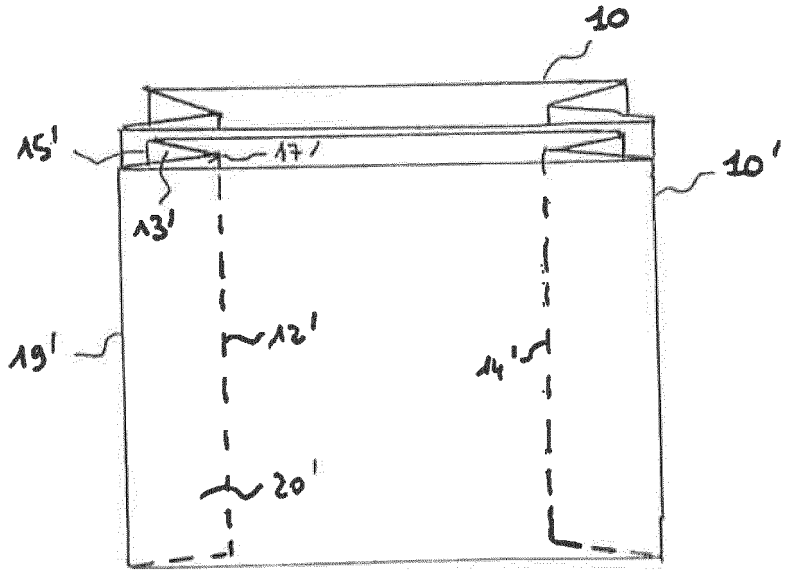


FIG.4

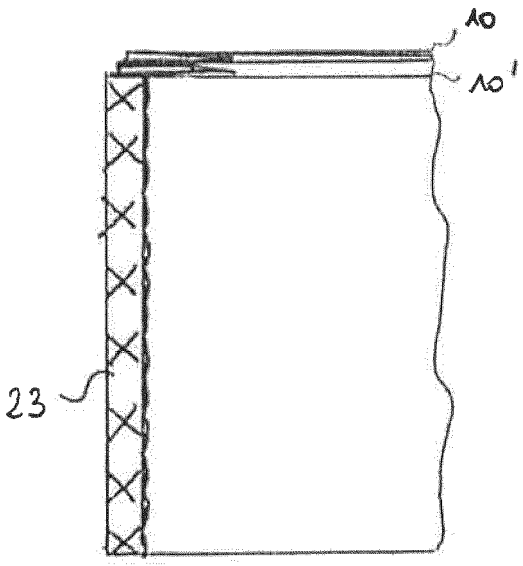


FIG.5

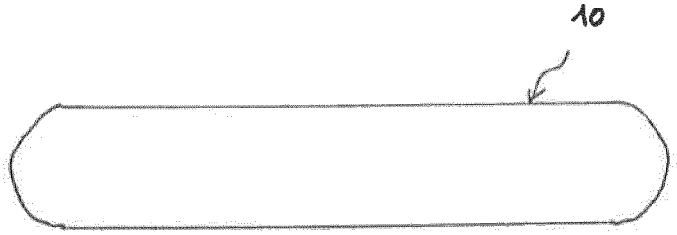


Fig. 1a



Fig. 2a

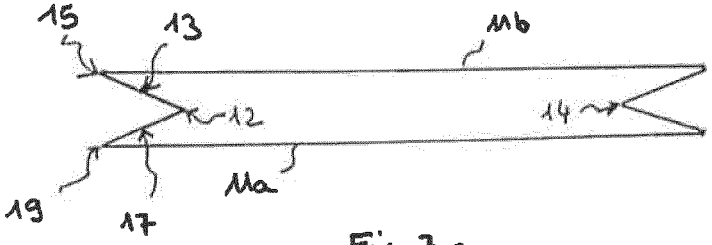


Fig. 3a

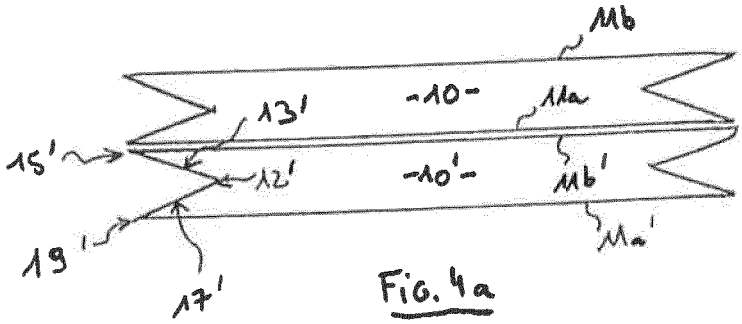


Fig. 4a

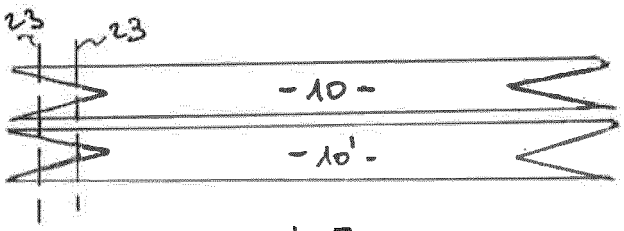


Fig. 5a

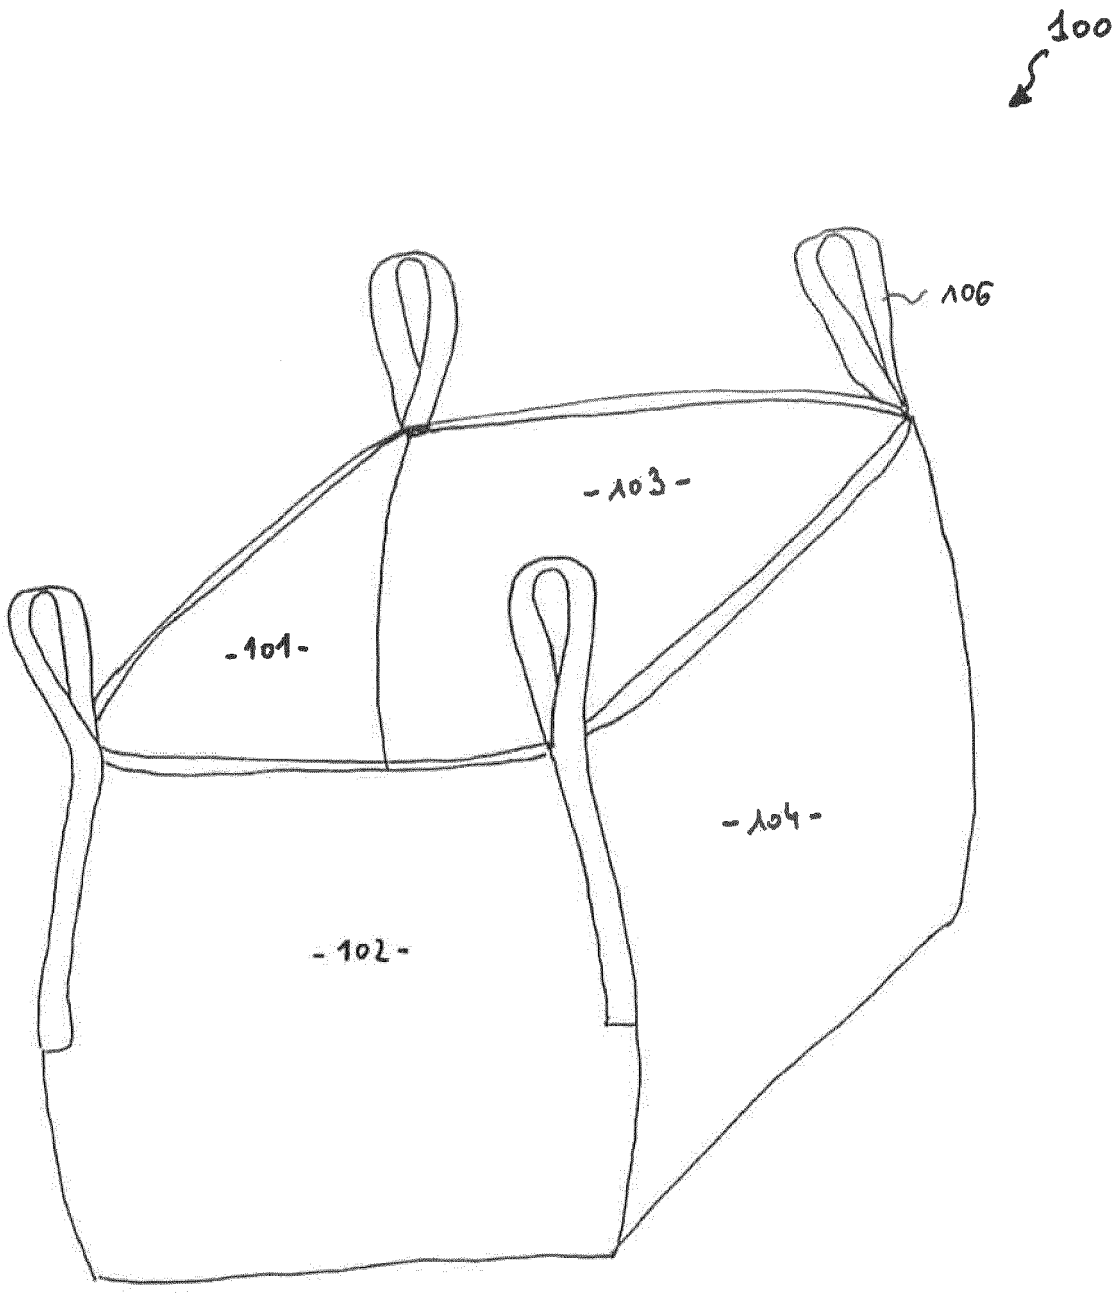


Fig. 6

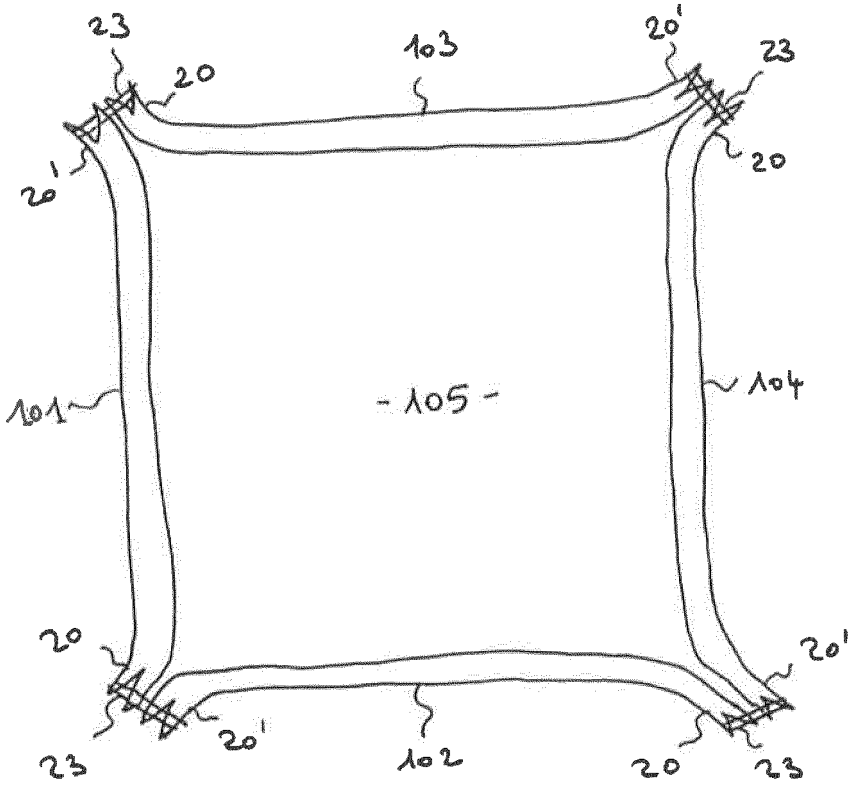


FIG. 7

Europäisches Patentamt
European Patent Office
Office européen des brevets

EUROPEAN SEARCH REPORT

Application Number
EP 16 17 4949

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	US 2014/363106 A1 (SCHNAARS SR DANIEL R [US] ET AL) 11 December 2014 (2014-12-11)	1	INV. D05B13/00
A	* paragraph [0139] - paragraph [0223]; figures 1-19 *	2	B65D88/16
Y	WO 2013/070516 A1 (COMPOSITE CONTAINERS LLC [US]) 16 May 2013 (2013-05-16)	1	
A	* paragraph [0020] - paragraph [0068]; figures 1-23 *	2	
Y	US 3 291 375 A (LEPISTO JOHN G) 13 December 1966 (1966-12-13)	1	
A	* column 4, line 53 - column 11, line 3; figures 1-18 *	2	
Y	GB 1 062 552 A (KORSNAS G M B H) 22 March 1967 (1967-03-22)	1	
A	* page 2, line 20 - page 3, line 34; figures 1-10 *	2	
Y	US 2003/235350 A1 (RICHARDSON JOE RONALD [US] ET AL) 25 December 2003 (2003-12-25)	1	TECHNICAL FIELDS SEARCHED (IPC)
A	* paragraph [0031] - paragraph [0064]; figures 1-24 *	2	D05B B65D
Y	EP 0 661 223 A1 (NAMPAK PRODUCTS [ZA]) 5 July 1995 (1995-07-05)	1	
A	* column 3, line 4 - column 4, line 58; figures 1-6 *	2	
Y	US 4 646 357 A (NATTRASS PETER J [US]) 24 February 1987 (1987-02-24)	1	
A	* column 2, line 58 - column 5, line 6; figures 1-8 *	2	
Y	AT 508 364 A4 (STORSACK HOLDING GMBH [DE]) 15 January 2011 (2011-01-15)	1	
A	* page 7, line 28 - page 11, line 14; figures 1-8 *	2	

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
Munich	25 November 2016	Herry-Martin, D

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published on, or after the filing date
D : document cited in the application
L : document cited for other reasons

& : member of the same patent family, corresponding document

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO. EP 16 17 4949

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-11-2016

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014363106 A1	11-12-2014	AU 2014274820 A1	21-01-2016
		CA 2914682 A1	11-12-2014
		CN 105452116 A	30-03-2016
		EP 3003891 A1	13-04-2016
		JP 2016525968 A	01-09-2016
		US 2014363106 A1	11-12-2014
		WO 2014197728 A1	11-12-2014
WO 2013070516 A1	16-05-2013	US 2015203288 A1	23-07-2015
		WO 2013070516 A1	16-05-2013
US 3291375 A	13-12-1966	BE 680677 A	07-11-1966
		DE 1486975 B1	26-08-1971
		GB 1149363 A	23-04-1969
		NL 6606253 A	14-11-1966
		NL 7214529 A	26-02-1973
		NL 7214530 A	26-02-1973
		SE 310303 B	21-04-1969
		US 3291375 A	13-12-1966
GB 1062552 A	22-03-1967	CH 424449 A	15-11-1966
		GB 1062552 A	22-03-1967
		NL 296469 A	10-05-1965
		SE 309151 B	10-03-1969
US 2003235350 A1	25-12-2003	US 2003235350 A1	25-12-2003
		US 2005180663 A1	18-08-2005
EP 0661223 A1	05-07-1995	AT 168652 T	15-08-1998
		AU 679805 B2	10-07-1997
		AU 8169894 A	06-07-1995
		BR 9405267 A	01-08-1995
		CA 2138576 A1	28-06-1995
		CN 1108200 A	13-09-1995
		DE 69411876 D1	27-08-1998
		DE 69411876 T2	10-12-1998
		DK 0661223 T3	26-04-1999
		EP 0661223 A1	05-07-1995
		ES 2119095 T3	01-10-1998
		FI 946028 A	28-06-1995
		IL 112028 A	04-01-1998
		JP 2826474 B2	18-11-1998
		JP H0880993 A	26-03-1996
		NO 945027 A	28-06-1995
		NZ 270272 A	25-09-1996
		PH 30617 A	06-08-1997

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO. EP 16 17 4949

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-11-2016

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 5556205 A	17-09-1996
US 4646357	A 24-02-1987	NONE	
AT 508364	A4 15-01-2011	AT 508364 A4	15-01-2011
		EP 2302117 A2	30-03-2011
		US 2011142378 A1	16-06-2011

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 2301087 A **[0004]**
- JP 2004033548 A **[0004]**
- JP 2005118400 A **[0004]**
- US 8950346 B2 **[0004] [0011] [0019]**