

(19)



(11)

EP 3 266 952 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

08.04.2020 Bulletin 2020/15

(51) Int Cl.:

E04D 3/363^(2006.01)

(21) Application number: **17177054.8**

(22) Date of filing: **21.06.2017**

(54) ASSEMBLY FOR CLADDING SURFACES

ANORDNUNG ZUR VERKLEIDUNG VON OBERFLÄCHEN

ENSEMBLE DE REVÊTEMENT DE SURFACES

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

(30) Priority: **05.07.2016 IT 201600069659**

(43) Date of publication of application:

10.01.2018 Bulletin 2018/02

(73) Proprietor: **TREVO S.R.L.**

24062 Costa Volpino (BG) (IT)

(72) Inventors:

- **Del Puppo, Luca**
42123 Reggio Emilia (RE) (IT)
- **Grosso, Giuseppe**
12030 Torre San Giorgio Cuneo (CN) (IT)

(74) Representative: **Paparo, Aldo**

Bugnion S.p.A.
Via Vellani Marchi, 20
41124 Modena (IT)

(56) References cited:

WO-A1-2006/101406 FR-A1- 2 534 299
GB-A- 2 428 051 JP-A- 2006 138 084

EP 3 266 952 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to an assembly comprising a panel for cladding surfaces and a fixing bracket.

[0002] The assembly according to the present invention is useful for covering roofs and walls, but not exclusively.

[0003] Various types of panels for covering roofs are currently available on the market. An example of such panels, to which the invention relates in particular, has two coupling portions that are substantially complementary to one another. Such coupling portions are arranged in side zones of the panel and extend parallel to one another. Each coupling portion is provided for being engaged with the complementary coupling portion of an adjacent panel, to allow the mutual fixing of the panels.

[0004] In the panels currently available, the two coupling portions, seen on a sectional plane perpendicular to the longitudinal extension thereof, have a complex profile that comprises a circular top portion connected to the panel through a base portion, being open at the bottom. Between the top panel and the base portion, at least one undercut is arranged.

[0005] To couple two adjacent panels to one another, it is necessary to engage the top portion of a coupling profile of a first panel in the top portion of the complementary coupling profile of the second panel. Such engagement takes place by first inserting the end portion of a coupling profile into the base portion of the supplementary coupling profile, subsequently pressing the two coupling portions towards one another, so as to surpass the undercut placed below the two end portions and complete the insertion. The preliminary insertion of the end portion of the coupling profile of a panel in the base portion of the complementary profile of the adjacent panel is not particularly precise, i.e. it leaves substantial freedom of movement between the two panels. This means that, in the event of incorrect alignment, the pressure exerted for completing the coupling leads to excessive deformation or even damage to the two profiles.

[0006] Examples of prior art panels are disclosed in documents JP 2006 138084, WO 2006/101406, GB 2 428 051.

[0007] The aim of the present invention is to offer an assembly comprising a panel for cladding surfaces and a fixing bracket, wherein said assembly makes it possible to overcome the drawbacks of the currently available panels. This aim is provided by an assembly according to the appended claims 1 to 5.

[0008] An advantage of the assembly according to the present invention is to notably facilitate the application and coupling operations of adjacent panels, hence substantially reducing the risks of damage to the coupling profiles.

[0009] Another advantage of the assembly according to the present invention is that it substantially facilitates the fixing operations to a support structure.

[0010] A further advantage of the assembly according to the present invention is that it allows an excellent seal against infiltrations in the coupling zone between two adjacent panels.

[0011] Further characteristics and advantages of the present invention will become more apparent in the following detailed description of an embodiment of the present invention, illustrated by way of non-limiting example in the attached figures, in which:

- figure 1 shows a schematic view of a panel used in the assembly according to the present invention;
- figure 2 shows an enlargement of two coupling portions of two adjacent panels, in an alignment position;
- figure 3 shows the two coupling portions of figure 2, coupled to one another.

[0012] The assembly according to the present invention comprises a panel (1) for cladding surfaces. The panel (1) comprises a main portion (10), flat overall, which lies on a longitudinal plane (S) whose trace is shown in figure 1. The panel extends longitudinally on such longitudinal plane (S). The panel (1) has a complex profile that is represented, in figure 1, in a view on a sectional plane (X,Y) perpendicular to the longitudinal plane (S). The panel (1) is defined overall by the projection, along a perpendicular direction to the plane (X,Y) of the profile shown in figure 1.

[0013] The panel (1) comprises, for example, a metal sheet, folded along directrices perpendicular to the plane (X,Y) for forming the profile shown in figure 1.

[0014] The panel comprises a first coupling (2) projecting from the main portion (10). The first coupling (2) comprises a head portion (21) with a curved profile, for example circular or semicircular, and a base portion (24), which connects the head portion (21) to the main portion (10). The base portion (24) is inclined upwards, in a distancing direction from the longitudinal plane (S). The head portion (21) is associated with an end of the base portion (24).

[0015] The first coupling (2) further comprises an undercut (22) arranged below the head portion (21). In particular, the undercut (22) is located at an end of the head portion (21), in an opposite position to the base portion (24). Overall, the first coupling (2) is open at the bottom and has a concavity facing downwards.

[0016] The panel further comprises a second coupling (3) projecting from the main portion (10). The second coupling (3) projects from the main portion (10) in the same direction as the first coupling (2).

[0017] The second coupling (3) comprises a head portion (31) with a curved profile being complementary to the head portion (21) of the first coupling (2). The second coupling (3) further comprises a base portion (34) which connects the head portion (31) to the main portion (10). The base portion (34) comprises two walls (34) inclined upwards, in a distancing direction from the longitudinal

plane (S). The head portion (31) is connected to the ends of the two walls (34) being inclined upwards. Overall, the second coupling is U-shaped, with a concavity facing downwards.

[0018] The second coupling (3) further comprises an undercut (32) arranged below the head portion (31). In particular, the undercut (32) faces towards the first coupling (2) and is arranged between an end of the head portion (31) and the corresponding end of the base portion (34). The undercut (32) of the second coupling (3) is complementary to the undercut (22) of the first coupling (2). When the second coupling (3) of a panel is inserted into the first coupling (2) of an adjacent panel, the undercut (22) of the first coupling (2) is arranged in contact with the undercut (32) of the second coupling (3), on an internal side of the latter.

[0019] The head portion (31) of the second coupling (3) has a curvature such as to be able to be arranged in contact with an internal surface of the head portion (21) of the first coupling (2), as shown in figure 3. In substance, the second coupling (3) of a panel can be inserted into the first coupling (2) of an adjacent panel. In such an arrangement, the head portion (21) of the first coupling (2) envelops the head portion (31) of the second coupling (3). The main portion (10) is interposed between the first and the second coupling (2,3) i.e. the first and the second couplings (2,3) are arranged on opposite sides of the main portion (10). Preferably the first and the second coupling (2,3) extend parallel to one another along a perpendicular direction to the sectional plane (X,Y). According to the invention, the first coupling (2) comprises an intermediate part (23), associated with the base part (34), which exhibits an arcuate profile complementary to at least a side portion of the head portion (31) of the second coupling (3). For example, the intermediate portion (23) has a profile shaped like an arc of a circle.

[0020] The intermediate portion (23) is structured to define a temporary housing for the head portion (31) of the second coupling (3) of an adjacent panel. Such temporary housing obstructs or prevents relative movements between the first and the second coupling (2,3) along a transverse direction (X) parallel to the longitudinal plane (S), as can be deduced from figure 2. The temporary housing defined by the intermediate portion (23) therefore allows the first coupling (2) of one panel to be correctly aligned with the second coupling (3) of an adjacent panel. In this way, the application of a force that pushes the first coupling (2) towards the second coupling (3) is transmitted to the two couplings (2,3) along a substantially perpendicular direction to the longitudinal plane (S). This means that the first coupling (2) is exclusively strained to enlarge in order to allow the insertion of the second coupling (3) as far as the coupling position illustrated in figure 3.

[0021] The intermediate portion (23) projects outside the base portion (24) towards the second coupling (3), so as to turn its concavity towards the inside of the first coupling (2).

[0022] Preferably, the first coupling (2) comprises an edge (25), arranged in a substantially opposite position to the intermediate portion (23). As shown in figure 2, the edge (25) defines, together with the intermediate part (23), the temporary housing for at least one part of the head portion (31) of the second coupling (3) of an adjacent panel. The presence of the edge (25) makes the positioning of the first coupling (2) with respect to the second coupling (3) even more stable for movements along the transverse direction (X). This is because the head portion (31) of the second coupling (3) can be arranged in contact both with the intermediate portion (23), and the edge (25). Furthermore, the presence of the edge (25) promotes the enlargement of the first coupling (2) due to the effect of a pressure force towards the second coupling (3).

[0023] Advantageously, the head portion (31) of the second coupling (3) comprises a longitudinal groove (33). Such groove (33) allows any infiltrations of water between the two couplings (2,3) coupled to one another to be collected. Through a pre-established inclination it is possible to drain out the liquid accumulated along the groove itself. A gasket, not illustrated in detail, may be inserted in the longitudinal groove (33) to prevent or limit the accumulation of liquid inside the groove (33).

[0024] On an opposite side to the first coupling (2), the panel is equipped with a raised end edge (35), arranged to be fitted into a fixing bracket (38). In the embodiment shown, the end edge (35) is inclined upwards, with an orientation that is roughly perpendicular with respect to the longitudinal plane (S). The end edge (35) is connected to the panel through a flat portion (36), which can be provided with holes for fixing to a support structure, alternatively to or in combination with the fixing bracket (38). The fixing bracket (38) is shown schematically in figure 3. The bracket (38) is U-shaped, and is structured to be positioned straddling the end edge (35), with concavity facing downwards. At one of its ends, the bracket (38) may be fixed to a support structure, for example a frame or another part of the surface to be clad, so as to constrain the panel to the support structure.

[0025] To promote the coupling between the first coupling (2) of a panel and the second coupling (3) of an adjacent panel, a rise (12) is interposed between the main portion (10) and the first coupling (2). Such rise (12) is structured to be superposed on an end edge (35) and on the possible bracket (38) of an adjacent panel, as shown in figure 3.

[0026] The cladding of a surface, for example the covering of a roof or the cladding of a wall, may be realised substantially with the same methods used in the prior art. In practice, the cladding may be realised by applying the necessary panels in succession. To couple two adjacent panels to one another, it is necessary to engage the head portion (21) of the first coupling (2) of a first panel on the head portion (31) of the second coupling (3) of a second panel, adjacent to the first. In turn, the head portion (21) of the first coupling (2) of the second panel will be en-

gaged on the head portion (31) of the second coupling (3) of a third panel, adjacent to the second on the opposite side with respect to the first panel, and so on for all the other panels. Each panel can be constrained to the support structure of the cladding by means of one or more brackets (38).

[0027] The assembly according to the present invention provides important advantages.

[0028] First of all, it notably facilitates the application and coupling operations of adjacent panels, hence substantially reducing the risks of damage to the coupling profiles. This is thanks to the presence of the intermediate portion (23) which allows the first coupling (2) of one panel to be correctly positioned, in perfect alignment, with respect to the second coupling (3) of an adjacent panel. Thanks to the presence of the intermediate portion (23), the first coupling (2) as well as being perfectly aligned with respect to the second coupling (3) of an adjacent panel, is also positioned in a stable way. In this way, in the subsequent assembly step, the operator can concentrate solely on applying on the first coupling (2) a direct force towards the longitudinal plane (S), i.e. directed downwards, without worrying about maintaining the two couplings in alignment. Furthermore, the first coupling (2) is exclusively strained to be enlarged in order to allow the insertion of the second coupling (3) of the adjacent panel, as far as the complete insertion position in which the two undercuts (22,32) are engaged with one another in the configuration of figure 3.

[0029] Another advantage of the assembly according to the present invention is that it substantially facilitates the fixing operations to a support structure. This is thanks to the presence of the end edge (35), which can be constrained to the support structure by means of the bracket (38), safely and easily.

[0030] A further advantage of the assembly according to the present invention is that it allows an excellent seal against infiltrations in the coupling zone between two adjacent panels. This is because of the presence of the longitudinal groove (33), which allows any infiltrations to be collected and/or a sealing gasket to be housed.

Claims

1. An assembly comprising a panel intended for surface cladding, said panel comprising:

a main portion (10);
 a first coupling (2) projecting from the main portion (10), which comprises a head portion (21) with a curved profile, and a base portion (24), which connects the head portion (21) to the main portion (10);
 a second coupling (3) protruding from the main portion (10), which comprises a head portion (31) with a curved profile being complementary to the head portion (21) of the first coupling (2),

and a base portion (34) which connects the head portion (31) to the main portion (10);

wherein the first coupling (2) comprises an intermediate portion (23), associated with the base portion (34), which exhibits an arcuate profile complementary to at least a side portion of the head portion (31) of the second coupling (3); wherein the first coupling (2) comprises an edge (25), arranged in a substantially opposite position to the intermediate portion (23) so as to define, together with the intermediate portion (23), a housing for at least a section of the head portion (31) of the second coupling (3);

wherein said panel further comprises a raised end edge (35);

characterized in that said assembly further comprises a fixing bracket (38) and **in that** said raised end edge (35) is fit into said fixing bracket (38).

2. An assembly according to claim 1, wherein the first and second coupling (2,3) comprise a respective undercut (22,32) disposed below of its head portion (21,32), the two undercuts (22, 32) being complementary to each other.
3. An assembly according to claim 1, wherein the head portion (31) of the second coupling (3) comprises a longitudinal groove (33).
4. An assembly according to claim 3, comprising a gasket inserted in the longitudinal groove (33).
5. An assembly according to claim 1, comprising a rise (12), interposed between the main portion (10) and the first coupling (2), which is so structured as to be capable to be superposed on a raised end edge (35) of an adjacent panel.

Patentansprüche

1. Anordnung umfassend eine Platte, die zur Verkleidung von Oberflächen vorgesehen ist, wobei die Platte umfasst:

einen Hauptabschnitt (10);
 eine erste Kupplung (2), die aus dem Hauptabschnitt (10) herausragt, die einen Kopfabschnitt (21) mit einem gekrümmten Profil umfasst, und einen Basisabschnitt (24), der den Kopfabschnitt (21) mit dem Hauptabschnitt (10) verbindet;
 eine zweite Kupplung (3), die aus dem Hauptabschnitt (10) herausragt, die einen Kopfabschnitt (31) mit einem gekrümmten Profil umfasst, das zu dem Kopfabschnitt (21) der ersten Kupplung (2) komplementär ist, und

einen Basisabschnitt (34),
 der den Kopfabschnitt (31) mit dem Hauptabschnitt (10) verbindet;
 wobei die erste Kupplung (2) einen Zwischenabschnitt (23) umfasst, der mit dem Basisabschnitt (34) assoziiert ist, der ein bogenförmiges Profil aufweist, das zu mindestens einem Seitenabschnitt des Kopfabschnitts (31) der zweiten Kupplung (3) komplementär ist;
 wobei die erste Kupplung (2) eine Kante (25) umfasst, die in einer im Wesentlichen entgegengesetzten Position zu dem Zwischenabschnitt (23) angeordnet ist, um zusammen mit dem Zwischenabschnitt (23) ein Gehäuse für mindestens einen Abschnitt des Kopfabschnitts (31) der zweiten Kupplung (3) zu definieren;
 wobei die Platte zudem eine erhöhte Endkante (35) umfasst;
dadurch gekennzeichnet, dass die Anordnung zudem eine Befestigungsklammer (38) umfasst und dadurch dass die erhöhte Endkante (35) in die Befestigungsklammer (38) eingepasst ist.

2. Anordnung nach Anspruch 1, wobei die erste und die zweite Kupplung (2,3) einen jeweiligen Hinterschnitt (22,32) umfassen, der unter ihrem Kopfabschnitt (21,32) angeordnet ist, wobei die zwei Hinterschnitte (22, 32) zueinander komplementär sind.
3. Anordnung nach Anspruch 1, wobei der Kopfabschnitt (31) der zweiten Kupplung (3) eine Längsnut (33) umfasst.
4. Anordnung nach Anspruch 3, umfassend eine in die Längsnut (33) eingesetzte Dichtung.
5. Anordnung nach Anspruch 1, umfassend einen Anstieg (12), der zwischen dem Hauptabschnitt (10) und der ersten Kupplung (2) angeordnet ist, der so strukturiert ist, damit er in der Lage ist, um auf einer erhöhten Endkante (35) einer angrenzenden Platte überlagert zu werden.

Revendications

1. Ensemble comprenant un panneau destiné au revêtement de surface, ledit panneau comprenant :

une portion principale (10) ;
 un premier accouplement (2) faisant saillie de la portion principale (10), qui comprend une portion de tête (21) avec un profil courbe, et une portion de base (24), qui relie la portion de tête (21) à la portion principale (10) ;
 un deuxième accouplement (3) faisant saillie de la portion principale (10), qui comprend une por-

tion de tête (31) avec un profil courbe qui est complémentaire de la portion de tête (21) du premier accouplement (2), et
 une portion de base (34) qui relie la portion de tête (31) à la portion principale (10) ;
 dans lequel le premier accouplement (2) comprend une portion intermédiaire (23), associée à la portion de base (34), qui présente un profil arqué complémentaire d'au moins une portion latérale de la portion de tête (31) du deuxième accouplement (3) ;
 dans lequel le premier accouplement (2) comprend un bord (25), agencé dans une position substantiellement opposée à la portion intermédiaire (23) pour définir, avec la portion intermédiaire (23), un logement pour au moins une section de la portion de tête (31) du deuxième accouplement (3) ;
 dans lequel ledit panneau comprend également un bord d'extrémité relevé (35) ;
caractérisé en ce que ledit ensemble comprend également une équerre de fixation (38) et **en ce que** ledit bord d'extrémité relevé (35) est inséré dans l'équerre de fixation (38).

2. Ensemble selon la revendication 1, dans lequel le premier et le deuxième accouplements (2,3) comprennent une partie en creux respective (22,32) agencée sous sa portion de tête (21,32), les deux parties en creux (22, 32) étant complémentaires l'une de l'autre.
3. Ensemble selon la revendication 1, dans lequel la portion de tête (31) du deuxième accouplement (3) comprend une rainure longitudinale (33).
4. Ensemble selon la revendication 3, comprenant un joint inséré dans la rainure longitudinale (33).
5. Ensemble selon la revendication 1, comprenant un rehaussement (12), interposé entre la portion principale (10) et le premier accouplement (2), qui est structuré de manière à pouvoir être superposé sur un bord d'extrémité relevé (35) d'un panneau adjacent.

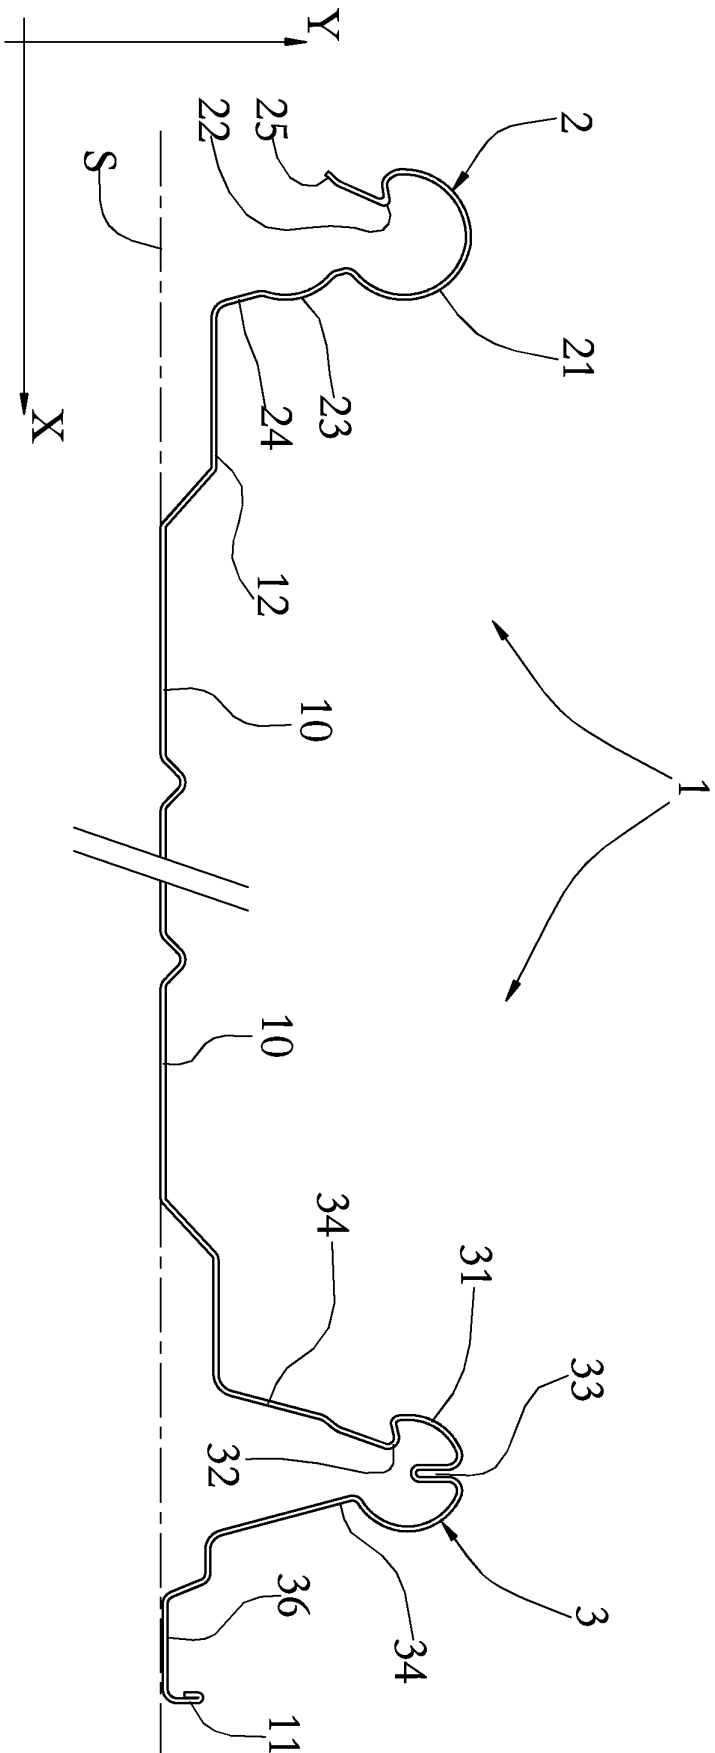


Fig. 1

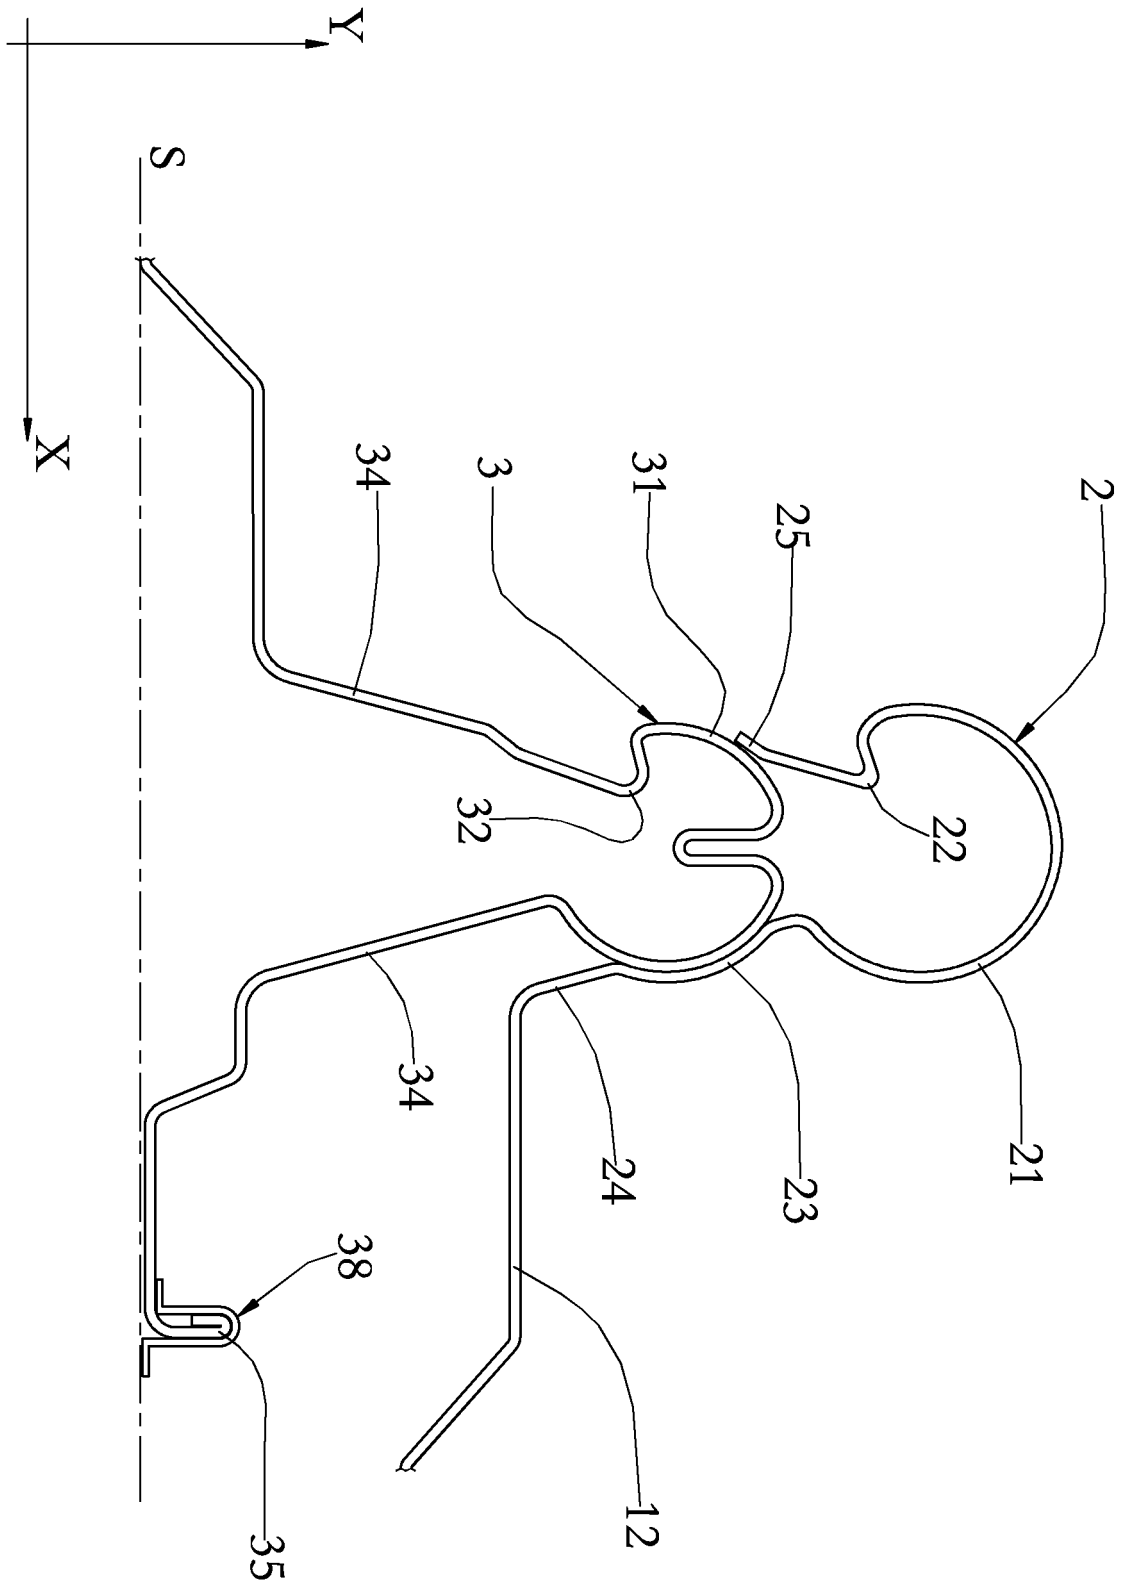


Fig.2

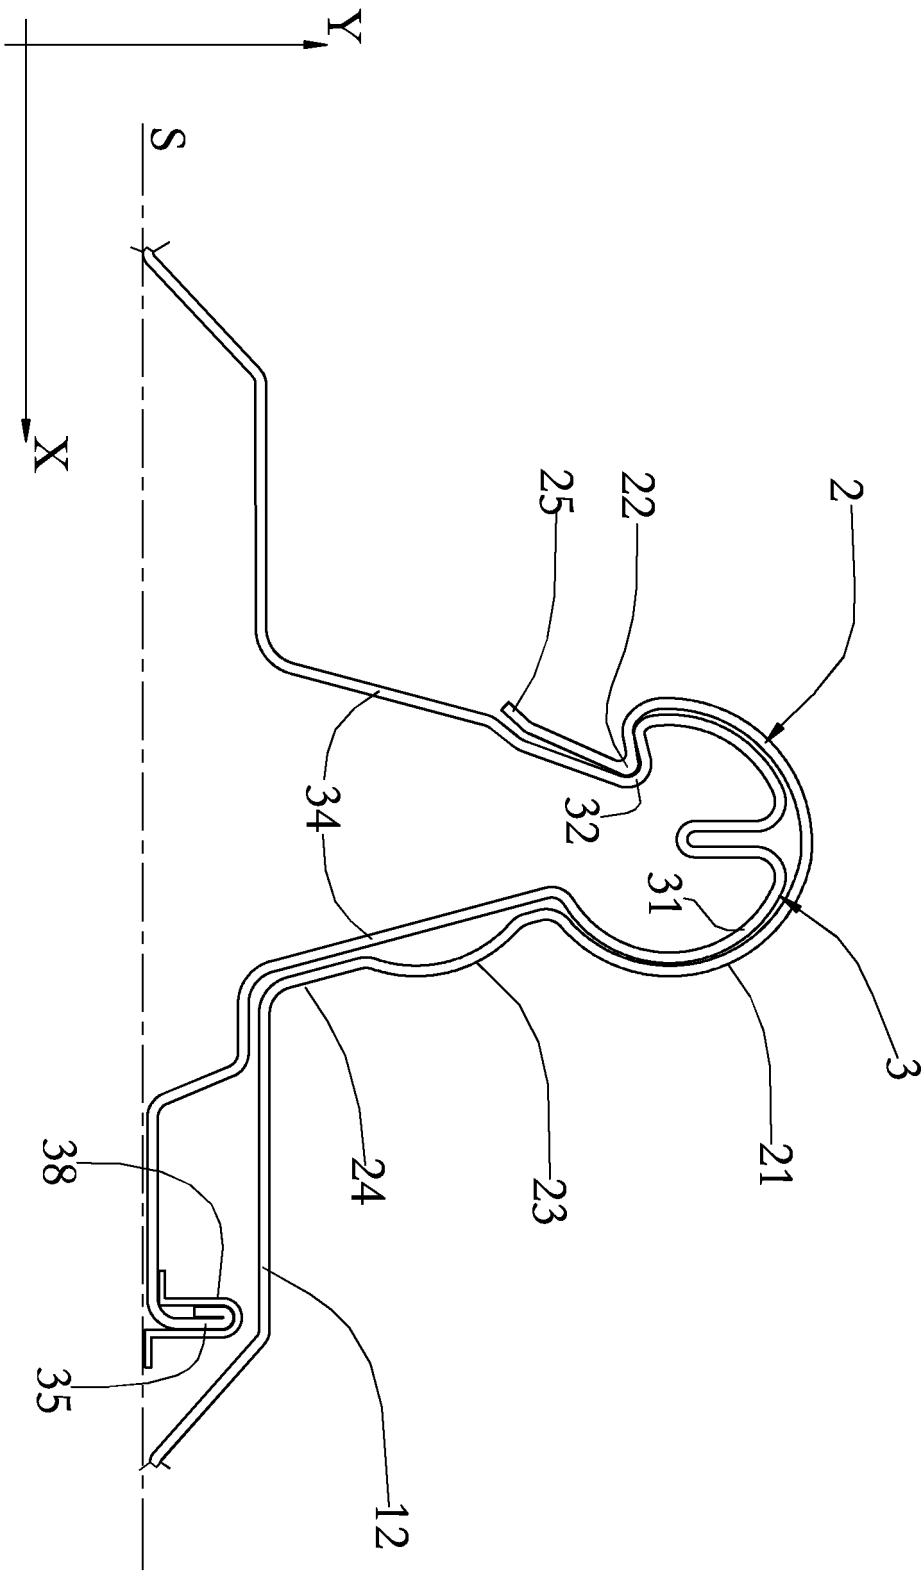


Fig.3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2006138084 A [0006]
- WO 2006101406 A [0006]
- GB 2428051 A [0006]