



(11) **EP 3 267 109 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
10.01.2018 Bulletin 2018/02

(51) Int Cl.:
F23Q 7/00 (2006.01)

(21) Application number: **17177193.4**

(22) Date of filing: **21.06.2017**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
 GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
 PL PT RO RS SE SI SK SM TR**
 Designated Extension States:
BA ME
 Designated Validation States:
MA MD

(30) Priority: 04.07.2016 JP 2016132254
25.10.2016 JP 2016208798

(71) Applicant: **NGK Spark Plug Co., Ltd.**
Nagoya-shi,
Aichi 4678525 (JP)

(72) Inventors:

- **OMORI, Akihiro**
Nagoya-shi, Aichi 4678525 (JP)
- **YUMITA, Yusuke**
Nagoya-shi, Aichi 4678525 (JP)

(74) Representative: **J A Kemp**
14 South Square
Gray's Inn
London WC1R 5JJ (GB)

(54) **GLOW PLUG**

(57) [Objective] To mitigate force transmitted between a center rod and a ceramic heater.

[Means for Solution] Aglow plug includes a metallic shell, a ceramic heater, and a center rod. The center rod includes one or more neck portions which extend in the direction of the axial line and in which a plurality of grooves each extending on the outer circumferential surface of the center rod in the circumferential direction thereof are successively arranged in the direction of the axial line. The forwardmost neck portion has a portion disposed forward of the middle position in the direction of the axial line between the forward and rear ends of the center rod. In the forwardmost neck portion, the plurality of grooves are arranged in the direction of the axial line at a pitch of less than 1.1 mm.

On a flat cross section containing the axial line, each groove has a forward sloping surface which slopes forward to be oblique to the direction of the axial line and a rear sloping surface which slopes rearward to be oblique to the direction of the axial line. In the forwardmost neck portion, the forward sloping surface and the rear sloping surface form an angle of less than 60°.

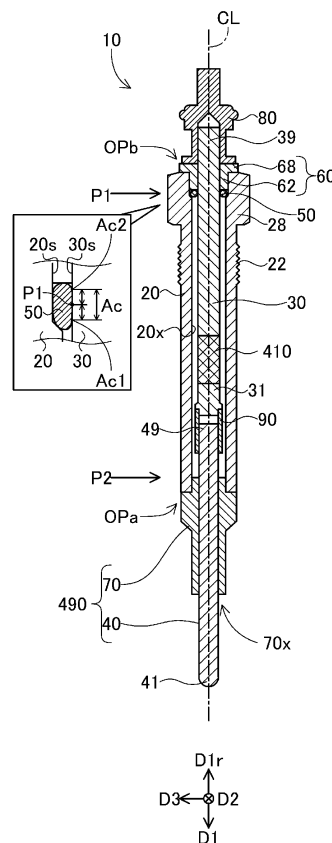


FIG. 1 (A)

Description**[Means for Solving the Problem]****[Technical Field]**

[0006] The present specification discloses the following application examples, for example.

[0001] The present specification relates to a ceramic glow plug used for an internal combustion engine or the like.

[Application example 1]**[Background Art]**

[0007] A glow plug comprising:

[0002] Conventionally, a ceramic glow plug which generates heat upon energization has been utilized, for example, for assisting the startup of an internal combustion engine. Such a conventionally used ceramic glow plug includes a ceramic heater and a center rod connected to the ceramic heater. Incidentally, when the ceramic glow plug is manufactured, the center rod may be fixed to the ceramic heater in a state in which the center rod is inclined in relation to the ceramic heater. When the metallic shell, the ceramic heater, and the center rod of the ceramic glow plug are combined for assembly, in order for these members to be disposed coaxially, a force for reducing the inclination of the center rod may be applied to the center rod, and as a result, the ceramic heater may be broken. In view of the forgoing, there has been proposed a technique for preventing breakage of the ceramic heater as a result of transmission of such force to the ceramic heater. According to the proposed technique, a smaller diameter portion for mitigating stress is provided on the center rod.

10 a metallic shell having a through hole extending in the direction of an axial line;
a ceramic heater inserted into the through hole of the metallic shell and held at a forward end of the metallic shell; and
15 a center rod formed of a metal, inserted into the through hole of the metallic shell, and electrically connected to the ceramic heater, wherein the center rod includes one or more neck portions which extend in the direction of the axial line and in which a plurality of grooves each extending on an outer circumferential surface of the center rod in the circumferential direction thereof are successively arranged in the direction of the axial line;
20 of the one or more neck portions, a forwardmost neck portion has a portion disposed forward of a middle position in the direction of the axial line between a forward end and a rear end of the center rod;
25 in the forwardmost neck portion, the plurality of grooves are arranged in the direction of the axial line at a pitch of less than 1.1 mm;
30 on a flat cross section containing the axial line, each groove has a forward sloping surface which slopes forward to be oblique to the direction of the axial line and a rear sloping surface which slopes rearward to be oblique to the direction of the axial line; and
35 in the forwardmost neck portion, the forward sloping surface and the rear sloping surface form an angle of less than 60°.

[Prior Art Documents]**[Patent Documents]****[0003]**

[Patent Document 1] Japanese Patent Application Laid-Open (kokai) No. 2006-207988
[Patent Document 2] Japanese Patent Application Laid-Open (kokai) No. 2002-359060
[Patent Document 3] US Patent No. 4252091
[Patent Document 4] Japanese Patent Application Laid-Open (kokai) No. 2014-109434
[Patent Document 5] Japanese Patent Application Laid-Open (kokai) No. 2015-78825

40 **[0008]** According to this configuration, the force transmitted between the center rod and the ceramic heater can be mitigated properly.

[Application example 2]

[0009] A glow plug according to application example 1, further comprising:

[Summary of the Invention]

a sleeve inserted into the through hole of the metallic shell and holding the ceramic heater; and
a packing sandwiched between an inner circumferential surface of the metallic shell and the outer circumferential surface of the center rod, wherein the following relational expression is satisfied:

[Problem to be Solved by the Invention]

[0004] However, there has not yet been conceived a way of properly mitigating the force transmitted between the center rod and the ceramic heater.

[0005] The present specification discloses a technique for properly mitigating the force transmitted between the center rod and the ceramic heater.

$$Lb > \frac{19.7}{Da^3} \times La$$

where

La is a distance between a first position and a second position in the direction of the axial line, the first position being a position of a center, in the direction of the axial line, of a contact area between the packing and the outer circumferential surface of the center rod, the second position being a position of a rearmost end of a contact area between the ceramic heater and the sleeve,

Lb is a distance in the direction of the axial line between the first position and a forward end of the forwardmost neck portion, and Da is an outer diameter of the ceramic heater at the second position.

[0010] According to this configuration, when a force is applied to the center rod, for example, during manufacture, the force transmitted from the center rod to the heater can be mitigated properly.

[Application example 3]

[0011] A glow plug according to application example 1 or 2, wherein the forwardmost neck portion is formed by closed loop grooves each extending, on the outer circumferential surface of the center rod, completely around the center rod in the circumferential direction thereof; and the following relational expression is satisfied:

$$Db < \sqrt[3]{\frac{Lb}{La}} \times Da$$

where

La is a distance between a first position and a second position in the direction of the axial line, the first position being a position of a center, in the direction of the axial line, of a contact area between the packing and the outer circumferential surface of the center rod, the second position being a position of a rearmost end of a contact area between the ceramic heater and the sleeve,

Lb is a distance in the direction of the axial line between the first position and a forward end of the forwardmost neck portion,

Da is an outer diameter of the ceramic heater at the second position, and

Db is a smallest outer diameter of a portion of the center rod where the forwardmost neck portion is formed.

[0012] According to this configuration, the force transmitted from the center rod to the heater can be mitigated

properly.

[Application example 4]

[0013] A glow plug according to any one of application examples 1 to 3, wherein the center rod includes a first transition portion which is connected to a forward end of at least one neck portion of the one or more neck portions and which includes a groove extending on the outer circumferential surface of the center rod in the circumferential direction thereof, and a first trunk portion which is connected to a forward end of the first transition portion and which has an approximately constant outer diameter, wherein a distance between a bottom portion of the groove of the first transition portion and the center axis of the center rod is larger than a distance between a bottom portion of each of the grooves of the neck portion and the center axis, and is smaller than a distance between an outer circumferential surface of the first trunk portion and the center axis.

[0014] According to this configuration, when a force is applied to the center rod, the concentration of stress on the forward end of the neck portion can be mitigated through bending of the bottom portion of the groove of the first transition portion. As a result, excessive bending of the center rod can be prevented.

[Application example 5]

[0015] A glow plug according to application example 4, wherein the first transition portion has a plurality of closed loop grooves each extending, on the outer circumferential surface of the center rod, completely around the center rod in the circumferential direction thereof; and the plurality of grooves of the first transition portion are formed such that the bottom portion of a groove on a forward side has an outer diameter larger than that of the bottom portion of a groove on a rear side.

[0016] According to this configuration, the plurality of grooves of the first transition portion gradually change the groove outer diameter between the neck portion and the first trunk portion. Accordingly, it is possible to mitigate the concentration of stress on a portion of the first transition portion. As a result, excessive bending of the center rod can be prevented.

[Application example 6]

[0017] A glow plug according to application example 4, wherein the first transition portion has a plurality of closed loop grooves each extending, on the outer circumferential surface of the center rod, completely around the center rod in the circumferential direction thereof; and of N pairs (N is an integer of 2 or greater) which are formed by the plurality of grooves of the first transition

portion and each of which includes two adjacent grooves, L pairs (L is an integer of 1 or greater but not greater than N-1) are configured such that the outer diameter of the bottom portion of the groove on the forward side is larger than that of the bottom portion of the groove on the rear side, and (N-L) pairs are configured such that the outer diameter of the bottom portion of the groove on the forward side is the same as that of the bottom portion of the groove on the rear side.

[0018] According to this configuration, the plurality of grooves of the first transition portion change the groove outer diameter in a plurality of steps between the neck portion and the first trunk portion. Accordingly, it is possible to mitigate the concentration of stress on a portion of the first transition portion. As a result, excessive bending of the center rod can be prevented.

[Application example 7]

[0019] A glow plug according to any one of application examples 1 to 6, wherein the center rod includes a second transition portion which is connected to a rear end of at least one neck portion of the one or more neck portions and which includes a groove extending on the outer circumferential surface of the center rod in the circumferential direction thereof, and a second trunk portion which is connected to a rear end of the second transition portion and which has an approximately constant outer diameter, wherein a distance between a bottom portion of the groove of the second transition portion and the center axis of the center rod is larger than a distance between a bottom portion of each of the grooves of the neck portion and the center axis, and is smaller than a distance between an outer circumferential surface of the second trunk portion and the center axis.

[0020] According to this configuration, when a force is applied to the center rod, the concentration of stress on the rear end of the neck portion can be mitigated through bending of the bottom portion of the groove of the second transition portion. As a result, excessive bending of the center rod can be prevented.

[Application example 8]

[0021] A glow plug according to application example 7, wherein the second transition portion has a plurality of closed loop grooves each extending, on the outer circumferential surface of the center rod, completely around the center rod in the circumferential direction thereof; and the plurality of grooves of the second transition portion are formed such that the bottom portion of a groove on a rear side has an outer diameter larger than that of the bottom portion of a groove on a forward side.

[0022] According to this configuration, the plurality of grooves of the second transition portion gradually change the groove outer diameter between the neck portion and

the second trunk portion. Accordingly, it is possible to mitigate the concentration of stress on a portion of the second transition portion. As a result, excessive bending of the center rod can be prevented.

[Application example 9]

[0023] A glow plug according to application example 7, wherein

the second transition portion has a plurality of closed loop grooves each extending, on the outer circumferential surface of the center rod, completely around the center rod in the circumferential direction thereof; and of P pairs (P is an integer of 2 or greater) which are formed by the plurality of grooves of the second transition portion and each of which includes two adjacent grooves, Q pairs (Q is an integer of 1 or greater but not greater than P-1) are configured such that the outer diameter of the bottom portion of the groove on the rear side is larger than that of the bottom portion of the groove on the forward side, and (P-Q) pairs are configured such that the outer diameter of the bottom portion of the groove on the rear side is the same as that of the bottom portion of the groove on the forward side.

[0024] According to this configuration, the plurality of grooves of the second transition portion change the groove outer diameter in a plurality of steps between the neck portion and the second trunk portion. Accordingly, it is possible to mitigate the concentration of stress on a portion of the second transition portion. As a result, excessive bending of the center rod can be prevented.

[0025] Notably, the technique disclosed in the present specification can be realized in various forms. For example, the technique can be realized as a center rod for a glow plug, a glow plug including the center rod, a startup assist apparatus including the glow plug, an internal combustion engine on which the glow plug is mounted, or an internal combustion engine on which the startup assist apparatus including the glow plug is mounted.

[Brief Description of the Drawings]

[0026]

[FIGS. 1(A) and 1(B)] Schematic views of one example of a ceramic glow plug of an embodiment.

[FIGS. 2(A), 2(B), and 2(C)] Explanatory views of a center rod 30.

[FIG. 3] Schematic sectional view of an assembly 200.

[FIGS. 4(A), 4(B), and 4(C)] Graphs showing the results of a first evaluation test.

[FIGS. 5(A), 5(B), and 5(C)] Graphs showing the results of a second evaluation test.

[FIG. 6] Schematic external view of the center rod 30.

[FIGS. 7(A), 7(B), and 7(C)] Schematic views of another embodiment of the center rod.

[FIGS. 8(A) and 8(B)] Schematic views of still another

er embodiment of the center rod.

[FIGS. 9(A) and 9(B)] Schematic views of yet another embodiment of the center rod.

[FIGS. 10(A) and 10(B)] Schematic views of a modification of the center rod.

[Mode for Carrying out the Invention]

A. First embodiment:

A1. Structure of ceramic glow plug:

[0027] FIGS. 1 (A) and 1 (B) are schematic views of one example of a ceramic glow plug of an embodiment. FIG. 1 (A) is a sectional view of a ceramic glow plug 10 (hereinafter also referred to as the "glow plug 10" for simplicity), and FIG. 1(B) is an enlarged sectional view showing a portion of the glow plug 10 (a portion including a ceramic heater element 40). A line CL shown in these drawings shows a center axis of the glow plug 10. The section shown in these drawings is a flat section including the center axis CL. In the following description, the center axis CL is also referred to as the "axial line CL," and a direction parallel to the center axis CL is also referred to as the "axial direction." The radial direction of a circle which is centered at the center axis CL is also referred to as the "radial direction" for simplicity, and the circumferential direction of a circle which is centered at the center axis CL is also referred to as the "circumferential direction." Of the directions parallel to the center axis CL, the downward direction in FIGS. 1 (A) and 1 (B) is referred to as the first direction D1. The first direction D1 is the direction from a terminal member 80 (which will be described later) toward the ceramic heater element 40. A second direction D2 and a third direction D3 in the drawings are directions which are orthogonal to each other and are orthogonal to the first direction D1. In the following description, the first direction D1 is also referred to as the forward direction D1, and the direction opposite the first direction D1 is also referred to as the rearward direction D1r. Also, the forward direction D1 side in FIGS. 1(A) and 1(B) is referred to as the forward side of the glow plug 10, and the rearward direction D1r side in FIGS. 1(A) and 1(B) is referred to as the rear side of the glow plug 10.

[0028] The glow plug 10 includes a metallic shell 20, a center rod 30, a ceramic heater element 40 (hereinafter also referred to as the "heater element 40" for simplicity), an O-ring 50 (hereinafter also referred to as the "packing 50"), an insulating member 60, a metal sleeve 70 (hereinafter also referred to as the "sleeve 70" for simplicity), a terminal member 80, and a connection member 90. The metallic shell 20 is a tubular member having a through hole 20x extending along the center axis CL. The metallic shell 20 has a tool engagement portion 28 formed on an end portion thereof on the rearward direction D1 r side, and a male screw portion 22 provided on the forward direction D1 side of the tool engagement portion 28. The

tool engagement portion 28 is a portion with which an unillustrated tool is engaged when the glow plug 10 is attached or detached. The male screw portion 22 includes a screw thread for screw engagement with a female screw of a mounting hole of an unillustrated internal combustion engine. The metallic shell 20 is formed of an electrically conductive material (e.g., metal such as carbon steel).

[0029] The center rod 30 is accommodated in the through hole 20x of the metallic shell 20. The center rod 30 is a rod-like member and extends along the axial line CL. The center rod 30 is formed of an electrically conductive material (for example, metal such as stainless steel). A rear end portion 39 (an end portion on the rearward direction D1 r side) of the center rod 30 projects in the rearward direction D1r from an opening OPb of the metallic shell 20 on the rearward direction D1 r side. The center rod 30 has a neck portion 410 which is provided between an end portion 31 (an end portion on the forward direction D1 side) of the center rod 30 and the end portion 39 on the rearward direction D1r side. The neck portion 410 will be described in detail later.

[0030] In the vicinity of the opening OPb, the ring-shaped packing 50 is provided between the outer surface of the center rod 30 and the wall surface of the through hole 20x of the metallic shell 20. The packing 50 is formed of elastic material (for example, rubber). A ring-shaped insulating member 60 is attached to the opening OPb of the metallic shell 20. The insulating member 60 includes a tubular portion 62 and a flange portion 68 provided on the rearward direction D1 r side of the tubular portion 62. The tubular portion 62 is sandwiched between the outer surface of the center rod 30 and the inner surface of a portion of the metallic shell 20 which forms the opening OPb. The insulating member 60 is formed of, for example, resin. The metallic shell 20 supports the center rod 30 through these members 50 and 60.

[0031] A left portion of FIG. 1(A) shows a partial enlarged view of portions of the metallic shell 20 and the center rod 30 between which the packing 50 is sandwiched. The packing 50 is in contact with an inner circumferential surface 20s of the metallic shell 20 and an outer circumferential surface 30s of the center rod 30 and establishes a seal between the inner circumferential surface 20s of the metallic shell 20 and the outer circumferential surface 30s of the center rod 30. The packing 50 is crushed between these surfaces 20s and 30s. An area Ac in FIG. 1(A) shows a portion of the outer circumferential surface 30s of the center rod 30, which portion is in contact with the packing 50 (hereinafter this area is also referred to as the contact area Ac). A first position P1 is the position of the center of the contact area Ac in the direction parallel to the axial line CL. Namely, the first position P1 is a position at which an area extending from the end Ac1 of the contact area Ac on the forward direction D1 side to the end Ac2 of the contact area Ac on the rearward direction D1 r side is bisected in the direction parallel to the axial line CL.

[0032] The terminal member 80 is disposed on the rearward direction D1 r side of the insulating member 60. The terminal member 80 is a cap-shaped member, and is formed of an electrically conductive material (for example, metal such as carbon steel). The flange portion 68 of the insulating member 60 is sandwiched between the terminal member 80 and the metallic shell 20. The rear end portion 39 of the center rod 30 is inserted into the terminal member 80. As a result of the terminal member 80 being crimped, the terminal member 80 is fixed to the rear end portion 39. Thus, the terminal member 80 is electrically connected to the center rod 30.

[0033] A portion of the sleeve 70 on the rearward direction D1 r side is inserted into an opening Opa of the metallic shell 20 on the forward direction D1 side, and the sleeve 70 is fixed (for example, press-fitted or welded) to the metallic shell 20. The sleeve 70 is a tubular member having a through hole 70x extending along the center axis CL. The sleeve 70 is formed of an electrically conductive material (for example, metal such as stainless steel).

[0034] The heater element 40, which generates heat upon energization, is inserted into the through hole 70x of the sleeve 70. The heater element 40 is a rod-shaped member disposed to extend along the center axis CL. The sleeve 70 holds the outer circumferential surface of a central portion of the heater element 40. A forward end portion 41 and a rear end portion 49 of the heater element 40 are exposed to the outside of the sleeve 70. The rear end portion 49 of the heater element 40 is accommodated in the through hole 20x of the metallic shell 20. In the following description, the combination of the heater element 40 and the metal sleeve 70 is also referred to as a "heater module 490."

[0035] The connection member 90 is fixed to the rear end portion 49 of the heater element 40. The connection member 90 is a cylindrical tubular member having a through hole extending along the center axis CL, and is formed of an electrically conductive material (for example, metal such as stainless steel). The rear end portion 49 of the heater element 40 is press-fitted into a portion of the connection member 90 on the forward direction D1 side. The forward end portion 31 (the end portion on the forward direction D1 side) of the center rod 30 is press-fitted into a portion of the connection member 90 on the rearward direction D1 r side. Thus, the center rod 30 is fixed to the heater element 40 through the connection member 90. Also, the center rod 30 is electrically connected to the connection member 90. Notably, the forward end portion 31 of the center rod 30 and the connection member 90 may be welded together.

[0036] Next, the details of the heater module 490 will be described. FIG. 1(B) shows a more specific sectional view of the metal sleeve 70, the connection member 90, and the heater element 40. The heater element 40 includes a round-rod-shaped base member 210 extending along the axial line CL, and a generally U-shaped heat generation resistor 220 (hereinafter simply referred to as

the "resistor 220") embedded in the base member 210. The base member 210 is formed of an insulating ceramic material (for example, a material containing silicon nitride). The resistor 220 is formed of an electrically conductive ceramic material (for example, a material containing silicon nitride and an electrical conductive substance (e.g., tungsten carbide)). The base member 210 supports the resistor 220 in a state in which the base member 210 covers the resistor 220. The heater element 40 is formed by firing the material thereof. A forward end portion of the base member 210 (namely, the forward end portion 41 of the heater element 40) is rounded. The electrical conductivity of the resistor 220 is higher than that of the base member 210. The resistor 220 generates heat upon energization.

[0037] The resistor 220 includes two lead portions 221 and 222, a heat generation portion 223 connected to the lead portions 221 and 222, and electrode connection portions 281 and 282. Each of the lead portions 221 and 222 extends, along the direction in which the axial line CL extends (parallel to the axial line CL in the present embodiment), from the rear end portion 49 of the heater element 40 to a position near the forward end portion 41. The first lead portion 221 and the second lead portion 222 are disposed at positions which are approximately symmetric with respect to the center axis CL. The third direction D3 is a direction from the second lead portion 222 toward the first lead portion 221.

[0038] The heat generation portion 223 is embedded in the forward end portion 41 of the heater element 40, and connects together the end of the first lead portion 221 on the forward direction D1 side and the end of the second lead portion 222 on the forward direction D1 side. Namely, the lead portions 221 and 222 are connected to the ends of the heat generation portion 223 on the rearward direction D1 r side. The shape of the heat generation portion 223 is a generally U-like shape; i.e., the heat generation portion 223 curves to follow the round shape of the forward end portion 41 of the heater element 40. The cross-sectional area of the heat generation portion 223 is smaller than those of the lead portions 221 and 222. Also, the electrical resistance of the heat generation portion 223 per unit length is larger than those of the lead portions 221 and 222. As a result, when the heater element is energized, the temperature of the heat generation portion 223 increases quickly as compared with the temperatures of the lead portions 221 and 222.

[0039] The first electrode connection portion 281 is connected to a portion of the first lead portion 221 on the rearward direction D1r side. The first electrode connection portion 281 extends along the radial direction. An inner end portion of the first electrode connection portion 281 is connected to the first lead portion 221, and an outer end portion thereof is exposed on the outer surface of the heater element 40. The exposed portion of the first electrode connection portion 281 is in contact with the inner circumferential surface of the sleeve 70. Thus, the sleeve 70 and the first lead portion 221 are electrically

connected together.

[0040] The second electrode connection portion 282 is connected to a portion of the second lead portion 222 on the rearward direction D1r side. The second electrode connection portion 282 extends along the radial direction, and is disposed on the rearward direction D1r side in relation to the first electrode connection portion 281. An inner end portion of the second electrode connection portion 282 is connected to the second lead portion 222, and an outer end portion thereof is exposed on the outer surface of the heater element 40. The exposed portion of the second electrode connection portion 282 is in contact with the inner circumferential surface of the connection member 90. Thus, the connection member 90 and the second lead portion 222 are electrically connected together.

[0041] A second position P2 in the drawings is the position of a rearmost end Ae2 (an end at the rearmost position in the rearward direction D1 r) of a contact area Ae where the heater element 40 comes into contact with the sleeve 70. Namely, the area Ae of the outer circumferential surface 40s of the heater element 40 which comes into contact with the inner circumferential surface 70s of the sleeve 70 extends from the second position P2 toward the forward direction D1 side.

[0042] When the glow plug 10 is used, a voltage is applied between the metallic shell 20 and the terminal member 80. As described above, the first lead portion 221 is electrically connected to the metallic shell 20 through the first electrode connection portion 281 and the metal sleeve 70. The second lead portion 222 is electrically connected to the terminal member 80 through the second electrode connection portion 282, the connection member 90, and the center rod 30. Accordingly, the electric power supplied through the metallic shell 20 and the terminal member 80 is supplied to the heat generation portion 223 through the lead portions 221 and 222. As a result, the heat generation portion 223 generates heat.

[0043] FIGS. 2(A), 2(B) and 2(C) are explanatory views of the center rod 30. FIG. 2(A) schematically shows the external appearance of the center rod 30, and FIG. 2(B) shows a cross section of the neck portion 410 of the center rod 30. The cross section of FIG. 2(B) is a flat cross section containing the axial line CL. As shown in these drawings, a plurality of grooves (radially inward recesses) 300 are formed on the outer circumferential surface of the neck portion 410. Each groove 300 is a closed loop groove which extends, on the outer circumferential surface 30s of the center rod 30, completely around the center rod 30 in the circumferential direction thereof. Namely, each groove 300 extends completely around the center line CL.

[0044] On the cross section of FIG. 2(B), each groove 300 is defined by a bottom portion 310 and two sloping surfaces 320 and 330 which are located on opposite sides of the bottom portion 310. The bottom portion 310 has an outer circumferential surface approximately parallel to the axial line CL. A first length L1 in FIG. 2(B) is

the length of each bottom portion 310 in the direction parallel to the axial line CL. The first sloping surface 320 is a sloping surface which slopes toward the forward direction D1 side to be oblique to the axial line CL when the sloping surface is followed from the inner side toward the outer side in the radial direction. The first sloping surface 320 is connected to the end of the bottom portion 310 on the forward direction D1 side. The sloping surface 320 on the forward direction D1 side of the groove 300 is also referred to as the forward side sloping surface 320. The second sloping surface 330 is a sloping surface which slopes toward the rearward direction D1r side to be oblique to the axial line CL when the sloping surface is followed from the inner side toward the outer side in the radial direction. The second sloping surface 330 is connected to the end of the bottom portion 310 on the rearward direction D1r side. The sloping surface 330 on the rearward direction D1 r side of the groove 300 is also referred to as the rear side sloping surface 330.

[0045] The radially outer end of the first sloping surface 320 and the radially outer end of the second sloping surface 330 are connected to corresponding crest portions 340. Each crest portion 340 has an outer circumferential surface approximately parallel to the axial line CL. A second length L2 in FIG. 2(B) is the length of each crest portion 340 in the direction parallel to the axial line CL. Each first sloping surface 320 is connected to the end of the corresponding crest portion 340 on the rearward direction D1r side, and each second sloping surface 330 is connected to the end of the corresponding crest portion 340 on the forward direction D1 side.

[0046] As shown in FIG. 2(B), the neck portion 410 forms a wavy portion where the bottom portions 310 and the crest portions 340 are alternately arranged toward the forward direction D1 side. As described above, the neck portion 410 extends in the direction parallel to the axial line CL.

[0047] A pitch Pt in FIG. 2(B) is the pitch of the grooves 300 in the direction parallel to the axial line CL. In the embodiment shown in FIG. 2(B), the pitch Pt is determined with the end of each bottom portion 310 on the rearward direction D1r side used as a reference. The plurality of grooves 300 are arranged toward the forward direction D1 side at the same pitch Pt.

[0048] A forward end 410f in FIG. 2(B) shows the forward end of the neck portion 410, and a rear end 410r in FIG. 2(B) shows the rear end of the neck portion 410. The forward end 410f of the neck portion 410 is the forward end of the forwardmost bottom portion 310 among the plurality of bottom portions 310 of the neck portion 410. Notably, in the present embodiment, the forward end 410f of the neck portion 410 coincides with the forward end of the forwardmost bottom portion 310 connected to the forwardmost sloping surface 320. Also, even in the case where the crest portion 340 is formed on the forward direction D1 side of the forwardmost bottom portion 310, the forward end 410f of the neck portion 410 coincides with the forward end of the forwardmost

bottom portion 310. Meanwhile, the rear end 410r of the neck portion 410 is the rear end of the rearmost bottom portion 310 among the plurality of bottom portions 310 of the neck portion 410. Notably, in the present embodiment, the rear end 410r of the neck portion 410 coincides with the rear end of the rearmost bottom portion 310 connected to the rearmost sloping surface 330. Also, even in the case where the crest portion 340 is formed on the rearward direction D1r side of the rearmost bottom portion 310, the rear end 410r of the neck portion 410 coincides with the rear end of the rearmost bottom portion 310.

[0049] A length Lf in FIG. 2(B) is the length of the neck portion 410 in the direction parallel to the axial line CL. This length Lf is the length between the forward end 410f and the rear end 410r of the neck portion 410 in the direction parallel to the axial line CL. Notably, the length Lf is preferably 5 mm or greater. An outer diameter Db in FIG. 2(B) is the smallest outer diameter of the neck portion 410. In the present embodiment, the smallest outer diameter Db is the outer diameter of the neck portion 410 measured at each bottom portion 310 (hereinafter simply referred to as the "outer diameter of the bottom portion 310"). In the present embodiment, the neck portion 410 is formed at a circular columnar portion of the center rod 30 whose outer diameter Dc is approximately constant. This smallest outer diameter Db is smaller than the outer diameter Dc. A second distance Lb in FIG. 2(A) is the distance between the first position P1 and the forward end 410f of the neck portion 410 in the direction parallel to the axial line CL.

[0050] A middle position P3 in FIG. 2(A) is the middle position, in the direction parallel to the axial line CL, between the forward end 30f and the rear end 30r of the center rod 30. The neck portion 410 is disposed on the forward direction D1 side of the middle position P3.

[0051] FIG. 2(C) is an enlarged view of a portion of the sectional view of FIG. 2(B), which portion includes the grooves 300. An angle Ang in FIG. 2(C) is the angle between the first sloping surface 320 and the second sloping surface 330. In the embodiment shown in FIG. 2(C), the angle Ang is the same among the plurality of grooves 300.

[0052] Various methods can be employed so as to form the plurality of bottom portions 310 and the plurality of crest portions 340 (accordingly, the neck portion 410 having the plurality of grooves 300) on the center rod 30. For example, so-called form rolling may be employed. Specifically, a roller having a portion whose shape is inverse to that of the neck portion 410 is pressed against the center rod 30. In this state, the roller and the center rod 30 are rotated, whereby the neck portion 410 is formed on the center rod 30. Such machining is also called knurling.

[0053] The neck portion 410 which has the grooves 300 each having the small outer diameter Db easily bends as compared with the remaining portion of the center rod 30. Accordingly, when a force is applied to the

center rod 30, the neck portion 410 can prevent, by bending, the transmission of the force from the center rod 30 to other portions (for example, the heater element 40) of the glow plug 10. For example, when the glow plug 10 is manufactured (for example, when the packing 50 is fitted between the center rod 30 and the metallic shell 20), a force may be applied to the center rod 30. The force may be transmitted from the center rod 30 to the heater element 40. Also, when an internal combustion engine having the glow plug 10 vibrates, the center rod 30 may vibrate within the metallic shell 20. As a result, a force may be transmitted from the center rod 30 to the heater element 40. When the force transmitted to the heater element 40 is large, the heater element 40 may be broken. In the present embodiment, the neck portion 410 can prevent the transmission of force from the center rod 30 to the heater element 40 through deformation of the neck portion 410.

[0054] Also, as having been described with reference to FIG. 2(A), the neck portion 410 includes a portion located on the forward direction D1 side of the middle position P3 of the center rod 30. Namely, the neck portion 410 is formed in a portion of the center rod 30 near the heater element 40. Accordingly, since the portion of the center rod 30, which portion is located on the heater element 40 side with respect to the middle position P3, can bend, the neck portion 410 can properly mitigate the force transmitted from the center rod 30 to the heater element 40.

[0055] Also, as shown in FIG. 2(A), the rear end 410r of the neck portion 410 is located on the forward direction D1 side of the contact area Ac of the center rod 30 in contact with the packing 50. Namely, the neck portion 410 is not provided in the contact area Ac and is disposed on the forward direction D1 side of the contact area Ac. Accordingly, formation of a gap between the center rod 30 and the packing 50 can be prevented.

B. Evaluation tests:

[0056] Next, evaluation tests will be described. There were carried out a first evaluation test in which samples of the glow plug 10 shown in FIGS. 1(A) and 1(B) were used and a second evaluation test in which samples of an assembly 200 shown in FIG. 3 (its details will be described later) were used. FIGS. 4(A) to 4(C) are graphs showing the results of the first evaluation test. FIGS. 5(A) to 5(C) are graphs showing the results of the second evaluation test. Black points in each graph represent the test results of the samples.

[0057] In the first evaluation test in which samples of the glow plug 10 were used, the strength of resonance between an engine and the glow plug 10 (in particular, the center rod 30) was evaluated. As described above, the center rod 30 may vibrate within the metallic shell 20. When the center rod 30 resonates due to vibration of the engine, the center rod 30 or the heater element 40 may be broken due to force generated as a result of the vi-

bration of the center rod 30. Accordingly, it is preferred that the strength of the resonance between the engine and the glow plug 10 (in particular, the center rod 30) be small.

[0058] A method for carrying out the first evaluation test is as follows. A jig corresponding to an engine was prepared. This jig is attached to a table through a mount to be vibratable as in the case of the engine which is attached to the body of an automobile through an engine mount such that the engine can vibrate. This jig can vibrate in relation to the table like the engine which can vibrate in relation to the body. Each sample of the glow plug 10 was attached to the jig. Subsequently, a vibrating force was externally applied to the jig having the sample attached thereto so as to cause the jig to vibrate in relation to the table, and the peak value of the amplitude of vibration of the center rod in relation to the table at the resonance frequency was measured (this peak value is referred to as the "first peak value"). This first peak value represents the amplitude of vibration obtained by combining the vibration of the jig in relation to the table and the vibration of the center rod 30 in relation to the jig (specifically, the vibration of the center rod 30 in relation to the metallic shell 20 of the glow plug 10 fixed to the jig). This first peak value was measured by specifying the position of the center rod 30 through a hole provided in the metallic shell 20. Also, in a state in which the sample of the glow plug 10 was removed from the jig, the jig was caused to vibrate, and the peak value of the amplitude of vibration of the jig in relation to the table at the resonance frequency was measured (this peak value is referred to as the "second peak value"). Subsequently, a value obtained by dividing the first peak value by the second peak value was recorded as an amplification factor Rx. The test results of FIGS. 4(A) and 4(C) show the amplification factors Rx of samples of a plurality of types of glow plugs 10 which differ from one another in terms of the structure of the center rod 30.

[0059] Notably, the strength of the force applied to the jig when the second peak value was obtained is the same as the strength of the force applied to the jig when the first peak value was obtained. Accordingly, in an assumed case where the sample of each glow plug 10 exerts no influence on the vibration of the jig, the second peak value is equal to the first peak value, and the amplification factor Rx is 1. In actuality, the sample of each glow plug 10 exerts an influence on the vibration of the jig, and the amplification factor Rx was greater than 1. The greater the strength of the resonance between the jig and the glow plug 10 (in particular, the center rod 30), the greater the amplification factor Rx. Accordingly, it is preferred that the amplification factor Rx be small. Also, when the amplification factor Rx is small, the vibration of the center rod 30 is restrained. Accordingly, in the case where the amplification factor Rx is small, it is expected that the force transmitted from the center rod 30 to the heater element 40 is mitigated. Notably, the resonance frequency at which the second peak value is obtained

may differ from the resonance frequency at which the first peak value is obtained.

[0060] Next, the second evaluation test in which the assembly 200 (FIG. 3) is used will be described. FIG. 3 is a schematic sectional view of an assembly 200 used in the evaluation test. The assembly 200 includes the sleeve 70, the heater element 40 inserted into the sleeve 70, the connection member 90 fixed to the heater element 40, and the center rod 30 fixed to the connection member 90. The remaining elements (specifically, the metallic shell 20, the packing 50, the insulating member 60, and the terminal member 80) of the glow plug 10 (FIGS. 1(A) and 1(B)) are omitted from the assembly 200.

[0061] An outer diameter Da in FIG. 3 is the outer diameter of the heater element 40 at the second position P2. A first distance La is the distance between the first position P1 and the second position P2 in the direction parallel to the axial line CL. The second distance Lb, the length Lf of the neck portion 410, and the smallest outer diameter Db of the neck portion 410 have already been described with reference to FIGS. 2(A) and 2(B).

[0062] A method of carrying out the evaluation test is as follows. The sleeve 70 of the assembly 200 was fixed to the table of a tester (also called autograph). Subsequently, by using the tester, a load F1 in the direction toward the axial line CL was applied to the outer circumferential surface 30s of the center rod 30, at the first position P1, in the direction orthogonal to the axial line CL. As a result of application of the load F1, the center rod 30 bent in the direction of the load F1. In FIG. 3, a bent portion of the center rod 30x is shown by broken lines. Subsequently, the load F1 was increased until the distance df of movement of the first position P1 in the direction of the load F1 (i.e., the direction orthogonal to the axial line CL) due to the application of the load F1 reached a predetermined distance for reference. The load F1 at the time when the moving distance df reached the distance for reference was employed as a load for reference (in the following description, symbol "F" is used for the load for reference). From this load for reference F, the stress of the heater element 40 at the second position P2 was calculated. A portion (excluding the forward end portion 41) of the heater element 40 which extends from the second position P2 toward the forward direction D1 side is held by the sleeve 70. Accordingly, when the load F is applied to the center rod 30 as shown in FIG. 3, the stress acting on the portion of the heater element 40 corresponding to the second position P2 is large.

[0063] The stress of the heater element 40 at the second position P2 was calculated by a formula of "bending moment M/section modulus Z." The bending moment M is the bending moment at the second position P2 and calculated by a formula of "the load for reference F x the first distance La." The section modulus Z is the section modulus of the heater element 40 at the second position P2. The heater element 40 used in the present evaluation test has the shape of a circular column extending along the axial line CL. Therefore, the section modulus at the

second position P2 is represented by " $(\pi \times Da^3)/32$." As a result, the stress S_a acting on the portion of the heater element 40 corresponding to the second position P2 is represented by $F \times La / ((\pi \times Da^3)/32)$. Subsequently, the ratio of the calculated stress S_a to a reference stress S_z determined in advance was calculated as a stress ratio R_a ($R_a = S_a/S_z$). The reference stress S_z is a stress which can have an influence on cracking of the heater element 40. The larger the stress ratio R_a , the larger the stress acting on the heater element 40. From the viewpoint of prevention of breakage of the heater element 40, it is preferred that the stress ratio R_a be small, and it is particularly preferred that the stress ratio R_a be 1 or less (namely, the stress S_a be equal to or less than the reference stress S_z). Each of the test results of FIG. 4(B) and FIGS. 5(A) to 5(C) shows the stress ratios R_a of samples of a plurality of assemblies 200 different from one another in terms of the structure of the center rod 30.

[0064] Next, parameters which represent the structure of the center rod 30 of each sample will be described. The horizontal axes of the graphs of FIGS. 4(A) to 4(C) and FIGS. 5(A) to 5(C) show the parameters which represent the structure of the center rod 30. In the graphs of FIGS. 4(A) and 4(B), the angle Ang (FIG. 2(C)) differs among the plurality of samples. In the graph of FIG. 4(C), the pitch Pt (FIG. 2(B)) differs among the plurality of samples. In the graph of FIG. 5(A), distance ratio RLb which will be described later differs among the plurality of samples. In the graph of FIG. 5(B), the length Lf described with reference to FIG. 2(B) differs among the plurality of samples. In the graph of FIG. 5(C), outer diameter ratio RDb which will be described later differs among the plurality of samples. In all the samples, the neck portion 410 is formed to satisfy the relation of $L1 = L2$ (FIG. 2(B)).

[0065] The distance ratio RLb of the horizontal axis of the graph of FIG. 5(A) is the ratio of the second distance Lb to a reference distance Dz ($RLb = Lb/Dz$). The reference distance Dz is represented by $19.7 \times La / (Da^3)$ (the details will be described later). The distance ratio RLb shows the position of the forward end 410f of the neck portion 410. The larger the distance ratio RLb , the greater the remoteness of the forward end 410f of the neck portion 410 from the first position P1; i.e., the greater the closeness of the forward end 410f to the heater element 40.

[0066] The reference distance Dz was determined as follows. As described above, the stress acting on the portion of the heater element 40 corresponding to the second position P2 is represented by $F \times La / ((\pi \times Da^3)/32)$. Also, the stress acting on the forward end 410f of the neck portion 410 of the center rod 30 is represented by $F \times Lb / ((\pi \times Db^3)/32)$. The forward end 410f of the neck portion 410 is a part of the neck portion 410 which is the most remote from the first position P1 and at which a large stress acts. In order to prevent the breakage of the heater element 40, it is preferred that the stress acting on the heater element 40 be equal to or less than that acting on the center rod 30. Namely, it is preferred that

a relational expression of " $F \times La / ((\pi \times Da^3)/32) < F \times Lb / ((\pi \times Db^3)/32)$ " be satisfied. When this relational expression is arranged for the smallest outer diameter Db of the neck portion 410, a relational expression of " $Db < (\text{the cubic root of } (Lb/La)) \times Da$ " is derived. In order to prevent the breakage of the heater element 40, it is preferred that the smallest outer diameter Db of the neck portion 410 be small. For example, when the outer diameter Db is less than 2.7 mm, the breakage of the heater element 40 can be prevented. When $Db = 2.7$ mm, the above-mentioned relational expression becomes " $Lb > 19.7 \times La / Da^3$." The right side of this relational expression; i.e., the smallest value of the second distance Lb represented by this relational expression, was employed as the reference distance Dz .

[0067] The outer diameter ratio RDb of the horizontal axis of the graph of FIG. 5(C) is the ratio of the smallest outer diameter Db of the neck portion 410 to a reference outer diameter Dy ($RDb = Db/Dy$). The reference outer diameter Dy is represented by (the cubic root of $(Lb/La) \times Da$ (the details will be described later)). The smaller the outer diameter ratio RDb , the smaller the smallest outer diameter Db of the neck portion 410; i.e., the greater the easiness of bending of the center rod 30.

[0068] The reference outer diameter Dy was determined as follows. As described above, the stress acting on the portion of the heater element 40 corresponding to the second position P2 is represented by $F \times La / ((\pi \times Da^3)/32)$. Also, the stress acting on the forward end 410f of the neck portion 410 of the center rod 30 is represented by $F \times Lb / ((\pi \times Db^3)/32)$. It is preferred that the stress acting on the heater element 40 be less than the stress acting on the center rod 30. Namely, it is preferred that a relational expression of " $F \times La / ((\pi \times Da^3)/32) < F \times Lb / ((\pi \times Db^3)/32)$ " be satisfied. When this relational expression is arranged for the smallest outer diameter Db , a relational expression of " $Db < (\text{the cubic root of } (Lb/La)) \times Da$ " is derived. The right side of this relational expression; i.e., the upper limit of the smallest outer diameter Db represented by this relational expression is the reference outer diameter Dy .

[0069] Next, the test results will be described. In the graph of FIG. 4(A), the horizontal axis shows the angle Ang (FIG. 2(C)), and the vertical axis shows the amplification factor R_x . As shown in FIG. 4(A), three types of samples ($Ang = 30, 60, 90$ (deg.)) were evaluated. These samples were the same in terms of the structure of the center rod 30 except the angle Ang . For example, the pitch Pt was 1.06 mm, the length Lf of the neck portion 410 was 20 mm, the distance ratio RLb was 1.24, and the outer diameter ratio RDb was 0.83.

[0070] As shown in FIG. 4(A), in the case where the angle Ang was 30 deg., the amplification factor R_x was smaller as compared with the case where the angle Ang was 60 deg. or greater. The reason for this is presumably as follows. Since the length Lf and the pitch Pt are fixed among the three types of samples used in the present evaluation test, the smaller the angle Ang , the greater

the length L1 of each bottom portion 310. Namely, the smaller the angle Ang, the greater the total sum of the first lengths L1 of the plurality of bottom portions 310 of the neck portion 410. Accordingly, the smaller the angle Ang, the greater the easiness of bending of the neck portion 410 of the center rod 30. Specifically, as a result of bending at each of the plurality of bottom portions 310, the neck portion 410 of the center rod 30 bends greatly as a whole. Also, force may be transmitted between the engine (the jig used in the evaluation test) and the center rod 30 through other members of the glow plug 10 (for example, the heater element 40, the sleeve 70, the metallic shell 20, etc.). This force is mitigated as a result of bending of the neck portion 410. For the reason described above, the smaller the angle Ang, the greater the degree to which the force transmitted between the engine (the jig used in the evaluation test) and the center rod 30 is mitigated. As a result, presumably, the amplification factor Rx decreases.

[0071] Notably, in the range within which the angle Ang is less than 60 deg., the amplification factor Rx was particularly small as compared with the range within which the angle Ang is equal to or greater than 60 deg. Accordingly, it is preferred that the angle Ang be less than 60 deg.

[0072] In the graph of FIG. 4(B), the horizontal axis shows the angle Ang (FIG. 2(C), and the vertical axis shows the stress ratio Ra. As shown in FIG. 4(B), three types of samples (Ang = 30, 60, 90 (deg.)) were evaluated. These samples were the same in terms of the structure of the center rod 30 except the angle Ang. For example, the pitch Pt was 1.06 mm, the length Lf of the neck portion 410 was 20 mm, the distance ratio RLb was 1.24, and the outer diameter ratio RDb was 0.83.

[0073] As shown in FIG. 4(B), the smaller the angle Ang, the smaller the stress ratio Ra. Presumably, the reason for this is that, as described above, the smaller the angle Ang, the greater the easiness of bending of the neck portion 410 of the center rod 30. Specifically, the smaller the angle Ang, the greater the amount by which the neck portion 410 of the center rod 30 bends upon application of the same load F1 (FIG. 3). As a result, the smaller the angle Ang, the smaller the stress acting on the heater element 40; i.e., the smaller the stress ratio Ra.

[0074] Also, when the graph of FIG. 4(A) and the graph of FIG. 4(B) are combined together, there can be presumed that when the angle Ang is less than 60 deg., both the amplification factor Rx and the stress ratio Ra can be decreased as compared with the case where the angle Ang is 60 deg. or greater. Accordingly, it is preferred that the angle Ang be less than 60 deg.

[0075] Notably, in order to properly form the grooves 300, it is preferred that each groove 300 is configured such that its width increases toward the radially outer side on a cross section including the axial line CL. Namely, it is preferred that on a flat cross section containing the axial line CL, the first sloping surface 320 on the forward direction D1 side of each bottom portion 310 slopes

from the bottom portion 310 toward the forward direction D1 side to be oblique to the axial line CL, and the second sloping surface 330 on the rear direction D1r side of each bottom portion 310 slopes from the bottom portion 310 toward the rear direction D1r side to be oblique to the axial line CL. Namely, in the case where the angle Ang is greater than 0 deg., the neck portion 410 can be formed properly. Accordingly, the angle Ang may be any of various angles greater than 0 deg.

[0076] In the graph of FIG. 4(C), the horizontal axis shows the pitch Pt, and the vertical axis shows the amplification factor Rx. As shown in FIG. 4(C), four types of samples (Pt = 0.7, 1.1, 2.1, 3.7 (mm)) were evaluated. The angles Ang of the samples were not smaller than 59 deg. but less than 60 deg. These samples were the same in terms of the structure of the center rod 30 except the pitch Pt and the angle Ang. For example, the length Lf of the neck portion 410 was 20 mm, the distance ratio RLb was 1.24, and the outer diameter ratio RDb was 0.83.

[0077] As shown in FIG. 4(C), in the case where the pitch Pt is less than 1.1 mm, the amplification factor Rx was smaller as compared with the case where the pitch Pt is 1.1 mm or greater. The reason for this is presumably as follows. Since the length Lf is fixed and the angle Ang is approximately the same among the four types of samples used in the present evaluation test, the smaller the pitch Pt, the greater the total number of the grooves 300 of the neck portion 410. Accordingly, the smaller the pitch Pt, the greater the easiness of bending of the neck portion 410 of the center rod 30. Specifically, as a result of bending at each of the plurality of bottom portions 310, the neck portion 410 of the center rod 30 bends greatly as a whole. As described above, in the case where the neck portion 410 of the center rod 30 easily bends, the force transmitted between the engine (the jig used in the evaluation test) and the center rod 30 is mitigated. For the above-described reason, it is presumed that the smaller the pitch Pt, the smaller the amplification factor Rx.

[0078] Notably, in the range within which the pitch Pt is less than 1.1 mm, the amplification factor Rx was particularly small as compared with the range within which the pitch Pt is equal to or greater than 1.1 mm. Accordingly, it is preferred that the pitch Pt be less than 1.1 mm.

[0079] In the graph of FIG. 5(A), the horizontal axis shows the distance ratio RLb, and the vertical axis shows the stress ratio Ra. As shown in FIG. 5(A), four types of samples were evaluated. These samples differed from one another in the distance ratio RLb (specifically, the second distance Lb, and therefore, the position of the neck portion 410), and were the same in the remaining configuration of the center rod 30. For example, the length Lf of the neck portion 410 was 20 mm, the outer diameter ratio RDb was 0.83, the angle Ang was 60 degrees, and the pitch Pt was 1.06 mm.

[0080] As shown in FIG. 5(A), the larger the distance ratio RLb (i.e., the larger the second distance Lb), the smaller the stress ratio Ra. The reason for this is presumably as follows. The larger the distance ratio RLb,

the greater the remoteness of the neck portion 410 from the first position P1 at which the load F (FIG. 3) acts, and the larger the stress acting on the neck portion 410 of the center rod 30. Accordingly, the larger the distance ratio RLb, the greater the amount by which the neck portion 410 of the center rod 30 bends upon application of the same load. Specifically, as a result of bending at the plurality of bottom portions 310, the neck portion 410 of the center rod 30 bends greatly as a whole. As a result, the greater the distance ratio RLb, the smaller the stress acting on the heater element 40; i.e., the smaller the stress ratio Ra.

[0081] Also, as shown in FIG. 5(A), the stress ratio Ra of the sample whose distance ratio RLb was less than 1.0 was larger than 1.0. In contrast, the stress ratios Ra of the samples whose distance ratios RLb were larger than 1.0 were 1.0 or less. As described above, the stress acting on the heater element 40 was able to be decreased properly; i.e., the force transmitted from the center rod 30 to the heater element 40 was able to be mitigated properly, through employment of the distance ratios RLb larger than 1.0 (i.e., the second distances Lb larger than the reference distance Dz).

[0082] Notably, the distance ratios RLb which realized good stress ratios Ra of 1.0 or less were 1.10, 1.24, and 1.31. A preferred range of the distance ratio RLb (a range between the lower and upper limits of the distance ratio RLb) may be determined through use of the above-mentioned three values. Specifically, any one of the three values may be employed as the lower limit of the preferred range of the distance ratio RLb. For example, the distance ratio RLb may be equal to or greater than 1.10. Namely, the second distance Lb may be equal to or greater than 1.10 times of the reference distance Dz. Also, any one of the three values which is greater than the lower limit may be employed as the upper limit of the preferred range of the distance ratio RLb. For example, the distance ratio RLb may be equal to or less than 1.31. Namely, the second distance Lb may be equal to or less than 1.31 times of the reference distance Dz.

[0083] Notably, the larger the distance ratio RLb, the greater the remoteness of the neck portion 410 from the first position P1, and the larger the stress acting on the neck portion 410. In order to mitigate the force transmitted from the center rod 30 to the heater element 40 by bending of the neck portion 410 of the center rod 30, it is preferred that the distance ratio RLb (i.e., the second distance Lb) be large. For example, the distance ratio RLb may be larger than any of the distance ratios RLb of the samples shown in FIG. 5(A). Notably, the distance ratio RLb assumes the largest value when the position (in the direction parallel to the axial line CL) of the neck portion 410 in the center rod 30 is determined such that the forward end 410f of the neck portion 410 coincides with the forward end of the center rod 30. The distance ratio RLb may be any of various values equal to or smaller than such a largest value. Namely, the second distance Lb may be any of various values equal to or smaller than

the distance between the first position P1 and the forward end of the center rod 30.

[0084] Notably, in general, in order to prevent breakage of the heater element 40, it is preferred that the stress acting on the portion of the heater element 40 corresponding to the second position P2 be smaller than the stress acting on the portion of the center rod 30 corresponding to the forward end 410f of the neck portion 410. Accordingly, as described above, it is preferred to satisfy the relation of "the second distance Lb > the reference distance Dz (the distance ratio RLb > 1.0)." It is presumed that the preferred range of the second distance Lb can be applied to various center rods (for example, center rods whose neck portions have various angles Ang less than 60 deg. and have various pitches Pt less than 1.1 mm). Further, it is presumed that the above-described various preferred ranges of the second distance Lb derived from the graph of FIG. 5(A) can be applied to various center rods (for example, center rods whose neck portions have various angles Ang less than 60 deg. and have various pitches Pt less than 1.1 mm).

[0085] Notably, the distance ratio RLb may be outside the preferred range described above. For example, in the case where the length Lf is longer than 20 mm which is the length Lf of the samples, even when the distance ratio RLb is less than 1.0, it is expected that a good stress ratio Ra can be realized. Also, in the case where the outer diameter ratio RDb is smaller than 0.83 which is the outer diameter ratio RDb of the samples, even when the distance ratio RLb is less than 1.0, it is expected that a good stress ratio Ra can be realized.

[0086] The graph of FIG. 5(B) shows the results of the evaluation performed for six types of samples. These samples differed from one another in the length Lf of the neck portion 410 and were the same in the remaining configuration of the center rod 30. For example, the distance ratio RLb was 1.24, the outer diameter ratio RDb was 0.83, the angle Ang was 60 degrees, and the pitch Pt was 1.06 mm. The position of the forward end 410f of the neck portion 410 is the same among the six types of samples, and the position of the rear end 410r of the neck portion 410 differs among the six types of sample. In all the samples, the rear end 410r of the neck portion 410 is located on the forward direction D1 side of the contact area Ac between the center rod 30 (FIGS. 1(A) and 1(B) and FIG. 2(A)) and the packing 50 (i.e., located on the forward direction D1 side of the first position P1). Also, the total number of the grooves 300 changes in direct proportional to the length Lf.

[0087] FIG. 6 is a schematic external view of the center rod 30 for the case where the length Lf is long (for example, the length Lf of the neck portion 410 is equal to or greater than one half of the length of the center rod 30 between the forward end 30f and the rear end 30r in the direction parallel to the axial line CL. As described above, even in the case where the length Lf is long, the rear end 410r of the neck portion 410 is located on the forward direction D1 side of the contact area Ac between the cent-

er rod 30 and the packing 50. Also, the neck portion 410 includes a portion disposed on the forward direction D1 side of the middle position P3.

[0088] As shown in FIG. 5(B), the greater the length L_f , the smaller the stress ratio R_a . The reason for this is presumably as follows. As having been described with reference to FIG. 2(B), the outer diameter D_b of the portions of the center rod 30 which form the bottom portions 310 is smaller than the outer diameter of the remaining portion of the center rod 30. Accordingly, in the case where the load F is applied to the center rod 30 as shown in FIG. 3, the stress acting on the portions of the center rod 30 which form the bottom portions 310 becomes larger than the stress acting on the remaining portion of the center rod 30. Thus, the portions of the center rod 30 which form the bottom portions 310 bend. In the case where the length L_f is long, the total number of the grooves 300 of the neck portion 410 (namely, the total number of the bottom portions 310 having the smallest outer diameter D_b) increases as compared with the case where the length L_f is short. Accordingly, the greater the length L_f of the neck portion 410, the greater the degree of bending of the neck portion 410 of the center rod 30 upon application of the same load to the center rod 30. As a result, the greater the length L_f of the neck portion 410, the smaller the stress acting on the heater element 40; i.e., the smaller the stress ratio R_a .

[0089] Also, as shown in FIG. 5(B), whereas the stress ratios R_a of the samples whose lengths L_f were less than 5 mm were larger than 1.0, the stress ratios R_a of the samples whose lengths L_f were 5 mm or greater were smaller than 1.0. As described above, through employment of lengths L_f equal to or greater than 5 mm, the stress acting on the heater element 40 was able to be decreased properly; namely, the force transmitted from the center rod 30 to the heater element 40 was able to be mitigated properly.

[0090] Notably, the lengths L_f which realized good stress ratios R_a of 1.0 or smaller were 5, 11, 50, and 80 (mm). A preferred range of the length L_f of the neck portion 410 (a range between the lower and upper limits of the length L_f) may be determined through use of the above-mentioned four values. Specifically, any one of the four values may be employed as the lower limit of the preferred range of the length L_f . For example, the length L_f may be equal to or greater than 5 mm. Also, any one of these values which is greater than the lower limit may be employed as the upper limit of the preferred range of the length L_f . For example, the length L_f may be equal to or less than 80 mm.

[0091] Notably, the greater the length L_f of the neck portion 410, the greater the total number of the bottom portions 310 at which the center rod 30 easily bends. Accordingly, in order to mitigate the force transmitted from the center rod 30 to the heater element 40 by bending of the neck portion 410 of the center rod 30, it is preferred that the length L_f be long. For example, a length L_f which is greater than the lengths L_f of the samples

shown in FIG. 5(B) may be employed. Notably, the possible maximum value of the length L_f is the same as the entire length of the center rod 30. The length L_f may have any value equal to or smaller than such a maximum value.

[0092] In general, the greater the length L_f of the neck portion 410, the greater the easiness of bending of the neck portion 410 of the center rod 30, and the smaller the stress acting on the heater element 40. Accordingly, it is presumed that the above-described various preferred ranges of the length L_f derived from the graph of FIG. 5(B) can be applied to various center rods (for example, center rods whose neck portions have various angles Ang less than 60 deg. and have various pitches P_t less than 1.1 mm).

[0093] Notably, the length L_f may be outside the above-described preferred range. For example, in the case where the distance ratio RL_b is larger than 1.24 which is the distance ratio RL_b of the samples, it is expected that a good stress ratio R_a can be realized even when the length L_f is less than 5 mm. Also, in the case where the outer diameter ratio RD_b is smaller than 0.83 which is the outer diameter ratio RD_b of the samples, it is expected that a good stress ratio R_a can be realized even when the length L_f is less than 5 mm.

[0094] In the graph of FIG. 5(C), the horizontal axis shows the outer diameter ratio RD_b , and the vertical axis shows the stress ratio R_a . As shown in FIG. 5(C), four types of samples were evaluated. These samples differed from one another in the outer diameter ratio RD_b (specifically, the smallest outer diameter D_b) and were the same in the remaining configuration of the center rod 30. For example, the distance ratio RL_b was 1.24, the length L_f of the neck portion 410 was 20 mm, the angle Ang was 60 degrees, and the pitch P_t was 1.06 mm.

[0095] As shown in FIG. 5(C), the smaller the outer diameter ratio RD_b (namely, the smaller the smallest outer diameter D_b), the smaller the stress ratio R_a . The reason for this is presumably as follows. The smaller the outer diameter ratio RD_b , the smaller the smallest outer diameter D_b of the bottom portions 310 of the neck portion 410, and the larger the stress acting on the portions of the center rod 30 corresponding to the bottom portions 310. Accordingly, the smaller the outer diameter ratio RD_b , the greater the degree of bending of the portions of the center rod 30 corresponding to the bottom portions 310 upon application of the same load. As a result, the smaller the outer diameter ratio RD_b , the smaller the stress acting on the heater element 40; i.e., the smaller the stress ratio R_a .

[0096] Also, as shown in FIG. 5(C), the outer diameter ratios RD_b of the four types of evaluated samples were smaller than 1 (namely, their smallest outer diameters D_b were smaller than the reference outer diameter D_y). The stress ratios R_a of all the samples were equal to or less than 1.0. As described above, through employment of outer diameter ratios RD_b less than 1 (namely, smallest outer diameters D_b less than the reference outer diameter D_y), the stress acting on the heater element 40

was able to be decreased properly; namely, the force transmitted from the center rod 30 to the heater element 40 was able to be mitigated properly.

[0097] Notably, the outer diameter ratios RDb which realized good stress ratios Ra of 1.0 or smaller were 0.83, 0.86, 0.90, and 0.93. A preferred range of the outer diameter ratio RDb may be determined through use of the above-mentioned four values. Specifically, any one of the four values may be employed as the upper limit of the preferred range of the outer diameter ratio RDb. For example, the outer diameter ratio RDb may be equal to or less than 0.93. Namely, the smallest outer diameter Db may be equal to or less than 0.93 times of the reference outer diameter Dy. Also, any of these values which is less than the upper limit may be employed as the lower limit of the outer diameter ratio RDb. For example, the outer diameter ratio RDb may be equal to or greater than 0.83. Namely, the smallest outer diameter Db may be equal to or greater than 0.83 times of the reference outer diameter Dy.

[0098] Notably, the smaller the smallest outer diameter Db, the larger the stress acting on the portions of the center rod 30 corresponding to the bottom portions 310. Accordingly, in order to mitigate the force transmitted from the center rod 30 to the heater element 40 by bending of the neck portion 410 of the center rod 30, it is preferred that the smallest outer diameter Db (thus, the outer diameter ratio RDb) be small. For example, an outer diameter ratio RDb which may be smaller than the outer diameter ratios RDb of the samples shown in FIG. 5(C) may be employed. Notably, in the case where the smallest outer diameter Db is excessively small, a failure may occur (for example, the center rod 30 may be broken). Accordingly, the smallest outer diameter Db is preferably not excessively small and is preferably, for example, 2 mm or greater.

[0099] Notably, in general, in order to prevent breakage of the heater element 40, it is preferred that the stress acting on the portion of the heater element 40 corresponding to the second position P2 be smaller than the stress acting on the portion of the center rod 30 corresponding to the forward end 410f of the neck portion 410. Accordingly, as described above, it is preferred to satisfy the relation of "the smallest outer diameter Db < the reference outer diameter Dy (the outer diameter ratio RDb < 1.0)." It is presumed that the preferred range of the smallest outer diameter Db can be applied to various center rods (for example, center rods whose neck portions have various angles Ang less than 60 deg. and have various pitches Pt less than 1.1 mm). Further, it is presumed that the above-described various preferred ranges of the smallest outer diameter Db derived from the graph of FIG. 5(C) can be applied to various center rods (for example, center rods whose neck portions have various angles Ang less than 60 deg. and have various pitches Pt less than 1.1 mm).

[0100] Notably, the outer diameter ratio RDb (thus, the smallest outer diameter Db) may be outside the above-

described preferred range. For example, in the case where the distance ratio RLb is larger than 1.24 which is the distance ratio RLb of the samples, it is expected that a good stress ratio Ra can be realized even when the outer diameter ratio RDb is equal to or greater than 1. Also, in the case where the length Lf of the neck portion 410 is greater than 20 mm which is the length Lf of the samples, it is expected that a good stress ratio Ra can be realized even when the outer diameter ratio RDb is equal to or greater than 1.

C. Second embodiment:

[0101] FIGS. 7(A), 7(B), and 7(C) are schematic views of another embodiment of the center rod. FIG. 7(A) schematically shows the external appearance of a center rod 30c as in the case of FIG. 2(A). The center rod 30c differs from the center rod 30 of the first embodiment shown in FIGS. 2(A), 2(B), and 2(C) only in the point that a first transition portion 500 is formed on the forward side of the neck portion 410 to be located adjacent thereto, and a second transition portion 700 is formed on the rear side of the neck portion 410 to be located adjacent thereto. The configurations of other portions of the center rod 30c are identical with those of corresponding portions of the center rod 30 of the first embodiment (elements identical with the corresponding elements of the center rod 30 are denoted by the same reference numerals and their descriptions are omitted). This center rod 30c can be used in place of the center rod 30 shown in FIGS. 1(A) and 1(B).

[0102] Each of the first transition portion 500 and the second transition portion 700 is a portion which has grooves formed on the outer circumferential surface 30s of the center rod 30c such that the grooves extend in the circumferential direction of the center rod 30c as in the case of the neck portion 410. However, the depth of the grooves differs from the depth of the grooves 300 of the neck portion 410 (the details will be described later).

[0103] The first transition portion 500 is connected to the end of the neck portion 410 on the forward direction D1 side, and is provided on the rearward direction D1r side of the forward end portion 31 of the center rod 30c. No groove is formed on a portion 910 on the forward side of the first transition portion 500 (hereinafter referred to as the "first trunk portion 910"). The first trunk portion 910 is a circular columnar portion which is connected to the end of the first transition portion 500 on the forward direction D1 side and which has an approximately constant outer diameter Dc.

[0104] The second transition portion 700 is connected to the end of the neck portion 410 on the rearward direction D1r side, and is provided on the forward direction D1 side of the rear end portion 39 of the center rod 30c. No groove is formed on a portion 920 on the rear side of the second transition portion 700 (hereinafter referred to as the "second trunk portion 920"). The second trunk portion 920 is a circular columnar portion which is connected to the end of the second transition portion 700 on

the rearward direction D1 r side and which has an approximately constant outer diameter Dc.

[0105] FIG. 7(B) shows a cross section (flat cross section containing the axial line CL) of the first transition portion 500 of the center rod 30c. In FIG. 7(B), hatching is omitted (similarly, hatching is omitted in FIG. 7(C), FIGS. 8(A) and 8(B), FIGS. 9(A) and 9(B), and

[0106] FIGS. 10(A) and 10(B) which will be described later). As shown in FIG. 6(B), a plurality of grooves (i.e., radially inward recesses) 600 are formed on the outer circumferential surface of the first transition portion 500. Each groove 600 is a closed loop groove which extends, on the outer circumferential surface 30s of the center rod 30c, completely around the center rod 30c in the circumferential direction thereof. The plurality of grooves 600 are formed successively in the direction parallel to the axial line CL. In the present embodiment, the first transition portion 500 has three grooves 600.

[0107] On the cross section of FIG. 7(B), each groove 600 is defined by a bottom portion 610 and two sloping surfaces which are located on opposite sides of the bottom portion 610; i.e., a first sloping surface 620 on the forward direction D1 side and a second sloping surface 630 on the rearward direction D1r side. Like the first sloping surface 320 of each groove 300 of the neck portion 410, the first sloping surface 620 slants toward the forward direction D1 side, when the sloping surface is followed from the inner side toward the outer side in the radial direction. Like the second sloping surface 330 of each groove 300 of the neck portion 410, the second sloping surface 630 slants toward the rearward direction D1r side, when the sloping surface is followed from the inner side toward the outer side in the radial direction. Although not illustrated, the angle formed between the first sloping surface 620 and the second sloping surface 630 is the same as the angle Ang formed between the first sloping surface 320 and the second sloping surface 330 described with reference to FIG. 2(C) (however, the angle formed between the sloping surfaces 620 and 630 may differ from the angle Ang formed between the sloping surfaces 320 and 330). The radially outer end of the first sloping surface 620 and the radially outer end of the adjacent second sloping surface 630 on the forward direction D1 side of the first sloping surface 620 are connected to a common crest portion 640. Each crest portion 640 has an outer circumferential surface approximately parallel to the axial line CL. The outer diameter of the crest portions 640 is the same as the outer diameter of the crest portions 340 of the neck portion 410 (however, the outer diameter of the crest portions 640 may differ from the outer diameter of the crest portions 340 of the neck portion 410).

[0108] Each bottom portion 610 has an outer circumferential surface approximately parallel to the axial line CL. The bottom portion 610 is a portion of the corresponding groove 600 which has the smallest outer diameter. Outer diameters D61 to D63 and radiuses R61 to R63 in FIG. 7(B) show the outer diameters and radiuses of the

three bottom portions 610 successively arranged toward the forward direction D1 side. In the present embodiment, the three outer diameters D61 to D63 are the same. Also, the three outer diameters D61 to D63 are larger than the outer diameter Db of the bottom portions 310 of the neck portion 410 and smaller than the outer diameter Dc of the first trunk portion 910. Namely, the distances between the center axis of the center rod 30c (which is the same as the center axis CL in the present embodiment) and the outer circumferential surfaces of the bottom portions 610 of the grooves 600 of the first transition portion 500 (the radiuses R61 to R63 in the present embodiment) are larger than the distance (one half of Db) between the center axis CL and the outer circumferential surfaces of the bottom portions 310 of the grooves 300 of the neck portion 410, and smaller than the distance (one half of Dc) between the center axis CL and the outer circumferential surface of the first trunk portion 910.

[0109] As described above, between the neck portion 410 and the first trunk portion 910, there are formed the grooves 600 which are larger in outer diameter than the bottom portions 310 of the grooves 300 of the neck portion 410 and are smaller in outer diameter than the first trunk portion 910. Accordingly, when a force is applied to the center rod 30c, the bottom portions 610 of the grooves 600 bend, whereby the concentration of stress on the end of the neck portion 410 on the forward direction D1 side can be mitigated. As a result, excessive bending of the center rod 30c can be prevented.

[0110] Notably, the pitch Pt of the plurality of grooves 600 in the direction parallel to the axial line CL is the same as the pitch Pt of the plurality of grooves 300 of the neck portion 410. In FIG. 7(B), the pitch Pt is determined by using the center position of each of the bottom portions 610 and 310 in the direction parallel to the axial line CL as a reference. Also, as shown in FIG. 6(B), the pitch Pt1 (also referred to as the "first connection pitch Pt1") between the forwardmost groove 300 of the neck portion 410 and the rearmost groove 600 of the first transition portion 500 is also the same as the pitch Pt.

[0111] FIG. 7(C) shows a cross section (flat cross section containing the axial line CL) of the second transition portion 700 of the center rod 30c. In the present embodiment, the shape of the first transition portion 500 and the shape of the second transition portion 700 are plane symmetry with each other with respect to a symmetry plane Ps (FIG. 7(A)) orthogonal to the center axis CL of the center rod 30c (the symmetry plane Ps is located at the center of the neck portion 410). Specifically, a plurality of grooves (i.e., radially inward recesses) 800 are formed on the outer circumferential surface of the second transition portion 700. Each groove 800 is a closed loop groove which extends, on the outer circumferential surface 30s of the center rod 30c, completely around the center rod 30c in the circumferential direction thereof. The plurality of grooves 800 are formed successively in the direction parallel to the axial line CL. Notably, the shape of the first transition portion 500 may differ from

the shape of the second transition portion 700.

[0112] Each groove 800 is defined by a bottom portion 810 and two sloping surfaces which are located on opposite sides of the bottom portion 810; i.e., a first sloping surface 820 on the forward direction D1 side and a second sloping surface 830 on the rearward direction D1r side. Like the first sloping surface 620 (FIG. 7(B)), the first sloping surface 820 slants toward the forward direction D1 side. Like the second sloping surface 630 (FIG. 7(B)), the second sloping surface 830 slants toward the rearward direction D1r side. Although not illustrated, the angle formed between the first sloping surface 820 and the second sloping surface 830 is the same as the angle Ang formed between the first sloping surface 320 and the second sloping surface 330 described with reference to FIG. 2(C) (however, the angle formed between the sloping surfaces 820 and 830 may differ from the angle Ang formed between the sloping surfaces 320 and 330). The radially outer end of the first sloping surface 820 and the radially outer end of the adjacent second sloping surface 830 on the forward direction D1 side of the first sloping surface 820 are connected to a common crest portion 840. Each crest portion 840 has an outer circumferential surface approximately parallel to the axial line CL. The outer diameter of the crest portions 840 is the same as the outer diameter of the crest portions 340 of the neck portion 410 (however, the outer diameter of the crest portions 840 may differ from the outer diameter of the crest portions 340 of the neck portion 410).

[0113] Each bottom portion 810 has an outer circumferential surface approximately parallel to the axial line CL. The bottom portion 810 is a portion of the corresponding groove 800 which has the smallest outer diameter. Outer diameters D81 to D83 and radiuses R81 to R83 in FIG. 7(C) show the outer diameters and radiuses of the three bottom portions 810 arranged toward the rearward direction D1r side. In the present embodiment, the three outer diameters D81 to D83 are the same. Also, the three outer diameters D81 to D83 are larger than the outer diameter Db of the bottom portions 310 of the neck portion 410 and smaller than the outer diameter Dc of the second trunk portion 920. Namely, the distances between the center axis CL of the center rod 30c and the outer circumferential surfaces of the bottom portions 810 of the grooves 800 of the second transition portion 700 (the radiuses R81 to R83 in the present embodiment) are larger than the distance (one half of Db) between the center axis CL and the outer circumferential surfaces of the bottom portions 310 of the grooves 300 of the neck portion 410, and smaller than the distance (one half of Dc) between the center axis CL and the outer circumferential surface of the second trunk portion 920.

[0114] As described above, between the neck portion 410 and the second trunk portion 920, there are formed the grooves 800 which are larger in outer diameter than the bottom portions 310 of the grooves 300 of the neck portion 410 and are smaller in outer diameter than the second trunk portion 920. Accordingly, when a force is

applied to the center rod 30c, the bottom portions 810 of the grooves 800 bend, whereby the concentration of stress on the end of the neck portion 410 on the rearward direction D1r side can be mitigated. As a result, excessive bending of the center rod 30c can be prevented.

[0115] Notably, the pitch Pt of the plurality of grooves 800 in the direction parallel to the axial line CL is the same as the pitch Pt of the plurality of grooves 300 of the neck portion 410. In FIG. 7(C), the pitch Pt is determined by using the center position of each of the bottom portions 810 and 310 in the direction parallel to the axial line CL as a reference. Also, as shown in FIG. 6(C), the pitch Pt2 (also referred to as the "second connection pitch Pt2") between the rearmost groove 300 of the neck portion 410 and the forwardmost groove 800 of the second transition portion 700 is also the same as the pitch Pt.

[0116] Notably, the first transition portion 500 having the plurality of grooves 600 and the second transition portion 700 having the plurality of grooves 800 can be formed on the center rod 30c through use of any of various methods such as cutting and form rolling.

D. Third embodiment:

[0117] FIGS. 8(A) and 8(B) are schematic views of still another embodiment of the center rod. The center rod 30d of the present embodiment differs from the center rod 30c of the embodiment shown in FIGS. 7(A), 7(B), and 7(C) only in the point that the first transition portion 500 is replaced with a first transition portion 500d, and the second transition portion 700 is replaced with a second transition portion 700d. FIG. 8(A) shows a cross section of the first transition portion 500d and FIG. 8(B) shows a cross section of the second transition portion 700d (each of the cross sections is a flat cross section containing the axial line CL). The first transition portion 500d (FIG. 8(A)) differs from the first transition portion 500 (FIG. 7(B)) in terms of the total number of the grooves 600 and the outer diameters of the bottom portions 610. The second transition portion 700d (FIG. 8(B)) differs from the second transition portion 700 (FIG. 7(C)) in terms of the total number of the grooves 800 and the outer diameters of the bottom portions 810. The configurations of other portions of the center rod 30d of the present embodiment are identical with those of corresponding portions of the center rod 30c shown in FIGS. 7(A), 7(B), and 7(C) (elements identical with the corresponding elements of the center rod 30c are denoted by the same reference numerals and their descriptions are omitted).

[0118] As shown in FIG. 8(A), in the present embodiment, the first transition portion 500d has five grooves 600. Outer diameters D61 to D65 and radiuses R61 to R65 in FIG. 8(A) show the outer diameters and radiuses of the five bottom portions 610 arranged toward the forward direction D1 side. As in the case of the embodiment shown in FIG. 7(B), each of the outer diameters D61 to D65 is larger than the outer diameter Db of the bottom

portions 310 of the neck portion 410 and smaller than the outer diameter D_c of the first trunk portion 910. Namely, each of the radiuses R_{61} to R_{65} is larger than one half of the outer diameter D_b of the bottom portions 310 of the neck portion 410 and smaller than one half of the outer diameter D_c of the first trunk portion 910. Accordingly, as in the case of the embodiment shown in FIG. 7(B), when a force is applied to the center rod 30d, the bottom portions 610 of the grooves 600 bend, whereby the concentration of stress on the end of the neck portion 410 on the forward direction D_1 side can be mitigated. As a result, excessive bending of the center rod 30d can be prevented.

[0119] In the present embodiment, unlike the embodiment shown in FIG. 7(B), the five bottom portions 610 have different outer diameters. Specifically, the outer diameters D_{61} to D_{65} of the five bottom portions 610 increase toward the forward direction D_1 side ($D_{65} > D_{64} > D_{63} > D_{62} > D_{61}$). Namely, as to the five grooves 600, the outer diameter of the bottom portion 610 of the groove 600 on the forward side is larger than the outer diameter of the bottom portion 610 of the groove 600 on the rear side. As described above, the plurality of grooves 600 of the first transition portion 500d are formed such that the groove outer diameter gradually changes between the neck portion 410 and the first trunk portion 910. Accordingly, it is possible to mitigate the concentration of stress on a portion of the first transition portion 500d (for example, an end portion on the forward direction D_1 side or an end portion on the rearward direction D_{1r} side). As a result, excessive bending of the center rod 30d can be prevented.

[0120] As shown in FIG. 8(B), in the present embodiment, the second transition portion 700d has five grooves 800. Outer diameters D_{81} to D_{85} and radiuses R_{81} to R_{85} in FIG. 8(B) show the outer diameters and radiuses of the five bottom portions 810 arranged toward the rearward direction D_{1r} side. As in the case of the embodiment shown in FIG. 7(C), each of the outer diameters D_{81} to D_{85} is larger than the outer diameter D_b of the bottom portions 310 of the neck portion 410 and smaller than the outer diameter D_c of the first trunk portion 910. Namely, each of the radiuses R_{81} to R_{85} is larger than one half of the outer diameter D_b of the bottom portions 310 of the neck portion 410 and smaller than one half of the outer diameter D_c of the first trunk portion 910. Accordingly, as in the case of the embodiment shown in FIG. 7(C), when a force is applied to the center rod 30d, the bottom portions 810 of the grooves 800 bend, whereby the concentration of stress on the end of the neck portion 410 on the rearward direction D_{1r} side can be mitigated. As a result, excessive bending of the center rod 30d can be prevented.

[0121] In the present embodiment, unlike the embodiment shown in FIG. 7(C), the five bottom portions 810 have different outer diameters. Specifically, the outer diameters D_{81} to D_{85} of the five bottom portions 810 increase toward the rearward direction D_{1r} side ($D_{81} <$

$D_{82} < D_{83} < D_{84} < D_{85}$). Namely, as to the five grooves 800, the outer diameter of the bottom portion 810 of the groove 800 on the rear side is larger than the outer diameter of the bottom portion 810 of the groove 800 on the forward side. As described above, the plurality of grooves 800 of the second transition portion 700d are formed such that the groove outer diameter gradually changes between the neck portion 410 and the second trunk portion 920. Accordingly, it is possible to mitigate the concentration of stress on a portion of the second transition portion 700d (for example, an end portion on the forward direction D_1 side or an end portion on the rearward direction D_{1r} side). As a result, excessive bending of the center rod 30d can be prevented.

[0122] Notably, in the present embodiment as well, the pitch P_t of the plurality of grooves 600 of the first transition portion 500d is the same as the pitch P_t of the plurality of grooves 300 of the neck portion 410. The first connection pitch P_{t1} between the neck portion 410 and the first transition portion 500d is the same as the pitch P_t . Similarly, the pitch P_t of the plurality of grooves 800 of the second transition portion 700d is the same as the pitch P_t of the plurality of grooves 300 of the neck portion 410. The second connection pitch P_{t2} between the neck portion 410 and the second transition portion 700d is the same as the pitch P_t .

[0123] Notably, the first transition portion 500d having the plurality of grooves 600 and the second transition portion 700d having the plurality of grooves 800 can be formed on the center rod 30d through use of any of various methods such as cutting and form rolling.

E. Fourth embodiment:

[0124] FIGS. 9(A) and 9(B) are schematic views of yet another embodiment of the center rod. The center rod 30e of the present embodiment differs from the center rod 30d of the embodiment shown in FIGS. 8(A) and 8(B) only in the point that the first transition portion 500d is replaced with a first transition portion 500e, and the second transition portion 700d is replaced with a second transition portion 700e. FIG. 9(A) shows a cross section of the first transition portion 500e and FIG. 9(B) shows a cross section of the second transition portion 700e (each of the cross sections is a flat cross section containing the axial line CL). The present embodiment differs from the embodiment shown in FIGS. 8(A) and 8(B) only in the point that in the present embodiment, the outer diameters of the crest portions 640 and 840 of the transition portions 500e and 700e differ from the outer diameter of the crest portions 340 of the neck portion 410. The configurations of other portions of the center rod 30e of the present embodiment are identical with those of corresponding portions of the center rod 30d shown in FIGS. 8(A) and 8(B) (elements identical with the corresponding elements of the center rod 30d are denoted by the same reference numerals and their descriptions are omitted).

[0125] An outer diameter D34 and a radius R34 in FIG. 9(A) show the outer diameter and radius of the crest portions 340 of the neck portion 410. Although not illustrated, the plurality of crest portions 340 of the neck portion 410 have the same outer diameter (namely, have the same radius).

[0126] The first transition portion 500e has five crest portions 640 each formed on the rearward direction D1r side of corresponding one of the five bottom portions 610. Outer diameters D641 to D645 and radiuses R641 to R645 show the outer diameters and radiuses of the five crest portions 640 arranged toward the forward direction D1 side. In the embodiment shown in FIG. 9(A), the outer diameters D641 to D645 are smaller than the outer diameter D34 of the crest portions 340 of the neck portion 410 and larger than the outer diameter Dc of the first trunk portion 910. Further, the outer diameters D641 to D645 of the five crest portions 640 decrease toward the forward direction D1 side ($D645 < D644 < D643 < D642 < D641$). As described above, the outer diameter of each crest portion 640 is determined such that the smaller the outer diameter of the bottom portion 610 adjacent to the crest portion 640, the larger the outer diameter of the crest portion 640.

[0127] The shape in which the smaller the outer diameter of the bottom portion 610 adjacent to the crest portion 640, the larger the outer diameter of the crest portion 640 can be easily formed in the case where form rolling is used, as well as in the case where cutting is used. In the case of form rolling, a roller having protrusions corresponding to the grooves 600 is pressed against the outer circumferential surface 30s having no groove. Portions of the outer circumferential surface 30s which are depressed radially inward as a result of pressing by the protrusions of the roller form the grooves 600 (thus, the bottom portions 610). As a result of portions of the outer circumferential surface 30s being depressed, other portions of the outer circumferential surface 30s (in particular, portions each located between a groove 600 and another groove 600 adjacent thereto) are bulged. The bulged portions form the crest portions 640. The degree of bulging of each crest portion 640 increases with the degree of depression of the adjacent bottom portion 610. Accordingly, the smaller the outer diameter of the adjacent bottom portion 610, the larger the outer diameter which the crest portion 640 tends to have.

[0128] The second transition portion 700e shown in FIG. 9(B) has the same configuration. The second transition portion 700e has five crest portions 840 each formed on the forward direction D1 side of corresponding one of the five bottom portions 810. Outer diameters D841 to D845 and radiuses R841 to R845 show the outer diameters and radiuses of the five crest portions 840 arranged toward the rearward direction D1r side. In the embodiment shown in FIG. 9(B), the outer diameters D841 to D845 are smaller than the outer diameter D34 of the crest portions 340 of the neck portion 410 and larger than the outer diameter Dc of the second trunk

portion 920. Further, the outer diameters D841 to D845 of the five crest portions 840 decrease toward the rearward direction D1r side ($D841 > D842 > D843 > D844 > D845$). As described above, the outer diameter of each crest portion 840 is determined such that the smaller the outer diameter of the bottom portion 810 adjacent to the crest portion 840, the larger the outer diameter of the crest portion 840. Such a second transition portion 700e can be easily formed by cutting or form rolling as in the case of the first transition portion 500e shown in FIG. 9(A).

F. Modifications:

[0129]

(1) Instead of the above-described configuration, other various configurations can be employed as the configuration of the neck portion. For example, instead of a closed loop groove extending completely around the center rod in the circumferential direction, a spiral groove extending completely around the center rod in the circumferential direction may be formed as each of the plurality of grooves of the neck portion. Specifically, the groove may be a spiral groove which extends toward the forward direction D1 side on the outer circumferential surface of the center rod, while changing its position in the circumferential direction with respect to the axial line CL of the center rod which serves as a reference. A plurality of grooves may be formed such that they are successively arranged toward the forward direction D1 side, and are connected in series to form a single spiral groove. Both the closed loop groove and the spiral groove can be said to be provided on the outer circumferential surface of the center rod to extend in the circumferential direction of the center rod.

In any case, if a plurality of grooves are successively disposed along a line extending on the outer circumferential surface of the center rod in the direction parallel to the axial line CL such that the plurality of grooves intersect with the line, the plurality of grooves can be said to be successively disposed in the direction parallel to the axial line CL. Thus, the neck portion having the plurality of grooves can be said to extend in the direction parallel to the axial line CL. In the case where such a neck portion is provided on the center rod, the force transmitted from the center rod to the heater element can be mitigated through bending of the neck portion.

(2) The shape of the grooves 300 is not limited to the shape having been described with reference to FIG. 2(B), and the grooves 300 may have any of various other shapes. For example, the first length L1 of the bottom portions 310 may be longer than the second length L2 of the crest portions 340. Alternatively, the second length L2 of the crest portions 340 may be longer than the first length L1 of the

bottom portions 310. The connection portions between the bottom portions 310 and the first sloping surfaces 320 may be rounded. Also, the connection portions between the bottom portions 310 and the second sloping surfaces 330 may be rounded. In any case, the pitch P_t is determined while the end (on the rearward direction D1r side) of a portion of each bottom portion 310 having the smallest outer diameter D_b is used as a reference. The connection portions between the crest portions 340 and the first sloping surfaces 320 may be rounded. Also, the connection portions between the crest portions 340 and the second sloping surfaces 330 may be rounded. Also, the entire bottom portions 310 may be rounded. In this case, the pitch P_t is determined while the portion of each bottom portion 310 having the smallest outer diameter is used as a reference. Also, the entire crest portions 340 may be rounded. Alternatively, the each bottom portion may be a V-shaped portion formed by mutually connecting the two sloping surfaces on the opposite sides of the bottom portion. Also, each crest portion may be a V-shaped edge formed by mutually connecting the two sloping surfaces on the opposite sides of the crest portion. In any case, an angle formed between a straight portion of the first sloping surface 320 and a straight portion of the second sloping surface 330 on a cross section containing the axial line CL can be employed as the angle Ang . Also, the end (on the forward direction D1 side) of a smallest outer diameter portion of the forwardmost bottom portion among the plurality of bottom portions of the neck portion may be employed as the forward end of the neck portion. Similarly, the end (on the rearward direction D1r side) of a smallest outer diameter portion of the rearmost bottom portion among the plurality of bottom portions of the neck portion may be employed as the rear end of the neck portion. In the case where the smallest outer diameter portion of the forwardmost bottom portion does not extend along the axial line CL (for example, the case where the entire bottom portion is rounded, or the case where the bottom portion is a V-shaped portion), the smallest outer diameter portion of the bottom portion may be employed as the forward end of the neck portion. The same is true of the rear end of the neck portion.

(3) The total number of the neck portions provided on the center rod may be 2 or more. In general, the total number of the neck portions provided on the center rod may be an arbitrary number of 1 or greater. Notably, a wavy portion which is formed, as a result of disposition of a plurality of grooves, on a cross section of the center rod containing the axial line CL may be employed as one neck portion. In this case, two grooves in the wavy portion which are spaced from each other by a distance greater than the distance between two adjacent grooves (for example, the pitch) may be considered as grooves of neck

portions different from each other.

In any case, it is preferred that the forwardmost neck portion of the one or more neck portions provided on the center rod include a portion disposed on the forward side of the middle position (for example, the middle position P3 of FIG. 2(A)) between the forward end and the rear end of the center rod in the direction parallel to the axial line CL. In other words, it is preferred that the forward end of the forwardmost neck portion be disposed on the forward side of the middle position P3. In this configuration, since a portion of the center rod, which portion is located on the heater element side of the middle position, can bend, the force transmitted from the center rod to the heater element can be mitigated properly. Also, it is preferred that in the forwardmost neck portion of the one or more neck portions provided on the center rod, the pitch of the plurality of grooves (for example, the pitch P_t of FIG. 2(B)) be less than 1.1 mm. Further, it is preferred that in the forwardmost neck portion, the angle formed between the forward sloping surface and the rear sloping surface of each groove (for example, the angle Ang of FIG. 2(C)) be less than 60 deg. Notably, in the case where the total number of the neck portions is two or more, the pitch of the plurality of grooves may differ among the plurality of neck portions. Also, the angle of the grooves may differ among the plurality of neck portions.

Also, it is preferred that the distance L_b (in the direction parallel to the axial line CL) between the first position P1 and the forward end of the forwardmost neck portion among one or more neck portions provided on the center rod (for example, the forward end 410f of the neck portion 410 shown in FIG. 3) fall within the preferred range of the second distance L_b having been described with reference to FIG. 5(A). Also, it is preferred that the length of the forwardmost neck portion (for example, the length L_f of the neck portion 410 shown in FIG. 3) fall within the preferred range of the length L_f having been described with reference to FIG. 5(B).

Also, in the case where the forwardmost neck portion has closed loop grooves, it is preferred that the smallest outer diameter of the forwardmost neck portion (for example, the smallest outer diameter D_b of the neck portion 410 shown in FIG. 3) fall within the preferred range of the smallest outer diameter D_b having been described with reference to FIG. 5(C).

(4) Instead of form rolling, any of other methods may be employed so as to form the plurality of grooves of the neck portion on the center rod. For example, the plurality of grooves may be formed through cutting. In this case, the entire outer circumferential surface of the neck portion may be formed on the radially inner side of the outer circumferential surface of portions of the center rod where the neck portion is not formed (for example, the outer circumferential surfaces 30s of the portions of the center rod 30 shown

in FIG. 2(B), the portions having the outer diameter D_c).

(5) The plurality of grooves formed on the center rod may include a plurality of grooves which differ from one another in terms of the distance between the bottom portion and the center axis of the center rod. A portion in which one or more grooves which are the same in terms of the distance (for example, radius) between the bottom portion of the groove and the center axis of the center rod are successively formed in the direction parallel to the axial line CL may be employed as a neck portion. Notably, of the plurality of grooves formed on the center rod, one or more grooves may have rounded bottom portions. In this case, the smallest distance between the rounded bottom portion and the center axis may be employed as the distance between the rounded bottom portion and the center axis. Also, a portion where a plurality of grooves are successively arranged at the same pitch may be employed as a single neck portion.

(6) It is preferred that the first transition portion be connected to the forward end of the neck portion, and the first trunk portion where the outer diameter is approximately constant be connected to the forward end of the first transition portion. Instead of the configurations having been described with reference to FIGS. 7(B), 8(A), and 9(A), various other configurations may be employed as the configuration of the first transition portion. For example, the total number of grooves may be an arbitrary number of 1 or greater. Also, the first transition portion may be formed by a spiral groove as in the case of the above-described modifications of the neck portion. Also, the grooves of the first transition portion may have any of various shapes as in the case of the above-described embodiments and modifications of the grooves of the neck portion. In general, a portion having W grooves (W is an integer of 1 or greater) which satisfy the following condition may be employed as the first transition portion. The condition is such that the distance (for example, radius) between the bottom portion of each of the W grooves and the center axis of the center rod is larger than the distance between the bottom portions of the grooves of the neck portion and the center axis and is smaller than the distance between the outer circumferential surface of the first trunk portion and the center axis. Such a first transition portion can properly mitigate the concentration of stress on the end portion of the neck portion on the forward side.

The first transition portion may have a plurality of closed loop grooves each extending completely around the center rod in the circumferential direction. As in the case of the embodiments shown in FIGS. 8(A) and 9(A), as to the plurality of grooves of the first transition portion, the outer diameter of the bottom portion of the groove on the forward side may

be larger than the outer diameter of the bottom portion of the groove on the rear side. According to this configuration, the plurality of grooves of the first transition portion gradually change the groove outer diameter between the neck portion and the first trunk portion. Therefore, it is possible to mitigate the concentration of stress on a portion of the first transition portion. As a result, excessive bending of the center rod can be prevented.

FIG. 10(A) shows a first transition portion 500f of a center rod 30f according to a modification. This modification differs from the embodiment shown in FIG. 8(A) only in the point that a plurality of grooves 600 whose bottom portions 610 have the same outer diameter are provided on the first transition portion 500f (specifically, $D_c > D_{65} = D_{64} = D_{63} > D_{62} = D_{61} > D_b$). As described above, of the plurality of pairs each including two adjacent grooves of the first transition portion, one or more pairs may be configured such that the outer diameter of the bottom portion of the groove on the forward side is larger than the outer diameter of the bottom portion of the groove on the rear side, and one or more pairs different from the above-mentioned one or more pairs may be configured such that the outer diameter of the bottom portion of the groove on the forward side is the same as the outer diameter of the bottom portion of the groove on the rear side. In general, of N pairs (N is an integer of 2 or greater) which are formed by the plurality of grooves of the first transition portion and each of which includes two adjacent grooves, L pairs (L is an integer of 1 or greater but not greater than $N-1$) may be configured such that the outer diameter of the bottom portion of the groove on the forward side is larger than the outer diameter of the bottom portion of the groove on the rear side, and $(N-L)$ pairs may be configured such that the outer diameter of the bottom portion of the groove on the forward side is the same as the outer diameter of the bottom portion of the groove on the rear side. According to this configuration, in at least one pair of the grooves of the first transition portion, the outer diameter of the bottom portion of the groove increases toward the forward direction D_1 side. Therefore, the plurality of grooves of the first transition portion change the groove outer diameter in a plurality of steps between the neck portion and the first trunk portion. Accordingly, it is possible to mitigate the concentration of stress on a portion of the first transition portion. As a result, excessive bending of the center rod can be prevented.

Also, in the case where the first transition portion has W grooves, the first transition portion has W crest portions each formed on the rearward direction D_{1r} side of the corresponding groove. In this case, as in the case of the embodiments shown in FIGS. 7(B) and 8(A), in each pair including two adjacent crest portions of the first transition portion, the crest por-

tions may have the same outer diameter. Alternatively, as in the case of the embodiment shown in FIG. 9(A), in each pair including two adjacent crest portions of the first transition portion, the outer diameter of the crest portion on the forward side may be smaller than the outer diameter of the crest portion on the rear side. In general, of B ($B = W-1$) pairs which are formed by the W crest portions of the first transition portion and each of which includes two adjacent crest portions, C pairs (C is an integer of 1 or greater but not greater than B) may be configured such that the outer diameter of the crest portion on the forward side is smaller than the outer diameter of the crest portion on the rear side, and (B-C) pairs may be configured such that the outer diameter of the crest portion on the forward side is the same as the outer diameter of the crest portion on the rear side. In the case where each crest portion is rounded, the largest outer diameter of the rounded crest portion may be employed as the outer diameter of the rounded crest portion.

In the case where the first connection pitch between the rearmost groove of the first transition portion and the forwardmost groove of the neck portion is equal to or less than the three times of the pitch of the plurality of grooves of the neck portion (referred to as the "reference pitch"), the first transition portion can be said to be connected to the neck portion (in the embodiments shown in FIGS. 7(B), 8(A), 9(A), and 10(A), the pitch Pt1 corresponds to the first connection pitch). Notably, the pitch of the plurality of grooves of the first transition portion may differ from the reference pitch of the neck portion connected to the end of the first transition portion on the rearward direction D1r side. Also, the pitch may change among the plurality of grooves of the first transition portion.

(7) It is preferred that the second transition portion be connected to the rear end of the neck portion, and the second trunk portion where the outer diameter is approximately constant be connected to the rear end of the second transition portion. Instead of the configurations having been described with reference to FIGS. 7(C), 8(B), and 9(B), various other configurations may be employed as the configuration of the second transition portion. For example, the total number of grooves may be an arbitrary number of 1 or greater. Also, the second transition portion may be formed by a spiral groove as in the case of the above-described modifications of the neck portion. Also, the grooves of the second transition portion may have any of various shapes as in the case of the above-described embodiments and modifications of the grooves of the neck portion. In general, a portion having successively formed X grooves (X is an integer of 1 or greater) which satisfy the following condition may be employed as the second transition portion. The condition is such that the distance

(for example, radius) between the bottom portion of each of the X grooves and the center axis of the center rod is larger than the distance between the bottom portions of the grooves of the neck portion and the center axis and is smaller than the distance between the outer circumferential surface of the second trunk portion and the center axis. Such a second transition portion can properly mitigate the concentration of stress on the end portion of the neck portion on the rear side.

The second transition portion may have a plurality of closed loop grooves each extending completely around the center rod in the circumferential direction. As in the case of the embodiments shown in FIGS. 8(B) and 9(B), as to the plurality of grooves of the second transition portion, the outer diameter of the bottom portion of the groove on the rear side may be larger than the outer diameter of the bottom portion of the groove on the forward side. According to this configuration, the plurality of grooves of the second transition portion gradually change the groove outer diameter between the neck portion and the second trunk portion. Therefore, it is possible to mitigate the concentration of stress on a portion of the second transition portion. As a result, excessive bending of the center rod can be prevented.

FIG. 10(B) shows a second transition portion 700f of the center rod 30f according to the modification. This modification differs from the embodiment shown in FIG. 8(B) only in the point that a plurality of grooves 800 whose bottom portions 810 have the same outer diameter are provided on the second transition portion 700f (specifically, $D_b < D_{81} = D_{82} < D_{83} = D_{84} = D_{85} < D_c$). As described above, of the plurality of pairs each including two adjacent grooves of the second transition portion, one or more pairs may be configured such that the outer diameter of the bottom portion of the groove on the rear side is larger than the outer diameter of the bottom portion of the groove on the forward side, and one or more pairs different from the above-mentioned one or more pairs may be configured such that the outer diameter of the bottom portion of the groove on the rear side is the same as the outer diameter of the bottom portion of the groove on the forward side. In general, of P pairs (P is an integer of 2 or greater) which are formed by the plurality of grooves of the second transition portion and each of which includes two adjacent grooves, Q pairs (Q is an integer of 1 or greater but not greater than P-1) may be configured such that the outer diameter of the bottom portion of the groove on the rear side is larger than the outer diameter of the bottom portion of the groove on the forward side, and (P-Q) pairs may be configured such that the outer diameter of the bottom portion of the groove on the rear side is the same as the outer diameter of the bottom portion of the groove on the forward side. According to this configuration,

in at least one pair of the grooves of the second transition portion, the outer diameter of the bottom portion of the groove increases toward the rearward direction D1 r side. Therefore, the plurality of grooves of the second transition portion change the groove outer diameter in a plurality of steps between the neck portion and the second trunk portion. Accordingly, it is possible to mitigate the concentration of stress on a portion of the second transition portion. As a result, excessive bending of the center rod can be prevented.

Also, in the case where the second transition portion has X grooves, the second transition portion has X crest portions each formed on the forward direction D1 side of the corresponding groove. In this case, as in the case of the embodiments shown in FIGS. 7(C) and 8(B), in each pair including two adjacent crest portions of the second transition portion, the crest portions may have the same outer diameter. Alternatively, as in the case of the embodiment shown in FIG. 9(B), in each pair including two adjacent crest portions of the second transition portion, the outer diameter of the crest portion on the rear side may be smaller than the outer diameter of the crest portion on the forward side. In general, of G ($G = X - 1$) pairs which are formed by the X crest portions of the second transition portion and each of which includes two adjacent crest portions, H pairs (H is an integer of 1 or greater but not greater than G) may be configured such that the outer diameter of the crest portion on the rear side is smaller than the outer diameter of the crest portion on the forward side, and (G-H) pairs may be configured such that the outer diameter of the crest portion on the rear side is the same as the outer diameter of the crest portion on the forward side. In the case where each crest portion is rounded, the largest outer diameter of the rounded crest portion may be employed as the outer diameter of the rounded crest portion.

In the case where the second connection pitch between the forwardmost groove of the second transition portion and the rearmost groove of the neck portion is equal to or less than three times of the reference pitch of the neck portion, the second transition portion can be said to be connected to the neck portion (in the embodiments shown in FIGS. 7(C), 8(B), 9(B), and 10(B), the pitch Pt2 corresponds to the second connection pitch). Notably, the pitch of the plurality of grooves of the second transition portion may differ from the reference pitch of the neck portion connected to the end of the second transition portion on the forward direction D1 side. Also, the pitch may change among the plurality of grooves of the second transition portion.

(8) The first transition portion and the second transition portion may differ in configuration from each other. For example, a first transition portion arbitrarily selected from the first transition portions 500, 500d,

and 500e shown in FIGS. 7(B), 8(A), and 9(A) and a second transition portion arbitrarily selected from the second transition portions 700, 700d, and 700e shown in FIGS. 7(C), 8(B), and 9(B) may be connected to a common neck portion. Also, the first transition portion may be connected to the neck portion, with the second transition portion omitted. Alternatively, the second transition portion may be connected to the neck portion, with the first transition portion omitted. Also, at least one of the first transition portion and the second transition portion may be applied to any neck portion of the center rod of any of the above-described embodiments. In general, in the case where T neck portions (T is an integer of 1 or greater) are provided on the center rod, the first transition portion may be connected to U neck portions (U is an integer of zero or greater but not greater than T), and the second transition portion may be connected to V neck portions (V is an integer of zero or greater but not greater than T). The value of V may be the same as or different from the value of U. Also, the configuration may differ among the U first transition portions, and the configuration may differ among the V second transition portions.

(9) The structure of the glow plug is not limited to the structure described with reference to FIGS. 1(A) and 1(B), and various structures may be employed. For example, there may be employed a structure in which a male screw is formed on the outer circumferential surface of the rear end portion 39 of the center rod 30, a female screw is formed on the terminal member 80, and the terminal member 80 is screwed onto the rear end portion 39 of the center rod 30, whereby the terminal member 80 is fixed to the center rod 30. In this case, instead of a cap-shaped member, a nut may be employed as the terminal member 80.

(10) The above-described glow plug is not limited to a glow plug used for assisting startup of an internal combustion engine, and can be applied to various glow plugs. For example, the above-described glow plug can be applied to various apparatuses such as an exhaust gas heater apparatus for heating exhaust gas, a burner system for reactivating a catalyst or a diesel particulate filter (DPF), and a water heater apparatus for heating cooling water.

[0130] Although the present invention has been described on the basis of the embodiments and modifications thereof, the above-mentioned mode of the invention is provided so as to facilitate the understanding of the invention and does not limit the present invention. The present invention may be modified or improved without departing from the spirit and scope of the claims, and encompasses equivalents thereof.

[Description of Symbols]

[0131]

10 ... ceramic glow plug (glow plug), 20 ... metallic shell, 20s ... inner circumferential surface, 20x ... through hole, 22 ... male screw portion, 28 ... tool engagement portion, 30, 30x, 30c, 30d, 30e, 30f... center rod, 30f... forward end, 30r ... rear end, 30s ... outer circumferential surface, 31 ... forward end portion, 39 ... rear end portion, 40 ... ceramic heater element (heater element), 40s ... outer circumferential surface, 41 ... forward end portion, 49 ... rear end portion, 50 ... packing (O-ring), 60 ... insulating member, 62... tubular portion, 68 ... flange portion, 70 ... metal sleeve (sleeve), 70s ... inner circumferential surface, 70x ... through hole, 80 ... terminal member, 90 ... connection member, 200 ... assembly, 210 ... base member, 220 ... heat generation resistor, 221 ... first lead portion, 222 ... second lead portion, 223 ... heat generation portion, 281 ... first electrode connection portion, 282 ... second electrode connection portion, 300, 600, 800 ... groove, 310, 610, 810 ... bottom portion, 320, 620, 820 ... first sloping surface (forward sloping surface), 330, 630, 830 ... second sloping surface (rear sloping surface), 340, 640, 840... crest portion, 410 ... neck portion, 410f ... forward end, 410r... rear end, 490... heater module, 500, 500d, 500e, 500f ... first transition portion, 700, 700d, 700e, 700f... second transition portion, 910 ... first trunk portion, 920 ... second trunk portion, OPa ... opening, OPb... opening, D1 ... first direction (forward direction), D1r... rearward direction, D2... second direction, D3... third direction, CL... center axis (axial line), Ac ... contact area, Ae ... contact area

Claims

1. A glow plug (10) comprising:

a metallic shell (20) having a through hole (20x) extending in the direction of an axial line (CL);
 a ceramic heater (40) inserted into the through hole (20x) of the metallic shell (20) and held at a forward end of the metallic shell (20); and
 a center rod (30, 30c, 30d, 30e, 30f) formed of a metal, inserted into the through hole (20x) of the metallic shell (20), and electrically connected to the ceramic heater (40), wherein
 the center rod (30, 30c, 30d, 30e, 30f) includes one or more neck portions (410) which extend in the direction of the axial line (CL) and in which a plurality of grooves (300) each extending on an outer circumferential surface (30s) of the center rod (30, 30c, 30d, 30e, 30f) in the circumferential direction thereof are successively ar-

ranged in the direction of the axial line (CL);
 of the one or more neck portions (410), a forwardmost neck portion (410) has a portion disposed forward of a middle position (P3) in the direction of the axial line (CL) between a forward end (30f) and a rear end (30r) of the center rod (30, 30c, 30d, 30e, 30f);

in the forwardmost neck portion (410), the plurality of grooves (300) are arranged in the direction of the axial line (CL) at a pitch (Pt) of less than 1.1 mm;

on a flat cross section containing the axial line (CL), each groove (300) has a forward sloping surface (320) which slopes forward to be oblique to the direction of the axial line (CL) and a rear sloping surface (330) which slopes rearward to be oblique to the direction of the axial line (CL); and

in the forwardmost neck portion (410), the forward sloping surface (320) and the rear sloping surface (330) form an angle (Ang) of less than 60°.

2. A glow plug (10) according to claim 1, further comprising:

a sleeve (70) inserted into the through hole (20x) of the metallic shell (20) and holding the ceramic heater (40); and

a packing (50) sandwiched between an inner circumferential surface (20s) of the metallic shell (20) and the outer circumferential surface (30s) of the center rod (30, 30c, 30d, 30e, 30f), wherein the following relational expression is satisfied:

$$Lb > \frac{19.7}{Da^3} \times La$$

where

La is a distance between a first position (P1) and a second position (P2) in the direction of the axial line (CL), the first position (P1) being a position of a center, in the direction of the axial line (CL), of a contact area (Ac) between the packing (50) and the outer circumferential surface (30s) of the center rod (30, 30c, 30d, 30e, 30f), the second position (P2) being a position of a rearmost end of a contact area between the ceramic heater (40) and the sleeve (70),

Lb is a distance in the direction of the axial line (CL) between the first position (P1) and a forward end (410f) of the forwardmost neck portion (410), and

Da is an outer diameter of the ceramic heater (40) at the second position (P2).

3. A glow plug (10) according to claim 1 or 2, wherein the forwardmost neck portion (410) is formed by closed loop grooves (300) each extending, on the outer circumferential surface (30s) of the center rod (30, 30c, 30d, 30e, 30f), completely around the center rod (30, 30c, 30d, 30e, 30f) in the circumferential direction thereof; and the following relational expression is satisfied:

$$Db < \sqrt[3]{\frac{Lb}{La}} \times Da$$

where

La is a distance between a first position (P1) and a second position (P2) in the direction of the axial line (CL), the first position (P1) being a position of a center, in the direction of the axial line (CL), of a contact area (Ac) between the packing (50) and the outer circumferential surface (30s) of the center rod (30, 30c, 30d, 30e, 30f), the second position (P2) being a position of a rearmost end of a contact area between the ceramic heater (40) and the sleeve (70),

Lb is a distance in the direction of the axial line (CL) between the first position (P1) and a forward end (410f) of the forwardmost neck portion (410),

Da is an outer diameter of the ceramic heater (40) at the second position (P2), and

Db is a smallest outer diameter of a portion of the center rod (30, 30c, 30d, 30e, 30f) where the forwardmost neck portion (410) is formed.

4. A glow plug (10) according to any one of claims 1 to 3, wherein the center rod (30c, 30d, 30e, 30f) includes a first transition portion (500, 500d, 500e, 500f) which is connected to a forward end of at least one neck portion (410) of the one or more neck portions and which includes a groove (600) extending on the outer circumferential surface (30s) of the center rod (30c, 30d, 30e, 30f) in the circumferential direction thereof, and a first trunk portion (910) which is connected to a forward end of the first transition portion (500, 500d, 500e, 500f) and which has an approximately constant outer diameter, wherein a distance (R61 - R65) between a bottom portion (610) of the groove (600) of the first transition portion (500, 500d, 500e, 500f) and the center axis (CL) of the center rod (30c, 30d, 30e, 30f) is larger than a distance (Db/2) between a bottom portion (310) of each of the grooves (300) of the neck portion (410) and the center axis (CL), and is smaller than a distance (Dc/2) between an outer circumferential

surface of the first trunk portion (910) and the center axis (CL).

5. A glow plug (10) according to claim 4, wherein the first transition portion (500d, 500e) has a plurality of closed loop grooves (600) each extending, on the outer circumferential surface (30s) of the center rod (30d, 30e), completely around the center rod (30d, 30e) in the circumferential direction thereof; and the plurality of grooves (600) of the first transition portion (500d, 500e) are formed such that the bottom portion (610) of a groove (600) on a forward side has an outer diameter larger than that of the bottom portion (610) of a groove (600) on a rear side.

6. A glow plug (10) according to claim 4, wherein the first transition portion (500f) has a plurality of closed loop grooves (600) each extending, on the outer circumferential surface (30s) of the center rod (30f), completely around the center rod (30f) in the circumferential direction thereof; and of N pairs (N is an integer of 2 or greater) which are formed by the plurality of grooves (600) of the first transition portion (500f) and each of which includes two adjacent grooves (600), L pairs (L is an integer of 1 or greater but not greater than N-1) are configured such that the outer diameter of the bottom portion (610) of the groove (600) on the forward side is larger than that of the bottom portion (610) of the groove (600) on the rear side, and (N-L) pairs are configured such that the outer diameter of the bottom portion (610) of the groove (600) on the forward side is the same as that of the bottom portion (610) of the groove (600) on the rear side.

7. A glow plug (10) according to any one of claims 1 to 6, wherein the center rod (30c, 30d, 30e, 30f) includes a second transition portion (700, 700d, 700e, 700f) which is connected to a rear end of at least one neck portion (410) of the one or more neck portions and which includes a groove (800) extending on the outer circumferential surface (30s) of the center rod (30c, 30d, 30e, 30f) in the circumferential direction thereof, and a second trunk portion (920) which is connected to a rear end of the second transition portion (700, 700d, 700e, 700f) and which has an approximately constant outer diameter, wherein a distance (R81 - R85) between a bottom portion (810) of the groove (800) of the second transition portion (700, 700d, 700e, 700f) and the center axis (CL) of the center rod (30c, 30d, 30e, 30f) is larger than a distance (Db/2) between a bottom portion (310) of each of the grooves (300) of the neck portion (410) and the center axis (CL), and is smaller than a distance (Dc/2) between an outer circumferential surface of the second trunk portion (920) and

the center axis (CL).

8. A glow plug (10) according to claim 7, wherein the second transition portion (700d, 700e) has a plurality of closed loop grooves (800) each extending, on the outer circumferential surface (30s) of the center rod (30d, 30e), completely around the center rod (30d, 30e) in the circumferential direction thereof; and the plurality of grooves (800) of the second transition portion (700d, 700e) are formed such that the bottom portion (810) of a groove (800) on a rear side has an outer diameter larger than that of the bottom portion (810) of a groove (800) on a forward side.
9. A glow plug (10) according to claim 7, wherein the second transition portion (700f) has a plurality of closed loop grooves (800) each extending, on the outer circumferential surface (30s) of the center rod (30f), completely around the center rod (30f) in the circumferential direction thereof; and of P pairs (P is an integer of 2 or greater) which are formed by the plurality of grooves (800) of the second transition portion (700f) and each of which includes two adjacent grooves (800), Q pairs (Q is an integer of 1 or greater but not greater than P-1) are configured such that the outer diameter of the bottom portion (810) of the groove (800) on the rear side is larger than that of the bottom portion (810) of the groove (800) on the forward side, and (P-Q) pairs are configured such that the outer diameter of the bottom portion (810) of the groove (800) on the rear side is the same as that of the bottom portion (810) of the groove (800) on the forward side.

5

10

15

20

25

30

35

40

45

50

55

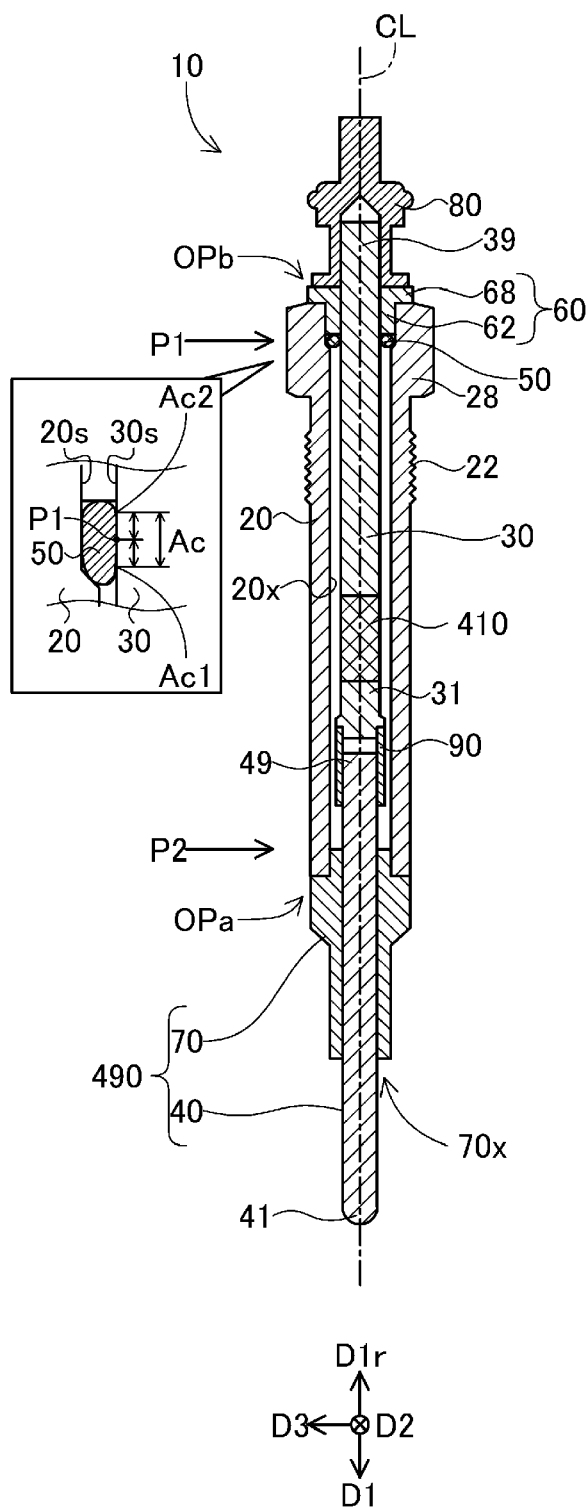


FIG. 1 (A)

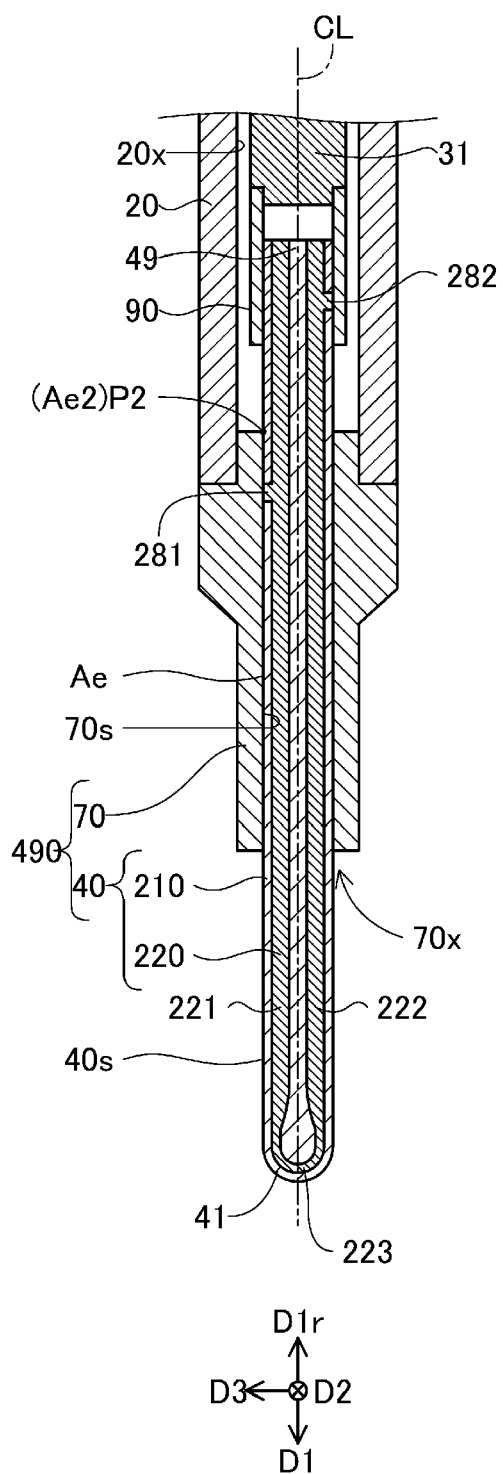


FIG. 1 (B)

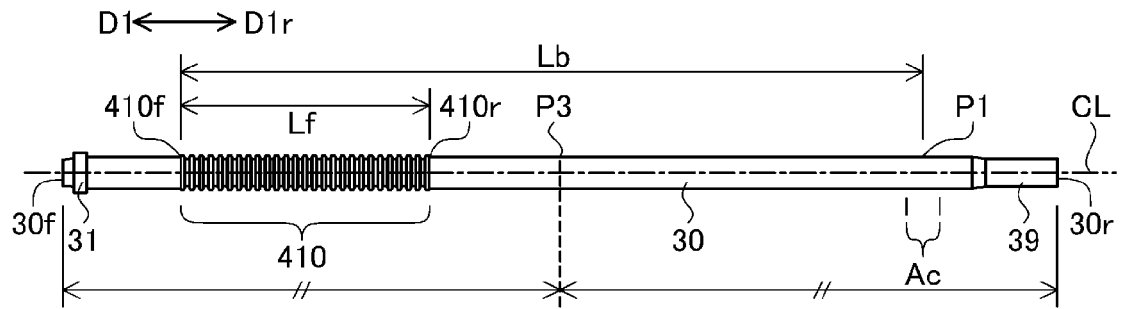


FIG. 2 (A)

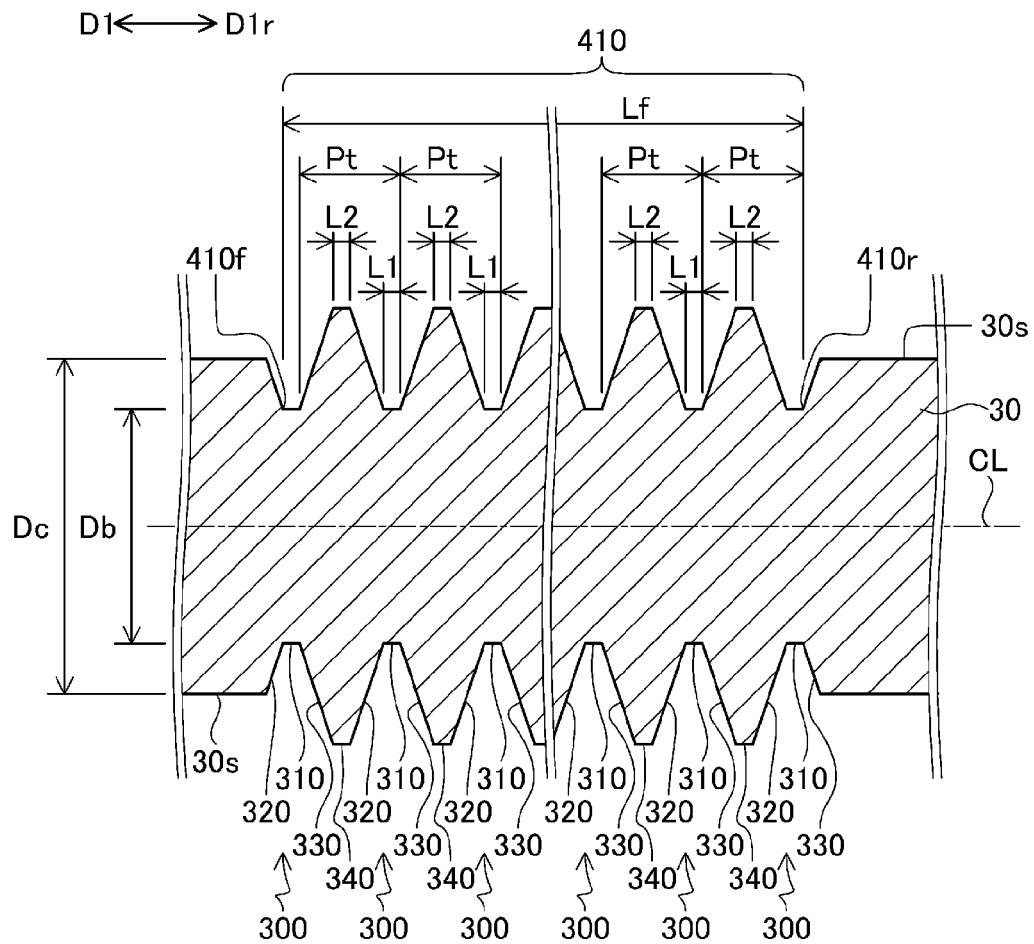


FIG. 2 (B)

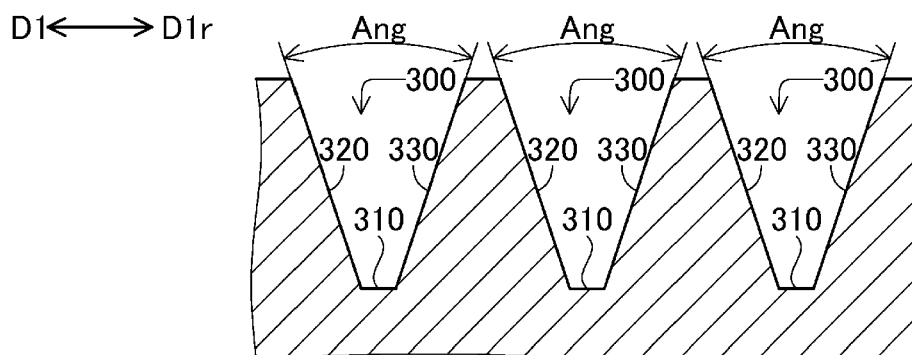


FIG. 2(C)

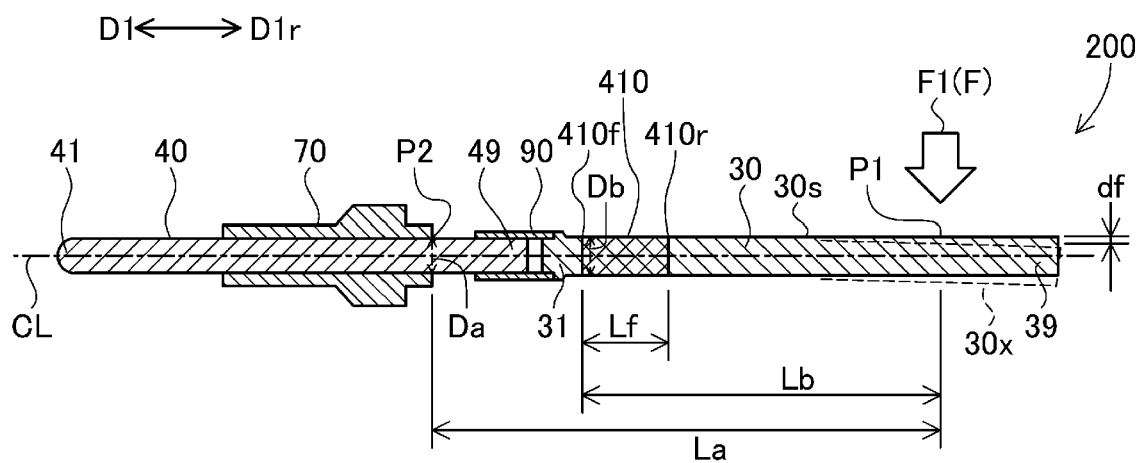


FIG. 3

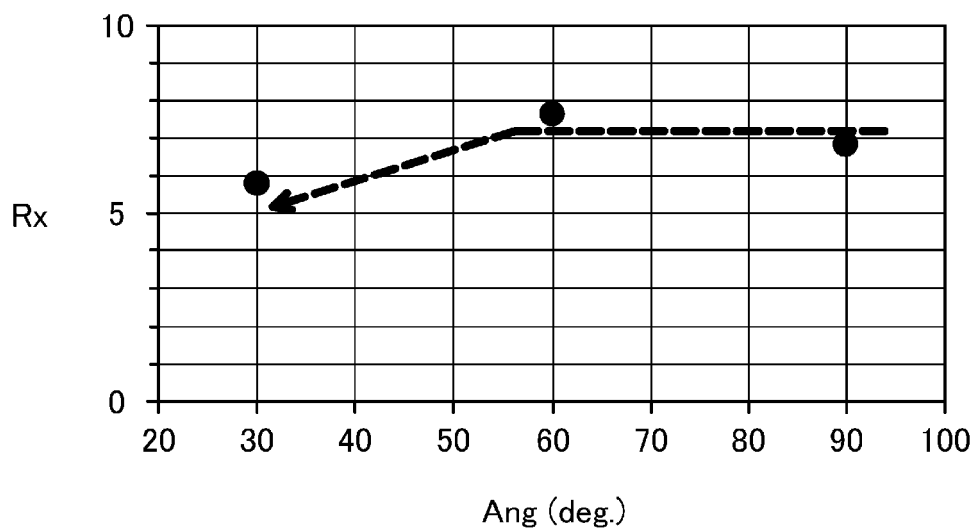


FIG. 4 (A)

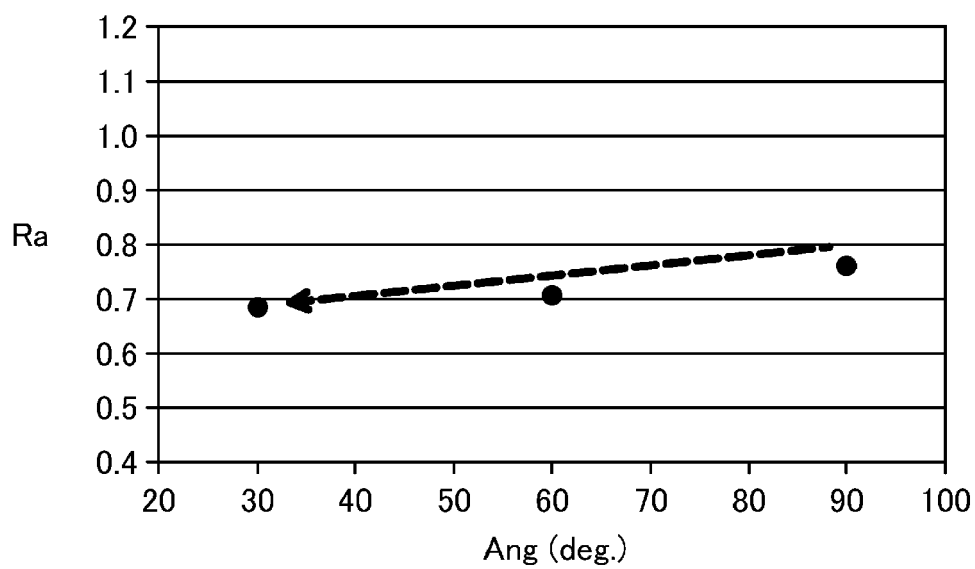


FIG. 4 (B)

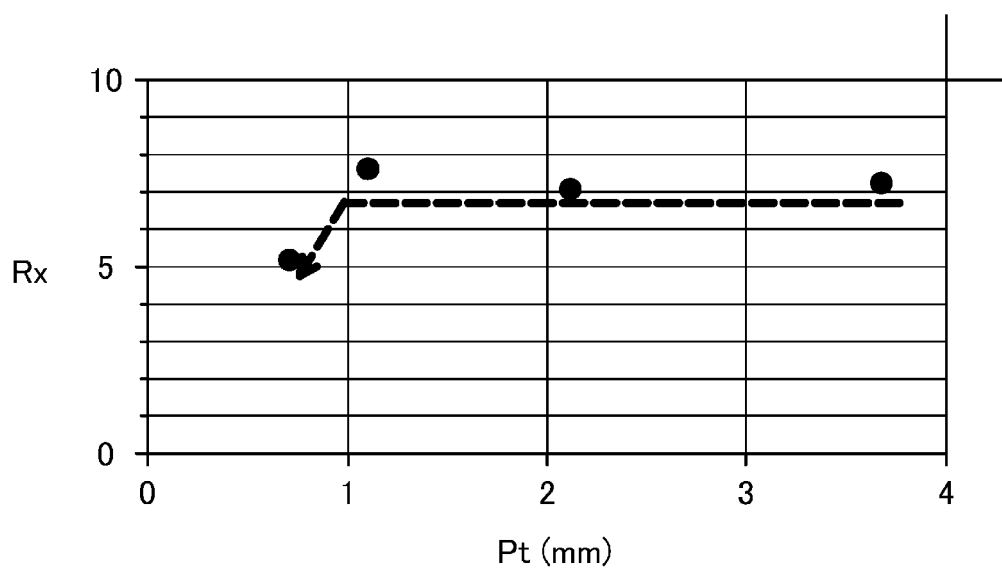


FIG. 4 (C)

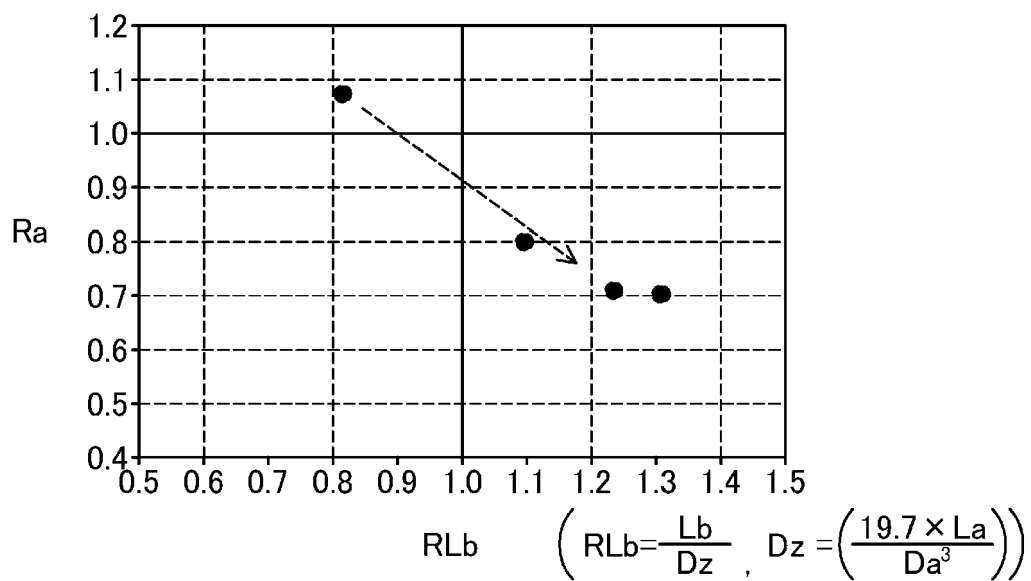


FIG. 5 (A)

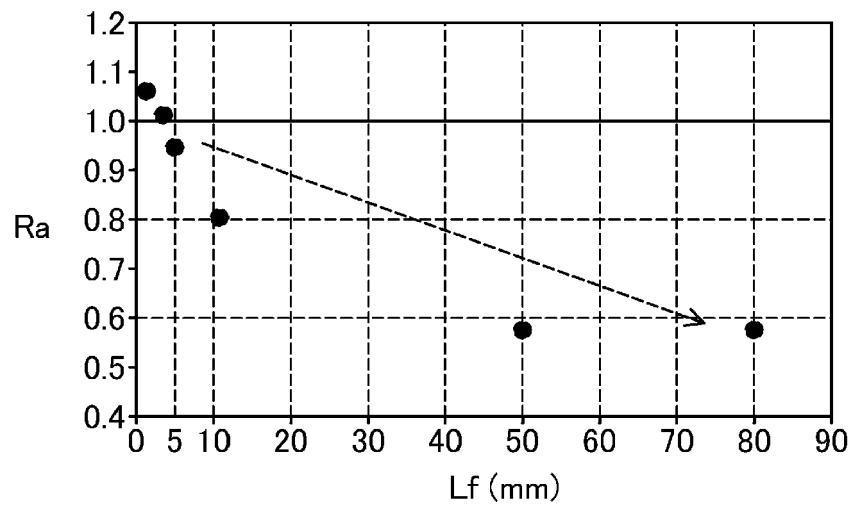


FIG. 5 (B)

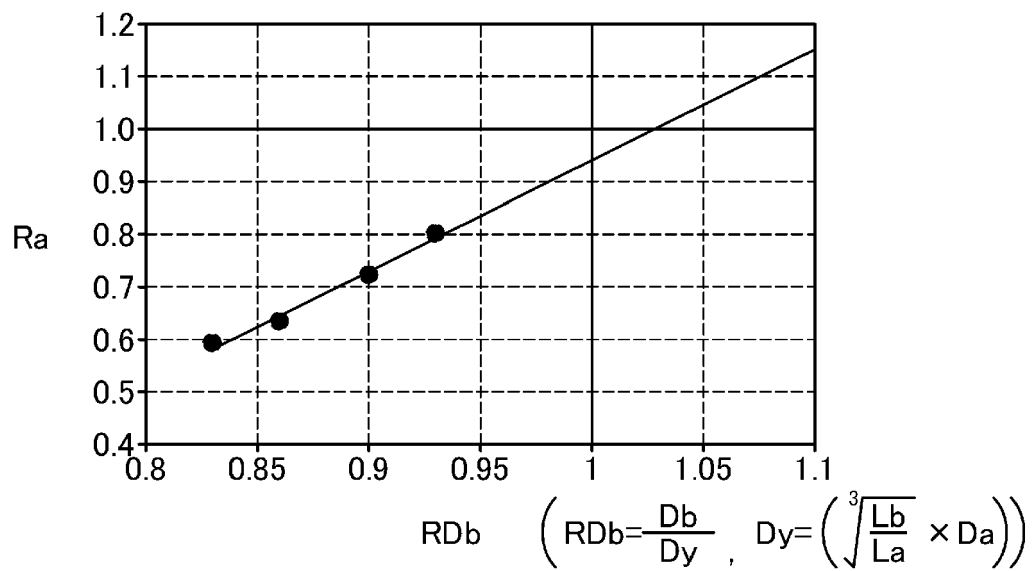


FIG. 5 (C)

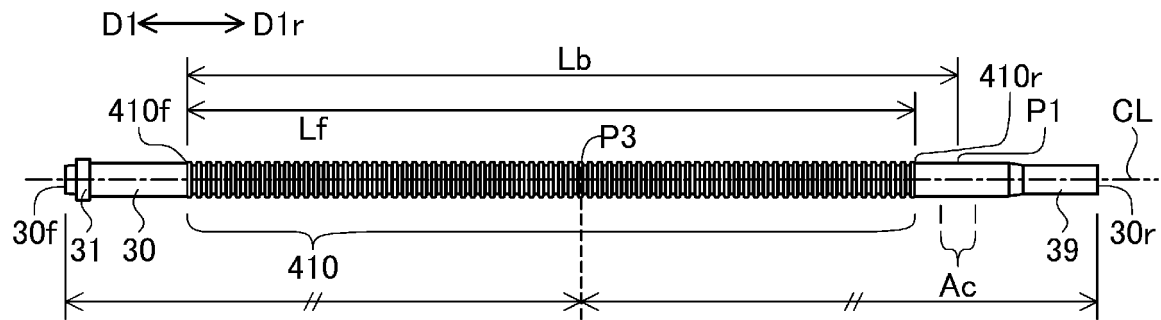


FIG. 6

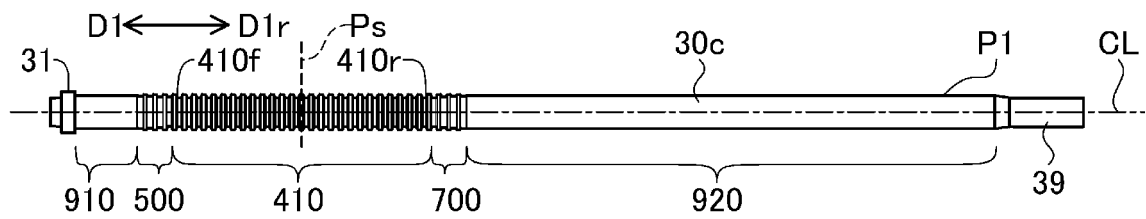


FIG. 7(A)

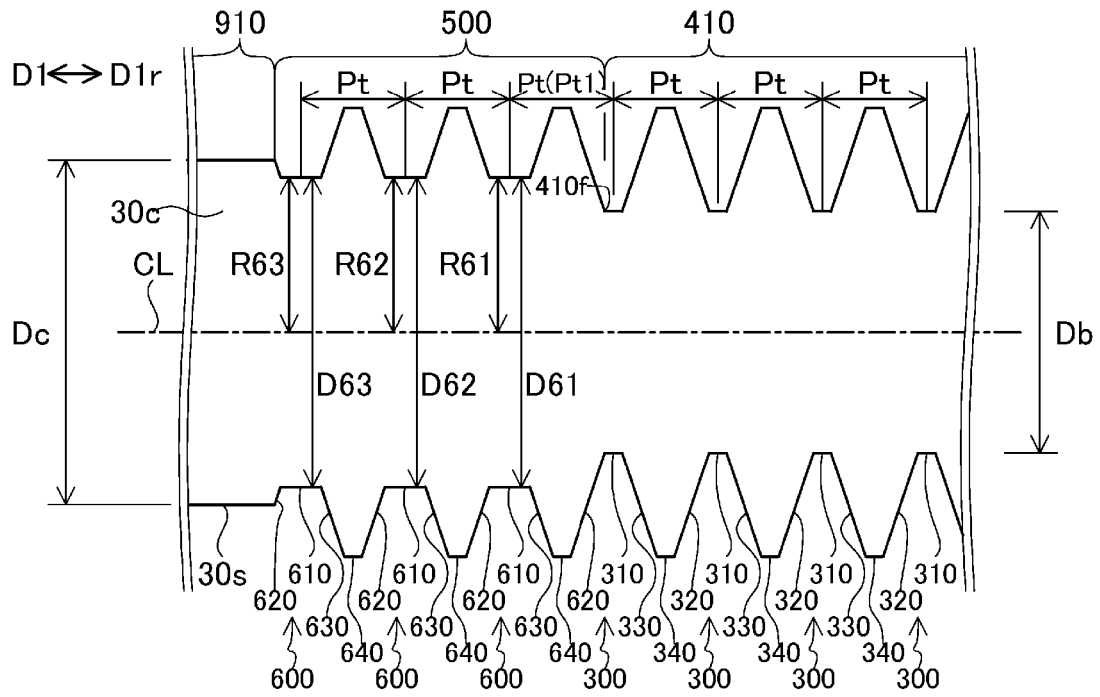


FIG. 7 (B)

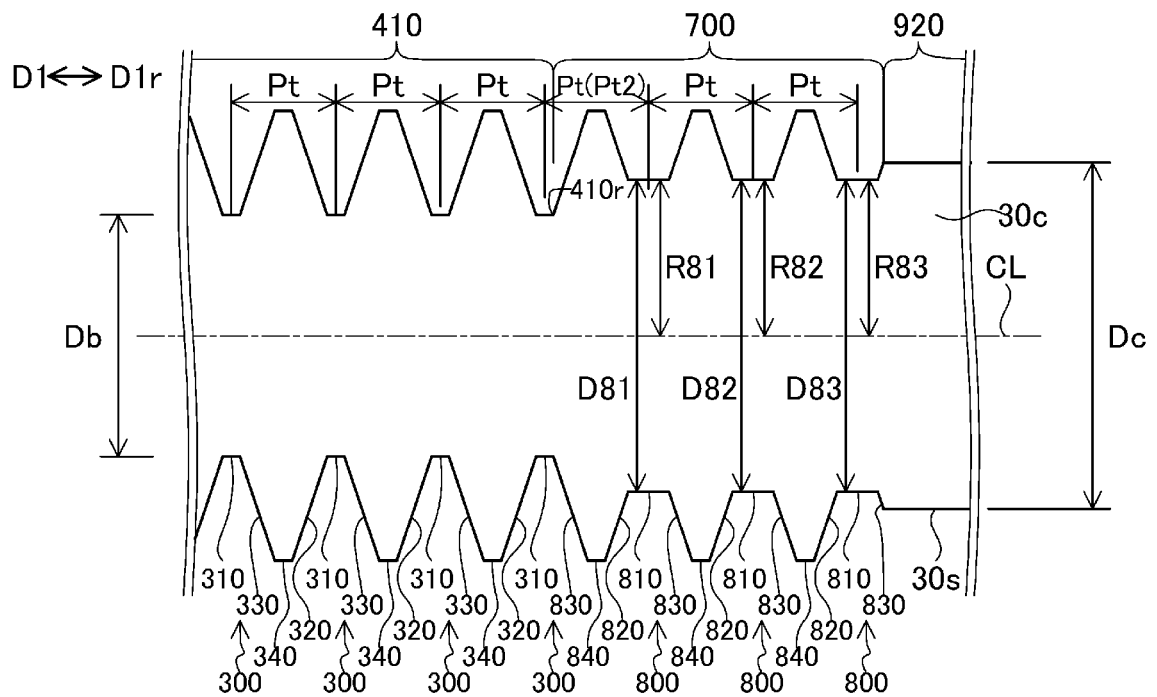


FIG. 7 (C)

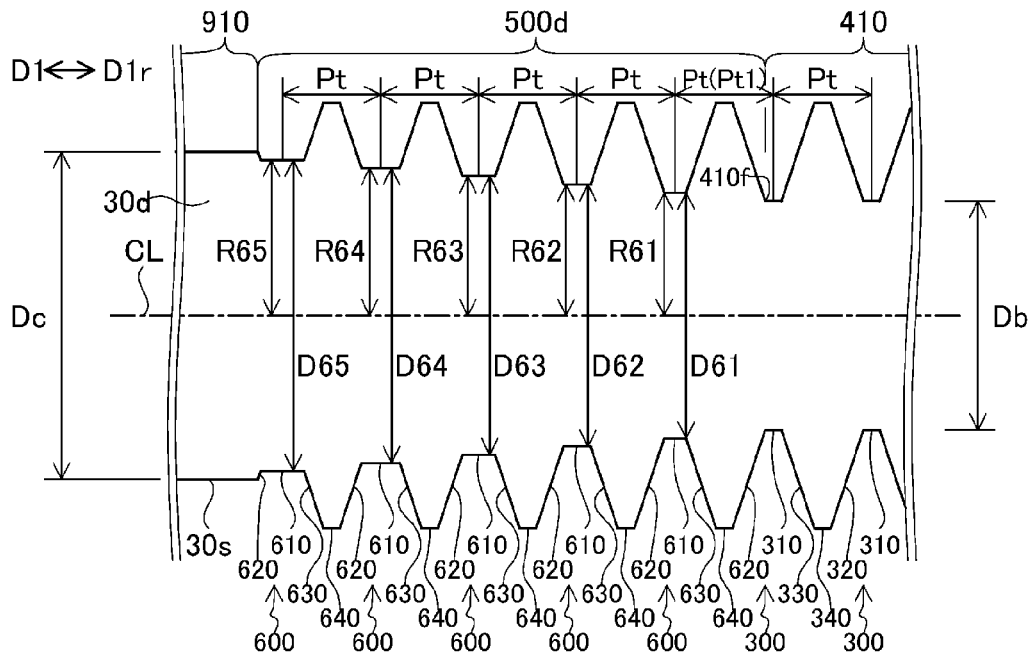


FIG. 8(A)

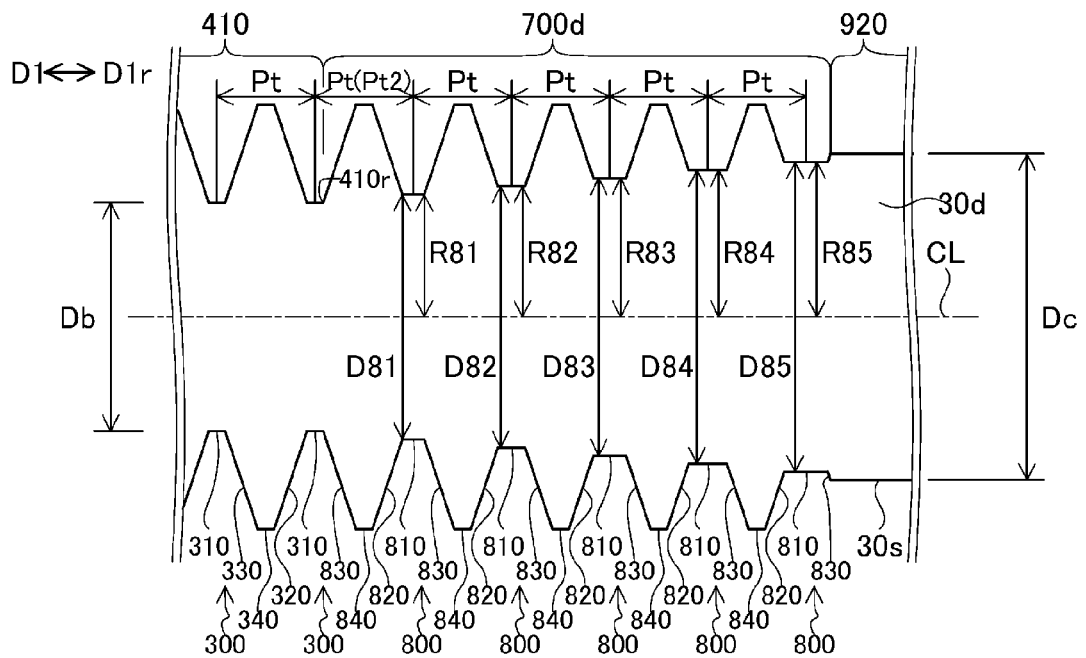


FIG. 8(B)

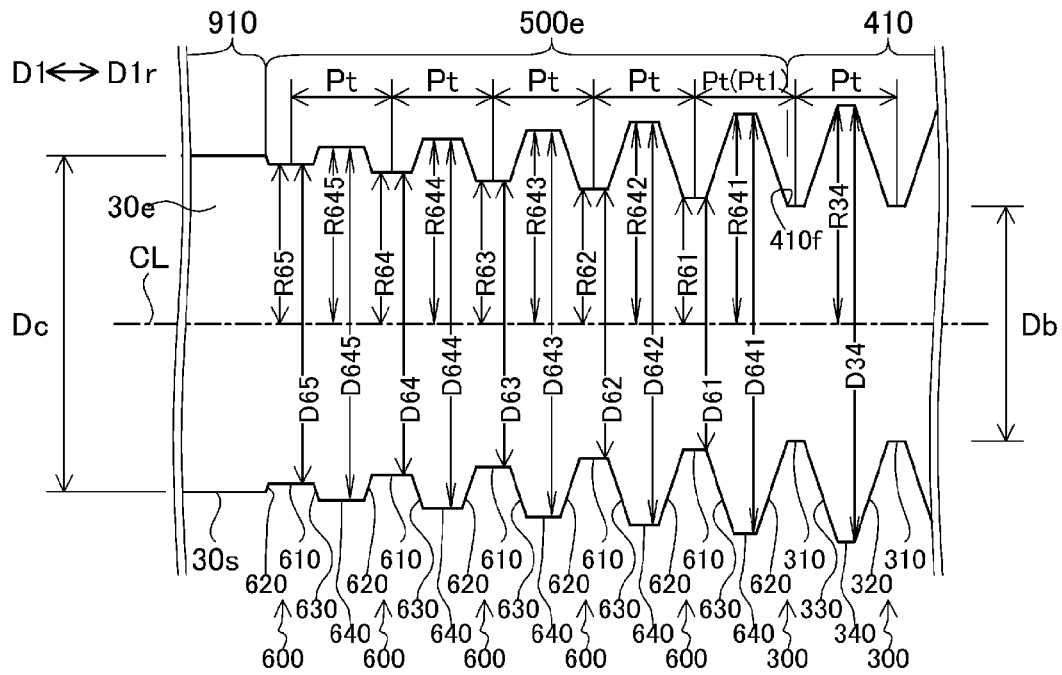


FIG. 9 (A)

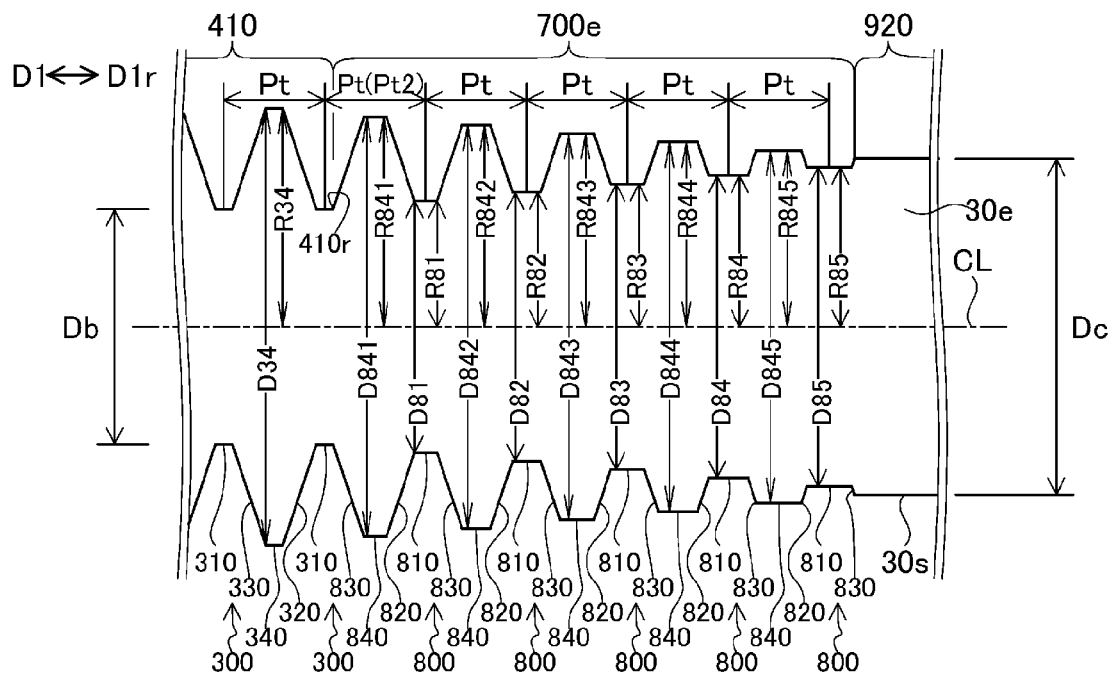


FIG. 9 (B)

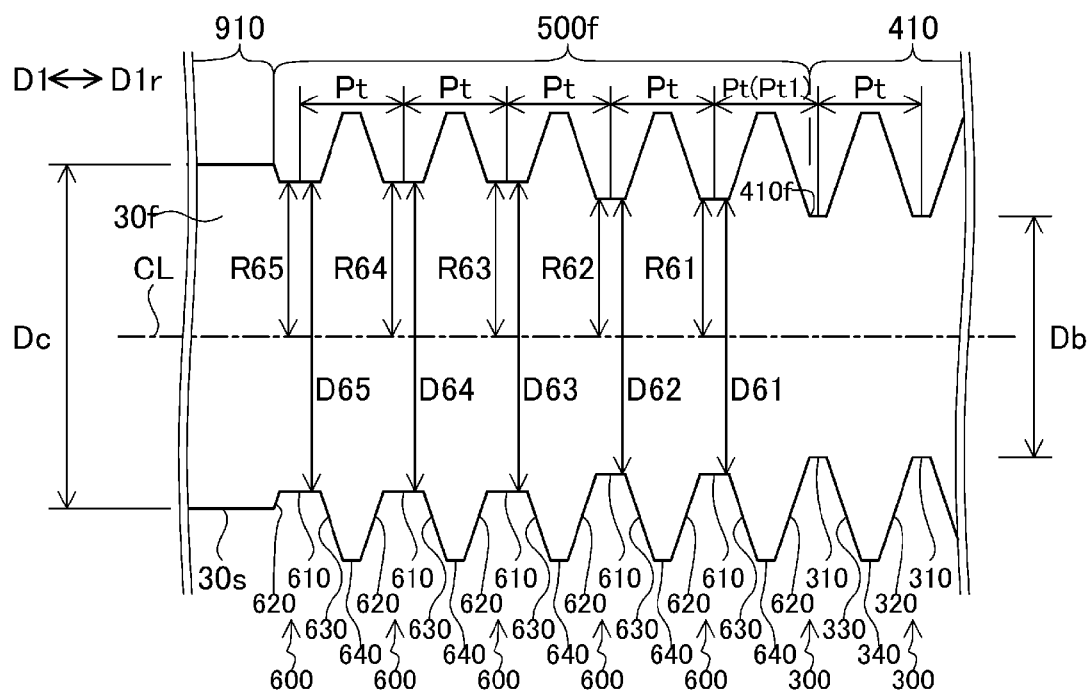


FIG. 10(A)

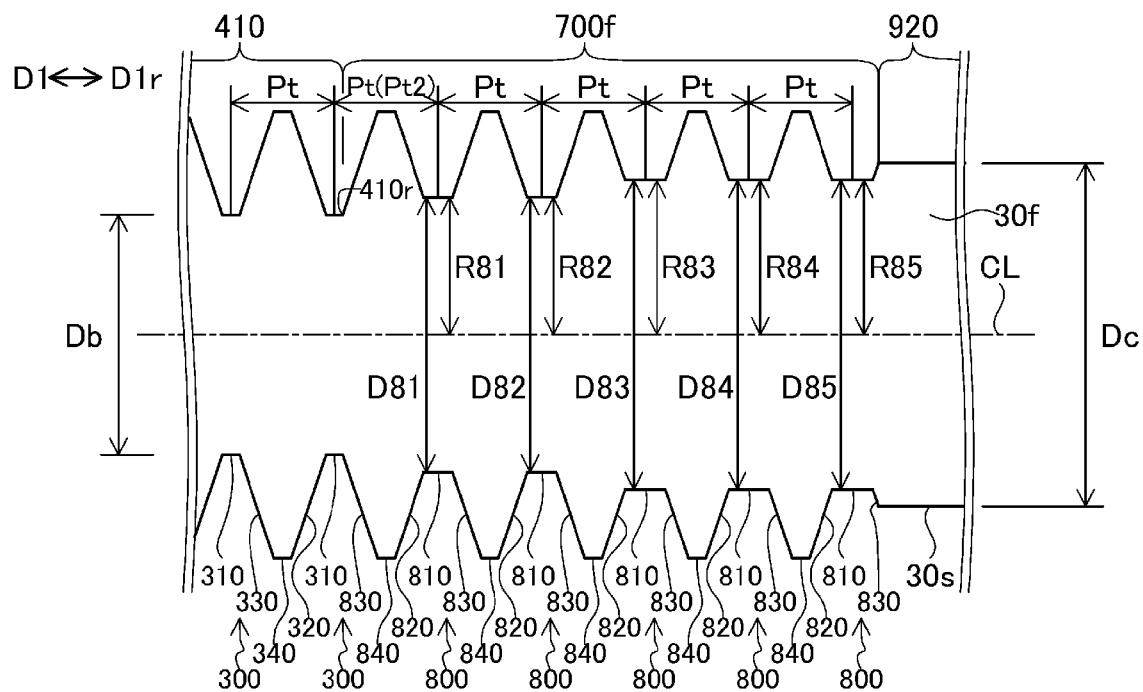


FIG. 10(B)



EUROPEAN SEARCH REPORT

Application Number
EP 17 17 7193

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A,D	JP 2014 109434 A (BOSCH GMBH ROBERT) 12 June 2014 (2014-06-12) * figures 1-4 * & DE 10 2013 222388 A1 (BOSCH GMBH ROBERT [DE]) 18 June 2014 (2014-06-18) * figures 1-4 * * paragraphs [0033], [0035], [0039] * -----	1-9	INV. F23Q7/00
A,D	JP 2015 078825 A (NGK SPARK PLUG CO) 23 April 2015 (2015-04-23) * figures 1,3,8-11 * & EP 2 863 127 A1 (NGK SPARK PLUG CO [JP]) 22 April 2015 (2015-04-22) * figures 1,3,8-11 * * paragraphs [0070] - [0074] * -----	1-9	
A	EP 2 944 877 A1 (BOSCH GMBH ROBERT [DE]) 18 November 2015 (2015-11-18) * paragraphs [0024] - [0026]; figures 1,2,3A,3B,3C * -----	1-9	
			TECHNICAL FIELDS SEARCHED (IPC)
			F23Q
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 27 October 2017	Examiner Moreno Rey, Marcos
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 17 7193

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-10-2017

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2014109434 A	12-06-2014	DE 102013222388 A1	18-06-2014
		FR 2998928 A1	06-06-2014
		JP 2014109434 A	12-06-2014

JP 2015078825 A	23-04-2015	EP 2863127 A1	22-04-2015
		JP 6204787 B2	27-09-2017
		JP 2015078825 A	23-04-2015

EP 2944877 A1	18-11-2015	EP 2944877 A1	18-11-2015
		FR 3021096 A1	20-11-2015

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2006207988 A [0003]
- JP 2002359060 A [0003]
- US 4252091 A [0003]
- JP 2014109434 A [0003]
- JP 2015078825 A [0003]