



(11)

EP 3 267 406 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:
10.01.2018 Bulletin 2018/02

(51) Int Cl.:
G07D 11/00 (2006.01)

(21) Application number: **15884352.4**

(86) International application number:
PCT/CN2015/086730

(22) Date of filing: **12.08.2015**

(87) International publication number:
WO 2016/141672 (15.09.2016 Gazette 2016/37)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA

- **SUN, Zhiqiang**
Guangzhou
Guangdong 510663 (CN)
- **XIAO, Hanfeng**
Guangzhou
Guangdong 510663 (CN)
- **WU, Wenqing**
Guangzhou
Guangdong 510663 (CN)

(30) Priority: **06.03.2015 CN 201510100824**

(71) Applicant: **GRG Banking Equipment Co., Ltd.**
Guangzhou, Guangdong 510663 (CN)

(74) Representative: **Maiwald Patentanwalts GmbH**
Engineering
Elisenhof
Elisenstrasse 3
80335 München (DE)

(72) Inventors:
• **ZHANG, Tao**
Guangzhou
Guangdong 510663 (CN)

(54) **BANKNOTE ROLLING-OUT CONTROL METHOD AND APPARATUS, AND BANKNOTE STORAGE DEVICE**

(57) A banknote rolling-out control method and apparatus and a storage device (200) are used for solving the technical problem of device failure caused by the case where a banknote can easily be stuck in the device after being stored on a reel for a long time. The method comprises: storing a rolling-in time of a current banknote that needs to be rolled out (102); acquiring a corresponding rolling-in time according to the banknote serial number of the current banknote (103); judging whether the rolling-in time and the rolling-out time satisfy a pre-set time condition (104); and if yes, rolling out the current banknote at a rolling-out speed lower than the pre-set speed (105).

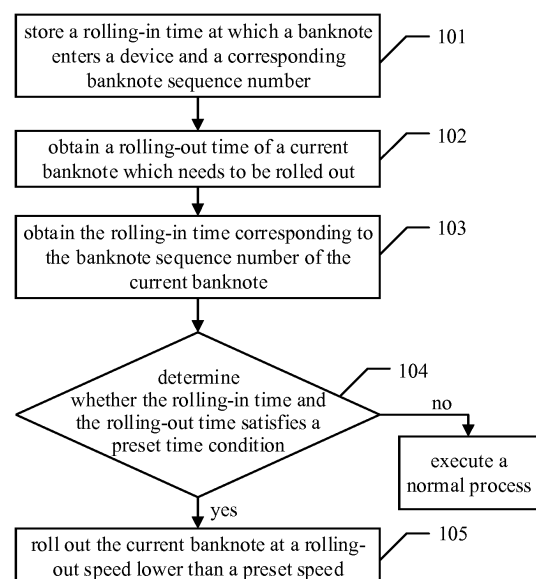


Figure 1

EP 3 267 406 A1

Description

[0001] The present application claims the priority to Chinese Patent Application No. 201510100824.0, titled "BANKNOTE ROLLING-OUT CONTROL METHOD AND APPARATUS, AND BANKNOTE STORAGE DEVICE", filed on March 6, 2015 with the State Intellectual Property Office of the People's Republic of China, which is incorporated herein by reference in its entirety.

FIELD

[0002] The present disclosure relates to the field of a financial self-service device, and particularly to a banknote rolling-out control method, a banknote rolling-out control apparatus and a banknote storage device.

BACKGROUND

[0003] A presently used mechanism of a reel/tape is a common storage means for banknotes. The storage device includes a storage reel driven by a first power motor, a tape backup reel driven by a second power motor, an outer channel of the storage mechanism driven by a third power motor. Two ends of the tape are fixed on the storage reel and the tape backup reel respectively. The wound tape is received or released by the storage reel and the tape backup reel. The first power motor, the second power motor and the third power motor are all controlled to start or stop by a micro controller. This storage device stores banknotes with the working principle of co-operation between the reel and the tape.

[0004] A currently existing control method for rolling a banknote in or out of a device is as follows. The third power motor drives the outer channel of the device to convey the banknote into the device. Then the first power motor drives the storage reel to receive the tape to store the banknote on the storage reel. The second power motor drives the tape backup reel to receive the tape in order to roll the banknote out of the device at a preset speed. Then the third power motor drives the outer channel of the device to convey the banknote to any other device. A disadvantage of the control method is that if the banknote is stored in the storage reel for a long time, the banknote is shaped as an arc due to the radian of the storage reel. In this case, if the banknote is rolled out at the fast preset speed (because of a requirement on the speed at which the device rolls out the banknote, the rolling-out speed is always fast), the rolled out banknote easily gets stuck in the device, which causes a fault in the device.

SUMMARY

[0005] A banknote rolling-out control method, a banknote rolling-out control apparatus and a banknote storage device are provided according to embodiments of the present disclosure, which may solve the technical

problem that a banknote stored in a reel for a long time easily gets stuck in the device when it is rolled out, which causes a fault in the device.

[0006] The banknote rolling-out control method provided according to an embodiment of the present disclosure includes:

storing a rolling-in time at which a banknote enters a device and a corresponding banknote sequence number;

obtaining a rolling-out time of a current banknote which needs to be rolled out;

obtaining the rolling-in time corresponding to the banknote sequence number of the current banknote;

determining whether the rolling-in time and the rolling-out time satisfies a preset time condition and rolling out the current banknote at a rolling-out speed lower than a preset speed in a case that the rolling-in time and the rolling-out time satisfies the preset time condition.

[0007] Optionally, the determining whether the rolling-in time and the rolling-out time satisfies a preset time condition and rolling out the current banknote at a rolling-out speed lower than a preset speed in a case that the rolling-in time and the rolling-out time satisfies the preset time condition includes:

calculating a storage time length based on the rolling-in time and the rolling-out time;

determining whether the storage time length is greater than the preset time value and rolling out the current banknote at a preset low rolling-out speed in a case that the storage time length is greater than the preset time value, where the low rolling-out speed is less than the preset speed.

[0008] Optionally, after rolling out the current banknote at a rolling-out speed lower than a preset speed, the method further includes:

recovering the current rolling-out speed to the preset speed.

[0009] A banknote rolling-out control apparatus provided according to an embodiment of the present disclosure includes:

a storage unit, configured to store a rolling-in time at which a banknote enters a device and a corresponding banknote sequence number;

a rolling-out time obtaining unit, configured to obtain a rolling-out time of a current banknote which needs

to be rolled out;

a rolling-in time obtaining unit, configured to obtain the rolling-in time corresponding to the banknote sequence number of the current banknote;

a determining unit, configured to determine whether the rolling-in time and the rolling-out time satisfies a preset time condition;

a rolling out unit, configured to roll out the current banknote at a rolling-out speed lower than a preset speed in a case that the determining unit determines that the rolling-in time and the rolling-out time satisfies the preset time condition.

[0010] Optionally, the determining unit specifically includes:

a calculating sub-unit, configured to calculate a storage time length based on the rolling-in time and the rolling-out time;

a determining sub-unit, configured to determine whether the storage time length is greater than the preset time value.

[0011] Optionally, the apparatus further includes:

a recovering unit, configured to recover the current rolling-out speed to the preset speed.

[0012] A banknote storage device provided according to an embodiment of the present disclosure includes: a first photoelectric sensor, a second photoelectric sensor, a storage reel, a tape backup reel, a tape, a conveying channel, a first power motor, a second power motor, a third power motor, an information storage unit and a micro-processor.

[0013] The first photoelectric sensor is arranged on the conveying channel, and is configured to feedback first information to the micro-processor when a banknote is rolled into the banknote storage device via the conveying channel.

[0014] The second photoelectric sensor is arranged on the conveying channel, and is configured to feedback second information to the micro-processor when the banknote is rolled out from the banknote storage device via the conveying channel.

[0015] When the micro-processor obtains the first information, the information storage unit stores a rolling-in time and a corresponding banknote sequence number of the banknote. When the micro-processor obtains the second information, the micro-processor obtains a rolling-out time of the banknote and reads the rolling-in time of the banknote from the information storage unit according to the banknote sequence number of the banknote, calculates a storage time length of the banknote stored

in the banknote storage device based on the rolling-out time and the rolling-in time. The micro-processor determines whether the storage time length satisfies a preset time condition and adjusts the second power motor to roll out the banknote at a rolling-out speed lower than a preset speed in a case that the storage time length satisfies the preset time condition.

[0016] From the above technical solutions, the embodiments of the present disclosure have the following advantages.

[0017] In the embodiments of the present disclosure, firstly, the rolling-in time at which the banknote enters the device and the corresponding banknote sequence number are stored. Then the rolling-out time of the current banknote which needs to be rolled out is obtained. Subsequently, the rolling-in time is obtained according to the banknote sequence number of the current banknote. Finally, whether the rolling-in time and the rolling-out time satisfies the preset time condition is determined. The current banknote is rolled out at the rolling speed lower than the preset speed in a case that the rolling-in time and the rolling-out time satisfies the preset time. In the embodiments of the present disclosure, whether the current banknote is shaped as an arc is determined based on the rolling-in time and the rolling-out time of the current banknote. The current banknote is rolled out at the rolling speed lower than the preset speed in a case that the current banknote is shaped as an arc to prevent the banknote from getting stuck in the device so as to avoid a fault in the device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018]

Figure 1 is a flow chart of a banknote rolling-out control method according to an embodiment of the present disclosure;

Figure 2 is another flow chart of a banknote rolling-out control method according to another embodiment of the present disclosure;

Figure 3 is a structural diagram of a banknote rolling-out control apparatus according to an embodiment of the present disclosure;

Figure 4 is another structural diagram of a banknote rolling-out control apparatus according to another embodiment of the present disclosure;

Figure 5 is a schematic structural diagram of a banknote storage device according to an embodiment of the present disclosure;

Figure 6 is a diagram illustrating a banknote arc related to the present disclosure;

Figure 7 is a control flow chart for a banknote entering a device according to an embodiment of the present disclosure; and

Figure 8 is a control flow chart for a banknote being rolled out of a device according to an embodiment of the present disclosure.

DETAILED DESCRIPTION OF EMBODIMENTS

[0019] A banknote rolling-out control method, a banknote rolling-out control apparatus and a banknote storage device are provided according to embodiments of the present disclosure, which may solve a technical problem that a banknote stored in a reel for a long time easily gets stuck in a device when it is rolled out, which cause a fault in the device.

[0020] In order to make the invention objective, characteristics and advantages of the present disclosure more clear and easy to understand, hereinafter the technical solutions of the embodiments of the present disclosure are described clearly and completely in conjunction with drawings of the embodiments of the present disclosure. Apparently, the described embodiments are only a part of rather than all of the embodiments of the present disclosure. Based on the embodiments of the present disclosure, all other embodiments obtained by those skilled in the art without any creative work belong to a protective scope of the present disclosure.

[0021] Referring to Figure 1, a banknote rolling-out control method according to an embodiment of the present disclosure includes the following steps 101 to 105.

[0022] In step 101, a rolling-in time at which a banknote enters a device and a corresponding banknote sequence number are stored.

[0023] Firstly, the rolling-in time at which the banknote enters the device and the corresponding banknote sequence number are stored.

[0024] In step 102, a rolling-out time of a current banknote needing to be rolled out is obtained.

[0025] When the banknote is prepared to be rolled out, the rolling-out time of the current banknote needing to be rolled out may be obtained.

[0026] In step 103, the corresponding rolling-in time is obtained according to the banknote sequence number of the current banknote.

[0027] When the banknote is prepared to be rolled out, the corresponding rolling-in time may be obtained according to the banknote sequence number of the current banknote.

[0028] In step 104, whether the rolling-in time and the rolling-out time satisfies a preset time condition is determined. In a case that the rolling-in time and the rolling-out time satisfies the preset time condition, step 105 is executed. In a case that the rolling-in time and the rolling-out time does not satisfy the preset time condition, a normal process is executed.

[0029] After the rolling-in time and the rolling-out time of the current banknote is obtained, whether the rolling-in time and the rolling-out time satisfies the preset time condition may be determined. In a case that the rolling-in time and the rolling-out time satisfies the preset time condition, step 105 is executed. In a case that the rolling-in time and the rolling-out time does not satisfy the preset time condition, the normal process is executed.

[0030] In step 105, the current banknote is rolled out at a rolling-out speed lower than a preset speed.

[0031] In a case that the rolling-in time and the rolling-out time satisfies the preset time condition, the current banknote may be rolled out at the rolling-out speed lower than the preset speed. It should be understood that, the above preset speed is a speed at which the banknote is rolled out in the normal process, which generally is a default rolling-out speed.

[0032] In the embodiments of the present disclosure, firstly, the rolling-in time at which the banknote enters the device and the corresponding banknote sequence number are stored. Then the rolling-out time of the current banknote needing to be rolled out is obtained. Subsequently, the rolling-in time is obtained according to the banknote sequence number of the current banknote. Finally, whether the rolling-in time and the rolling-out time satisfies the preset time condition is determined. The current banknote is rolled out at the rolling speed lower than the preset speed in a case that the rolling-in time and the rolling-out time satisfies the preset time. In the embodiments of the present disclosure, whether the current banknote is shaped as an arc is determined based on the rolling-in time and the rolling-out time of the current banknote. The current banknote is rolled out at the rolling speed lower than the preset speed in a case that the current banknote is shaped as an arc to prevent the banknote from getting stuck in the device so as to avoid a fault in the device.

[0033] In order to make the present disclosure easy to understand, hereinafter a banknote rolling-out control method in the embodiment of the present disclosure is described in detail. Referring to Figure 2, a banknote rolling-out control method according to another embodiment of the present disclosure includes the following steps 021 to 027.

[0034] In step 021, a rolling-in time at which a banknote enters a device and a corresponding banknote sequence number are stored.

[0035] When the banknote enters the device, the rolling-in time at which the banknote enters the device and the corresponding banknote sequence number are stored. It should be understood, the banknote sequence number is a sequence number that the banknote enters the device. For example, a banknote that enters the device the first may be numbered 001, the next one is numbered 002, and so on. The number sequence may be stored in a queue in a first in first out manner.

[0036] In step 022, a rolling-out time of a current banknote needing to be rolled out is obtained.

[0037] When a current banknote needs to be rolled out, the rolling-out time of the current banknote may be obtained.

[0038] In step 023, the corresponding rolling-in time is obtained according to the banknote sequence number of the current banknote.

[0039] When the rolling-out time of the current banknote is obtained, the corresponding rolling-in time may be obtained according to the banknote sequence number of the current banknote. It is known that, since a rolling-in time and a corresponding banknote sequence number of each banknote are stored when it enters the device, when the banknote is rolled out, a system may read the corresponding rolling-in time according to the banknote sequence number.

[0040] In step 024, a storage time length is calculated based on the rolling-in time and the rolling-out time.

[0041] After the rolling-in time and the rolling-out time of the current banknote are obtained, the storage time length may be calculated based on the rolling-in time and the rolling-out time. It is easy to understand that the storage time length may be calculated as a difference obtained by subtracting the rolling-in time from the rolling-out time.

[0042] In step 025, whether the storage time length is greater than a preset time value is determined. In a case that the storage time length is greater than the preset time value, step 026 is executed. In a case that the storage time length is not greater than the preset time value, a normal process is executed.

[0043] After the storage time length of the current banknote is obtained, whether the storage time length is greater than the preset time value may be determined. In a case that the storage time length is greater than the preset time value, step 026 is executed. In a case that the storage time length is not greater than the preset time value, a normal process is executed. It should be understood that, if the banknote is stored in a storage reel for a long time, the banknote is shaped as an arc. The preset time value may be set according to characteristics of different devices or banknotes, which is a boundary value for shaping a banknote as an arc. That is, if the storage time length is less than or equal to the preset time value, it may be considered that the current banknote is not shaped as an arc, and if the storage time length is greater than the preset time value, it may be considered that the current banknote is shaped as an arc, and step 026 needs to be performed.

[0044] It should be noted that the above executing the normal process generally is rolling out the current banknote at a preset speed.

[0045] In step 026, the current banknote is rolled out at a preset low rolling-out speed.

[0046] If the storage time length is greater than the preset time value, the current banknote may be rolled out at the preset low rolling-out speed. The low rolling-out speed is less than the preset speed.

[0047] It should be noted that the preset low rolling-out

speed may be set according to real situations. Besides, the setting may be graded according to how much the storage time length is greater than the preset time value. For example, if the storage time length is 30% greater than the preset time value, the current banknote is rolled out at a first low rolling-out speed, which is 50% of the preset speed. If the storage time length is 50% greater than the preset time value, the current banknote is rolled out at a first low rolling-out speed, which is 30% of the preset speed. If the storage time length is 80% greater than the preset time value, the current banknote is rolled out at a first low rolling-out speed, which is 20% of the preset speed. Such setting may make an estimated degree of the arc shape generated due to long time of storage to correspond to a different rolling-out speed, and thus compromise between the rolling-out efficiency and avoiding stuck banknote.

[0048] In step 027, the current rolling-out speed is recovered to the preset speed.

[0049] After the current banknote is rolled out at the preset low rolling-out speed, the current rolling-out speed may be recovered to the preset speed. It should be understood that, after the current rolling-out speed is lowered to the low rolling-out speed to roll out the current banknote, the current rolling-out speed may be recovered to the preset speed so as to ensure an entire rolling-out efficiency of the device.

[0050] In order to make the method easy to be understood, according to the embodiment illustrated in Figure 2, the banknote rolling-out control method according to the embodiment of the disclosure is described with a real application scenario.

1. A banknote enters a device at a constant speed V_0 via an outer channel of the device.

2. After a back-end of the banknote leaves a first photoelectric sensor, an information storage unit stores an entering time T of the banknote and stores a sequence number N that the banknote enters the device.

3. A second power motor drives a tape backup reel to receive a tape at a normal speed V to roll out the banknote. When a front-end of the banknote enters a second photoelectric sensor, a time T_{in} at which the banknote enters the device is read from the information storage unit according to the banknote sequence number N .

4. A storage time length during which the banknote is stored in the device is calculated according to a rolling-out time T_{out} as:

$$T_{storage} = T_{out} - T_{in}.$$

5. A time T_{shape} for shaping the banknote as a serious arc is determined according to a material of the banknote in combination with a test result.

6. A detecting unit detects whether the T_{storage} that the banknote is stored in the device is greater than the time T_{shape} for shaping the banknote as a serious arc.

[0051] If $T_{\text{storage}} < T_{\text{shape}}$, it indicates that the banknote is not shaped as a serious arc. The banknote is rolled out at a normal speed V_{normal} .

[0052] If $T_{\text{storage}} \geq T_{\text{shape}}$, it indicates that the banknote is shaped as a serious arc. A situation that the banknote gets stuck can readily occur if rolling out the banknote at the normal speed. At this time, a banknote control unit adjusts a speed of the second power motor to adjust the banknote rolling-out speed from the normal speed V_{normal} to a low speed V_{low} . The low speed ensures the banknote being steadily rolled out via the inner channel of the device.

[0053] Above the banknote rolling-out control method is described. Hereinafter a banknote rolling-out control apparatus is described in detail. Referring to Figure 3, a banknote rolling-out control apparatus according to an embodiment of the present disclosure includes a storage unit 031, a rolling-out time obtaining unit 032, a rolling-in time obtaining unit 033, a determining unit 034, and a rolling out unit 035.

[0054] The storage unit 031 is configured to store a rolling-in time at which a banknote enters a device and a corresponding banknote sequence number.

[0055] The rolling-out time obtaining unit 032 is configured to obtain a rolling-out time of a current banknote which needs to be rolled out.

[0056] The rolling-in time obtaining unit 033 is configured to obtain the corresponding rolling-in time according to the banknote sequence number of the current banknote.

[0057] The determining unit 034 is configured to determine whether the rolling-in time and the rolling-out time satisfies a preset time condition.

[0058] The rolling out unit 035 is configured to roll out the current banknote at a rolling-out speed lower than a preset speed in a case that the determining unit determines that the rolling-in time and the rolling-out time satisfies the preset time condition.

[0059] In the embodiment, firstly, the storage unit 031 stores the rolling-in time at which the banknote enters the device and the corresponding banknote sequence number. Then the rolling-out time obtaining unit 032 obtains the rolling-out time of the current banknote which needs to be rolled out. Subsequently, the rolling-in time obtaining unit 033 obtains the corresponding rolling-in time according to the banknote sequence number of the current banknote. Finally, the determining unit 034 determines whether the rolling-in time and the rolling-out time satisfies the preset time condition. The rolling out

unit 035 rolls out the current banknote at the rolling-out speed lower than the preset speed in a case that the determining unit determines that the rolling-in time and the rolling-out time satisfies the preset time condition. In the embodiment, whether the current banknote is shaped as an arc is determined based on the rolling-in time and the rolling-out time. If the current banknote is shaped as an arc, the current banknote is rolled out at a rolling-out speed lower than the preset speed to prevent the banknote from getting stuck in the device so as to avoid a fault in the device.

[0060] In order to make the apparatus to be easily understood, hereinafter a banknote rolling-out apparatus in the embodiments of the present disclosure is described in detail. Referring to Figure 4, a banknote rolling-out apparatus according to another embodiment of the present disclosure includes a storage unit 041, a rolling-out time obtaining unit 042, a rolling-in time obtaining unit 043, a determining unit 044, and a rolling out unit 045.

[0061] The storage unit 041 is configured to store a rolling-in time at which a banknote enters a device and a corresponding banknote sequence number.

[0062] The rolling-out time obtaining unit 042 is configured to obtain a rolling-out time of a current banknote which needs to be rolled out.

[0063] The rolling-in time obtaining unit 043 is configured to obtain the corresponding rolling-in time according to the banknote sequence number of the current banknote.

[0064] The determining unit 044 is configured to determine whether the rolling-in time and the rolling-out time satisfies a preset time condition.

[0065] The rolling out unit 045 is configured to roll out the current banknote at a rolling-out speed lower than a preset speed in a case that the determining unit determines that the rolling-in time and the rolling-out time satisfies the preset time condition.

[0066] The determining unit 44 in the embodiment may further include a calculating sub-unit 0441 and a determining sub-unit 0442.

[0067] The calculating sub-unit 0441 is configured to calculate a storage time length based on the rolling-in time and the rolling-out time.

[0068] The determining sub-unit 0442 is configured to determine whether the storage time length is greater than the preset time value.

[0069] The banknote rolling-out control apparatus in the embodiment may further include a recovering unit 046.

[0070] The recovering unit 046 is configured to recover the current rolling-out speed to the preset speed.

[0071] Above the banknote rolling-out control apparatus is described. Hereinafter a banknote storage device is described in detail. Referring to Figure 5, a banknote storage device according to an embodiment of the present disclosure is illustrated.

[0072] Figure 5 is a side view of the storage device 200 according to the present disclosure. The device includes

a first photoelectric sensor 202, a second photoelectric sensor 203, a storage reel 204, a tape backup reel 207, a tape 205, a conveying channel 201, a first power motor 209, a second power motor 210, a third power motor 211, an information storage unit 212, and a micro-processor 206.

[0073] The micro-processor 206 controls the first power motor 209 and the second power motor 210. The first power motor 209 drives the storage reel 204. The second power motor 210 drives the tape backup reel 207. The first photoelectric sensor 202 divides the conveying channel 201 into an outer channel and an inner channel of the device. The third power motor 211 drives the outer channel of the device. The tape 205 is fixed on the storage reel 204 and the tape backup reel 207. A banknote 208 enters the device 200 via the conveying channel 201 and is stored on the storage reel 204 via the tape 205. The first sensor 202 detects the banknote 208 entering the device 200. The second sensor 203 detects the banknote 208 being rolled out of the device 100. The information storage unit 212 stores the information of time of year, month and day at which a banknote enters the device and a sequence number.

[0074] A control principle for rolling the banknote into the device is illustrated with reference to Figure 5 and Figure 7.

[0075] In step S101, the third power motor 211 drives an outer part of the conveying channel 201 to convey the banknote 208 into the device 200. The first power motor 209 drives the storage reel 204 to receive the tape 205 in order to roll the banknote in the storage reel. In a process that the banknote enters the device 200, whether a back-end of the banknote leaves the first photoelectric sensor 202 is determined.

[0076] In step S102, when the back-end of the banknote leaves the first photoelectric sensor 202, information of a time T of year, month and day at which the banknote enters the device and a sequence number N are stored in the information storage unit 212.

[0077] The steps S01-S02 are repeatedly performed to store entering time and sequence information of all banknotes entering the device in the information storage unit 212.

[0078] A control principle for rolling the banknote out of the device is illustrated with reference to Figure 5, Figure 6 and Figure 8.

[0079] In step S201, the second power motor 201 drives the tape backup reel 207 to receive the tape 205 in order to roll the banknote out of the device 200. In a process that the banknote is rolled out of the device, whether a front-end of the banknote enters the second photoelectric sensor 203 is determined.

[0080] In step S202, when the front-end of the banknote enters the second photoelectric sensor 203, the micro-processor 206 reads a time information T_{in} (in the unit of day) at which the banknote enters the device from the information storage unit 212 according to the sequence number N of the banknote and calculates a stor-

age time length during which the banknote is stored in the device based on a banknote rolling-out time T_{out} :

$$T_{storage} = T_{out} - T_{in} \text{ (in the unit of day).}$$

[0081] In step S203, when the front-end of the banknote enters the second photoelectric sensor 203, a relationship between the storage time length $T_{storage}$ of the banknote and the time T_{shape} for shaping the banknote as the serious arc is determined. Figure 6 shows a banknote 301 which is shaped as a serious arc after the banknote is stored in the device for a long time. The time T_{shape} for shaping the banknote as a serious arc in the device is pre-set according to a material of the banknote.

[0082] In step S204, if $T_{storage} < T_{shape}$, which indicates that the banknote is not shaped as a serious arc, the banknote is rolled out at a normal speed V_{normal} .

[0083] In step S205, if $T_{storage} \geq T_{shape}$, which indicates that the banknote is shaped as a serious arc and the banknote will easily get stuck if rolling out the banknote at the normal speed, the banknote control unit adjusts a speed of the second power motor to adjust the banknote rolling-out speed from the normal speed V_{normal} to a low speed V_{low} . The low speed ensures the banknote being steadily rolled out via the inner channel of the device.

[0084] The steps S201-S205 are repeatedly performed to successfully roll all banknotes out of the device.

[0085] Hereinafter, the control principle is illustrated with reference to a practical control.

[0086] In a practical control, a normal speed for rolling out a banknote is denoted as $V_{normal} = 700\text{mm/s}$, a low speed is denoted as $V_{low} = 350\text{mm/s}$, and a preset time period for shaping a banknote as a serious arc is denoted as $T_{shape} = 10$ days.

[0087] It is assumed that a time at which the banknote enters the device is October 15, 2014, and the banknote is the eighth banknote that enters the device. The information is stored in a storage unit.

[0088] When the banknote is rolled out of the device on November 15, 2014, the information that the banknote entered the device on October 15, 2014 is read according to the sequence number 8. A storage time length during which the banknote is stored in the device is calculated as $T_{storage} = 30\text{days}$.

[0089] A relationship between the $T_{storage}$ and the T_{shape} is determined. Because $T_{storage} > T_{shape}$, the banknote is rolled out at a low speed $V_{low} = 350\text{mm/s}$ in order to prevent a situation that the arced banknote gets stuck.

[0090] Those skilled in the art may clearly understand that, in order to describe conveniently and concisely, for detailed working process of the above described system, apparatus and units, one may refer to the corresponding process of the above method embodiment, which is not repeated herein.

[0091] In the embodiments provided by the present disclosure, it should be understood that the system, the ap-

paratus and the method may be implemented by other methods. For example, the above described apparatus embodiments are only for illustration. For example, a division of the unit is merely a logic function division. In a real implementation, there may be other division manners. For example, multiple units or components may be combined or integrated to another system, or some characteristics may be ignored or not executed. Furthermore, a mutual coupling or a direct coupling or a communicative connection shown or discussed may be an indirect coupling or communicative connection via some interfaces, apparatuses or units, and may be electrical, mechanical or in other manners.

[0092] The above units described as discrete components may be or may not be physically separated. The components shown as units may be or may not be physical units. That is they may be located at a place or may be distributed to multiple network units. Part or all units may be selected according to a real requirement to implement an objective of the solution of the embodiment.

[0093] Besides, each functional unit in each embodiment of the present disclosure may be integrated in a processing unit or each unit may exist physically and separately, or two or more units may be integrated in a processing unit. The above integrated units may be implemented in a hardware manner or a software functional unit manner.

[0094] If the integrated units are implemented in the software functional unit manner and are sold or used as an independent product, they may be stored on a computer readable storage medium. Based on this understanding, the essence of the technical solution of the present disclosure or the part of a contribution to the conventional technology or all or part of the technical solution may be implemented in a form of software product. The computer software product is stored in a storage medium including multiple instructions used to make a computer device (which may be a personal computer, a server or a network device and so on) execute all or part of the steps of the method of each embodiment of the present disclosure. The above storage medium includes a USB, a portable hard disk, a read-only memory (ROM), a random access memory (RAM), a disk or a CD and many other medium that can store a program code.

[0095] The above embodiments are only used to illustrate the technical solutions of the present disclosure rather than limiting. Although the present disclosure is specifically described referring to the above embodiments, those skilled in the art can understand that they may modify the technical solutions described in the above embodiments or equivalently substitute part of technical features. All amendments or substitutions do not make a corresponding technical solution depart from the spirit or scope of the embodiments of the present disclosure.

Claims

1. A banknote rolling-out control method comprises:
 - storing a rolling-in time at which a banknote enters a device and a corresponding banknote sequence number;
 - obtaining a rolling-out time of a current banknote which needs to be rolled out;
 - obtaining the rolling-in time corresponding to the banknote sequence number of the current banknote; and
 - determining whether the rolling-in time and the rolling-out time satisfies a preset time condition, and rolling out the current banknote at a rolling-out speed lower than a preset speed in a case that the rolling-in time and the rolling-out time satisfies the preset time condition.
2. The method according to claim 1, wherein the determining whether the rolling-in time and the rolling-out time satisfies a preset time condition and rolling out the current banknote at a rolling-out speed lower than a preset speed in a case that the rolling-in time and the rolling-out time satisfies the preset time condition comprises:
 - calculating a storage time length based on the rolling-in time and the rolling-out time;
 - determining whether the storage time length is greater than a preset time value and rolling out the current banknote at a preset low rolling-out speed in a case that the storage time length is greater than the preset time value, wherein the low rolling-out speed is less than the preset speed.
3. The method according to claim 1, wherein after rolling out the current banknote at a rolling-out speed lower than a preset speed, the method further comprises:
 - recovering the current rolling-out speed to the preset speed.
4. A banknote rolling-out control apparatus comprises:
 - a storage unit, configured to store a rolling-in time at which a banknote enters a device and a corresponding banknote sequence number;
 - a rolling-out time obtaining unit, configured to obtain a rolling-out time of a current banknote which needs to be rolled out;
 - a rolling-in time obtaining unit, configured to obtain the rolling-in time corresponding to the banknote sequence number of the current banknote;
 - a determining unit, configured to determine

whether the rolling-in time and the rolling-out time satisfies a preset time condition; and a rolling out unit, configured to roll out the current banknote at a rolling-out speed lower than a preset speed in a case that the determining unit determines that the rolling-in time and the rolling-out time satisfies the preset time condition. 5

5. The apparatus according to claim 4, wherein the determining unit comprises: 10

a calculating sub-unit, configured to calculate a storage time length based on the rolling-in time and the rolling-out time; 15
a determining sub-unit, configured to determine whether the storage time length is greater than the preset time value.


6. The apparatus according to claim 4, wherein the apparatus further comprises: 20


a recovering unit, configured to recover the current rolling-out speed to the preset speed.

7. A banknote storage device comprises: 25

a first photoelectric sensor, a second photoelectric sensor, a storage reel, a tape backup reel, a tape, a conveying channel, a first power motor, a second power motor, a third power motor, an information storage unit and a micro-processor, wherein, 30
the first photoelectric sensor is arranged on the conveying channel, and is configured to feedback first information to the micro-processor when a banknote is rolled in the banknote storage device via the conveying channel; 35
the second photoelectric sensor is arranged on the conveying channel, and is configured to feedback second information to the micro-processor when the banknote is rolled out of the banknote storage device via the conveying channel; 40
the information storage unit is configured to store a rolling-in time and a corresponding banknote sequence number of the banknote, when the micro-processor obtains the first information; 45
the micro-processor is configured to, when obtaining the second information, obtain a rolling-out time of the banknote and read the rolling-in time of the banknote from the information storage unit according to the banknote sequence number of the banknote, and calculate a storage time length of the banknote stored in the banknote storage device based on the rolling-out time and the rolling-in time; 50
the micro-processor is further configured to determine whether the storage time length satis- 55

fies a preset time condition and adjust the second power motor to roll out the banknote at a rolling-out speed lower than a preset speed in a case that the storage time length satisfies the preset time condition.

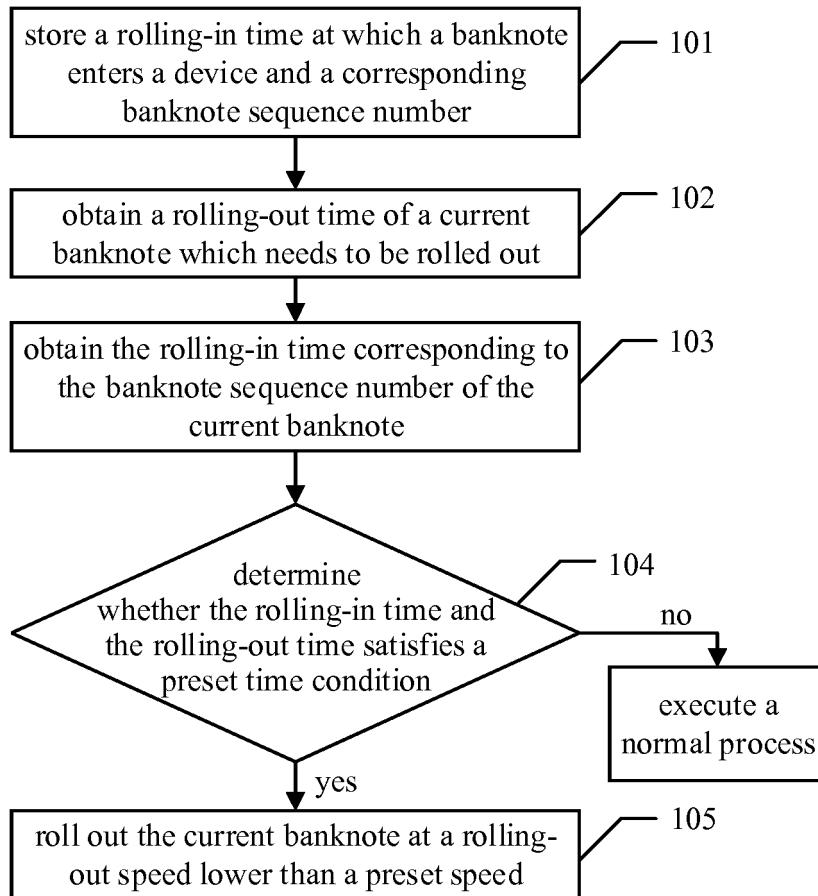**Figure 1**

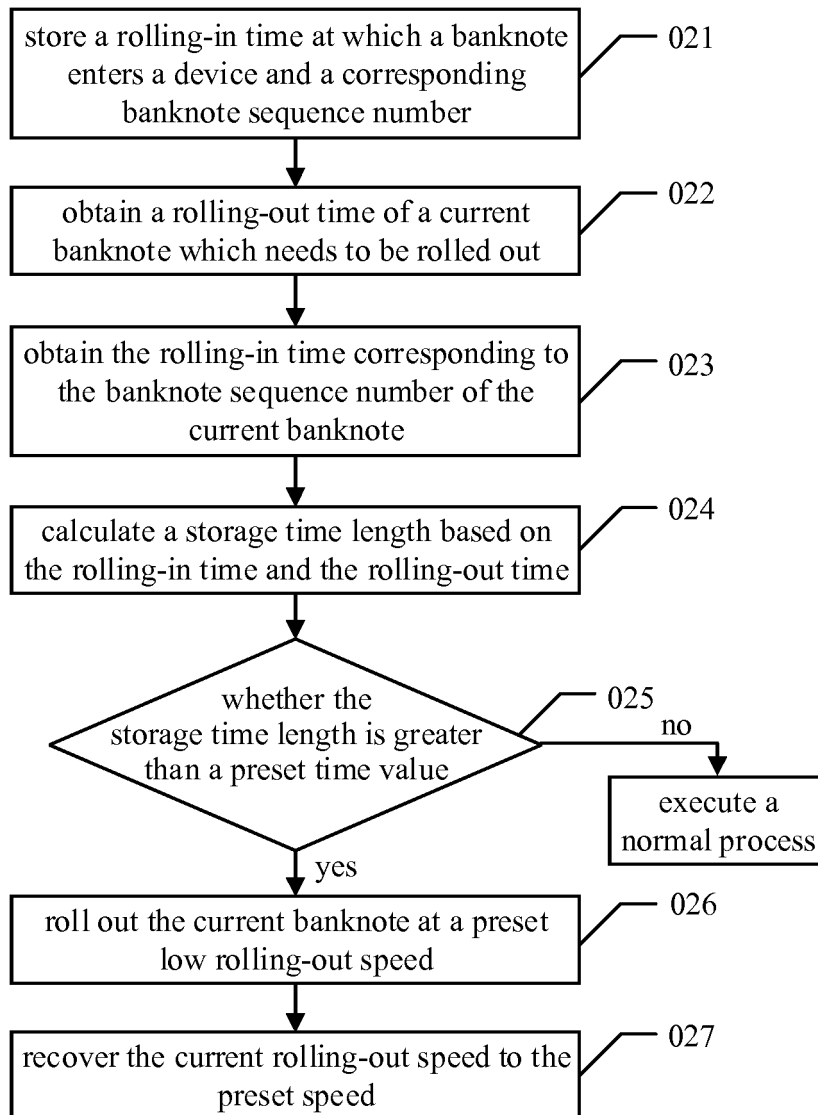**Figure 2**

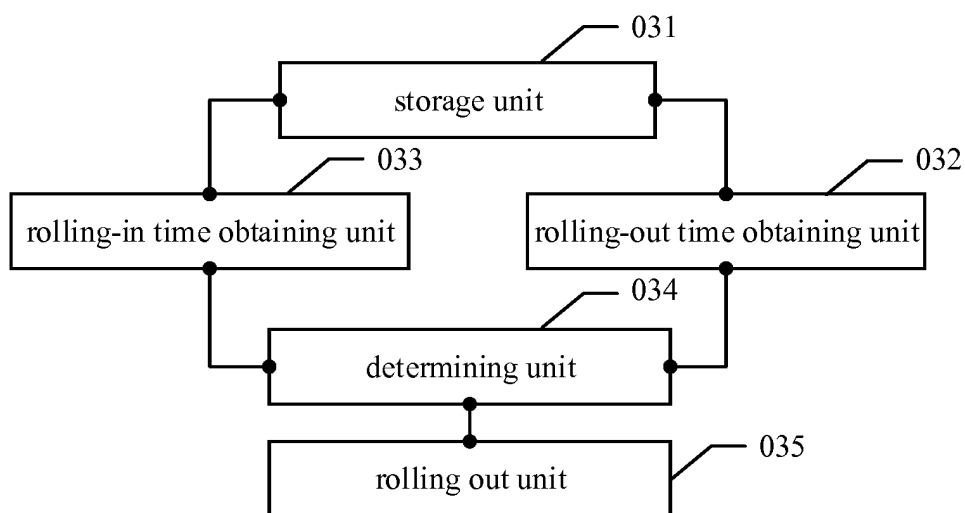


Figure 3

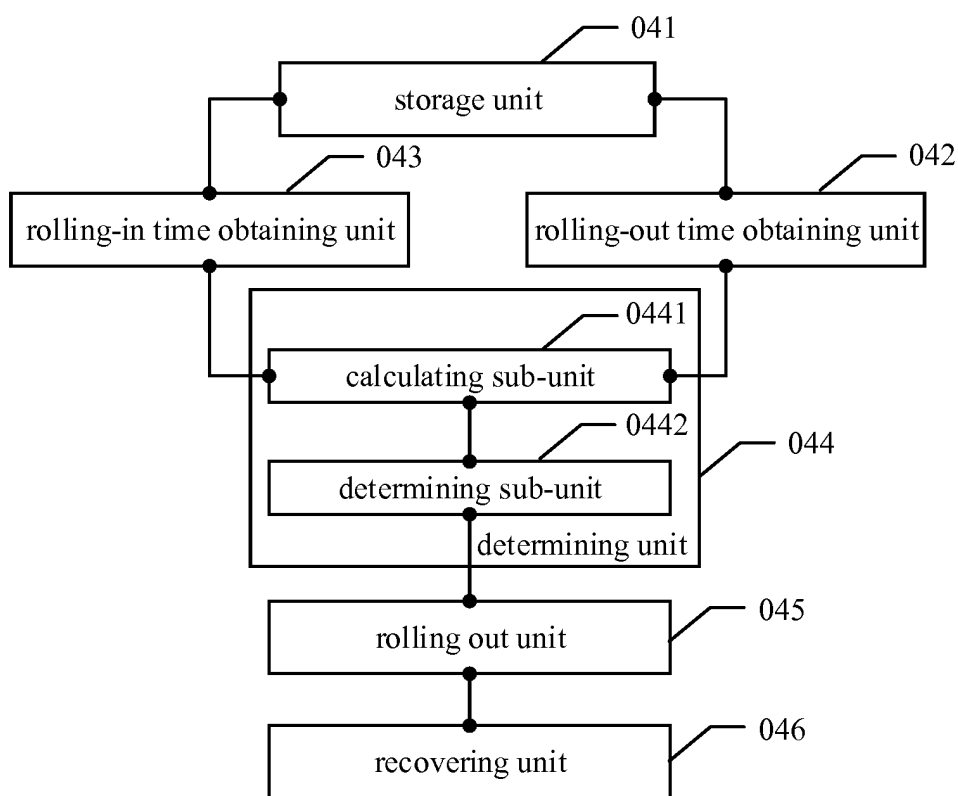


Figure 4

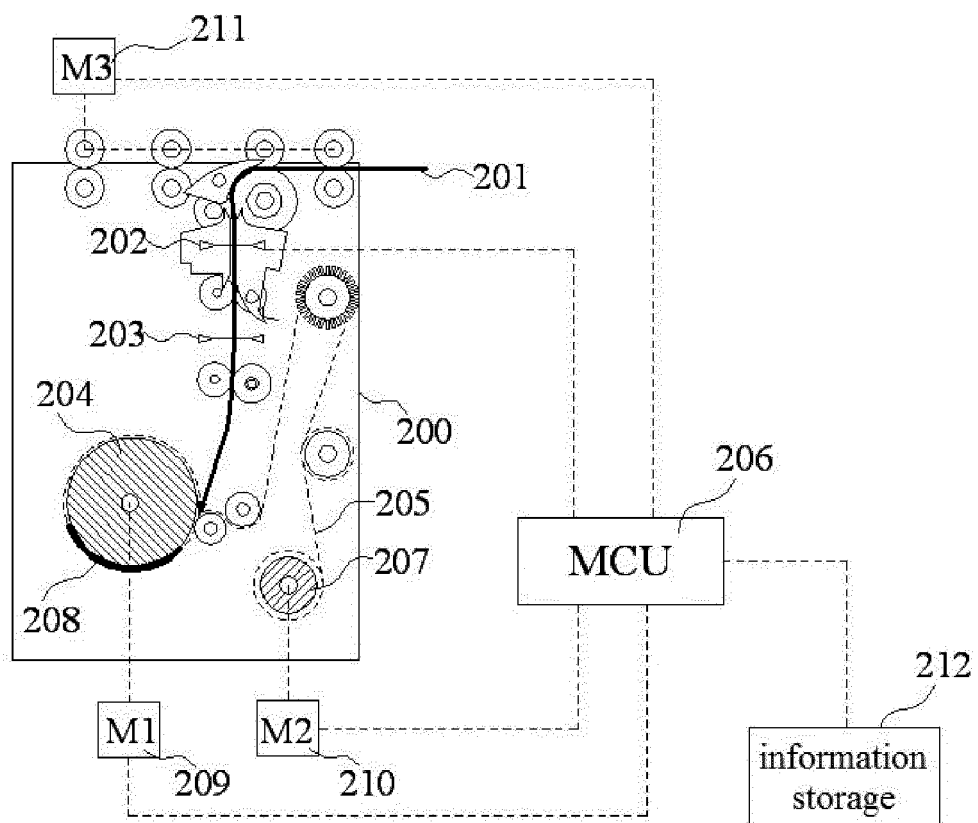


Figure 5

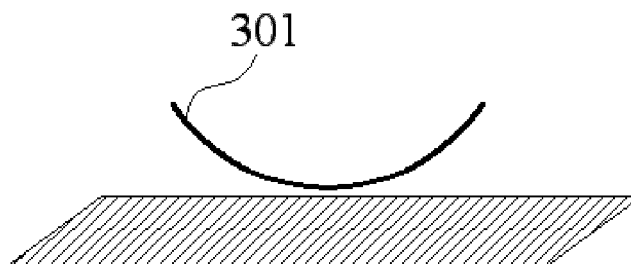


Figure 6

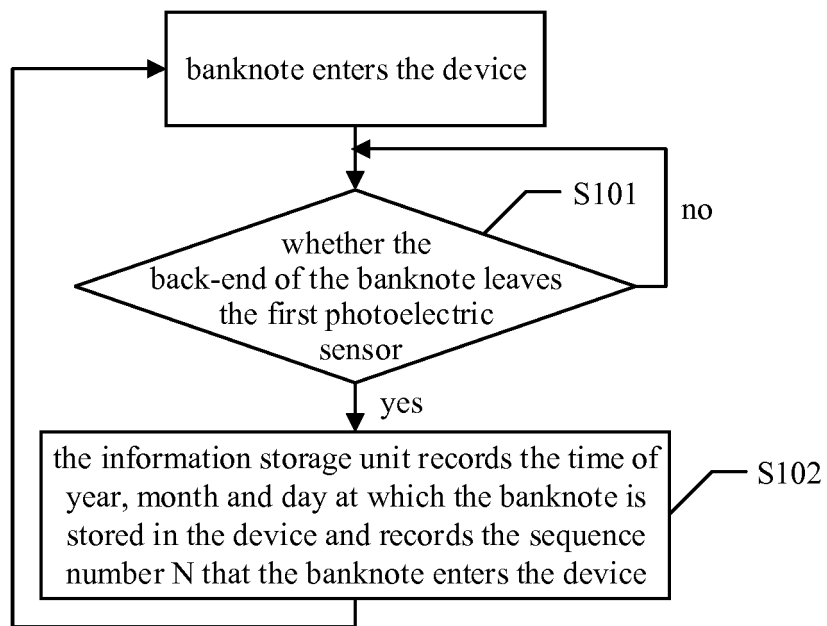


Figure 7

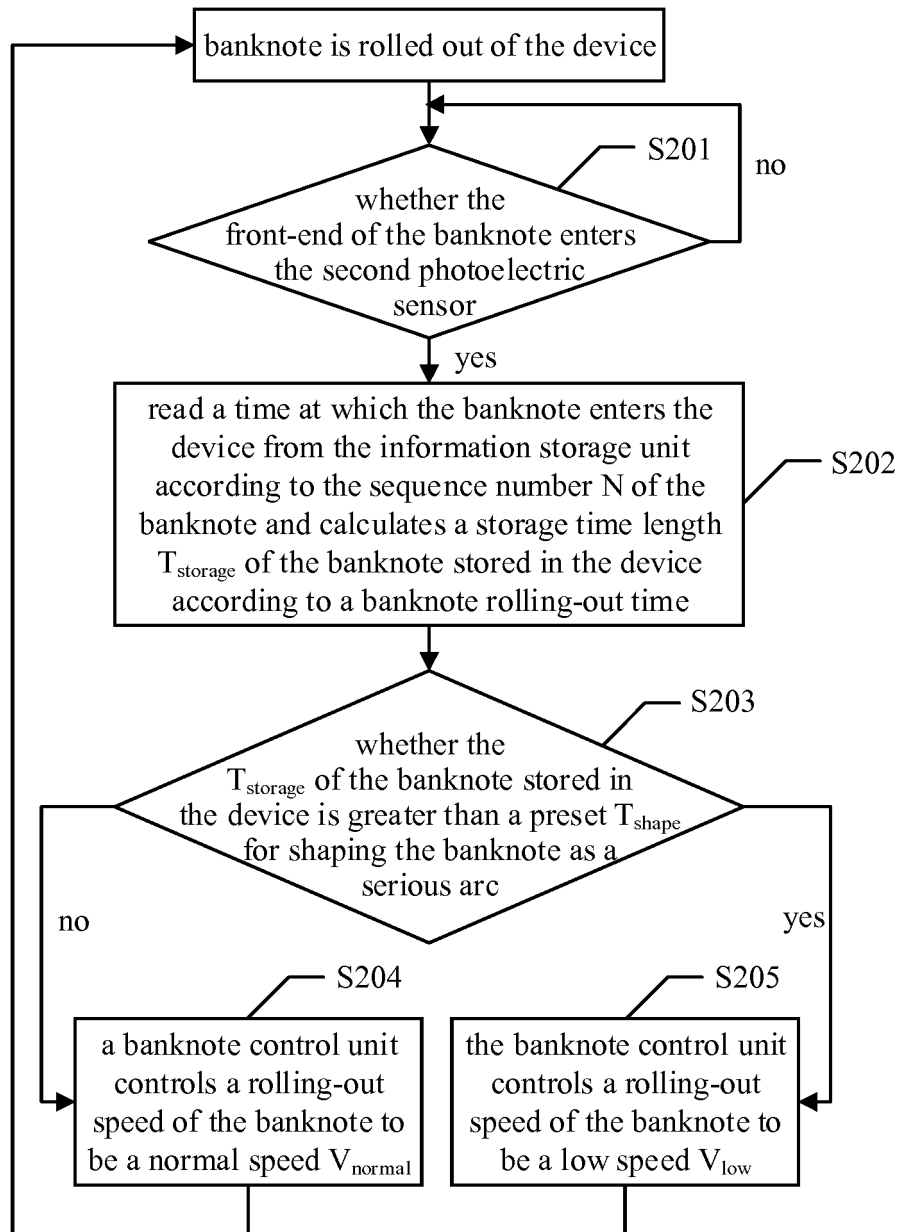


Figure 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/086730

A. CLASSIFICATION OF SUBJECT MATTER

G07D 11/00 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B65H 5/-; B65H 83/-; G07D 13/-; G07D 11/-; G07D 9/-; G03G 15/-; G05D 13/-; G06K 15/-; D21G 9/-

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNTXT, CNABS, TWABS, TWTXT, CNKI, WPI, EPODOC: bank note, RMB, bill, bank paper, crimp, crinkle, gauffer, bend, hour, career

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 104637156 A (GRG BANKING EQUIPMENT CO., LTD.) 20 May 2015 (20.05.2015) claims 1-7	1-7
A	CN 1228132 A (STORA PUBLICATION PAPER AG) 08 September 1999 (08.09.1999) claim 1	1-7
A	CN 103676990 A (GRG BANKING EQUIPMENT CO., LTD.) 26 March 2014 (26.03.2014) description, paragraphs [0079]-[0088]	1-7
A	CN 103608851 A (OKI ELECTRIC INDUSTRY CO., LTD.) 26 February 2014 (26.02.2014) the whole document	1-7
A	US 5506660 A (XEROX CORPORATION) 09 April 1996 (09.04.1996) the whole document	1-7
A	CN 102837985 A (GRG BANKING EQUIPMENT CO., LTD.) 26 December 2012 (26.12.2012) the whole document	1-7

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

10 November 2015

Date of mailing of the international search report

30 November 2015

Name and mailing address of the ISA
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No. (86-10) 62019451

Authorized officer

LIU, Zihan

Telephone No. (86-10) 82245816

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2015/086730

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2006017959 A1 (DOWNER, RAYMOND J. et al.) 26 January 2006 (26.01.2006) the whole document	1-7
A	CN 1931691 A (TOKYO SHIBAURA ELECTRIC CO.) 21 March 2007 (21.03.2007) the whole document	1-7
A	CN 103345797 A (GUANGZHOU ZHICUI ELECTRONIC TECHNOLOGY CO., LTD.) 09 October 2013 (09.10.2013) the whole document	1-7
A	CN 102930638 A (GRG BANKING EQUIPMENT CO., LTD.) 13 February 2013 (13.02.2013) the whole document	1-7
A	CN 101071517 A (OKI ELECTRIC INDUSTRY CO., LTD.) 14 November 2007 (14.11.2007) the whole document	1-7

EP 3 267 406 A1

INTERNATIONAL SEARCH REPORT Information on patent family members

International application No.
PCT/CN2015/086730

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 104637156 A	20 May 2015	None	
CN 1228132 A	08 September 1999	NO 990605 D0	09 February 1999
		CA 2263211 C	18 April 2006
		CZ 297849 B6	11 April 2007
		DE 19632988 C1	22 January 1998
		WO 9806897 A1	19 February 1998
		PT 922139 T	29 April 2002
		PT 922139 E	29 April 2002
		PL 184169 B1	30 September 2002
		EP 0922139 B1	12 December 2001
		AT 210762 T	15 December 2001
		RU 2166017 C2	27 April 2001
		ID 17869 A	05 February 1998
		BR 9714336 A	11 April 2000
		CN 1104526 C	02 April 2003
		ES 2165084 T3	01 March 2002
		NO 990605 A	09 February 1999
		CA 2263211 A1	19 February 1998
		JP 2001502648 A	27 February 2001
		PL 331586 A1	19 July 1999
		NO 313558 B1	21 October 2002
		EP 0922139 A1	16 June 1999
		KR 20000029927 A	25 May 2000
		CZ 9900488 A3	14 July 1999
CN 103676990 A	26 March 2014	WO 2015101174 A1	09 July 2015
CN 103608851 A	26 February 2014	RU 2538543 C1	10 January 2015
		WO 2013054575 A1	18 April 2013
		US 2014262678 A1	18 September 2014

INTERNATIONAL SEARCH REPORT
 Information on patent family members

 International application No.
 PCT/CN2015/087620

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
		YS 9004256 B2	14 April 2015
		JP 2013084204 A	09 May 2013
US 5506660 A	09 April 1996	JPH08101617 A	16 April 1996
CN 102837985 A	26 December 2012	WO 2014044037 A1	27 March 2014
US 2006017959 A1	26 January 2006	WO 2006014481 A2	09 February 2006
		CA 2572907 A1	09 February 2006
		DE 112005001597 T5	24 May 2007
CN 1931691 A	21 March 2007	US 2007063426 A1	22 March 2007
		EP 1764323 A2	21 March 2007
		JP 2007076879 A	29 March 2007
CN 103345797 A	09 October 2013	CN 103345797 B	04 February 2015
CN 102930638 A	13 February 2013	AU 2013347509 A1	14 May 2015
		WO 2014075449 A1	22 May 2014
		CN 102930638 B	31 December 2014
		EP 2922038 A1	23 September 2015
CN 101071517 A	14 November 2007	JP 2007302418 A	22 November 2007
		KR 101095328 B1	16 December 2011
		KR 20070110185 A	16 November 2007
		JP 4972993 B2	11 July 2012
		CN 101071517 B	25 April 2012

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201510100824 [0001]