



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
17.01.2018 Bulletin 2018/03

(51) Int Cl.:
D06F 75/12 ^(2006.01) **D06F 75/20** ^(2006.01)

(21) Application number: **16382340.4**

(22) Date of filing: **15.07.2016**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

- **ALET VIDAL, Josep**
25790 Oliana (ES)
- **VICENTE MOLINERO, Valentín**
01010 Vitoria-Gasteiz (ES)
- **CUEVAS RUÍZ DE AZÚA, Javier**
25790 Oliana (ES)

(71) Applicant: **Compania Espanola de Electromenaje, SA**
25790 Oliana (Lleida) (ES)

(74) Representative: **Juncosa Miro, Jaime et al**
Torner, Juncosa i Associates, S.L.
Gran Via de les Corts
Catalanes, 669 bis, 1^o, 2^a
08013 Barcelona (ES)

(72) Inventors:
• **TRENCH ROCA, Lluís**
08650 Sallent (ES)

(54) **STEAM IRON UNIT WITH VARIOUS STEAM FLOWS**

(57) The ironing station with several steam flows comprises an iron (40) with a soleplate (1), a supply unit (50) with a water tank (7) and a first evaporation chamber (4) separated from the soleplate and in communication with steam outlet holes (2) of the soleplate, which integrates a second evaporation chamber (14) in communication with steam outlet holes (3) of the soleplate, and heaters heating the soleplate (1) and the first and second evaporation chambers (4, 14). A pump (9) drives water through a main conduit (8) from the receptacle (7) to the first evaporation chamber (4) and an electrically-operated valve (15) controls the water flow of a secondary conduit (12) from a diversion (13) of the main conduit to the second evaporation chamber (14), depending on the opening/closing cycles thereof.

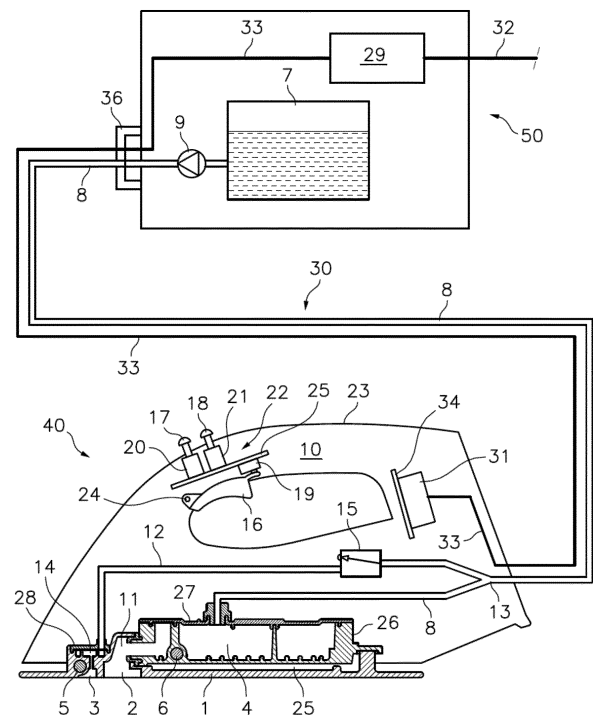


Fig. 1

Description

Technical Field

[0001] The present invention relates to an ironing station including a steam iron and a supply unit that can be connected to one another by fluid ducts and electrical ducts, and including a device selectively providing at least three steam flows through steam outlet holes formed in the soleplate of the iron.

Background of the Invention

[0002] Steam irons include a soleplate provided with a plurality of steam outlet holes, an evaporation chamber, heating means heating the soleplate for ironing and the evaporation chamber for generating steam, and a water tank, wherein the water is introduced into the evaporation chamber and the generated steam is expelled through the steam outlet holes of the soleplate.

[0003] Given that the water tank installed in the iron has a limited capacity and entails a weight that is added to the weight a user must support when handling the iron while ironing, separating the water tank from the iron and installing it in a stationary supply unit connected to the iron by a supply cord including a water conduit and an electric power supply cable is known. In some cases, the evaporation chamber is installed in the supply unit and the water conduit is replaced with a steam conduit, such that the generated steam is supplied to the iron through the steam conduit. The assembly formed by the iron and the supply unit is known as "ironing station" or "ironing center".

[0004] Patent document FR 2523164 A1 discloses an ironing station including a steam iron and a separate water tank, where the iron comprises a soleplate provided with a plurality of steam outlet holes, an evaporation chamber independent of the soleplate, a first heater for heating the soleplate and a second heater for heating the evaporation chamber and generating steam. The water is supplied from the water tank to the evaporation chamber through a conduit and a pump. The steam is supplied through another conduit from the evaporation chamber to a steam distribution chamber located in the iron in communication with the steam outlet holes of the soleplate. The evaporation chamber is located above and in contact with the steam distribution chamber.

[0005] Patent document US 5010664 A describes a steam iron comprising a soleplate provided with a plurality of steam outlet holes, an evaporation chamber partially demarcated by the soleplate, a water tank and a pump supplying water from the water tank to the evaporation chamber through a conduit. The steam is expelled from the evaporation chamber through the steam outlet holes of the soleplate. The pump is operated by an electric operating device, such as a solenoid, which can be activated according to different pulse sequences to provide different steam flow values.

[0006] Patent document FR 2690932 A1 discloses a steam iron comprising a soleplate provided with a plurality of steam outlet holes, a pair of evaporation chambers independent of the soleplate, a first heater heating the soleplate and a second heater heating the evaporation chambers, a water tank and a pump supplying water from the receptacle to the evaporation chambers. A device consisting of conduits and valves controlled by manual push buttons allows selecting two different steam flow levels by simply conducting the water through two different conduits towards either of the evaporation chambers, or towards both, and the steam is conducted through other conduits from the evaporation chambers to a steam distribution chamber in communication with the steam outlet holes of the soleplate. Additionally, this iron includes a device accumulating the hydraulic pressure of the water, and the pressurized water can be sprayed from a front spray nozzle by pressing another button.

[0007] Patent document FR 2747403 A1 describes an ironing station including a steam iron and a supply unit. The iron comprises a soleplate provided with a plurality of steam outlet holes and a heater arranged for heating the soleplate. The supply unit includes a water tank and an evaporation chamber provided with a heater for generating steam. The water is supplied from the water tank to the evaporation chamber through a main water conduit and a first pump. The steam is conducted through a steam conduit from the evaporation chamber to a steam distribution chamber located in the iron in communication with the steam outlet holes of the soleplate. The water can additionally be supplied from the main water conduit, before the first pump, to the steam conduit through a diversion conduit and a second pump for providing wet steam. The iron includes an electric switch controlling the operation of the first pump and the second pump, which are both housed in the supply unit.

[0008] Patent document FR 2785975 A1 discloses an ironing station comprising a steam iron and a supply unit. The iron includes a soleplate provided with a plurality of steam outlet holes and a heater heating the soleplate. The supply unit includes a water tank, an evaporation chamber and another heater heating the evaporation chamber for generating steam. The water is supplied from the water tank to the evaporation chamber through a main water conduit and a first pump. The steam is supplied through a steam conduit from the evaporation chamber to a steam distribution chamber located in the iron in communication with the steam outlet holes of the soleplate. Additional water can be supplied from the water tank to the steam conduit for providing wet steam by means of a secondary water conduit, which is a diversion of the main conduit, and a second pump. Both first and second pumps are housed in the supply unit and are controlled from a control located in the iron. The water can be returned from the main water conduit, after the first pump, to the water tank through a return conduit and a safety valve should there be any excess pressure in the evaporation chamber.

[0009] Patent document FR 2853671 A1 describes an ironing station comprising a steam iron and a supply unit. The iron includes a soleplate provided with a plurality of steam outlet holes located in two different regions of the soleplate, a separate evaporation chamber, a first heater heating the soleplate, and a second heater heating the evaporation chamber for generating steam. The supply unit includes a water tank. The water is supplied from the water tank to the evaporation chamber of the iron through a water conduit and a pump. The ironing station offers the possibility of conducting the steam through two different steam conduits, from the evaporation chamber to two steam distribution chambers located in the iron in communication with the steam outlet holes of the two different regions of the soleplate. The steam conduits are selected by means of a valve operated by a manual push button. The iron includes another valve operated by another manual push button which diverts water from the water conduit to a front spray nozzle through an auxiliary water conduit for spraying water from the front nozzle.

[0010] Patent document WO 2005080664 A1 discloses a steam iron including a soleplate provided with a plurality of steam outlet holes, a first evaporation chamber partially demarcated by a first region of the soleplate of the iron where there are side steam outlet holes, a second evaporation chamber partially demarcated by a second region of the soleplate of the iron where there are front steam outlet holes, a heater heating the soleplate and the first and second evaporation chambers, a water tank, a manual pump operated by a manual push button and a pressurized water accumulation receptacle. The water flows directly from the water tank to the first evaporation chamber through corresponding passages. Optionally, the water is pumped by the manual pump from the water tank to the pressurized water accumulation receptacle and the pressurized water is injected from the pressurized water accumulation receptacle into the second evaporation chamber through corresponding conduits.

[0011] Patent document WO 2013167692 A1 describes an ironing station comprising a steam iron and a supply unit. The iron includes a soleplate provided with a plurality of steam outlet holes and a supplementary water tank. The supply unit includes a water boiler acting like an evaporation chamber. The steam is conducted through a steam conduit from the boiler to a steam distribution chamber located in the iron in communication with the steam outlet holes of the soleplate. The boiler is at atmospheric pressure so a pump for driving the steam from the boiler to the steam distribution chamber is not necessary, and the passage of steam is controlled by a valve located in the supply unit and controlled by means of a manual push button located in the iron. In the iron there is a first pump manually operated by means of a push button obtaining water from the supplementary water tank located in the iron and conducting it directly to the steam distribution chamber, where the water evaporates upon contact with an inner surface of the soleplate, providing an additional steam function. A second pump

manually operated by means of a second push button obtains water from the supplementary water tank located in the iron and conducts it to a front spray nozzle from which the water is sprayed.

[0012] The invention proposes an alternative solution to those described which allows providing several steam flow rates in a controlled manner.

Brief Description of the Invention

[0013] The present invention provides an ironing station comprising a steam iron and a supply unit connected to one another by a supply cord. The iron includes a soleplate having a first region in which there are located one or more first steam outlet holes and a second region in which there are located one or more second steam outlet holes, a first evaporation chamber in communication with the first steam outlet holes, and heating means heating the soleplate for ironing and the first evaporation chamber for generating steam. The supply unit includes a water tank. A pump drives water from the water tank to the first evaporation chamber through a main water conduit, all according to the conventional art.

[0014] According to the proposal of this invention, an electrically-operated valve is intercalated in a secondary water conduit from a diversion of the main water conduit, located downstream from the pump to a second evaporation chamber which is in communication with the one or more second steam outlet holes. Therefore, and depending on the opening and closing cycles of said electrically-operated valve, the water flow rate circulating through said secondary conduit towards the second evaporation chamber can be controlled.

[0015] In one embodiment, the pump is installed in the supply unit and the electrically-operated valve and the diversion are installed in the iron. Alternatively, the pump for driving the water in the receptacle and the electrically-operated valve could be installed in the supply unit or in the iron, and the diversion could be arranged in the supply unit or between the supply unit and the iron.

[0016] In one embodiment, mentioned pump and the electrically-operated valve are operated by respective first and second solenoids the operation of which is controlled by an electronic control unit through a pulse sequence, and the iron comprises one or more switches connected to the electronic control unit and actuated by one or more manual controls that allow selecting one steam mode from three or more pre-established steam modes providing different steam flow levels.

[0017] Preferably, the one or more switches comprise a first switch activating the operation of the first solenoid operating the pump according to a single pulse sequence for providing a continuous steam flow through the one or more first steam outlet holes, and an additional multi-position switch or a plurality of additional switches activating the operation of the second solenoid controlling the opening and closing cycles of the electrically-operated valve according to multiple pulse sequences for pro-

viding different multiple additional steam flows through the one or more second steam outlet holes.

[0018] The one or more manual controls can comprise, for example, a first manual control actuating the first switch, and one or more additional manual controls actuating the additional multi-position switch or the additional switches. The first manual control and the one or more additional manual controls are preferably located in a handle of the iron. In one embodiment, the iron includes a plastic shell fixed to the soleplate, and this shell defines the handle. In this case, the first manual control is a trigger, for example, located on a front lower side of the handle and the one or more manual controls are one or more push buttons or one or more capacitive or resistive touch sensors or one or more optical sensors located on a front upper side of the handle.

[0019] In another embodiment, the pump driving the water from the receptacle is operated by a solenoid or an electric motor the operation of which is controlled by an electronic control unit through frequency variation, and the iron comprises at least one variable frequency drive connected to the electronic control unit and actuated by a manual control that allows regulating a water flow rate towards the steam evaporation chambers between a minimum flow level and a maximum flow level in a continuous or step-wise manner.

[0020] In yet another embodiment, the pump driving the water from the receptacle is operated by an electric motor the operation of which is controlled by an electronic control unit through voltage variation, and the iron comprises at least one voltage variator connected to the electronic control unit and actuated by a manual control that allows regulating a steam flow between a minimum flow level and a maximum flow level in a continuous or step-wise manner.

[0021] In any of these last two embodiments, the manual control is a sliding mechanical control or a linear touch sensor or a linear optical sensor located in a handle of the iron. The linear touch sensor can be capacitive or resistive. Optionally, the iron includes a plastic shell fixed to the soleplate, the handle is defined by the shell, and the sliding mechanical control or the linear touch sensor or the linear optical sensor is located on a front upper side of the handle.

[0022] A linear touch sensor can be capacitive or resistive, and can comprise, for example, an elongated touch-sensitive surface provided with first and second opposite ends, and calibrated such that it gives a 0% response when the first end is touched, a 100% response when the second end is touched, and a 0%-100% response when an intermediate point is touched, this 0%-100% response being proportional to the distance from the point touched to the first end.

[0023] A linear optical sensor can comprise, for example, a plurality of optical sensors adjacent to and aligned with one another, protected by a transparent cover, and calibrated such that it gives a 0% response when light is allowed to reach all the optical sensors, a 100% response

when light is prevented from reaching each and every one of the optical sensors, and a 0%-100% response when light is allowed to reach only some of the optical sensors, this 0%-100% response being proportional to the number of optical sensors prevented from receiving light.

[0024] In one embodiment, the first evaporation chamber is separated from the soleplate and the second evaporation chamber is partially formed by the soleplate. Preferably, the heating means comprise a first heating element heating the soleplate and a second heating element heating the first evaporation chamber. For example, the first heating element comprises a first electrical resistance embedded in the soleplate and the second heating element comprises a second electrical resistance embedded in the first evaporation chamber.

[0025] Optionally, the iron includes a thermostat actuated by a manual control that allows regulating the temperature of the first heating element. The electronic control unit only allows operating the pump driving the water from the receptacle and the electrically-operated valve if the temperatures of the first evaporation chamber and of the soleplate and/or of the second evaporation chamber are above a predetermined threshold assuring evaporation of the water. In one embodiment, the soleplate has an inner surface separated from the first evaporation chamber by an empty space.

Brief Description of the Drawings

[0026] The foregoing and other features and advantages will be better understood from the following merely illustrative and non-limiting detailed description of several embodiments in reference to the attached drawings, in which:

Figure 1 is a schematic side view of an ironing station according to one embodiment of the present invention;

Figure 2 is a schematic top view of a soleplate of a steam iron that is part of the ironing station of Figure 1;

Figure 3 is a voltage/time diagram of a pulse sequence according to which a pump included in the ironing station works;

Figure 4 and 5 are voltage/time diagrams of first and second pulse sequences, respectively, according to which a second electrically-operated valve included in the ironing station can selectively work; and

Figure 6 is a schematic side view of an ironing station according to another embodiment of the present invention.

Detailed Description of Embodiments

[0027] First in reference to Figure 1, there is shown an ironing station according to one embodiment of the present invention, which comprises a steam iron 40 and

a supply unit 50 connected to one another by a supply cord 30.

[0028] The iron 40 comprises a metal soleplate 1 and a plastic shell 23 fixed to the soleplate 1. The shell 23 defines a handle 10 by means of which the iron 40 can be gripped and handled.

[0029] The soleplate 1, schematically shown in Figure 2, has a plurality of first steam outlet holes 2 located in a first region of the soleplate 1 and a second steam outlet hole 3 located in a second region of the soleplate 1. Variations in the number and arrangement of the first steam outlet holes and second steam outlet holes 2, 3 and in the location and extent of the first and second regions of the soleplate 1 are within the scope of the present invention.

[0030] The shell 23 of the iron 40 houses a first evaporation chamber 4 comprising a body 26 and a cover 27. The body 26 is fixed to the soleplate 1 such that there is a gap 25 between the first evaporation chamber 4 and an inner surface of the soleplate 1. There is embedded in the soleplate 1 a first electrical resistance 5 constituting a first heating element which, when activated, heats the soleplate 1 for ironing, and there is embedded in the body 26 of the first evaporation chamber 4 a second electrical resistance 6 constituting a second heating element which, when activated, heats the first evaporation chamber 4 for generating steam.

[0031] The first evaporation chamber 4 has several compartments communicated with one another and with a steam distribution chamber 11 formed in the soleplate 1, and this steam distribution chamber 11 is in turn in communication with the first steam outlet holes 2 located in the first region of the soleplate 1. A second evaporation chamber 14 closed at the top by a cover 28 is formed in the soleplate 1. This second evaporation chamber 14 is in communication with the second steam outlet hole 3 located in the second region of the soleplate 1.

[0032] The supply unit 50 includes a water tank 7. A main water conduit 8 having a first end connected to the water tank 7 and a second end connected to the first evaporation chamber 4 is included in the mentioned supply cord 30. A pump 9, which is housed in the supply unit 50, is interposed in the main water conduit 8. Therefore, the water in the water tank 7 is supplied to the first evaporation chamber 4 through the main water conduit 8 driven by the pump 9, and the steam generated in the first evaporation chamber 4 is supplied to the steam distribution chamber 11, from where it is expelled through the first steam outlet holes 2 located in the first region of the soleplate 1.

[0033] Inside the shell 23 of the iron 40 there is a secondary water conduit 12 having a first end connected to a diversion 13 of the main water conduit 8, located downstream from the pump 9, and a second end connected to the second evaporation chamber 14. An electrically-operated valve 15, for example a two-way electrically-operated valve, which is housed in the shell 23 of the iron 40, is interposed in this secondary water conduit 12.

Therefore, the water in the water tank 7 is supplied to the second evaporation chamber 14 through the secondary water conduit 12, and the water flow rate circulating through said secondary water conduit, and hence the steam generated in the second evaporation chamber 14, which is expelled through the second steam outlet hole 3 located in the second region of the soleplate 1, is controlled depending on the opening and closing cycles of said electrically-operated valve 15.

[0034] In one embodiment, the pump 9 as well as the electrically-operated valve 15 are operated by respective first and second solenoids (not shown). An electronic control unit 22, which is installed, for example, in a printed circuit board 25, to which the first and second solenoids are connected, is housed in the shell 23. This electronic control unit 22 controls the operation of the first and second solenoids through a pulse sequence. The iron 40 further comprises one or more switches connected to the electronic control unit 22 and the switches are actuated by one or more manual controls whereby it is possible to select one steam mode from three steam modes providing different steam flow levels, namely: a "normal steam" mode providing a continuous steam flow, an "extra steam" mode providing an additional steam flow, and a "super steam" mode providing an enhanced additional steam flow, all this depending on the water flows supplied through the main conduit 8 and secondary conduit 12 towards the evaporation chambers 4 and 14, respectively.

[0035] In the embodiment illustrated in Figure 1, the one or more switches of the first, second and third switches 19, 20, 21 installed in the printed circuit board 25 and the one or more manual controls comprise a first manual control 16 actuating the first switch 19, a second manual control 17 actuating the second switch 20 and a third manual control 18 actuating the third switch 21. The first manual control 16 is a trigger located on a front lower side of the handle 10 and has a first end connected to the shell 23 by means of a connecting pin 24 and a second end adjacent to the first switch 19, which is a microswitch, for example. Therefore, when the trigger is pressed it pivots around the connecting pin 24 and actuates the first switch 19. The second and third manual controls 17, 18 are push buttons located on a front upper side of the handle 10.

[0036] The first switch 19 activates the operation of the first solenoid operating the pump 9 according to a single start/stop pulse sequence P (shown in Figure 3) for providing the continuous steam flow through the one or more first steam outlet holes 2 located in the first region of the soleplate 1 according to the "normal steam" mode.

[0037] The second switch 20 activates, through the mentioned electronic control unit 22, the operation of a second solenoid controlling the opening and closing cycles of the electrically-operated valve 15 according to a first pulse sequence P1 (shown in Figure 4) for providing a first additional steam flow through the one or more second steam outlet holes 3 located in the second region of

the soleplate 1 according to the "extra steam" mode.

[0038] The third switch 21 activates, also through the electronic control unit 22, the operation of the mentioned second solenoid controlling the opening and closing cycles of the electrically-operated valve 15, but in this case according to a second pulse sequence P2 for providing a second additional steam flow that is greater than the first one through the one or more second steam outlet holes 3 located in the second region of the soleplate 1 according to the "super steam" mode.

[0039] This embodiment allows for multiple variants. For example, the operation of the mentioned second solenoid controlling the opening and closing cycles of the electrically-operated valve 15 can be activated by means of more than two additional switches or by means of an additional multi-position switch, which allows selecting one pulse sequence from more than two pre-established pulse sequences for providing more than two different additional steam flows through the one or more second steam outlet holes 3. Accordingly, the manual controls can include more than two additional manual controls for actuating the more than two additional switches, or a single additional manual control for actuating the additional multi-position switch. The one or more additional manual controls can be, for example, one or more push buttons, or one or more capacitive or resistive touch sensors, or one or more optical sensors.

[0040] As is conventional, the iron includes a thermostat-based temperature control device, or an NTC with its TRIAC- or relay-type associated power electronics or the like (not shown) actuated by a manual control (not shown) that allows regulating the temperature of the first electrical resistance 5 heating the soleplate 1. Given that the second evaporation chamber 14 is integrated in the soleplate 1 and is heated by the same first electrical resistance 5 heating the soleplate, in order to activate the "extra steam" and "super steam" modes, the soleplate 1 must be heated to a relatively high temperature to evaporate the water in the second evaporation chamber 14.

[0041] Preferably, temperature detectors (not shown) connected to the electronic control unit 22 are arranged in the first evaporation chamber 4 and in the soleplate 1 and/or in the second evaporation chamber 14, and the electronic control unit 22 only allows operating the pump 9 and/or the electrically-operated valve 15 if the temperatures detected in the first evaporation chamber 4 and in the soleplate 1 and/or in the second evaporation chamber 14 are above a predetermined threshold for assuring evaporation of the water.

[0042] Likewise, given that the diversion 13 of the main water conduit 8 from where the secondary water conduit 12 takes water to conduct it to the second evaporation chamber 14 is located downstream from the pump 9, in order to activate the "extra steam" and "super steam" modes provided by the electrically-operated valve 15, the "normal steam" mode provided by the pump 9 must also be activated.

[0043] A main power supply unit 29 connected to a

power grid through an electric power supply cable 32 is installed in the supply unit 50. Inside the shell 23 of the iron 40 there is a secondary power supply unit 31 comprising, for example, a printed circuit board 34, from which electric current is supplied to the first and second electrical resistances 5, 6 and to the electronic control unit 22 from which the first and second electric operating devices of the pump 9 and electrically-operated valve 15 are powered and controlled. The main power supply unit 29 and the secondary power supply unit 31 are connected to one another by an electrical cable 33 included in the supply cord 30.

[0044] The supply cord 30 can be connected to and disconnected from the supply unit 50 by means of a connector 36 including a fluid connector for the main water conduit 8 and an electrical connector for the electrical cable 33.

[0045] Figure 6 shows an ironing station according to another embodiment of the present invention, which is similar to the one described above in relation to Figure 1 except that a second electrically-operated valve 15a has been incorporated in the main conduit 8, downstream from the mentioned diversion 13 and for the purpose of providing an additional control of the water flow rate provided towards the first evaporation chamber. By means of this embodiment and depending on the opening and closing cycles of the electrically-operated valves 15 and 15a, the water flows sent to each of the evaporation chambers 4 and 14, and hence the steam flows given off, as needed for the application, will be more precisely controlled.

[0046] In Figure 6, the manual control actuating the electrically-operated valves 15 and 15a is a linear touch sensor 35 located on a front upper side of the handle 10 of the iron 40 such that a user can regulate steam flow by sliding their thumb on the hand gripping the handle 10 along the linear touch sensor 35. The linear touch sensor 35 can be capacitive or resistive, but alternatively this control can also be a sliding mechanical control or a linear optical sensor. Furthermore, said manual control also acts on the variable frequency drive feeding the pump 9.

Claims

1. Ironing station with several steam flows comprising a steam iron (40) and a supply unit (50) connected to one another by a supply cord (30), wherein the iron (40) includes:

a soleplate (1) provided with one or more first steam outlet holes (2) located in a first region of the soleplate (1) and one or more second steam outlet holes (3) located in a second region of the soleplate (1);
a first evaporation chamber (4) in communication with the first steam outlet holes (2);

heating means heating the soleplate (1) for ironing and the first evaporation chamber (4) for generating steam;
 wherein the supply unit (50) includes a water tank (7);
 and wherein the water in the water tank (7) is supplied to the first evaporation chamber (4) through a main water conduit (8) driven by a first pump (9),

characterized in that the iron (40) includes:

a second evaporation chamber (14) which is in communication with the one or more second steam outlet holes (3); and
 an electrically-operated valve (15) controlling a water flow rate of a secondary water conduit (12) from a diversion (13) of the main water conduit (8) to the second evaporation chamber (14), said diversion (13) being located downstream from the pump (9).

2. The ironing station according to claim 1, **characterized in that** the iron additionally includes a second electrically-operated valve (15a) intercalated in the main water conduit (8), in a section comprised between the mentioned diversion (13) and the first evaporation chamber (4), said second electrically-operated valve (15a) controlling the water flow rate with respect to the water supplied to said first evaporation chamber
3. The ironing station according to claim 2, wherein the pump (9) and the electrically-operated valves (15) and (15a) are operated by respective first and second solenoids the operation of which is controlled by an electronic control unit (22) through a pulse sequence, and the iron (40) comprises one or more switches connected to the electronic control unit (22) and actuated by one or more manual controls that allow selecting one steam mode from three or more pre-established steam modes providing different steam flow levels based on the volume of water fed to said first and second evaporation chambers (4, 14).
4. The ironing station according to claim 1 or 2, wherein the pump (9) is operated by a solenoid or by an electric motor the operation of which is controlled by an electronic control unit (22) through frequency variation, and wherein the iron (40) comprises at least one variable frequency drive connected to the electronic control unit (22) and actuated by a manual control that allows regulating a water flow between a minimum flow level and a maximum flow level in a continuous or step-wise manner for generating steam.

5. The ironing station according to claim 1 or 2, wherein the pump (9) is operated by an electric motor the operation of which is controlled by an electronic control unit (22) through voltage variation, and wherein the iron (40) comprises at least one voltage variator connected to the electronic control unit (22) and actuated by a manual control that allows regulating a water flow between a minimum flow level and a maximum flow level in a continuous or step-wise manner for generating steam.
6. The ironing station according to claim 3, wherein the one or more switches comprise a first switch (19) activating the operation of the first solenoid operating the first pump (9) according to a single pulse sequence (P) for providing a continuous steam flow through the one or more first steam outlet holes (2), and an additional multi-position switch or a plurality of additional switches (20, 21) controlling the opening and closing cycles of the electrically-operated valve (15) and/or second electrically-operated valve (15a) according to multiple pulse sequences (PI, P2) for providing different multiple steam flows through the one or more first steam outlet holes (2) and second steam outlet holes (3).
7. The ironing station according to claim 6, wherein the one or more manual controls comprise a first manual control (16) actuating the first switch (19), and one or more additional manual controls (17, 18) actuating the additional multi-position switch or the additional switches (20, 21), the first manual control (16) and the one or more additional manual controls (16, 17, 18) being located in a handle (10) of the iron (40).
8. The ironing station according to claim 7, wherein the iron (40) includes a plastic shell (23) fixed to the soleplate (1), the shell (23) defining the handle (10), and the first manual control (16) is a trigger located on a front lower side of the handle (10) and the one or more manual controls (17, 18) are one or more push buttons or one or more capacitive or resistive touch sensors or one or more optical sensors located on a front upper side of the handle (10).
9. The ironing station according to claim 4 or 5, wherein the manual control is a sliding mechanical control, or a capacitive or resistive linear touch sensor (35) or a linear optical sensor located in a handle (10) of the iron (40).
10. The ironing station according to claim 9, wherein the iron (40) includes a plastic shell (23) fixed to the soleplate (1), the shell (23) defines the handle (10), and the sliding mechanical control or the capacitive or resistive linear touch sensor (35) or the optical sensor is located on a front upper side of the handle (10).

11. The ironing station according to claim 1 or 2, wherein the first evaporation chamber (4) is separated from the soleplate (1) and the second evaporation chamber (14) is partially formed by the soleplate (1). 5
12. The ironing station according to claim 11, wherein the heating means comprise a first heating element heating the soleplate (1) and a second heating element heating the first evaporation chamber (4), wherein the first heating element integrates a first electrical resistance (5) embedded in the soleplate (1) and the second heating element integrates a second electrical resistance (6) embedded in the first evaporation chamber (4). 10 15
13. The ironing station according to claim 11 or 12, wherein the iron (40) includes a thermostat actuated by a manual control that allows regulating the temperature of the first heating element. 20
14. The ironing station according to claim 11, 12 or 13, wherein the soleplate (1) has an inner surface separated from the first evaporation chamber (4).
15. The ironing station according to claim 2, wherein the first pump (9) is installed in the supply unit (50) and the electrically-operated valves (15) and (15a) and the diversion (13) are installed in the iron (40). 25
16. The ironing station according to claim 1, wherein the first evaporation chamber (4) is in communication with a steam distribution chamber (11) located in the soleplate (1), which is in communication with the one or more first steam outlet holes (2). 30 35

40

45

50

55

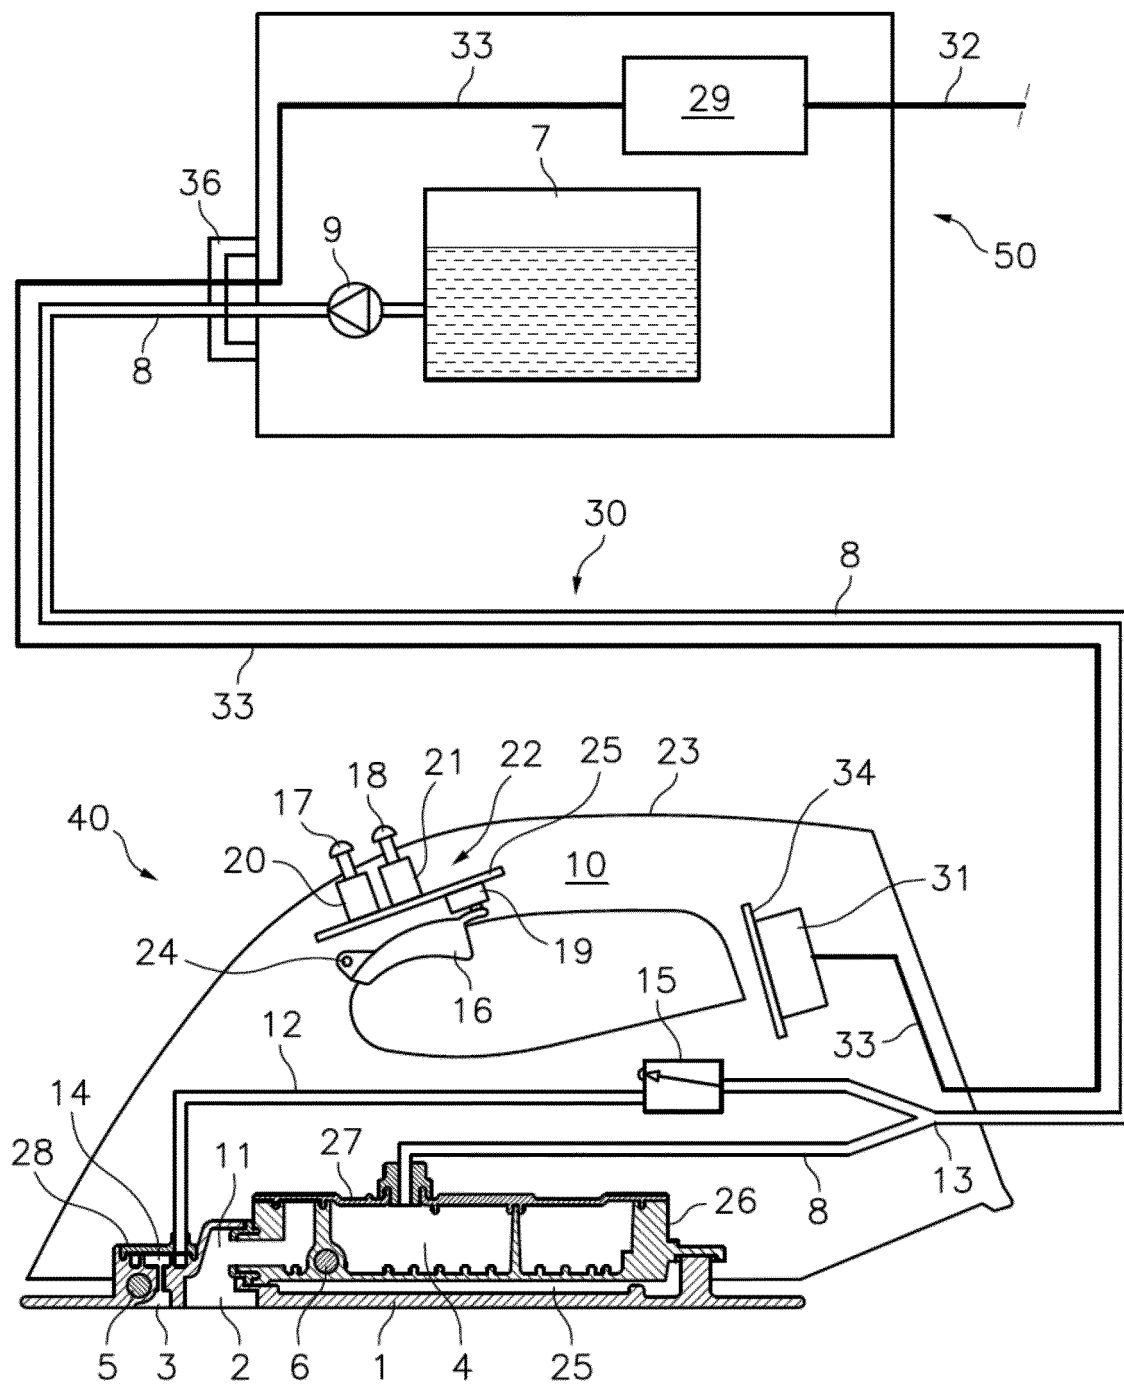


Fig. 1

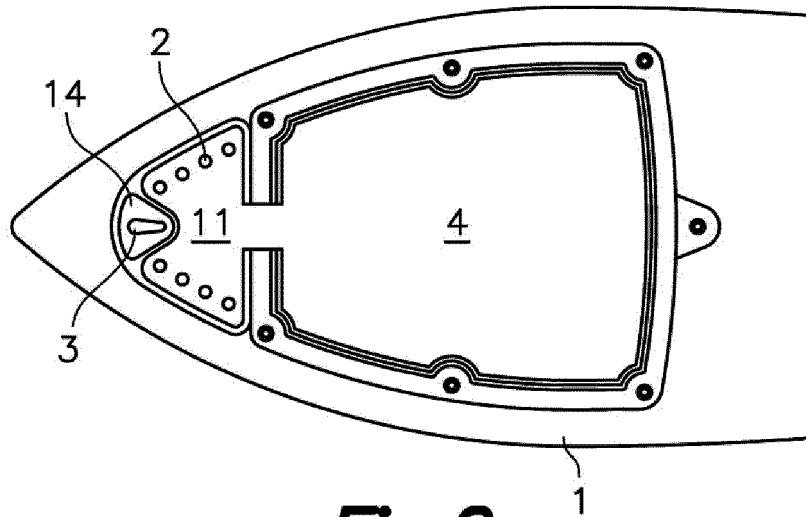


Fig. 2

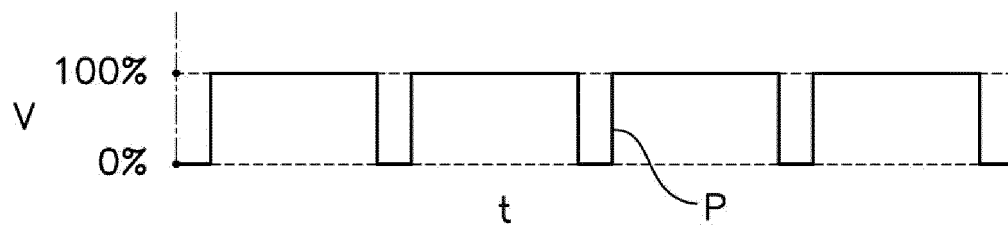


Fig. 3

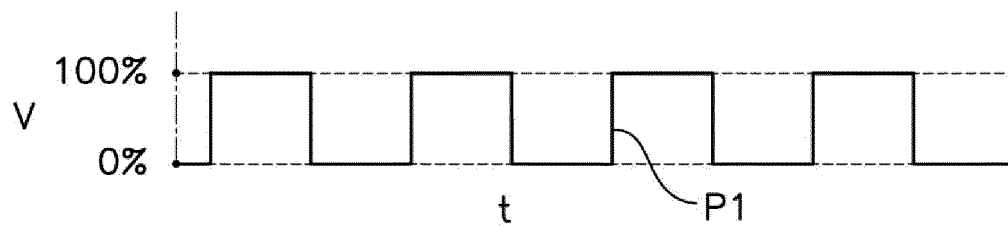


Fig. 4

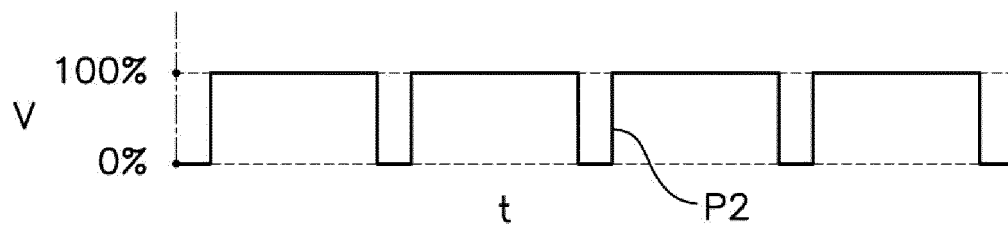


Fig. 5

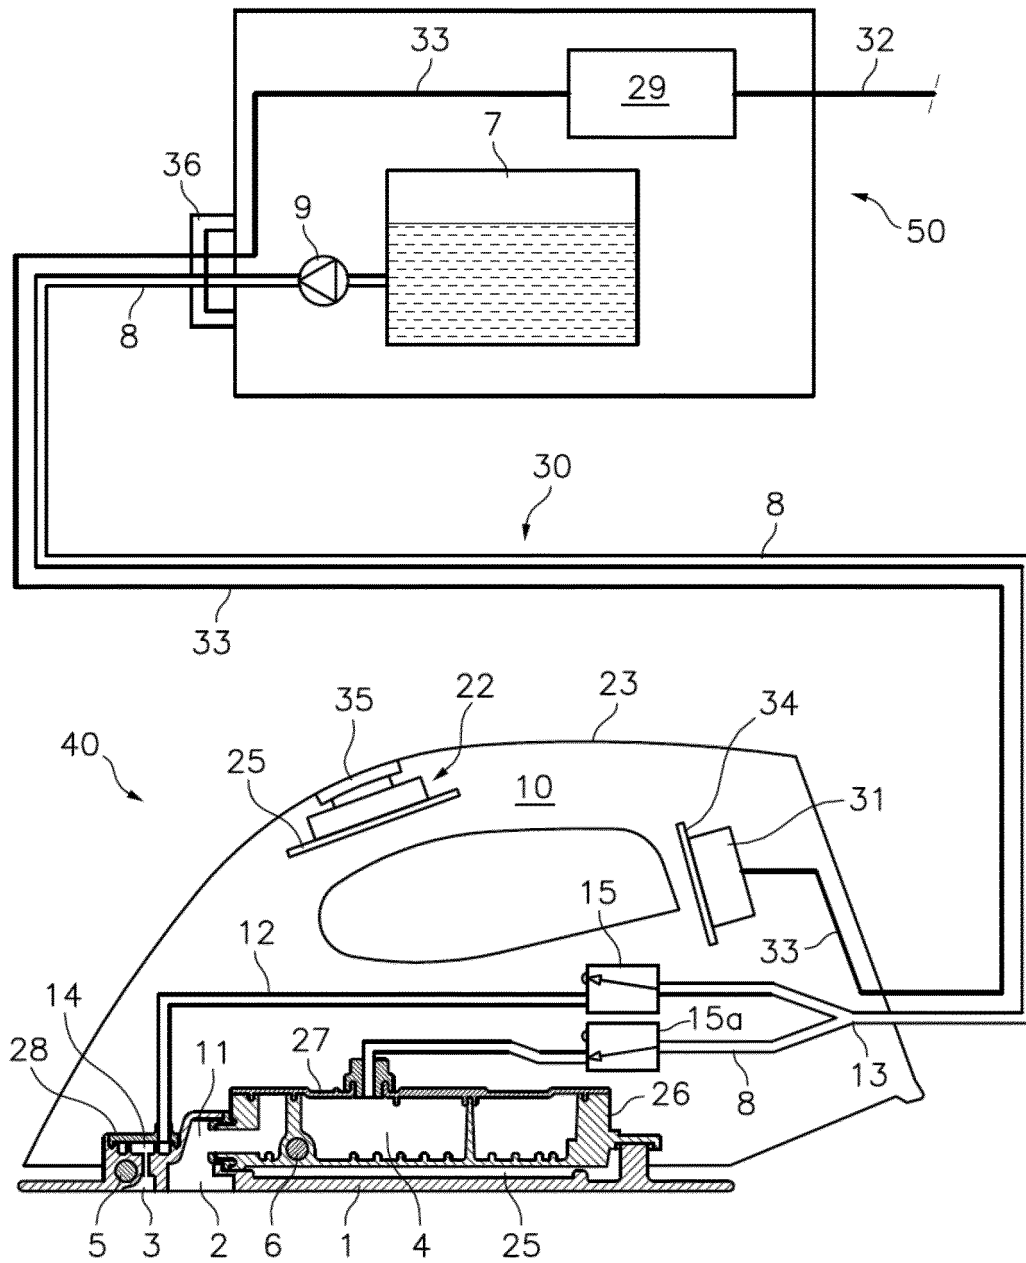


Fig. 6



EUROPEAN SEARCH REPORT

 Application Number
 EP 16 38 2340

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A,D	FR 2 853 671 A1 (FUNG KAI TUNG AUGUSTINE [CN]) 15 October 2004 (2004-10-15) * page 3 - page 5; figures 1,2 *	1-16	INV. D06F75/12
A	EP 1 801 281 A1 (BRAUN GMBH [DE]) 27 June 2007 (2007-06-27) * paragraph [0022] - paragraph [0035]; figure 9 *	1-16	ADD. D06F75/20
A,D	WO 2005/080664 A1 (EURO PRO OPERATING LLC [US]; FUNG KAI TUNG AUGUSTINE [CN]) 1 September 2005 (2005-09-01) * paragraph [0015] - paragraph [0023]; figures 1,2 *	1-16	
A	DE 20 46 656 A1 (SUNBEAM CORP) 25 March 1971 (1971-03-25) * page 5 - page 11; figures 1-8 *	1-16	
A,D	FR 2 690 932 A1 (ROWENTA WERKE GMBH [DE]) 12 November 1993 (1993-11-12) * page 3, line 14 - page 5, line 32; figure 1 *	1-16	TECHNICAL FIELDS SEARCHED (IPC)
A,D	FR 2 747 403 A1 (ROWENTA WERKE GMBH [DE]) 17 October 1997 (1997-10-17) * page 3, line 23 - page 4, line 28; figure 1 *	1-16	D06F
A	DE 41 33 295 A1 (BRAUN AG [DE]) 15 April 1993 (1993-04-15) * column 2, line 31 - column 3, line 28; figure 1 *	1-16	
		-/--	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 11 January 2017	Examiner Spitzer, Bettina
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

 Application Number
 EP 16 38 2340

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	DE 10 2009 035367 A1 (BSH BOSCH SIEMENS HAUSGERÄTE [DE]) 4 February 2010 (2010-02-04) * paragraph [0016] - paragraph [0032]; figure 1 *	1-16	
A	WO 2004/085732 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; JIANG YONG [SG]; VALIYAMBATH KRIS) 7 October 2004 (2004-10-07) * page 7, line 9 - page 10, line 11; figure 1 *	1-16	
A,D	FR 2 523 164 A1 (SEB SA [FR]) 16 September 1983 (1983-09-16) * page 5, line 28 - page 8, line 5; figure 1 *	1-16	
A,D	US 5 010 664 A (SAKANO CHIKASHI [JP] ET AL) 30 April 1991 (1991-04-30) * column 3 - column 6; figure 1 *	1-16	
A,D	FR 2 785 975 A1 (SEB SA [FR]) 19 May 2000 (2000-05-19) * page 4, line 21 - page 6, line 9; figure 1 *	1-16	
A,D	WO 2013/167692 A1 (LONGHI APPLIANCES S R L DIVISIONE COMMERCIALE ARIETE DE [IT]) 14 November 2013 (2013-11-14) * page 2 - page 6; figures 1,2 *	1-16	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
Place of search Munich		Date of completion of the search 11 January 2017	Examiner Spitzer, Bettina
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 16 38 2340

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-01-2017

10

15

20

25

30

35

40

45

50

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2853671 A1	15-10-2004	NONE	
EP 1801281 A1	27-06-2007	CN 1986950 A	27-06-2007
		DE 102005062641 A1	05-07-2007
		EP 1801281 A1	27-06-2007
		HK 1102230 A1	16-12-2011
		RU 2346094 C2	10-02-2009
WO 2005080664 A1	01-09-2005	NONE	
DE 2046656 A1	25-03-1971	BE 756196 A1	16-03-1971
		CH 516036 A	30-11-1971
		DE 2046656 A1	25-03-1971
		FR 2062277 A5	25-06-1971
		GB 1301317 A	29-12-1972
		GB 1303790 A	17-01-1973
		JP S4836719 B1	06-11-1973
		US 3599357 A	17-08-1971
FR 2690932 A1	12-11-1993	CH 687392 A5	29-11-1996
		DE 4214564 C1	02-09-1993
		FR 2690932 A1	12-11-1993
		GB 2266729 A	10-11-1993
		HK 96196 A	14-06-1996
		IT 1264372 B1	23-09-1996
		JP H0671099 A	15-03-1994
		JP H0761399 B2	05-07-1995
		NL 9300781 A	01-12-1993
		US 5341585 A	30-08-1994
FR 2747403 A1	17-10-1997	DE 19614511 C1	23-01-1997
		FR 2747403 A1	17-10-1997
		IT MI970805 A1	13-10-1997
DE 4133295 A1	15-04-1993	NONE	
DE 102009035367 A1	04-02-2010	DE 102009035367 A1	04-02-2010
		ES 2350144 A1	19-01-2011
WO 2004085732 A1	07-10-2004	CN 1791716 A	21-06-2006
		EP 1613806 A1	11-01-2006
		WO 2004085732 A1	07-10-2004
FR 2523164 A1	16-09-1983	NONE	
US 5010664 A	30-04-1991	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

55

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 38 2340

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-01-2017

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2785975	A1	19-05-2000	DE 19983757 T1 26-09-2002
			FR 2785975 A1 19-05-2000
			WO 0029787 A1 25-05-2000
WO 2013167692	A1	14-11-2013	AU 2013257978 A1 18-12-2014
			CA 2872757 A1 14-11-2013
			CN 104583484 A 29-04-2015
			EP 2847376 A1 18-03-2015
			RU 2014149656 A 10-07-2016
			US 2015135562 A1 21-05-2015
			WO 2013167692 A1 14-11-2013

15

20

25

30

35

40

45

50

EPO FORM P0459

55

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- FR 2523164 A1 **[0004]**
- US 5010664 A **[0005]**
- FR 2690932 A1 **[0006]**
- FR 2747403 A1 **[0007]**
- FR 2785975 A1 **[0008]**
- FR 2853671 A1 **[0009]**
- WO 2005080664 A1 **[0010]**
- WO 2013167692 A1 **[0011]**