



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.02.2018 Bulletin 2018/07

(51) Int Cl.:
F23D 14/10 (2006.01)

(21) Application number: **17191076.3**

(22) Date of filing: **26.11.2010**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **11.12.2009 EP 09178982**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
10782307.2 / 2 510 281

(71) Applicants:
• **Bekaert Combustion Technology B.V.**
9403 AR Assen (NL)
• **NV Bekaert SA**
8550 Zwevegem (BE)

(72) Inventors:
• **TEN HOEVE, Dirk**
7961 LD RUINERWOLD (NL)

• **LAMBERTS, Dinand**
9403 ZA Assen (NL)
• **HOGENBIRK, Camillo Marino Josef**
9403 JK Assen (NL)
• **DE JAGER, Bram**
9403 KJ Assen (NL)
• **VANOVERBERGHE, Koen**
1700 DILBEEK (BE)
• **ZWIGGELAAR, Gertjan**
7913 TP Hollandscheveld (NL)

(74) Representative: **Vangheluwe, Lieven Germain L.**
NV Bekaert SA
IPD - PC6030
Bekaertstraat 2
8550 Zwevegem (BE)

Remarks:

This application was filed on 14-09-2017 as a divisional application to the application mentioned under INID code 62.

(54) **BURNER WITH LOW POROSITY BURNER DECK**

(57) A gas burner (10) comprises a support (12) having a central gas inlet port (14) for supply of gas into a gas supply chamber (16). The gas supply chamber (16) is enclosed by a perforated metal plate (22), connected at the bottom to the support (12) through a base section. The perforation (24) in the perforated metal plate (22) provides a burner deck (20). The burner deck (20) has an overall porosity being equal to or lower than 11%. The burner deck has different patterns of perforations. The burner deck has a gradually changing porosity.

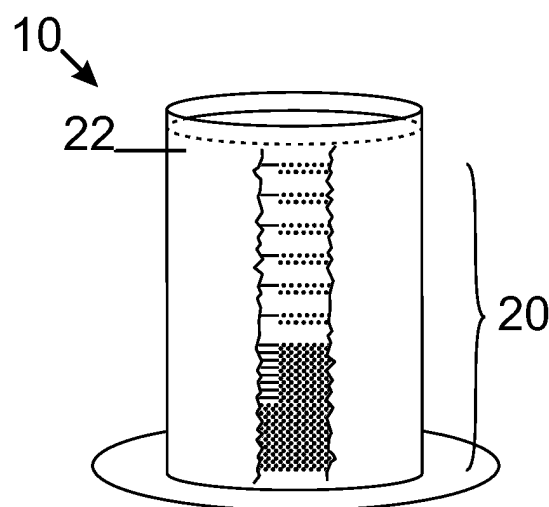


Fig. 6

Description

Technical Field

[0001] The present invention relates to a premix burner, more in particular a burner having a flameholder made of perforated metal plate material. Preferably, the burner is a tubular burner having a cylindrical shape. These burners are especially suitable for use in combustion boilers.

Background Art

[0002] One known type of premix burner consist of one or more of the following components: a) an end cap located at the top of the burner, b) a burner deck, the burner deck consists of a blind piece at the bottom, a perforated piece, with a regular (circular) pattern, with sometimes locally an additional modification for ignition purposes, in the centre part and a blind piece at the top. The pattern is mostly circumferential, and mostly repeating itself in height after a pitch of 1-10 mm; c) a distributor, having a blind piece at the bottom, a perforated part in the centre and a blind piece at the top; d) a distributor end cap; e) a flange; f) an anti noise tube which is a device located in or nearby the flange to adjust the pressure distribution. Such premix burners are described in e.g. EP 1337789, EP2037175, WO2009/077333, WO2009/065733, WO2009/059933. As can be seen in most of above referenced documents, these burners are provided with devices in the mixing chamber, such as e.g. an inner liner, also called distributor and/or anti-noise tube or other devices such as swirls or perforated disks in or nearby the flange. These devices are needed for stabilization of flames on these burners, which has an effect on noise and emissions. The need of using these devices implies a considerable complication for making the burner and for the assemblage and implies a considerable cost.

Disclosure of Invention

[0003] The object of the present invention is to obviate the drawbacks mentioned above.

[0004] An object of the present invention is to provide a premix burner which does not need such devices in the mixing chamber of the burner to obtain a good stability of the flames and to reduce or even eliminate noise problems.

[0005] A further object of the present invention is to provide a premix burner with a good stability over the full operating range of high to low CO₂, and for the full band of customary or natural gas qualities.

[0006] This full band of customary and natural gas qualities covers all gases selected from hydrocarbons such as methane, ethane, propane, butane, ethene, propene, butene, acetylene, and the like. In contrast with WO 95/23315, the present invention does not relate specifically to high reactive fuel gases, which are a mixture

of hydrogen and customary fuel gases.

[0007] A further object of the present invention is to provide a premix burner producing low NO_x levels.

[0008] An aspect of the claimed invention provides a gas burner, preferably a premix burner, as in claim 1. The burner deck has an overall porosity which is equal to or lower than 11 %, preferably lower than 10%, even more preferably lower than 9%.

[0009] In a further aspect, the present invention provides a gas burner as described above wherein the burner further comprises an end cap connected to the perforated metal plate substantially opposite to said gas inlet port.

[0010] In a preferred aspect, the present invention provides a gas burner as described in paragraph 8, wherein the end cap is also provided with perforations. These perforations thereby enlarge and are part of the burner deck. In a preferred aspect, the end cap is made of metal plate material. In a further preferred aspect, the perforation patterns in the end cap and in the perforated metal plate are equal. In an alternative further aspect, the perforation patterns in the end cap and in the perforated metal plate are different. In a further preferred aspect, the perforations, such as e.g. slots and holes, in the end cap and in the perforated metal plate are equal. In an alternative further aspect, the perforations in the end cap and in the perforated metal plate are different.

[0011] Conventional premix burners have a porosity in the range of 14 to 18%. It was surprisingly found that lowering the porosity of the burner deck decreased acoustic time-lag of the flames formed on the burner deck, which enabled us to make a burner which did not need a diffuser anymore. It was also surprisingly found that this burner had an unstable burning when this burner was operated in open air, but when applied inside a heat exchanger, this burner had a stable flame and burning pattern. This burner also had a more stable response on the first Helmholtz resonance of the heat exchanger and its peripheral parts, which therefore made that the burner did not provoke low frequency thermo-acoustic instabilities, often referred to as humming. However, during start sequences under cold conditions with this burner build in, the boiler sometimes suffered a humming sound which sometimes makes the burner still needing an anti-noise device in its mixing chamber. The use of the anti-noise device in this burner also has a positive effect on the CO emission. Also it was found that lowering the porosity did not dampen thermo-acoustic instabilities with a higher frequency than the first Helmholtz resonance of the boiler, often referred to as whistling or howling. To cancel these frequencies, the anti-noise device was necessary again.

[0012] In a further aspect of the present invention, the gas burner of the type described above has a burner deck wherein more than 50% of the burner deck has a porosity being equal to or lower than 9% and wherein upto 50% of the burner deck has a porosity being higher than 11 % and with an overall porosity which is equal to or lower

than 11 %. This modification of the perforation pattern of the burner deck provided a burner which, next to the effect of the deletion of the diffuser and the removal of the humming noise, also had a more stable response on the second and higher Helmholtz or instable acoustic resonances of the heat exchanger, which therefore made that the boiler, with this build in burner did not provoke a whistling sound anymore. Next to that, during start sequences under cold conditions, the humming sound was eliminated and therefore the use of anti-noise devices in the mixing chamber of the burner could be omitted. Furthermore, this provided a stabilized deck over the full operating range of high to low CO₂, and for a broad range of gas qualities.

[0013] Another aspect of the claimed invention provides a gas burner as described in [0007], [0008], [0009] or [0011] wherein the burner deck has different patterns of perforations. Adding more patterns with different pitches showed an increased stability for a broader range of gas qualities and induced less NO_x-emissions. In a preferred aspect, the burner is provided with an abrupt and stepwise variation of the perforation pattern in the burner deck.

[0014] The present invention provides a burner with gradually increasing or decreasing perforation pattern or gradually increasing or decreasing pitches in between the perforation pattern of the burner deck. This grading can go in axial or circumferential direction. Gradually increasing or decreasing the perforation of the decks allows an almost step less variety of the perforation, and thus creating a varying perforation of the surface of the deck.

[0015] Most preferably, in order to improve flame stability, there is a decreased porosity when going downstream. In an embodiment, the part with a porosity higher than 11% is closest to the gas inlet. The part with a porosity equal to or lower than 9% is most remote, i.e. downstream, from the gas inlet.

Definitions

[0016] The term "burner deck" is to be understood, in the light of this invention, to be that part of the burner where the totality of perforations are present. In case two or more distinct regions of perforations can be detected on the burner surface, the burner deck is defined as being the surface spanning of all regions with perforations.

[0017] The term "overall porosity of the burner deck" is to be understood, in the light of this invention, as ratio of the surface of the holes, slots or other openings divided by the surface of the burner over which the perforated part(s) is(are) located.

[0018] The term "perforation pattern" is to be understood, in the light of this invention, to be a recurring scheme of perforations.

Brief Description of Drawings

[0019] Example embodiments of the invention are described hereinafter with reference to the accompanying drawings in which

- Figure 1 shows a gas burner.
- Figures 2A and 2B show a gas premix burner. Figure 2C shows an example perforation pattern.
- Figure 3 shows an example of a gas burner.
- Figure 4 shows an example of a gas burner.
- Figure 5 shows an example of a gas burner.
- Figure 6 shows an example embodiment according to the invention.
- Figure 7 shows an example embodiment according to the invention.
- Figure 8 shows an example embodiment according to a further aspect of the present invention.
- Figure 9 shows an exemplary perforation pattern.
- Figure 10 shows a gas burner.
- Figure 11 shows a gas burner.

Reference numbers

[0020]

- 10 gas burner
- 12 support or flange
- 14 central gas inlet port
- 16 gas supply or mixing chamber
- 18 end cap
- 20 burner deck
- 22 perforated metal plate
- 24 perforation
- 30 perforation

Mode(s) for Carrying Out the Invention

[0021] Figure 1 shows a gas burner 10, preferably a premix burner, comprising a support or flange 12 which has a central gas inlet port 14 for supply of gas into a gas supply or mixing chamber 16. The gas supply chamber 16 is enclosed by a perforated metal plate 22. The perforated metal plate 22 is connected at the bottom to the support or flange 12 through a base section. The perforations 24 in the perforated metal plate 22 provide the burner deck 20. The burner deck 20 has an overall porosity which is equal to or lower than 11%, preferably lower than 10%, even more preferably lower than 9%.

[0022] Figure 2A shows a perspective view of a burner. Figure 2B shows a cross sectional view taken along the line II-II' in Figure 2A. Figures 2A and 2B shows a gas burner 10, preferably a premix burner, comprising a support or flange 12 which has a central gas inlet port 14 for supply of gas into a gas supply or mixing chamber 16. The gas supply chamber 16 is enclosed by a perforated metal plate 22 and an end cap 18 substantially opposite to said gas inlet port 14. The perforations 24 in the per-

forated metal plate 22 provide the burner deck 20. The end cap 18 is connected to the top of the perforated metal plate 22 and the perforated metal plate 22 is connected at the bottom to the support or flange 18 through a base section. The burner deck 20 has an overall porosity which is equal to or lower than 11%, preferably lower than 10%, even more preferably lower than 9%. In an exemplary embodiment, a burner 10, with a perforation pattern as shown in figure 2C, has a length of 102,4mm and diameter of 70,4mm. The burner deck has a length of 81,2 mm and has a porosity of 7,7%. The perforation pattern in the perforated plate is a combination of slits and round holes. For a thickness of the perforated plate of 0,6 mm, the slits being 4,0x0,5mm, the holes having a diameter of 0,8mm. The perforations are grouped in a pattern of 4,8 mm and this pattern is repeated over the burner deck in an equal division. As explained above, this burner still needed an anti-noise device, but no pressure divider or distributor anymore.

[0023] A further aspect of the present invention provides a burner 10 wherein the end cap 18 is also provided with perforations. Figure 3 shows a gas burner wherein the end cap is provided with perforations 30. The burner deck of this burner is as shown by reference number 20.

[0024] A further aspect of the present invention provides a burner 10 with a burner deck wherein more than 50% of the burner deck has a porosity being equal to or lower than 9% and wherein 10 to 50% of the burner deck has a porosity being higher than 11%. The burner deck has an overall porosity which is equal to or lower than 11%. A burner 10 as shown in figure 4 has a length of 94,8mm and diameter of 70,4mm. The burner deck 20 has a length of 93,6mm. The perforation pattern in the perforated plate 22 is a combination of slits and round holes. The thickness of the perforated plate 22 is 0,6 mm, the slits being 4,0x0,5mm, the holes having a diameter of 0,8mm. The perforations are grouped in a pattern as shown in fig. 4, wherein the first 11,8mm of the burner deck length has a porosity of 15%, thereafter is a zone of 46,8mm of the burner deck length with a porosity of 7,3% and the last zone with a length of 5,8mm of the burner deck length having a porosity of 16,5%. This pattern is repeated over the burner deck on the circumference of the burner. This provides a burner deck which has an overall porosity of 9,8%. This modification of the perforation pattern of the burner deck provided a burner which, next to the effect of the deletion of the diffuser and the removal of the humming noise, also had a more stable response on the second and higher Helmholtz or instable acoustic resonances of the heat exchanger, which therefore made that the burner did not provoke a whistling sound anymore. Next to that, during start sequences under cold conditions, the humming sound was eliminated and therefore the use of anti-noise devices in the mixing chamber of the burner could be omitted. Furthermore, this provided a stabilized deck over the full operating range of high to low CO₂'s, and for a broad range of gas qualities. Furthermore, for this specific example of fig. 4,

the use of the relatively high porosity at the beginning and end of the burner deck 20 provide an even more stable flame pattern of the burner.

[0025] Figure 5 provides a gas burner with a perforated metal plate 22 with a perforation pattern. The shown perforation pattern is repeated over the circumference of the burner. Here the burner deck 20 has different patterns of perforations. Adding more patterns with different pitches showed an increased stability for a broader range of gas qualities and induced less NO_x-emissions. The exemplary perforation pattern of fig. 5 is an abrupt and stepwise variation of the perforation pattern in the burner deck 20.

[0026] Figure 6 shows an example of a perforation pattern of burner deck 20 according to the present invention, wherein the porosity of the burner deck 20 decreases stepwise in downstream direction. The shown perforation pattern is repeated in the perforated metal plate 22 over the circumference of the burner.

[0027] Figure 7 shows an example of a perforation pattern of burner deck 20 according to the present invention, wherein the porosity is gradually increasing. This perforation pattern is repeated in the perforated metal plate 22 over the circumference of the burner.

[0028] Figure 8 shows an exemplary perforation pattern of the burner deck 20, which is repeated lengthwise over the perforated metal plate 22.

[0029] Figure 9 shows a further exemplary perforation pattern which is repeated on the circumference of a burner. The perforation pattern is such that no repeat of pattern is occurring along the length of the burner deck 20. An exemplary burner with a length of 91,2mm and diameter of 70,4mm. The burner deck has a length of 70,4mm. The perforation pattern in the perforated plate 22 is a combination of slits and round holes as shown in figure 9. For a thickness of the perforated plate 22 of 0,6 mm, the slits being 4,0x0,5mm, the holes having a diameter of 0,8mm, this burner deck has an overall porosity of 7.5%.






[0030] The person skilled in the art will acknowledge that any perforation pattern or set of perforation patterns can be repeated lengthwise or over the circumference to obtain the burner according to the present invention.





[0031] Another gas burner is shown in figure 10. The burner 10 made out of perforated metal plate 22 has a completely random perforated burner deck 20 with no repeatability over the full height or circumference of the burner deck which provides a stabilized deck without the additional devices as mentioned above.

[0032] Figure 11 shows another exemplary embodiment of the present invention. This burner has a perforated end cap 24 with different perforation pattern than the perforated metal plate 22. The perforations 30 together with the perforations 24 provide the burner deck 20.

Claims

1. A gas burner (10), preferably a premix burner, comprising a support (12) having a central gas inlet port (14) for supply of gas into a gas supply chamber (16), the gas supply chamber (16) being enclosed by a perforated metal plate (22), the perforated metal plate (22) connected at the bottom to the support (12) through a base section, the perforation (24) in the perforated metal plate (22) providing a burner deck (20), wherein the burner deck (20) has an overall porosity being equal to or lower than 11%; wherein the burner deck has different patterns of perforations; and wherein the burner deck has a gradually changing porosity. 5 10 15
2. A gas burner (10) as in claim 1, the burner further comprises an end cap (18) substantially opposite to the gas inlet port (14), the end cap (18) being connected to the perforated metal plate (22). 20
3. A gas burner as in claim 2, wherein the end cap (18) is also provided with perforations (30), the perforations (30) thereby enlarging the burner deck (20). 25
4. A gas burner as in any of the preceding claims, wherein more than 50% of the burner deck has a porosity being equal to or lower than 9% and wherein upto 50% of the burner deck has a porosity being higher than 11%. 30
5. A gas burner as in claim 4, wherein the part of the burner deck with a porosity higher than 11 % is closest to the gas inlet; and wherein the part of the burner deck with a porosity equal to or lower than 9% is most remote from the gas inlet. 35
6. A gas burner as in any of the claims 1 - 5, wherein the burner comprises a gradually increasing or a gradually decreasing perforation pattern. 40
7. A gas burner as in claim 6, wherein the gradual increasing perforation pattern goes in axial or in circumferential direction of the burner. 45
8. A gas burner as in any of the claims 1 - 5, wherein the burner comprises gradually increasing or gradually decreasing pitches in between the perforation pattern of the burner deck. 50
9. A gas burner as in claim 8, wherein the grading goes in axial or in circumferential direction of the burner deck.
10. A gas burner as in any of the preceding claims, wherein the burner has a decreased porosity when going in downstream direction of the burner. 55
11. Use of the gas burner as any one of the claims 1 - 10, in a heat exchanger.
12. Use of the gas burner as in any one of the claims 1 - 10, in a furnace or air heater.

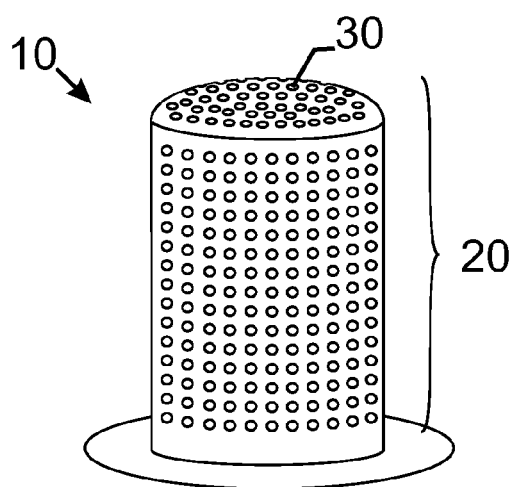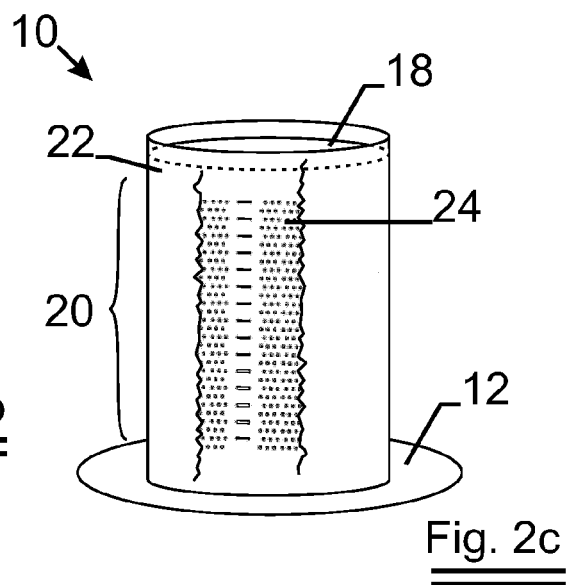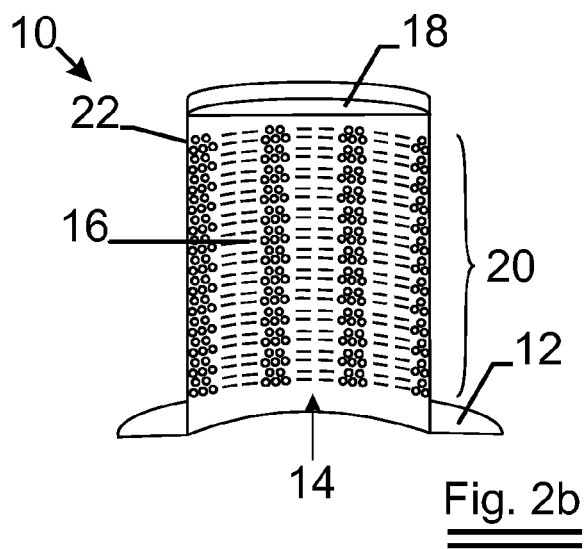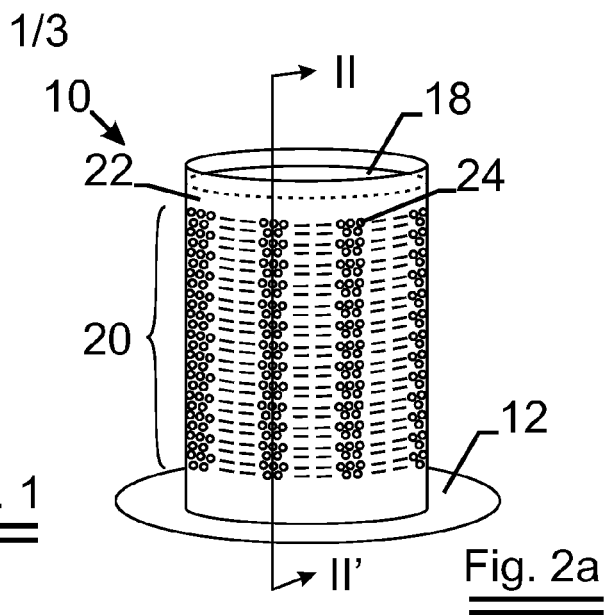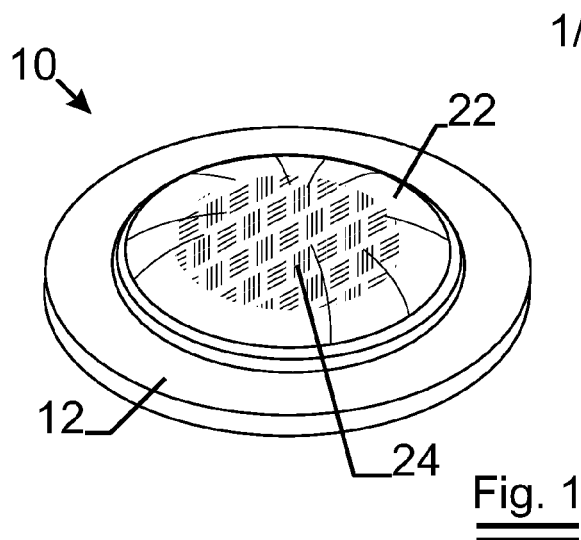

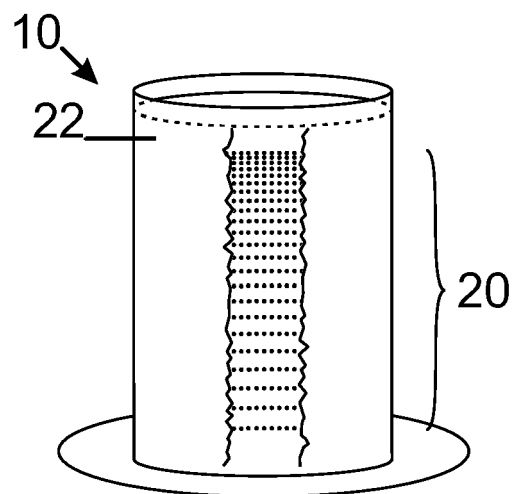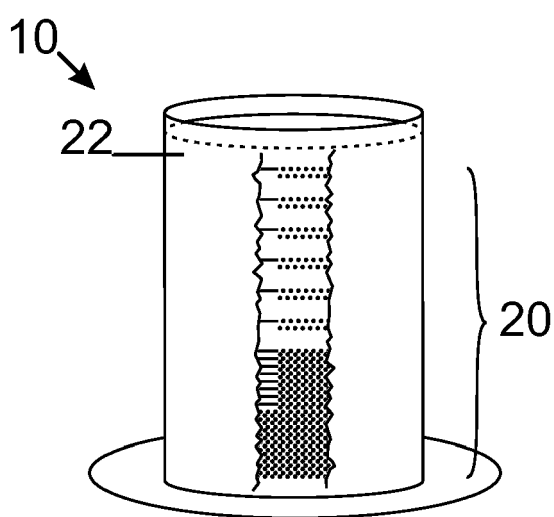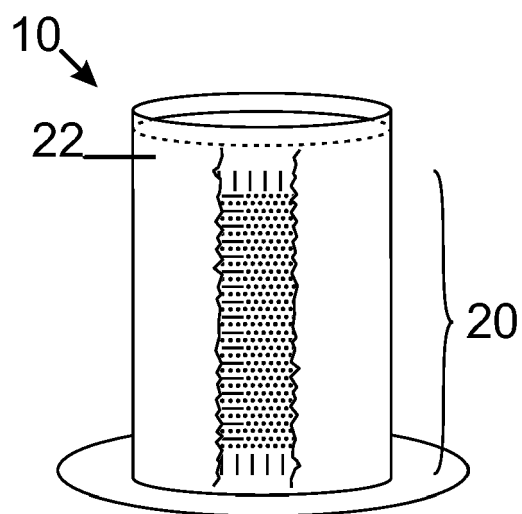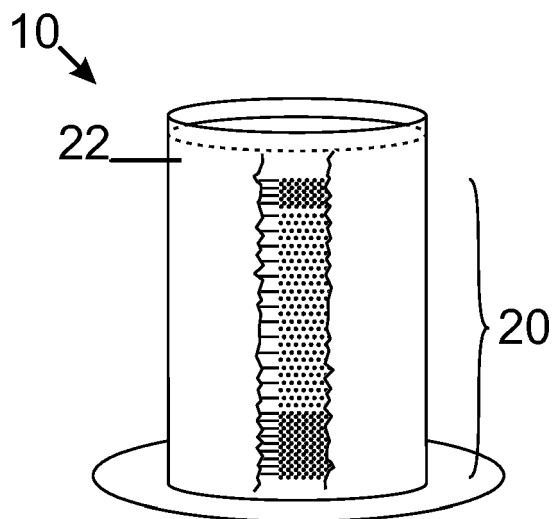

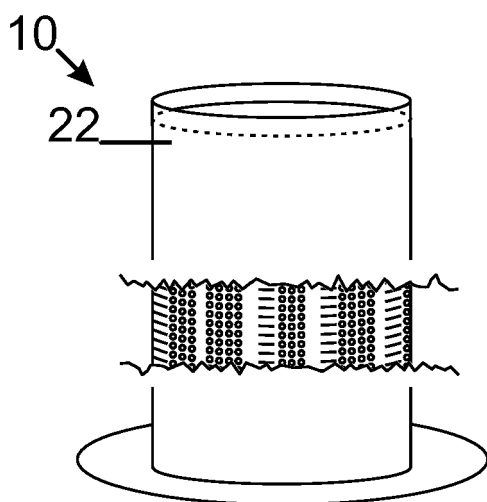


Fig. 8

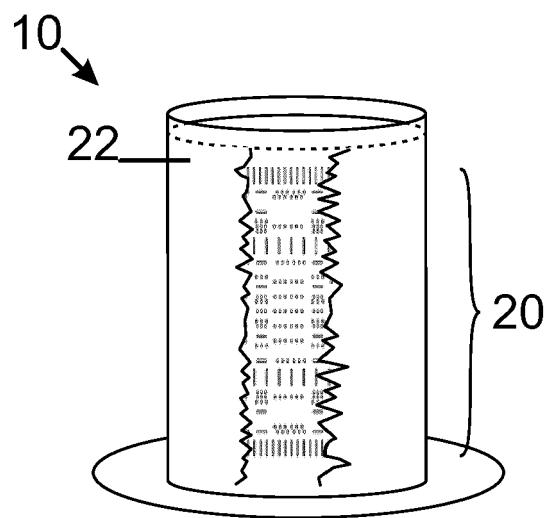


Fig. 9

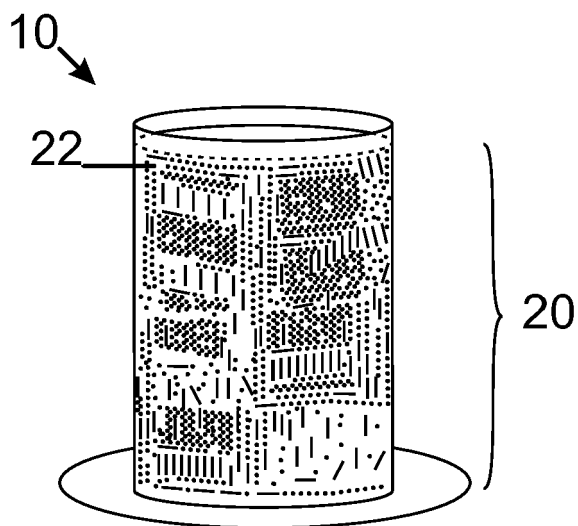


Fig. 10

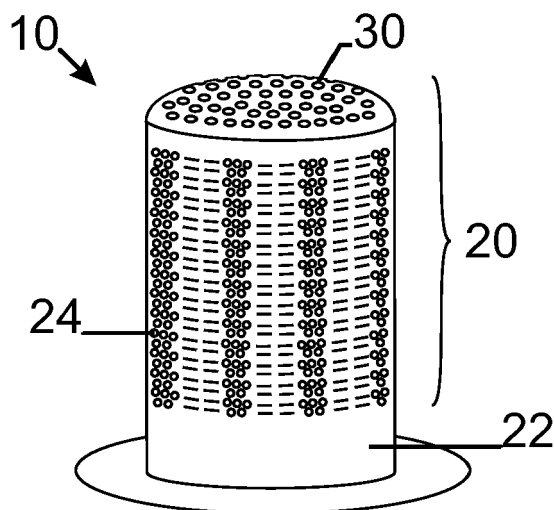


Fig. 11



EUROPEAN SEARCH REPORT

Application Number
EP 17 19 1076

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A,D	WO 2009/065733 A1 (SIT LA PRECISA S P A CON SOCIO [IT]; SCRIBANO GIANFRANCO [IT]; BEGHI M) 28 May 2009 (2009-05-28) * page 3, line 22 - page 5, line 5 * * page 7, line 3 - line 5 * * figures 1-3 *	1	INV. F23D14/10
A,D	WO 95/23315 A1 (STICHTING ENERGIE [NL]; DRIFT ABRAHAM V D [NL]) 31 August 1995 (1995-08-31) * page 1, line 3 - line 12 * * page 2, line 29 - line 34 * * page 7, line 21 - line 28 * * page 9, line 14 - page 10, line 14 * * page 12, line 37 - page 13, line 10 * * figures 5,13,14 *	1	
A	FR 2 792 394 A1 (GAZ DE FRANCE GDF SERVICE NATI [FR]) 20 October 2000 (2000-10-20) * page 1, line 1 - line 3 * * page 4, line 16 - line 25 * * page 8, line 28 - page 9, line 10 * * page 10, line 29 - page 11, line 13 * * figures 4,7 *	1	TECHNICAL FIELDS SEARCHED (IPC) F23D
A	EP 1 584 868 A2 (RINNAI KK [JP]) 12 October 2005 (2005-10-12) * column 6, paragraph 17 - column 7, paragraph 19 * * figures 1,2 *	1	
A	WO 2008/142531 A2 (WORGAS BRUCIATORI SRL [IT]; BAROZZI LUCA [IT]; LUGLI SANDRO [IT]) 27 November 2008 (2008-11-27) * abstract; figure 2 *	1	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 6 December 2017	Examiner Gavriliu, Costin
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 19 1076

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-12-2017

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 2009065733	A1	28-05-2009	CN 101861496 A	13-10-2010
			EP 2227655 A1	15-09-2010
			US 2010291495 A1	18-11-2010
			WO 2009065733 A1	28-05-2009

WO 9523315	A1	31-08-1995	AU 1592095 A	11-09-1995
			NL 9400280 A	02-10-1995
			WO 9523315 A1	31-08-1995

FR 2792394	A1	20-10-2000	AT 247799 T	15-09-2003
			CA 2334985 A1	26-10-2000
			DE 60004617 D1	25-09-2003
			DE 60004617 T2	17-06-2004
			EP 1088188 A1	04-04-2001
			FR 2792394 A1	20-10-2000
			US 6410878 B1	25-06-2002
			WO 0063617 A1	26-10-2000

EP 1584868	A2	12-10-2005	EP 1584868 A2	12-10-2005
			JP 3958754 B2	15-08-2007
			JP 2005299998 A	27-10-2005

WO 2008142531	A2	27-11-2008	EP 2167876 A2	31-03-2010
			US 2010227285 A1	09-09-2010
			WO 2008142531 A2	27-11-2008

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1337789 A [0002]
- EP 2037175 A [0002]
- WO 2009077333 A [0002]
- WO 2009065733 A [0002]
- WO 2009059933 A [0002]
- WO 9523315 A [0006]