



(11) **EP 3 286 099 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:

30.09.2020 Bulletin 2020/40

(21) Application number: **16784003.2**

(22) Date of filing: **22.04.2016**

(51) Int Cl.:

B65D 25/10 (2006.01)	B65D 43/16 (2006.01)
B65D 43/22 (2006.01)	B65D 55/02 (2006.01)
B65D 21/02 (2006.01)	B65D 25/04 (2006.01)
B65D 25/22 (2006.01)	B65D 1/30 (2006.01)
B65D 81/32 (2006.01)	B65D 25/24 (2006.01)

(86) International application number:

PCT/US2016/028996

(87) International publication number:

WO 2016/172592 (27.10.2016 Gazette 2016/43)

(54) **PACKAGING CONTAINER HAVING A SECURE CLOSURE MECHANISM**

VERPACKUNGSBEHÄLTER MIT EINEM SICHEREN VERSCHLUSSMECHANISMUS

RÉCIPIENT D'EMBALLAGE AYANT UN MÉCANISME DE FERMETURE SÉCURISÉE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **22.04.2015 US 201514693293**

(43) Date of publication of application:

28.02.2018 Bulletin 2018/09

(73) Proprietor: **Baker, Jay**

Mayville, NY 14757 (US)

(72) Inventor: **Baker, Jay**

Mayville, NY 14757 (US)

(74) Representative: **Haseltine Lake Kempner LLP**

**138 Cheapside
London EC2V 6BJ (GB)**

(56) References cited:

US-A- 4 512 474	US-A- 4 784 268
US-A- 4 986 438	US-A- 6 116 501
US-A1- 2006 081 493	US-A1- 2012 061 412
US-A1- 2014 262 878	

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates to a packaging container, more specifically, to clamshell-type packaging containers. Clamshell packaging is used for secure display or storage of items.

CROSS-REFERENCE TO RELATED APPLICATIONS 10

[0002] US 2014/262878 discloses a packaging container having the pre-characterising features of claim 1 below.

BRIEF SUMMARY 15

[0003] According to the present invention, there is provided a packaging container as set out in claim 1 below.

BRIEF DESCRIPTION OF THE DRAWINGS 20

[0004] In the drawings listed below, only Figures 5A to 5F and the corresponding paragraphs of the description illustrate embodiments of the invention. The other Figures and corresponding paragraphs of the description illustrate arrangements providing background to the claimed invention.

FIG. 1A is a perspective view of a packaging container, in which the packaging container is opened. 30

FIG. 1B is a front view of the packaging container of FIG. 1A in an open configuration. 35

FIG. 1C is an end view of the packaging container of FIG. 1A in an open configuration.

FIG. 1D is a front view of the packaging container of FIG. 1A, in which the packaging container is closed. 40

FIG. 1E is a side view the packaging container of FIG. 1A in a closed state.

FIG. 1F is an end view of the packaging container of FIG. 1A in a closed state. 45

FIG. 1G illustrates an end view of the packaging container of FIG. 1A in a closed state with a flange depressed. 50

FIG. 1H multiple packaging containers in a stacked configuration.

FIG. 2A is a front view of an alternate packaging container in an open configuration. 55

FIG. 2B is an end view of the packaging container

of FIG. 2A in an open configuration.

FIG. 2C is a front view of the packaging container of FIG. 2A, in which the packaging container is closed.

FIG. 2D is a side view the packaging container of FIG. 2A in a closed state.

FIG. 2E is an end view of the packaging container of FIG. 2A in a closed state.

Fig. 2F is a view of an alternate packaging container of FIG. 2A in an open configuration.

FIG. 3A is a perspective view of another packaging container, in which the packaging container is opened.

FIG. 3B is a front view of the packaging container of FIG. 3A in an open configuration.

FIG. 3C is an end view of the packaging container of FIG. 3A in an open configuration.

FIG. 3D is a front view of the packaging container of FIG. 3A, in which the packaging container is closed.

FIG. 3E is a side view the packaging container of FIG. 3A in a closed state.

FIG. 3F is an end view of the packaging container of FIG. 3A in a closed state.

FIGS 4A-4D illustrate assembled, bottom, cover, and assembled top views of an alternate packaging container.

FIGS 5A-5B illustrate side and enlarged side views of a locked packaging container according to an embodiment of the present invention.

FIGS 5C-5D illustrate perspective and side views of an alternate locked packaging container according to an embodiment of the invention.

FIGS. 5E-5F illustrate enlarged views of a locking mechanism of the packaging container.

FIGS. 6A-6C illustrate a perspective view of a packaging assembly having a dividing panel in an open state, a perspective view of a packaging assembly having a dividing panel in a partially closed state, and side view of the packaging assembly in a closed state.

FIGS. 7A-7C illustrate a top open view, a perspective open view, and a closed view of a packaging assembly having multiple chambers.

FIGS. 8A-8C illustrate an open perspective view, side view, and side display view of a packaging assembly with a stand.

FIGS. 9A-9C illustrate an open perspective view, side open view, and side closed view of a packaging assembly.

FIGS. 10A-10C illustrate an open perspective view, side open view, and side display view of a packaging assembly with compartment and a stand.

DETAILED DESCRIPTION

[0005] Before any embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the following drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting.

[0006] FIG. 1A illustrates a perspective view of a packaging container 10, in which packaging container 10 is opened to accommodate desired contents. FIG. 1B is a front view of the packaging container of FIG. 1A in an open configuration. FIG. 1C is an end view of the packaging container of FIG. 1A in an open configuration. FIGS. 1D, 1E, and 1F are front, side, and end views of packaging container 10 closed state. FIG. 1H illustrates multiple packaging containers 10 in a stacked configuration.

[0007] Packaging container 10 includes a base section 20 having a chamber 25 defined by a peripheral wall 30. Peripheral wall 30 forms the perimeter of chamber 25 and is collectively formed by spaced-apart inner wall segment 30a and an outer wall segment 30b adjoined by a top ledge 30c.

[0008] In order to facilitate a secure closure of packaging container 10, outer wall segment 30b includes at least one depression 40 formed therein. At least one aperture 42 is formed within depression 40 for engaging an inwardly protruding section formed on a cover section 50, as will be discussed in detail below. A plurality of apertures 42 may be included. At least one additional aperture 43, which aligns with aperture 42, is also formed within inner wall segment 30a of peripheral wall 30. Top ledge 30c also includes a scalloped area 44 formed therein adjacent to depression 40 formed within outer wall segment 30b for facilitating release of cover section 50. Further, a laterally extending flange 45 extends from outer wall segment 30b as show in FIG. 1A.

[0009] Packaging container 10 also includes a cover section 50 pivotally coupled to base section 20 at a hinge 52. Cover section 50 is configured to pivot about hinge 52 between an open state and a closed state. In particular, cover section 50 includes a top surface having a

recessed face 77 and side wall portion 54, which is collectively formed by first and second lateral walls 55, 57 and first and second end walls 58, 59. Side wall portion 54 defines a cover compartment 60 that fits over base section 20. First lateral wall 55 includes at least one inwardly protruding section 65 shaped to correspond with depression 40 formed within outer wall segment 30b of peripheral wall 30. In addition, a post 67 projects from inwardly protruding section 65. In one embodiment, post 67 includes an angled edge 67a and a top edge 67b. Post 67 is adapted to engage corresponding apertures 42 and 43. A peripheral flange 70 extends horizontally from a perimeter of cover section 50 such that, when packaging container 10 is in a closed position, peripheral flange 70 abuts flange 45 of base section 20. Peripheral flange 70 includes a cut out area 71 adjacent to inwardly protruding section 65, as will be discussed below.

[0010] In order to provide a container that is secure when closed, but is also easy to open by a user, packaging container 10 includes features that allows for easy one-hand opening. In particular, laterally extending flange 45 is deformable such that when flange 45 depressed in a region 75 adjacent to depression 40 of outer wall segment 30b, outer wall segment 30b and inner wall segment 30a move inwardly, as shown in Fig. 1G, thereby releasing post 67 from apertures 42 and 43 and opening packaging container 10. Peripheral flange 70 includes a cut out area 71 at inwardly protruding section 65 of side wall portion 54, such as to provide unobstructed access for depressing deformable flange 45 at region 75 of base section 20 for opening packaging container 10. Scalloped area 44 facilitates the inward movement of outer wall segment 30b and inner wall segment 30a by ensuring movement is not obstructed by recessed face 76 of the top surface.

[0011] Each of flanges 45 and 70 includes a hanger opening 72a, 72b formed at one side such that packaging container 10 can be hung on and kept in a display rack used for storage or selling of items contained in packaging container 10. When packaging container 10 is in a closed position hanger openings 72a and 72b align with one another. Hanger openings 72a and 72b are formed by a circular hole, a linear groove, or a combination such that packaging container 10 can be hung on any display rack having a circular rack rod or a thin plate-shaped rack rod. Thus, packaging container 10 can be suspended from a display rack through hanger openings 72a and 72b. In alternate embodiments, packaging container may include only one hanger opening 72a.

[0012] As shown in FIG. 1H, packaging container 10 includes a recessed face 76 which acts as a receiving area formed in a top surface of cover section 50. Recessed face 76 accepts and retains a bottom 77 of another packaging container 10 to allow for a stable stacking arrangement.

[0013] FIGS. 2A-2E illustrate an additional arrangement of packaging container 10. In this arrangement packaging container is elongated in order to accommo-

date items such as fishing lures or the like. The dimensions of packaging container may be, for example, about 4.5' x 1" x 1", about 5.75" x 1 x 1, or about 7 x 1 x 1. FIG. 2A is a front view of packaging container 10 in an open position. FIG. 2B is an end view of packaging container 10, in which packaging container 10 is opened to accommodate contents. FIGs. 2C, 2D and 2E are front, side, and end views of packaging container 10 in a closed position.

[0014] For the sake of simplicity FIGS. 2A-2E include reference numbers corresponding to those described in FIGS. 1A-1H. Like elements that are assigned corresponding reference numbers will not be described in detail. However, as further shown in FIG. 2E, packaging container 10 may include a mating features, such as an O-shaped depression 172, formed in base portion 20 and a corresponding projection 173 formed in cover portion 50. The shape or configuration of the mating features can be varied and are surrounded by a space 174 such that when an item is positioned in container 10 a portion of the item can be held in place by the mating features.

[0015] In the arrangements shown in FIGS. 3A-3F, a packaging container 110 is illustrated having a base section 120 having a chamber 125 defined by a peripheral wall 130. Peripheral wall 130 forms the perimeter of chamber 125 and is collectively formed by spaced-apart inner wall segment 130a and an outer wall segment 130b adjoined by a top ledge 130c. Peripheral wall 130 extends along three sides of base section 120 and includes an open end 132. Further, chamber 125 includes a plurality of wells 123 formed within a bottom surface 126 for receiving items to be stored within packaging container 110.

[0016] Similar to the previously described arrangements, in order to facilitate a secure closure of packaging container 110, outer wall segment 130b includes at least one depression 140 formed therein. An aperture 142 is formed within depression 140 for engaging a projection formed on a cover section, as will be discussed in detail below. At least one additional aperture 143, which aligns with aperture 142, may also be formed within inner wall segment 130a of peripheral wall 130. A laterally extending flange 145 is extends from outer wall segment 130b.

[0017] Packaging container 110 further includes a plate 146 pivotally attached to base section 120 at hinge or pivot axis 151. Plate 146 including a plurality of holes 148 formed therein for aligning with plurality of wells 123 formed in bottom surface 126. Plate 146 is adapted to secure items positioned in wells 123. When plate 146 is in an open position, items may be placed in wells 123. Plate 146 may then be pivoted about hinge or pivot axis 151 such that it is parallel to bottom surface 126 and holes 148 are aligned with wells 123. Alternatively, plate 146 may be closed first allowing items, such as long cylindrical items, to be placed into through holes 148 and into wells 123. Plate 146 and holes 148 may provide support for holding such items within wells 123. Plate 146 includes a flange 149 which abuts ridges 124 of chamber

125, thereby holding plate 146 in a position parallel to a bottom surface of chamber 125. Once plate is in a closed position, cover section 150 may be pivoted over base section 120 as discussed below.

[0018] Cover section 150 pivotally coupled to base section 120 at a hinge 152. Cover section 150 is configured to pivot about hinge 152 between an open state and a closed state. In particular, cover section 150 includes a side wall portion 154 collectively formed by first and second lateral walls 155, 157 and first and second end walls 158, 159. Side wall portion 154 defines a cover compartment 160 that fits over base section 120. First lateral wall 155 includes at least one inwardly protruding section 165 shaped to correspond with depression 140 formed within outer wall segment 130b of peripheral wall 130. In addition, a post 167 projects from inwardly protruding section 165. Post 167 is adapted to engage corresponding aperture 142. A peripheral flange 170 extends horizontally from a perimeter of cover section 150 such that, when packaging container 110 is in a closed position, peripheral flange 170 abuts flange 145 of base section 120. Peripheral flange 170 includes a cut out area 171 adjacent to inwardly protruding section 165, as will be discussed below.

[0019] As discussed with respect to the arrangement of FIGs. 1A-2E, in order to provide a container that is secure when closed, but is also easy to open by a user, packaging container 110 includes features that allows for easy one-hand opening. In particular, with reference to FIG. 3B, laterally extending flange 145 is deformable such that when flange 145 depressed in a region 175 adjacent to depression 140 of outer wall segment 130b, outer wall segment 130b moves inwardly, and thereby releasing post 167 from apertures 142 and/or 143 and opening packaging container 110. Peripheral flange 170 of cover section 150 includes a cut out area 171 at inwardly protruding section 165 of side wall portion 154, such as to provide unobstructed access for depressing deformable flange 145 of base section 120 for opening packaging container 110 when in a closed position. A scalloped area 144 is also formed adjacent to depression 140 formed within outer wall segment 130b for facilitating release of cover section 150, as shown in FIG. 3A.

[0020] An additional arrangement is shown in FIGs. 4A-4D, wherein a packaging container 210 includes a base portion 220 and a separate cover portion 250. FIGS 4A-4D illustrate assembled, bottom, cover, and assembled top views of packaging container 210. In order to facilitate a secure closure of packaging container 210, base portion 220 includes at least one depression 240 formed therein. An aperture 242 is formed within depression 240 for engaging a projection formed on cover section 250, as will be discussed in detail below. At least one additional aperture, which aligns with aperture 242, may also be formed within base portion 220. A laterally extending flange 245 is also provided. Cover section 250 includes a side wall portion 254 having at least one inwardly protruding section 265 shaped to correspond with

depression 240 formed within a peripheral wall 230 of base portion 220. In addition, a post 267 projects from inwardly protruding section 265. Post 267 is adapted to engage corresponding aperture 242. A peripheral flange 270 extends horizontally from a perimeter of cover section 250, such that when packaging container 210 is in a closed position, peripheral flange 270 abuts flange 245 of base section 220. Peripheral flange 270 includes a cut out area 271 adjacent to inwardly protruding section 265, as shown in FIG. 4D.

[0021] Laterally extending flange 245 is deformable such that when flange 245 is depressed in a region 275 adjacent to depression 240, outer and inner segments of peripheral wall 230 move inwardly, thereby releasing post 267 from aperture 242 (and any additional apertures) and opening packaging container 210. Peripheral flange 270 of cover section 250 includes a cut out area 271 at inwardly protruding section 265 of side wall portion 254, such as to provide unobstructed access for depressing deformable flange 245 of base section 220 for opening packaging container 210. As shown in FIG. 4D, packaging container 210 includes corresponding elements on each side thereof such that when both first and second regions 275 are depressed, cover section 250 is released from base section 220.

[0022] FIGs. 5A-5B illustrate side and enlarged side views of a lockable packaging container 310 according to an embodiment of the present invention. Packaging container 310 includes a mechanism for locking which does not allow for easy opening. In particular, packaging container 310 includes elements corresponding to those of packaging container 10. Further, packaging container 310 includes at least one obstructive member for preventing the opening of packaging container 310. In particular, packaging container 310 includes an obstructive member in the form of a recessed face 376 formed in a cover section 350 which extends towards an aperture 343 formed in inner wall segment 330a of base section 320 when packaging container 310 is in a closed position. Laterally extending flange 345 is deformable such that when flange 345 is depressed in a region 375 of outer wall segment 330b adjacent to depression 340, outer wall segment 330b moves inwardly toward inner wall segment 330a. However, since recessed face 376 is formed within the top surface and extends adjacent to aperture 342 of inner wall segment 330a, movement of inner wall segment 330a is hindered by recessed face 376. Therefore, post 367 is not released from apertures 342 and 343 and cover section 350 remains secured in a closed position over base section 320.

[0023] As shown in FIGs. 5C-5F, lockable packaging container 310 may additionally include obstructive members in the form of protuberances 312 extending from the top surface or recessed face 376 adjacent to post 367 of cover section 350. In particular, FIGs 5C-5D illustrate perspective and side views of locked packaging container 310 according to an embodiment of the invention. FIGs. 5E-5F illustrate enlarged views of a locking mechanism of packaging container 310.

As discussed above, laterally extending flange 345 is deformable such that when flange 345 is depressed in a region 375 of outer wall segment 330b outer wall segment 330b moves inwardly toward inner wall segment 330a. However, since recessed face 376 and protuberances 312 extends adjacent to aperture 343 of inner wall segment 330a, movement of inner wall segment 330a is hindered by protuberances 312. Therefore, post 367 is not released from apertures 342 and 343 and cover section 350 remains secured in a closed position over base section 320. In the embodiment shown in FIG. 5F, post 367 is longer such that movement of inner wall segment 330a is further restricted and packaging container 310 is prevented from opening.

[0024] FIGs. 6A-6C illustrate perspective views of an additional arrangement of a packaging container 410 in an open state, a partially closed state, and a closed state. Packaging container 410 includes a base section 420 having a chamber 425 defined by a peripheral wall 430. Peripheral wall 430 forms the perimeter of chamber 425 and is collectively formed by spaced-apart inner wall segment 430a and an outer wall segment 430b adjoined by a top ledge 430c. Peripheral wall 430 extends along three sides of base section 420 and includes an open end 432. Further, chamber 425 includes ridges 424 formed within inner wall segment 430a of packaging container 410. A divider plate 446 having a window 448 formed therein is pivotally attached to base section 420 at pivot axis 447. When plate 446 is in an open position, items may be placed in chamber 425. Plate 446 may then be pivoted about pivot axis 447 such that it is parallel to a bottom surface 426 of chamber 425, as shown in FIG. 6B. Alternatively, plate 446 may be closed first allowing items to be placed through window 448 into chamber 425. Plate 446 includes a flange 449 which abuts ridges 424 of chamber 425, thereby holding plate 446 in a position parallel to a bottom surface of chamber 425. Once plate is in a closed position, a cover section 450 may be pivoted over base section 420 at axis 452. As shown in FIGs. 6C, plate 446 creates first and second chambers 471 and 472 within packaging container 410. In order to facilitate a secure closure and easy opening of packaging container 410, packaging container 410 includes elements corresponding to those discussed with respect to FIGs. 1A-1F. The closure and release operate in a corresponding manner as previously described.

[0025] In particular, in order to facilitate a secure closure of packaging container 410, outer wall segment 430b includes at least one depression 440 formed therein. An aperture 442 is formed within depression 440 for engaging an inwardly protruding section formed on a cover section 450. At least one additional aperture 443, which aligns with aperture 442, may also be formed within inner wall segment 430a. A scalloped area 444 is also formed therein adjacent to depression 440 formed within outer wall segment 430b for facilitating release of cover section 450. Cover section 450 includes at least one in-

wardly protruding section 465 shaped to correspond with depression 440 formed within outer wall segment 430b. In addition, a post 467 projects from inwardly protruding section 465 for engaging corresponding apertures 442 and 443. A peripheral flange 470 extends horizontally from a perimeter of cover section 450 such that, when packaging container 410 is in a closed position, peripheral flange 470 abuts flange 445 of base section 420.

[0026] Similar to the arrangement discussed in FIG. 1A, in order to provide a container that is secure when closed, but is also easy to open by a user, packaging container 410 includes features that allows for easy one-hand opening. In particular, laterally extending flange 445 is deformable such that when flange 445 depressed in a region 475 adjacent to depression 440 of outer wall segment 430b, outer wall segment 430b and inner wall segment 430a move inwardly, thereby releasing post 467 from apertures 442 and 443 and opening packaging container 410.

[0027] As shown in FIGs. 7A-7C, a packaging container 510 may include multiple chambers. In particular FIGs. 7A-7C illustrate a top open view, a side open view, an end open view and a closed view of a packaging assembly having multiple chambers. Packaging container 510 includes a base section 520 including ridges 524. Peripheral wall 530 extends along three sides of base section 520 and includes an open end 532. A divider chamber 546, having a bottom surface 551 and a cover 560 hinged thereto at axis 548, is pivotally attached to base section 520 at pivot axis 547. Divider chamber 546 includes a flange 549 which abuts ridges 524 of base section 520, thereby holding divider chamber 546 in a position parallel to a bottom surface 526 of base section 520. Once divider chamber 546 is in a closed position, a cover section 550 may be pivoted at axis 552 over base section 520. As shown in FIG. 7C, a first and a second chamber 571 and 572 are created within packaging container 510 above and below divider chamber 546. In order to facilitate a secure closure and easy opening of packaging container 510, packaging container 510 includes elements corresponding to those discussed with respect to FIGs. 1A- 1F. The closure and release operate in a corresponding manner as previously described.

[0028] In particular, in order to facilitate a secure closure of packaging container 510, outer wall segment 530b includes at least one depression 540 formed therein. An aperture 542 is formed within depression 540 for engaging an inwardly protruding section 565 formed on a cover section 550. At least one additional aperture 543, which aligns with aperture 542, may also be formed within inner wall segment 530a. A scalloped area 544 is also formed therein adjacent to depression 540 formed within outer wall segment 530b for facilitating release of cover section 550. Cover section 550 includes at least one inwardly protruding section 565 shaped to correspond with depression 540 formed within outer wall segment 530b. In addition, a post 567 projects from inwardly protruding section 565 for engaging corresponding apertures 542

and 543. A peripheral flange 570 extends horizontally from a perimeter of cover section 550 such that, when packaging container 510 is in a closed position, peripheral flange 570 abuts flange 545 of base section 520.

[0029] Similar to the arrangement discussed in FIG. 1A, in order to provide a container that is secure when closed, but is also easy to open by a user, packaging container 510 includes features that allows for easy one-hand opening. In particular, laterally extending flange 545 is deformable such that when flange 545 depressed in a region 575 adjacent to depression 540 of outer wall segment 530b, outer wall segment 530b and inner wall segment 530a move inwardly, thereby releasing post 567 from apertures 542 and 543 and opening packaging container 510.

[0030] Each of FIGs 8A-8C illustrates an arrangement of a packaging container 610 having a stand 615 for propping up packaging container 610. In particular, FIGs. 8A-8C illustrate an open perspective view, side view, and side display view of packaging container 610. The elements of packaging container 610 correspond to those described in connection with FIGs 1A-1G. In particular, packaging container 610 includes base section 620 and cover section 650, which is configured to pivot about hinge 652 between an open state and a closed state. In order to provide a container that is secure when closed, but is also easy to open by a user, packaging container 610 includes features that allows for easy one-hand opening. A laterally extending flange 645 is deformable such that when flange 645 depressed in a region 675 adjacent to a depression 640 of outer wall segment 630b, outer wall segment 630b and inner wall segment 630a (shown in FIG. 8A) move inwardly, thereby releasing post 667 from apertures 642 and 643 and opening packaging container 610. Peripheral flange 670 of cover section 650 includes an inwardly protruding section 665 coupling with depression 640 of base section 620. A scalloped area 644 facilitates the inward movement of outer wall segment 630b and inner wall segment 630a by ensuring movement is not obstructed by recessed face 676 formed within the top surface.

[0031] Packaging container 610 further includes a stand 615 extending from and pivotally coupled to laterally extending flange 645 of base section 620 at hinge 647. Stand 615 includes a C-shaped portion 617 for engaging a notch 618 that extends from a bottom surface 626 of base section 620. When packaging container 610 is in a closed position, stand 615 is rotated about hinge 647 such that notch 618 of packaging container 610 fits within C-shaped portion 617 of stand 615. A flange 619 extends around a perimeter of stand 615, thereby creating a stable base for stand 615. Thus, packaging container 610 is supported in an upright position by stand 615.

[0032] FIGs. 9A-9C illustrate an open perspective view, side open view, and side closed view of packaging assembly 710 having a stand 715. Packaging container 710 includes similar elements to those described in con-

nection with the arrangement shown in FIGs 6A-6C. In particular, packaging container 710 includes a chamber 725 with ridges 724 formed therein. A divider plate 746 is pivotally attached to base section 720 at pivot axis 747. In some arrangements, divider plate 746 may include a window formed therein. When plate 746 is in an open position, items may be placed in chamber 725. Plate 746 may then be pivoted about pivot axis 747 such that it is parallel to a bottom surface 726 of chamber 725. Alternatively, plate 746 may be closed first allowing items to be placed through a window into chamber 725. Plate 746 includes a flange 749 which abuts ridges 724 of chamber 725, thereby holding plate 746 in a position parallel to a bottom surface of chamber 725. Once plate is in a closed position, a cover section 750 may be pivoted over base section 720 at axis 752. As shown in FIGs. 9C, plate 746 creates first and second chambers 771 and 772 within packaging container 710. In order to facilitate a secure closure and easy opening of packaging container 710, packaging container 710 includes elements corresponding to those discussed with respect to FIGs. 1A- 1F. The closure and release operate in a corresponding manner as previously described.

[0033] In particular, in order to facilitate a secure closure of packaging container 710, outer wall segment 730b includes at least one depression 740 formed therein. An aperture 742 is formed within depression 740 for engaging an inwardly protruding section formed on a cover section 750. At least one additional aperture 743, which aligns with aperture 742, may also be formed within inner wall segment 730a. A scalloped area 744 is also formed therein adjacent to depression 740 formed within outer wall segment 730b for facilitating release of cover section 750. Cover section 750 includes at least one inwardly protruding section 765 shaped to correspond with depression 740 formed within outer wall segment 730b. In addition, a post 767 projects from inwardly protruding section 765 for engaging corresponding apertures 742 and 743. A peripheral flange 770 extends horizontally from a perimeter of cover section 750 such that, when packaging container 710 is in a closed position, peripheral flange 770 abuts flange 745 of base section 720.

[0034] In order to provide a container that is secure when closed, but is also easy to open by a user, packaging container 710 includes features that allows for easy one-hand opening. In particular, laterally extending flange 745 is deformable such that when flange 745 depressed in a region 775 adjacent to depression 740 of outer wall segment 730b, outer wall segment 730b and inner wall segment 730a move inwardly, thereby releasing post 767 from apertures 742 and 743 and opening packaging container 710.

[0035] Further, a stand 715 extends from and is pivotally coupled to laterally extending flange 745 of base section 720 at hinge 748 at an end opposite divider plate 746. Stand 715 includes a C-shaped portion 717 for engaging a notch 718 that extends from a bottom surface 726 of base section 720. As noted above, when plate

746 is in an open position, items may be placed in chamber 725. Plate 746 may then be pivoted about pivot axis 747 such that it is parallel to a bottom surface of chamber 725. Plate 746 includes a flange 749 which abuts ridges 724 of chamber 725, thereby holding plate 746 in a position parallel to a bottom surface of chamber 725. Once plate is in a closed position, a cover section 750 may be pivoted over base section 720, securing packaging container 710 in a closed position. Stand 715 may then be rotated about hinge 748 such that notch 718 of packaging container 710 fits within C-shaped portion 717 of stand 715. A flange 719 extends around a perimeter of stand 615, thereby creating a stable base for stand 715. Thus, packaging container 710 is securely supported in an upright position by stand 715 as shown in FIG. 9C.

[0036] FIGS. 10A-10C illustrate an open perspective view, side open view, and side display view of an additional arrangement of packaging container 810, including a stand 815 having a chamber 816 formed therein. The elements of packaging container 810 correspond to those described in connection with FIGs 1A-1G. In particular, packaging container 810 includes base section 820 and cover section 850, which is configured to pivot about hinge 852 between an open state and a closed state. In order to provide a container that is secure when closed, but is also easy to open by a user, packaging container 810 includes features that allows for easy one-hand opening. A laterally extending flange 845 is deformable such that when flange 845 depressed in a region 875 adjacent to a depression 840 of outer wall segment 830b, outer wall segment 830b and inner wall segment 830a move inwardly, thereby releasing post 867 from apertures 842 and 843 and opening packaging container 810. Peripheral flange 870 of cover section 850 includes an inwardly protruding section 865 coupling with depression 840 of base section 820. A scalloped area 844 facilitates the inward movement of outer wall segment 830b and inner wall segment 830a by ensuring movement is not obstructed by recessed face 876.

[0037] Packaging container 810 further includes a stand 815 extending from and pivotally coupled to laterally extending flange 845 of base section 820 at hinge 847. Stand 815 includes a C-shaped portion 817 for engaging a notch 818 that extends from a bottom surface 826 of base section 820. Further, stand 815 includes a hollow interior portion forming a chamber 816 covered by a lid 812 pivotally coupled thereto. Lid 812 includes a depressed face portion 827 for mating with a perimeter 828 of chamber 816 to provide a secure closure of chamber 816. When packaging container 810 and chamber 815 are in closed positions, stand 815 is rotated about hinge 847 such that notch 818 of packaging container 810 fits within C-shaped portion 817 of stand 815. A flange 819 extends around a perimeter of chamber 815 and lid 812, thereby creating a stable base for stand 815. Thus, packaging container 810 is supported in an upright position by stand 815 that further includes chamber 816 for storing additional items.

[0038] Hereinafter, a process of manufacturing the packaging container is described. The process will be described with specific reference to the arrangement of FIGS. 1A-1G. However, it is to be understood that the process applies to all of the arrangements and embodiments disclosed herein. Packaging container 10 may be formed completely or partially of a transparent material to allow a user to see the interior of the packaging container. In particular, packaging container 10 is manufactured using a thermoforming process. In order to produce a projection, such as post 67, or other shaped projection in a vertical or nearly vertical sidewall of a thermoformed package, retractable tooling features are incorporated into a tool, which forms the package. These features can be of a variety of shapes and sizes.

[0039] Packaging container 10 is formed from a pre-heated sheet of thermoplastic material that is drawn into, or over a mold to create the desired shape of the end product. After the material has reached a stable set point, where upon it is rigid enough to be removed from the mold without losing the shape of the mold upon which it was formed, the sheet is withdrawn in the opposite direction from which it entered the mold. Typically the sheet enters the mold and is removed from the mold in a vertical fashion. Posts 67 are formed utilizing retractable features, such as a round post, or pin. When the heated plastic sheet is drawn into the mold the post is in an extended position. The plastic forms around the post, adopting its shape. The post is then retracted until the face of the post is flush with the sidewall of the mold. Thus, the post is out of the way such that the plastic product can be removed from the mold. Mechanical linkages and drive mechanisms may be used. Alternately, magnetics, pneumatic cylinders or the like may be employed. The timing of the projection of the feature out-bound from the sidewall of the mold may be fine-tuned by being in the fully extended position prior to the heated material entering the mold and being activated just after the material has entered the mold, but prior to the material cooling beyond the point where it will be able to form around the feature.

[0040] Apertures 42 and 43 are formed within outer wall segment 30b and inner wall segment 30a of wall 30, which are vertical or nearly vertical surfaces. A punch and die mechanism is utilized to form apertures 42 and 43. The punch and die may mimic the profile of the formed post 67, but with a slightly larger profile to allow for clearance and ease of insertion of the formed posts 67 within apertures 43 and 43. Alternatively, the cutout may take a shape that is different from the formed projection. For example, the formed projection could be a simple post, but the cutout could be oval in shape. The function of projections or posts 67 and cutouts or apertures 42, 43 is to prevent the vertical opening of cover section 50 of packaging container 10. Similarly, apertures 42, 43 may be round and projections may be star, octagonal, or the like, in shape. Apertures 42 and 43 are formed after the forming of packaging container 10. Thus, the plastic has

formed into the mold, the plastic has been demolded and then the apertures are cutout. In high volume production the cutting of the hole feature occurs at a station between a forming station and a die cutting station. It is in the die cutting station that the planer surfaces of the plastic container are trimmed from the surrounding web of material so that the container can be removed from a leftover perimeter sheet.

[0041] Apertures 42 and 43 may also be formed following a die cutting step, i.e. after the formed and die cut plastic part has been removed from the surrounding leftover plastic sheet. Thus, the last step in the process is to place the formed and die cut package into a mechanical device, which then punches out the holes. The holes may be formed by a manually actuated device punching one hole at a time or by a fully automated system punching all the holes in a package at once, with automated load and unload of the package into the punching mechanism. The holes may also be cut in the same station as where the planer die cut of the perimeter plastic occurs.

[0042] In use, an item or items is placed in chamber 25 of base section 20. Cover section 50 is then rotated to cover base section 20. At this time, post 67 and inwardly protruding section 65 engages depression 40 and corresponding aperture 42. In particular, post 67 of cover section 50 penetrates aperture 42 of base section 20, thereby securing cover section 50 to base section 20. Post 67 includes an angled edge 67a and a top edge 67b. Post 67 penetrates corresponding aperture 42 to prevent base section 50 from being pivoted open. Aperture 43 is provided in inner wall segment 30a such that post 67 may penetrate aperture 43 if first lateral wall 55 is pushed inwardly. Thus, inward deflection of lateral wall 55 will not cause post 67 to become disengaged from apertures 42. In order to open packaging container 10, outer wall segment 30b must be deflected such that post 67 disengages from corresponding aperture 42. In particular, applying downward pressure to deformable flange 45 in an area adjacent to depression 40 causes such deflection of outer wall segment 30b such that post 67 disengages from corresponding aperture 42 and container 10 is opened.

[0043] In general, the posts and apertures engage to form a locking feature that uses the shear strength of a post engaged against the wall of material through which the aperture is formed. The force required to separate the posts from the apertures is a function of the shear strength of the formed post, and or the tear strength of the punched hole, rather than the function of friction.

[0044] The downward force of closing cover section 50 over base section 20 drives post 67 having beveled or angled edge 67a down across the outer wall segment 30b descending the wall of the package until the post "snaps" into the hole. Since the posts and apertures are formed on vertical walls at 90 degrees, no additional material is required to form a secure closure of packaging container 10.

[0045] Although the present invention has been de-

scribed with reference to the embodiments and the accompanying drawings, it is not limited to the embodiments and the drawings. It should be understood that various modifications and changes can be made by those skilled in the art without departing from the scope of the present invention defined by the accompanying claims.

Claims

1. A packaging container (310) having a secure closure comprising: a base section (320) having a bottom surface and spaced apart inner and outer wall segments, said outer wall segment having a deformable flange (345) extending laterally therefrom; a cover section (350) having a top surface and a side wall portion, said cover section (350) adapted to cover said base section (320) when in a closed state; and a closure mechanism including at least one first aperture (343) formed within said inner wall segment (330a) of the base section and at least one second aperture (342) formed within the outer wall segment (330b) of the base section (320) aligned with said at least one first aperture (343), at least one projection (367) extending inward from the side wall portion of the cover section (350) for engaging the at least one second aperture (342) and being adapted to engage the at least one first aperture (343) of the base section (320), said closure mechanism retaining the cover section (350) over the base section (320) and securing the packaging container in a closed position **characterized in that** the packaging container (310) further comprises
an obstructive member (376) formed within the cover section (350) extending towards the at least one first aperture (343) formed within said inner wall segment of the base section (320) when the packaging container is in a closed position such that movement of the inner wall segment is hindered by the obstructive member (376) when the deformable flange (345) is depressed, preventing the projection from being released from the at least one first aperture and the at least one second aperture.
2. The packaging container (310) of claim 1, wherein the obstructive member (376) is a recessed face formed within the top surface of the cover section (350).
3. The packaging container (310) of claim 2 further comprising at least one protuberance (312) extending from the recessed face adjacent to the at least one projection (367) of cover section (350) for further hindering movement of the inner wall segment.
4. The packaging container (310) of claim 1 further comprising at least one depression formed within the outer wall segment wherein said at least one second

aperture (342) is formed within the at least one depression.

5. The packaging container (310) of claim 4 further comprising at least one inwardly protruding section formed in the side wall portion of the cover section (350) shaped to correspond with said at least one depression formed within the outer wall segment of the base section (320), wherein said at least one projection (367) is formed within the at least one inwardly protruding section.
6. The packaging container (310) of claim 5 further comprising a peripheral flange (370) extending laterally from the side wall portion of the cover section (350), said peripheral flange (370) adapted to contact said laterally extending flange (345) of said base section (320) when the packaging container (310) is in a closed position.
7. The packaging container (310) of claim 1 wherein the at least one projection (367) formed in the cover section (350) is a post having an angled edge.
8. The packaging container (310) of claim 1 further including a stand pivotally connected to the base section (320), said stand providing support for propping up the packaging container (310).
9. The packaging container (310) of claim 1 wherein the base section (320) includes a plurality of wells formed in the bottom surface thereof.
10. The packaging container (310) of claim 9 further comprising a plate pivotally attached to said base section (320), said plate including a plurality of holes formed therein for aligning with the plurality of wells formed in the bottom surface, said plate adapted to secure items positioned in the wells.
11. The packaging container (310) of claim 2 wherein the recessed face formed in the top surface of the cover section (350) forms a receiving area for retaining a bottom wall of the base section (320) of a second packaging container (310), thereby allowing the packaging containers (310) to be stacked.

Patentansprüche

1. Verpackungsbehälter (310), der einen sicheren Verschluss aufweist, umfassend: einen Bodenabschnitt (320), der eine untere Fläche und voneinander beabstandete innere und äußere Wandsegmente aufweist, wobei das äußere Wandsegment einen verformbaren Flansch (345) aufweist, der sich seitlich davon erstreckt; einen Deckelabschnitt (350), der eine obere Fläche und einen Seitenwandteil aufweist,

- wobei der Deckelabschnitt (350) angepasst ist, um den Bodenabschnitt (320) in einem geschlossenen Zustand abzudecken; und einen Verschlussmechanismus, der mindestens eine erste Öffnung (343), die in dem inneren Wandsegment (330a) des Bodenabschnitts gebildet ist, und mindestens eine zweite Öffnung (342), die in dem äußeren Wandsegment (330b) des Bodenabschnitts (320) gebildet ist, das mit der mindestens einen ersten Öffnung (343) ausgerichtet ist, und mindestens einen Ansatz (367), der sich von dem Seitenwandteil des Abdeckabschnitts (350) einwärts erstreckt, um mit der mindestens einen zweiten Öffnung (342) in Eingriff zu kommen, und der angepasst ist, um mit der mindestens einen ersten Öffnung (343) des Bodenabschnitts (320) in Eingriff zu kommen, wobei der Verschlussmechanismus den Deckelabschnitt (350) über dem Bodenabschnitt (320) hält und den Verpackungsbehälter in einer geschlossenen Position sichert, **dadurch gekennzeichnet, dass** der Verpackungsbehälter (310) ferner Folgendes umfasst ein Sperrelement (376), das in dem Deckelabschnitt (350) gebildet ist, das sich zu der mindestens einen ersten Öffnung (343) erstreckt, die in dem inneren Wandsegment des Bodenabschnitts (320) gebildet ist, wenn der Verpackungsbehälter in einer geschlossenen Position ist, sodass eine Bewegung des inneren Wandsegments durch das Sperrelement (376) behindert wird, wenn der verformbare Flansch (345) niedergedrückt wird, wodurch verhindert ist, dass der Ansatz aus der mindestens einen ersten Öffnung und der mindestens einen zweiten Öffnung freigegeben wird.
2. Verpackungsbehälter (310) gemäß Anspruch 1, wobei das Sperrelement (376) eine ausgesparte Fläche ist, die innerhalb der oberen Fläche des Deckelabschnitts (350) gebildet ist.
 3. Verpackungsbehälter (310) gemäß Anspruch 2, ferner umfassend mindestens einen Vorsprung (312), der sich von der ausgesparten Fläche benachbart zu dem mindestens einen Vorsprung (367) von Deckelabschnitt (350) erstreckt, um eine Bewegung des inneren Wandsegments weiter zu verhindern.
 4. Verpackungsbehälter (310) gemäß Anspruch 1, ferner umfassend mindestens eine Vertiefung, die innerhalb des äußeren Wandsegments gebildet ist, wobei die mindestens eine zweite Öffnung (342) innerhalb der mindestens einen Vertiefung gebildet ist.
 5. Verpackungsbehälter (310) gemäß Anspruch 4, ferner umfassend mindestens einen einwärts hervorstehenden Abschnitt aufweist, der in dem Seitenwandteil des Deckelabschnitts (350) gebildet ist, der geformt ist, um mit der mindestens einen Vertiefung übereinzustimmen, die innerhalb des äußeren Wandsegments des Bodenabschnitts (320) gebildet ist, wobei der mindestens einen Ansatz (367) innerhalb des mindestens einen einwärts hervorstehenden Abschnitts gebildet ist.
 6. Verpackungsbehälter (310) gemäß Anspruch 5, ferner umfassend einen Umfangsflansch (370), der sich seitlich von dem Seitenwandteil des Deckelabschnitts (350) erstreckt, wobei der Umfangsflansch (370) angepasst ist, um den sich seitlich erstreckenden Flansch (345) des Bodenabschnitts (320) zu berühren, wenn der Verpackungsbehälter (310) in einer geschlossenen Position ist.
 7. Verpackungsbehälter (310) gemäß Anspruch 1, wobei der mindestens einen Ansatz (367), der in dem Deckelabschnitt (350) gebildet ist, ein Pfosten ist, der einen abgewinkelten Rand aufweist.
 8. Verpackungsbehälter (310) gemäß Anspruch 1, ferner beinhaltend einen schwenkbar mit dem Bodenabschnitt (320) verbundenen Ständer, wobei der Ständer eine Stütze zum Abstützen des Verpackungsbehälters (310) bereitstellt.
 9. Verpackungsbehälter (310) gemäß Anspruch 1, wobei der Bodenabschnitt (320) eine Vielzahl von Vertiefungen aufweist, die in der Bodenfläche davon gebildet sind.
 10. Verpackungsbehälter (310) gemäß Anspruch 9, ferner umfassend eine Platte, die schwenkbar an dem Bodenabschnitt (320) angebracht ist, wobei die Platte eine Vielzahl von darin gebildeten Löchern zum Ausrichten mit der Vielzahl von in der Bodenfläche ausgebildeten Vertiefungen beinhaltet, wobei die Platte angepasst ist, um in den Vertiefungen positionierte Gegenstände zu sichern.
 11. Verpackungsbehälter (310) gemäß Anspruch 2, wobei die in der oberen Fläche des Deckelabschnitts (350) gebildete ausgesparte Fläche einen Aufnahmebereich zum Halten einer Bodenwand des Bodenabschnitts (320) eines zweiten Verpackungsbehälters (310) bildet, wodurch ermöglicht ist, dass die Verpackungsbehälter (310) gestapelt werden.

Revendications

1. Un récipient d'emballage (310) ayant une fermeture sécurisée comprenant: une section de base (320) ayant une surface inférieure et des segments de paroi intérieure et extérieure espacés, ledit segment de paroi extérieure ayant une bride déformable (345) s'étendant latéralement à partir de celui-ci ; une section de couvercle (350) ayant une surface supérieure et une partie de paroi latérale, ladite section de cou-

- vercle (350) adaptée pour couvrir ladite section de base (320) lorsqu'elle est dans un état fermé ; et un mécanisme de fermeture comprenant au moins une première ouverture (343) formée à l'intérieur dudit segment de paroi intérieure (330a) de la section de base et au moins une deuxième ouverture (342) formée à l'intérieur du segment de paroi extérieure (330b) de la section de base (320) alignée avec ladite au moins une première ouverture (343), au moins une projection (367) s'étendant vers l'intérieur à partir de la partie de paroi latérale de la section de couvercle (350) pour engager l'au moins une deuxième ouverture (342) et étant adaptée pour engager l'au moins une première ouverture (343) de la section de base (320), ledit mécanisme de fermeture retenant la section de couvercle (350) sur la section de base (320) et fixant le récipient d'emballage dans une position fermée, **caractérisé en ce que** le récipient d'emballage (310) comprend en outre un élément d'obstruction (376) formé à l'intérieur de la section de couvercle (350) s'étendant vers l'au moins une première ouverture (343) formée à l'intérieur dudit segment de paroi intérieure de la section de base (320) lorsque le récipient d'emballage est dans une position fermée telle que le mouvement du segment de paroi intérieure est entravé par l'élément d'obstruction (376) lorsque la bride déformable (345) est appuyée, empêchant la projection d'être libérée de l'au moins une première ouverture et de l'au moins une deuxième ouverture.
2. Le récipient d'emballage (310) selon la revendication 1, dans lequel l'élément d'obstruction (376) est une face évidée formée à l'intérieur de la surface supérieure de la section de couvercle (350).
 3. Le récipient d'emballage (310) selon la revendication 2 comprenant en outre au moins une protubérance (312) s'étendant à partir de la face évidée adjacente à l'au moins une projection (367) de la section de couvercle (350) pour entraver davantage le mouvement du segment de paroi intérieure.
 4. Le récipient d'emballage (310) selon la revendication 1 comprenant en outre au moins une dépression formée à l'intérieur du segment de paroi extérieure dans lequel ladite au moins une deuxième ouverture (342) est formée à l'intérieur de l'au moins une dépression.
 5. Le récipient d'emballage (310) selon la revendication 4 comprenant en outre au moins une section faisant saillie vers l'intérieur formée dans la partie de paroi latérale de la section de couvercle (350) façonnée pour correspondre à ladite au moins une dépression formée à l'intérieur du segment de paroi extérieure de la section de base (320), dans lequel ladite au moins une projection (367) est formée à l'intérieur de l'au moins une section faisant saillie vers l'intérieur.
 6. Le récipient d'emballage (310) selon la revendication 5 comprend en outre une bride périphérique (370) s'étendant latéralement à partir de la partie de paroi latérale de la section de couvercle (350), ladite bride périphérique (370) adaptée pour entrer en contact avec ladite bride s'étendant latéralement (345) de ladite section de base (320) lorsque le récipient d'emballage (310) est dans une position fermée.
 7. Le récipient d'emballage (310) selon la revendication 1 dans lequel l'au moins une projection (367) formée dans la section de couvercle (350) est un montant ayant un bord angulaire.
 8. Le récipient d'emballage (310) selon la revendication 1 comprenant en outre un support relié de manière pivotante à la section de base (320), ledit support fournissant un support pour soutenir le récipient d'emballage (310).
 9. Le récipient d'emballage (310) selon la revendication 1 dans lequel la section de base (320) comprend une pluralité de puits formés dans la surface inférieure de celui-ci.
 10. Le récipient d'emballage (310) selon la revendication 9 comprenant en outre une plaque fixée de manière pivotante à ladite section de base (320), ladite plaque comprenant une pluralité de trous formés dans celle-ci pour s'aligner avec la pluralité de puits formés dans la surface inférieure, ladite plaque adaptée pour fixer des objets positionnés dans les puits.
 11. Le récipient d'emballage (310) selon la revendication 2 dans lequel la face évidée formée dans la surface supérieure de la section de couvercle (350) forme une zone de réception pour retenir une paroi inférieure de la section de base (320) d'un deuxième récipient d'emballage (310), permettant ainsi aux récipients d'emballage (310) d'être empilés.

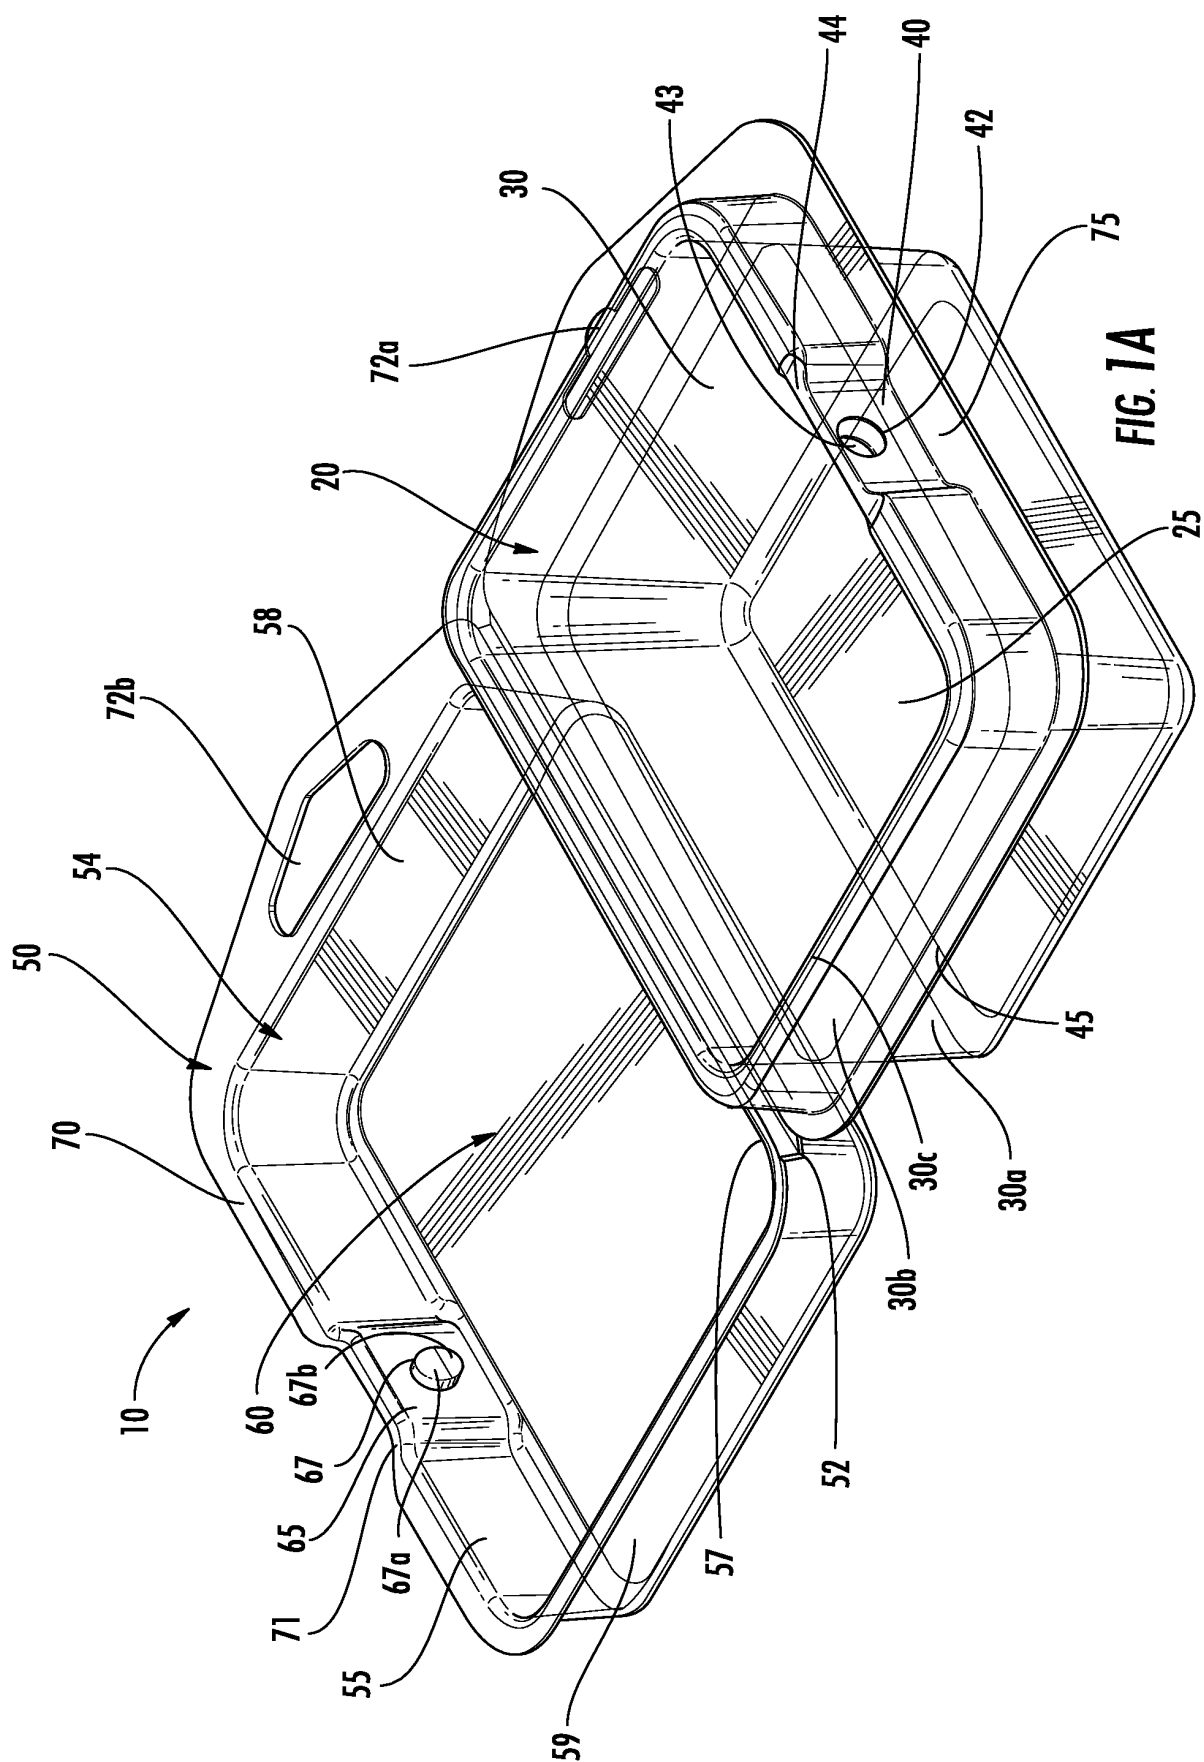
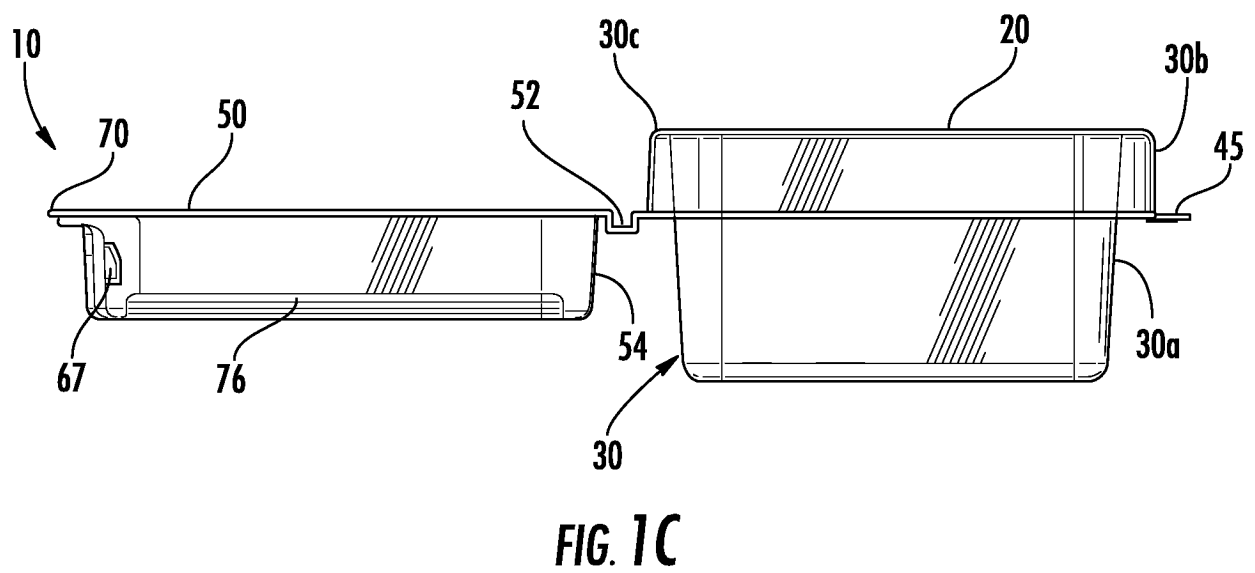
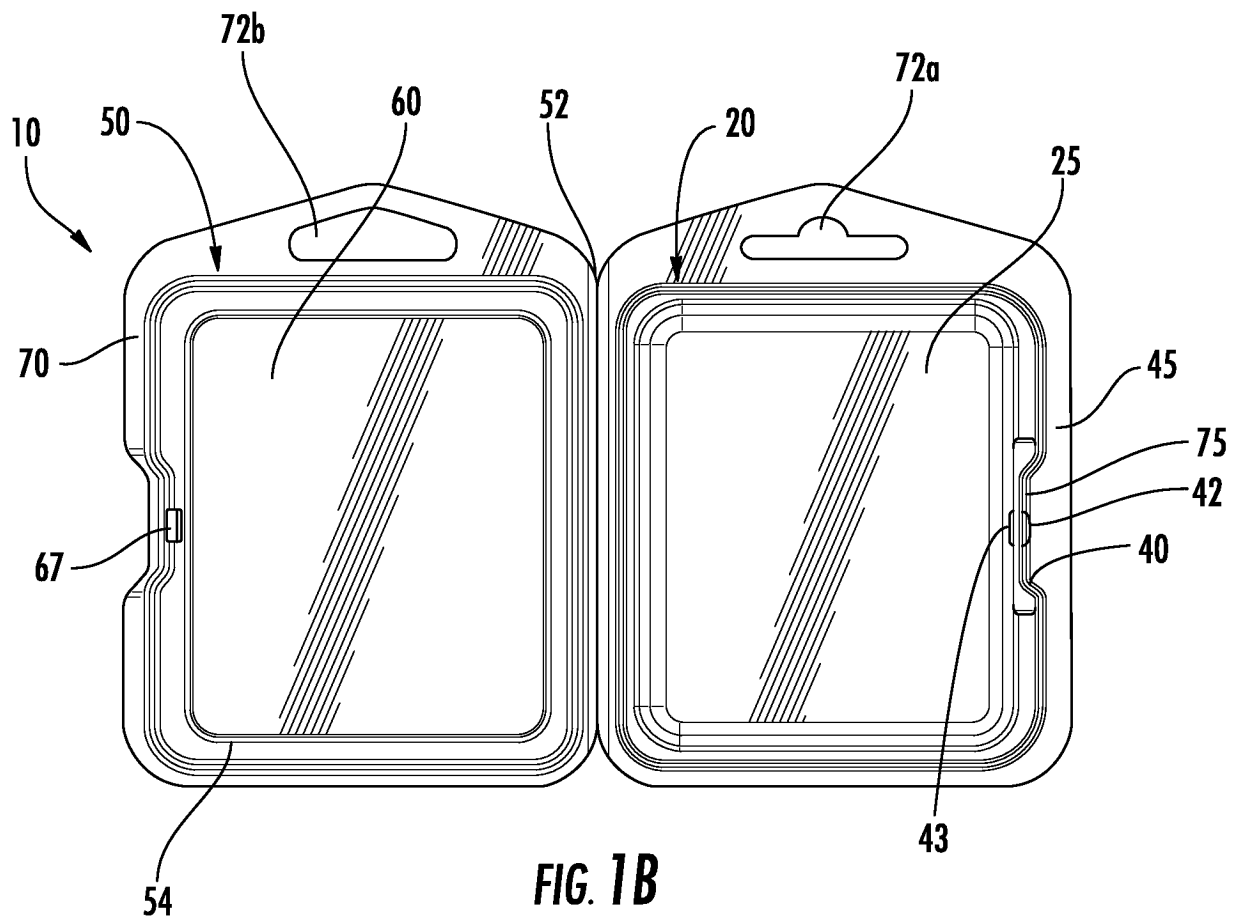
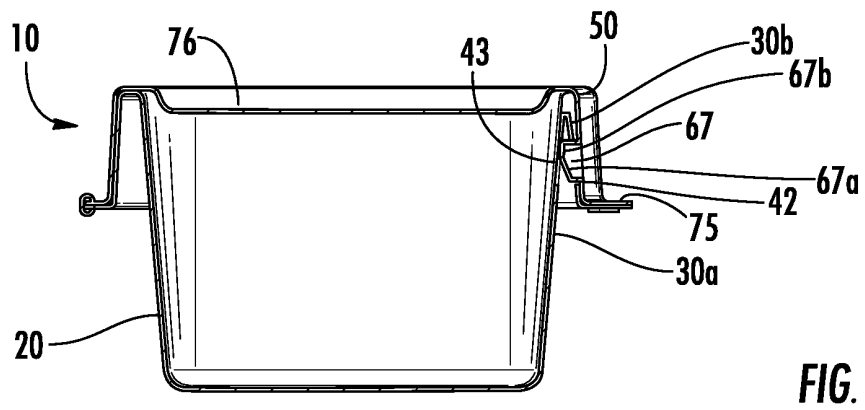
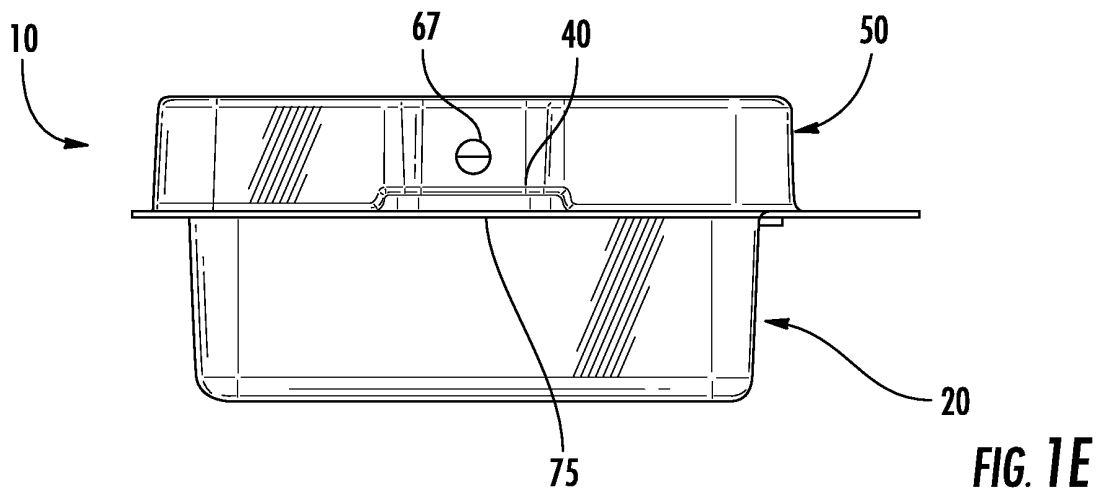
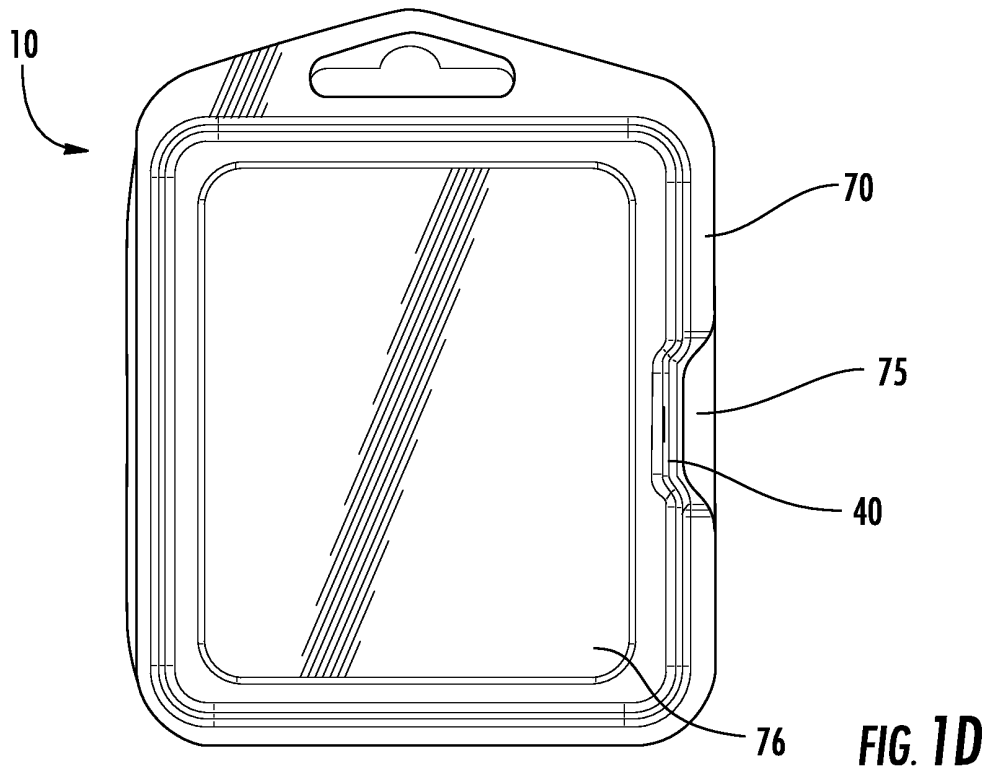


FIG. 1A





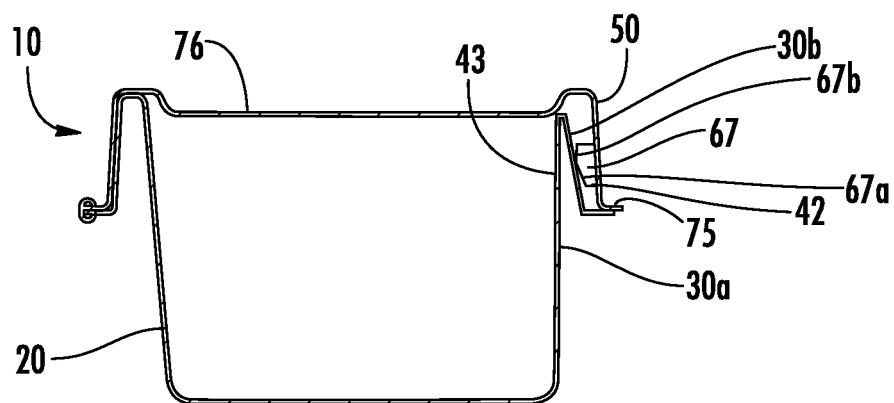


FIG. 1G

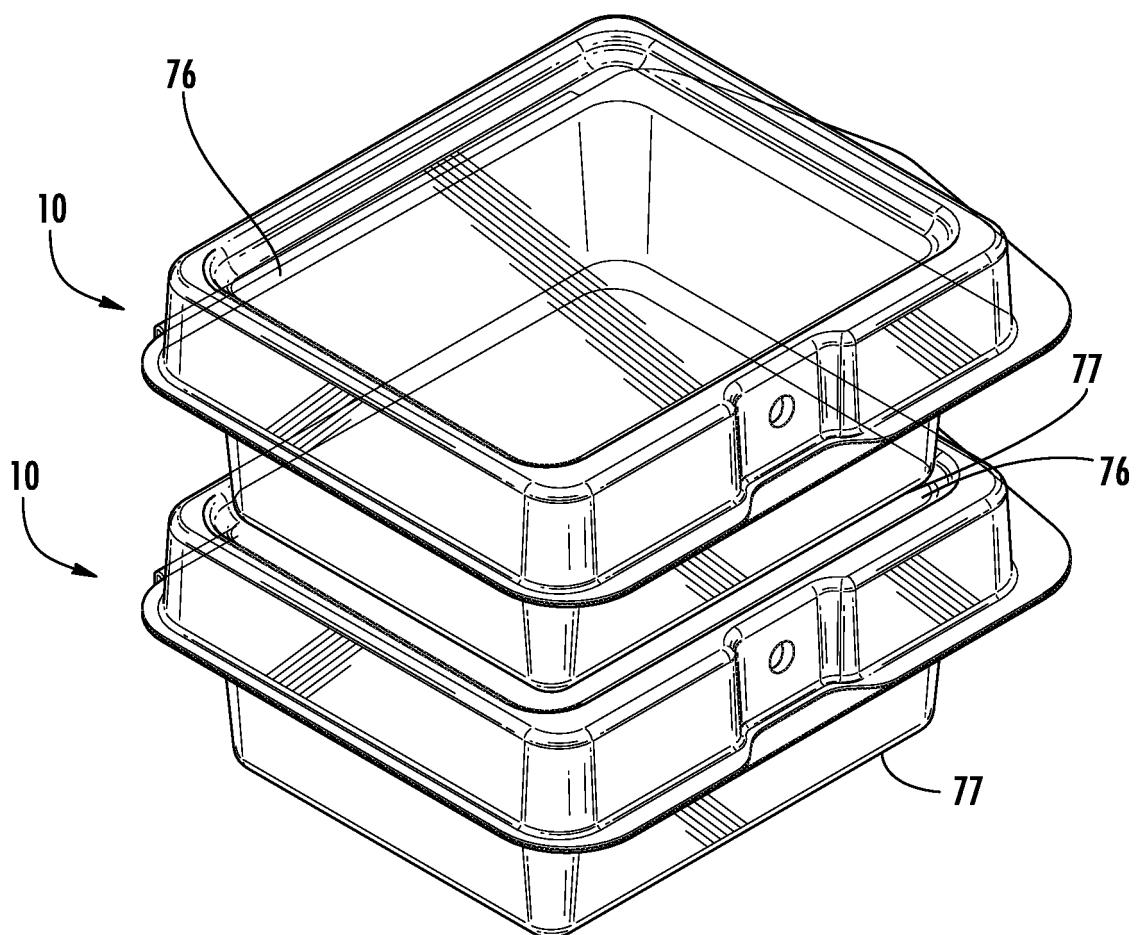
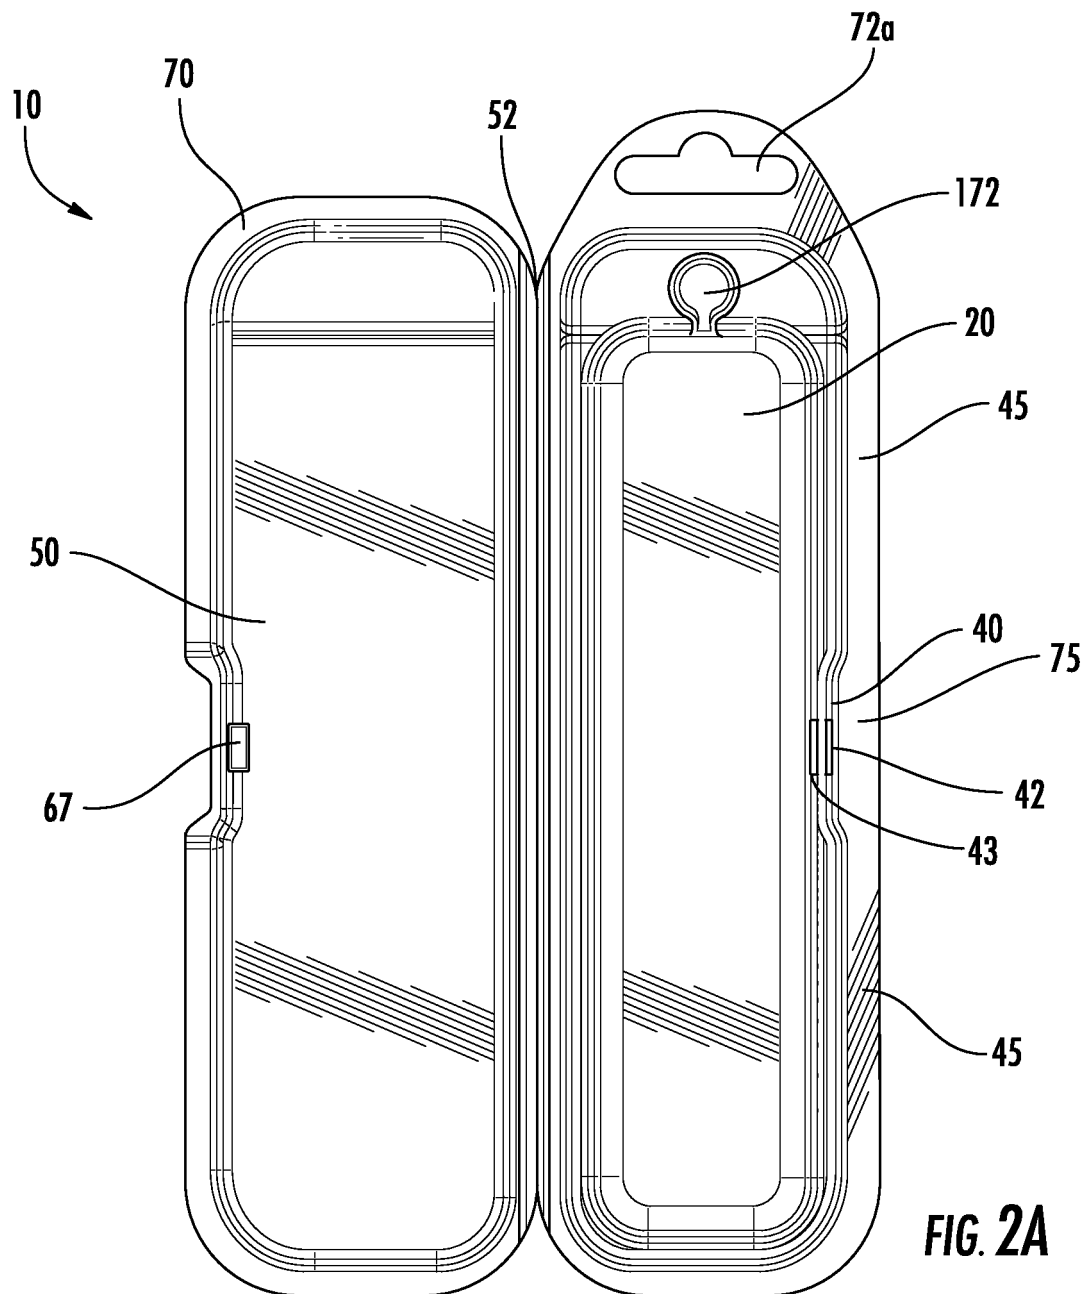


FIG. 1H



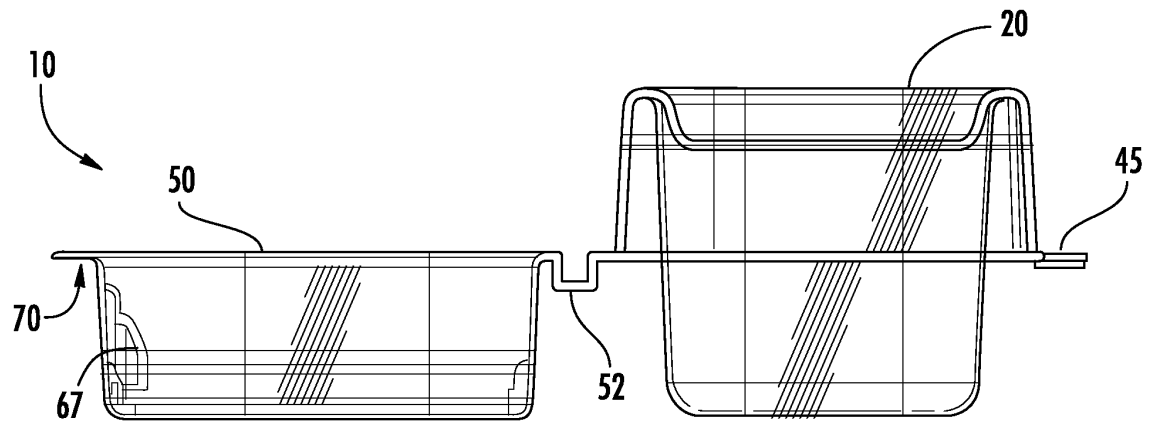


FIG. 2B

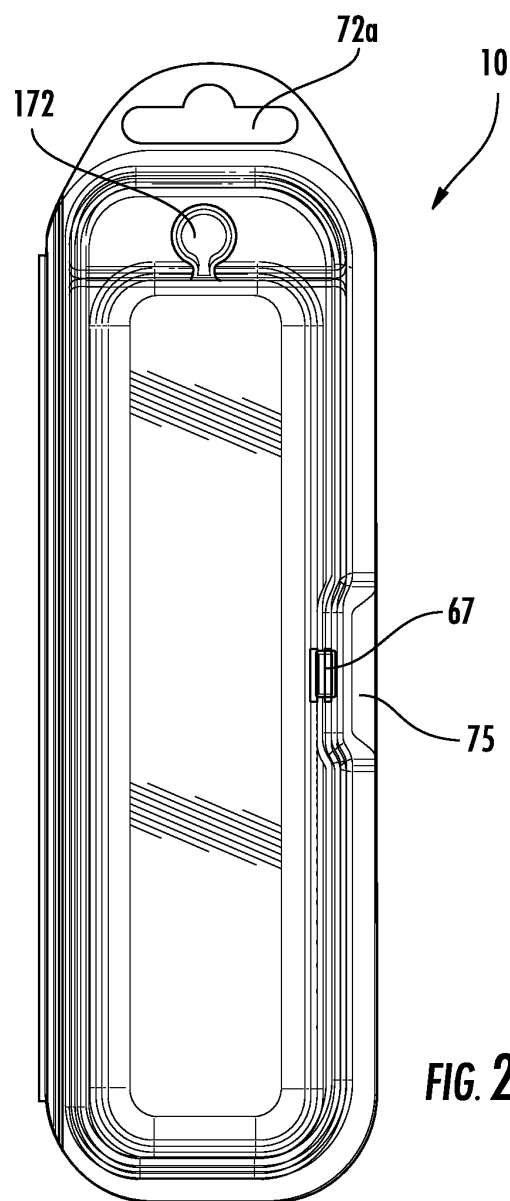
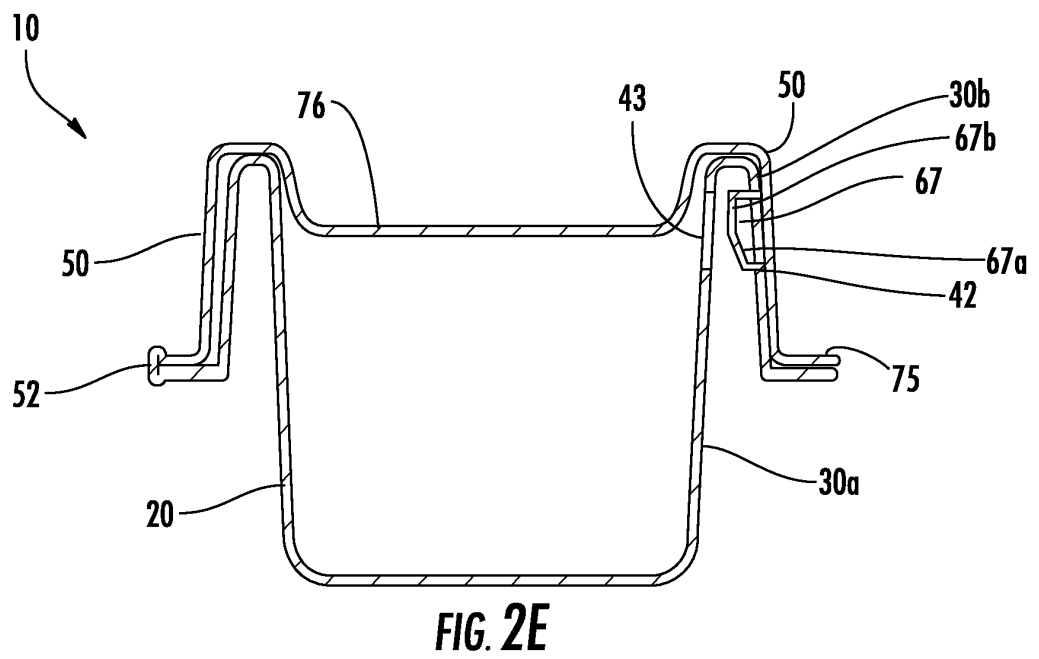
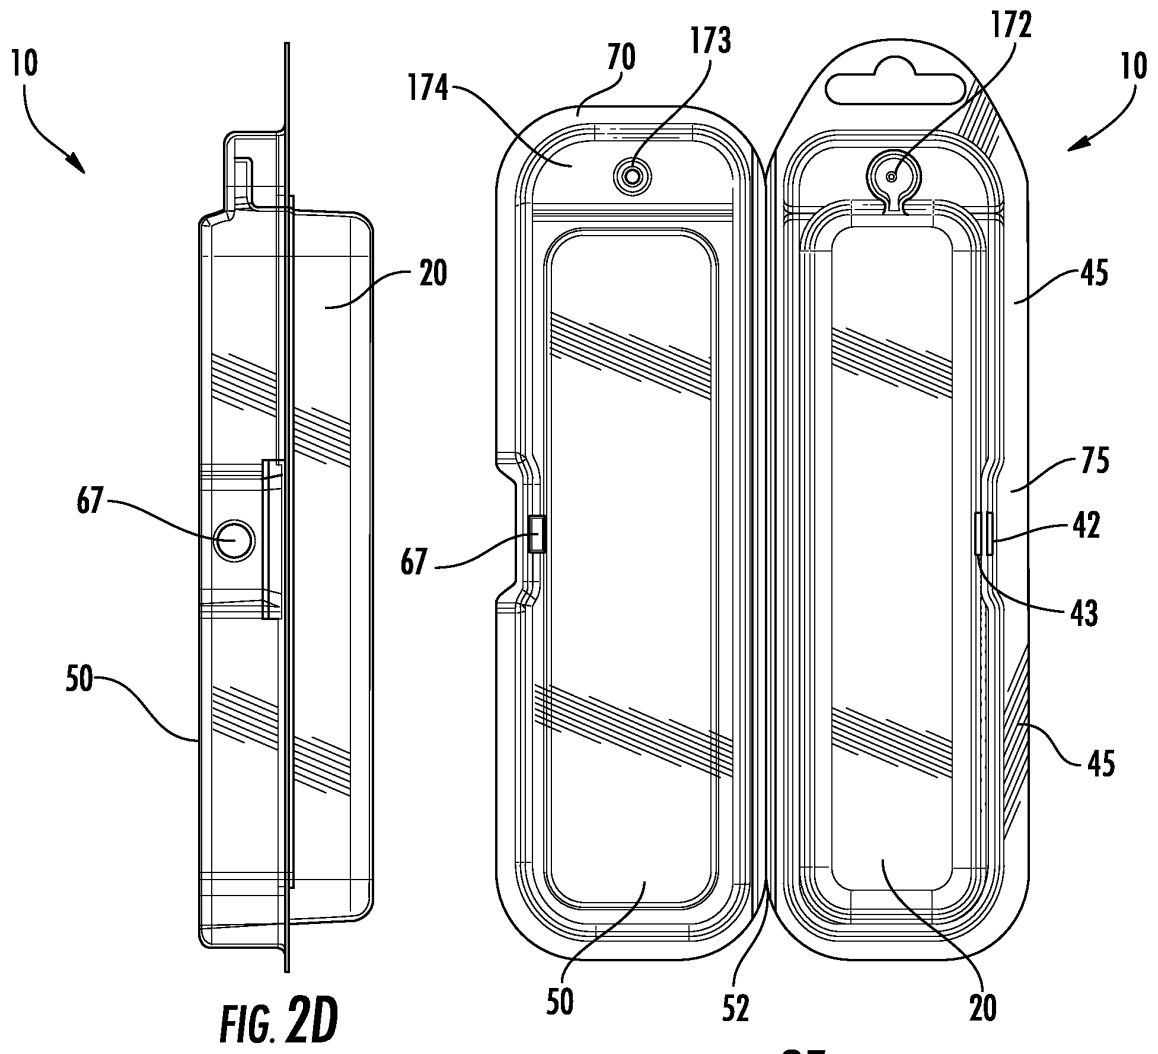
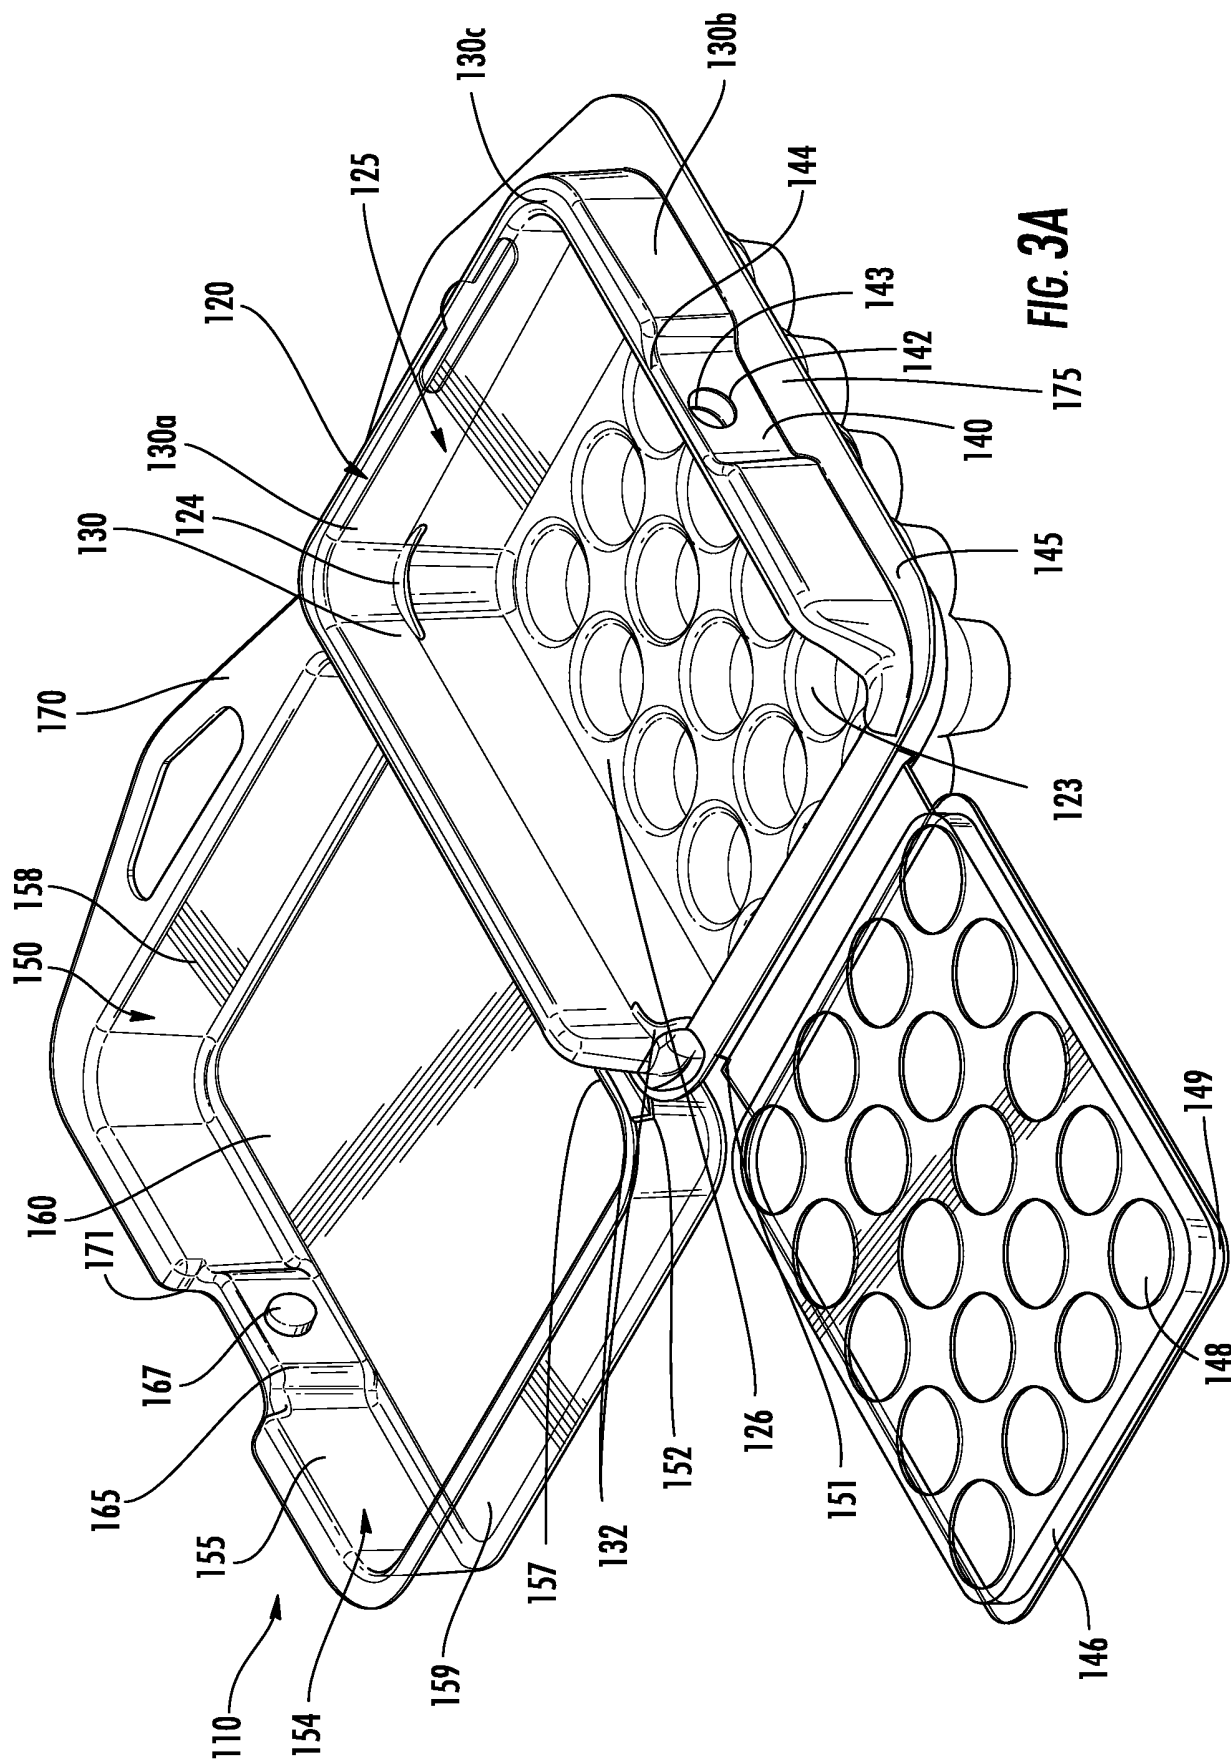


FIG. 2C





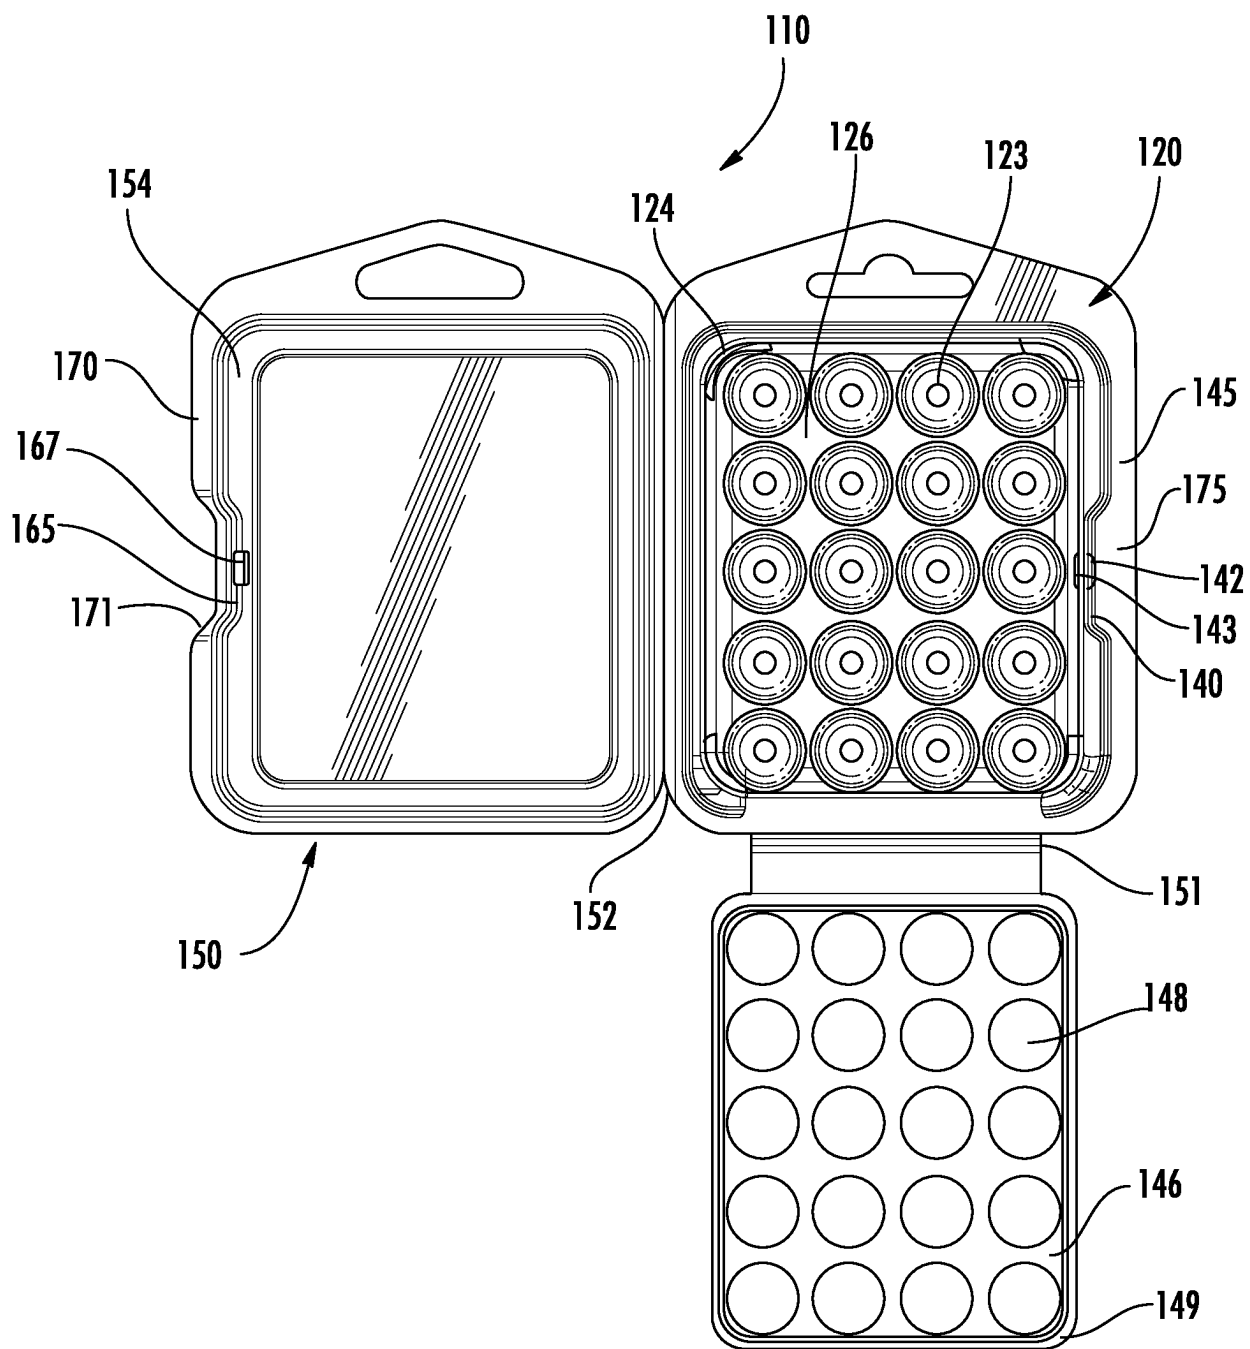
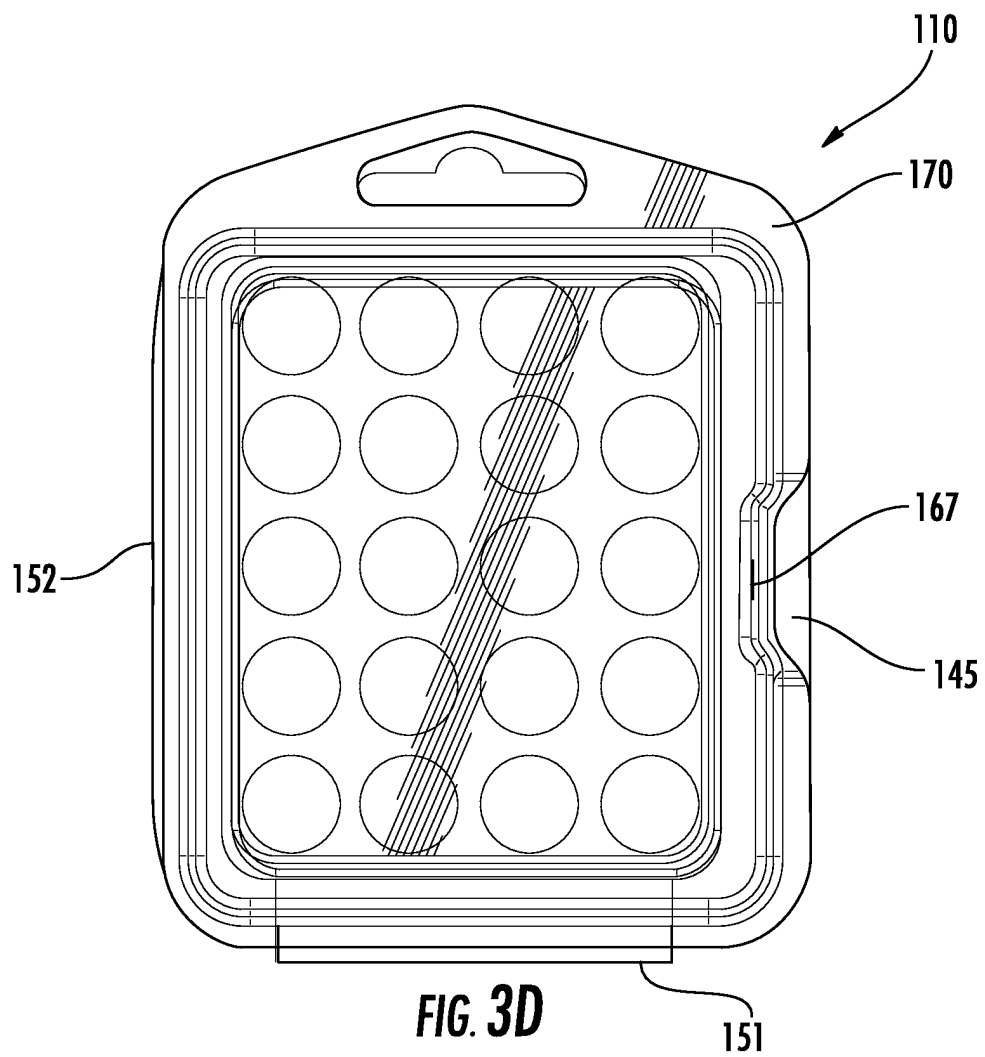
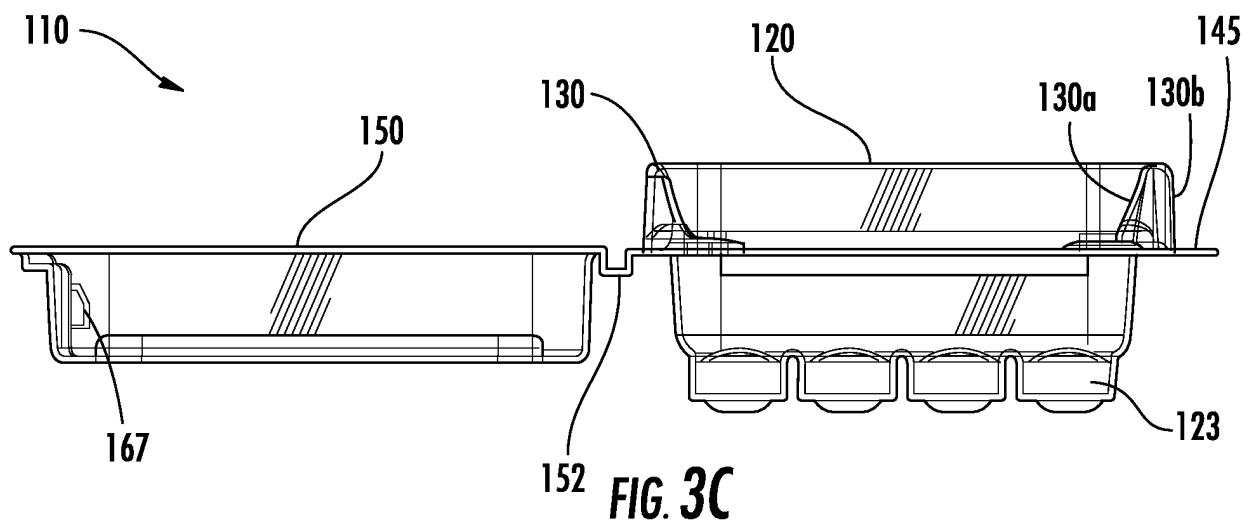


FIG. 3B



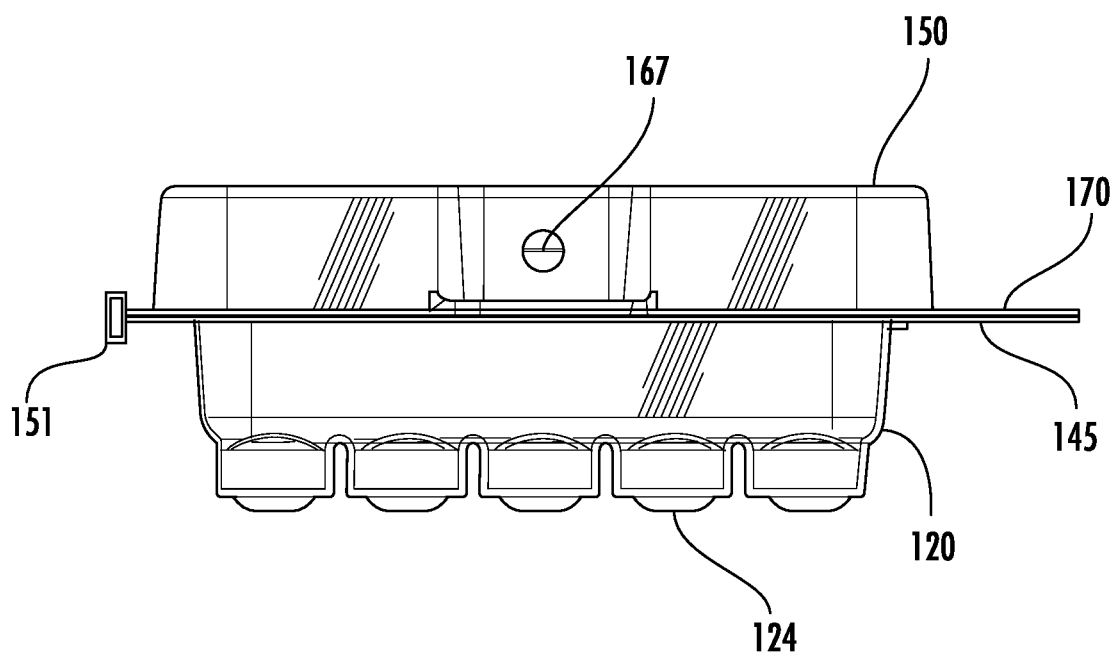


FIG. 3E

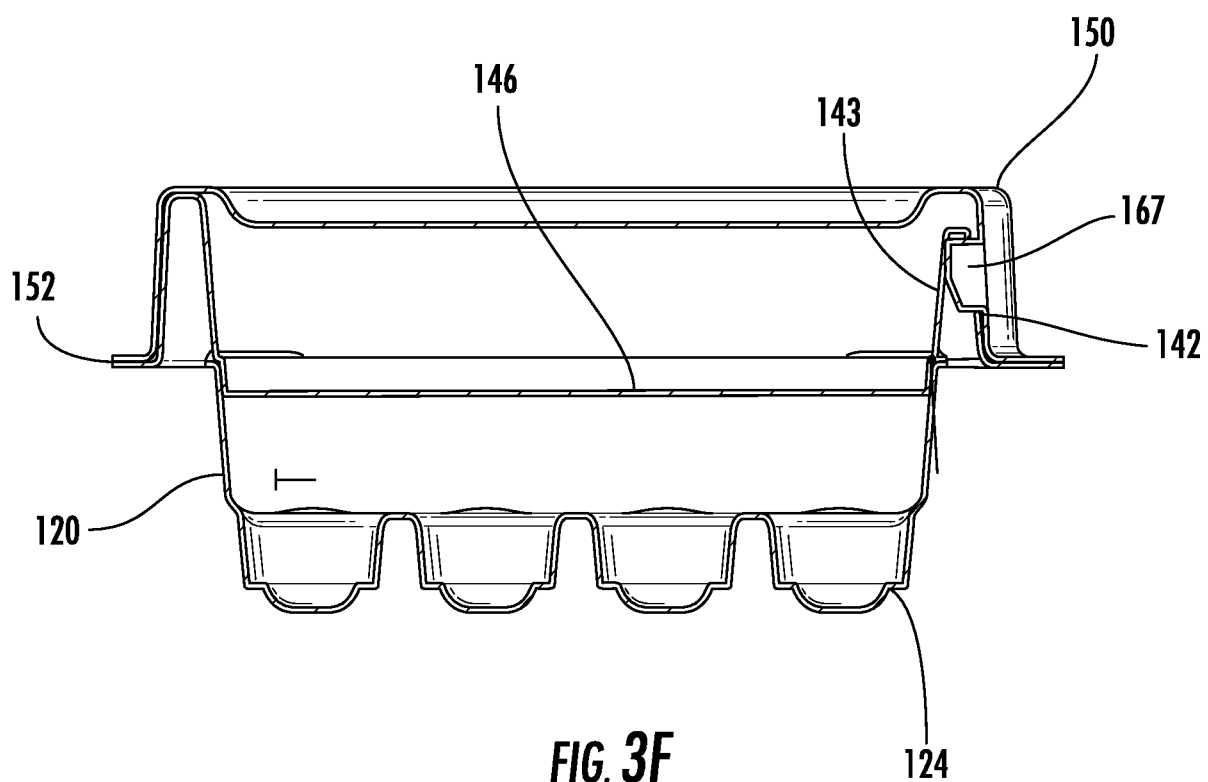


FIG. 3F

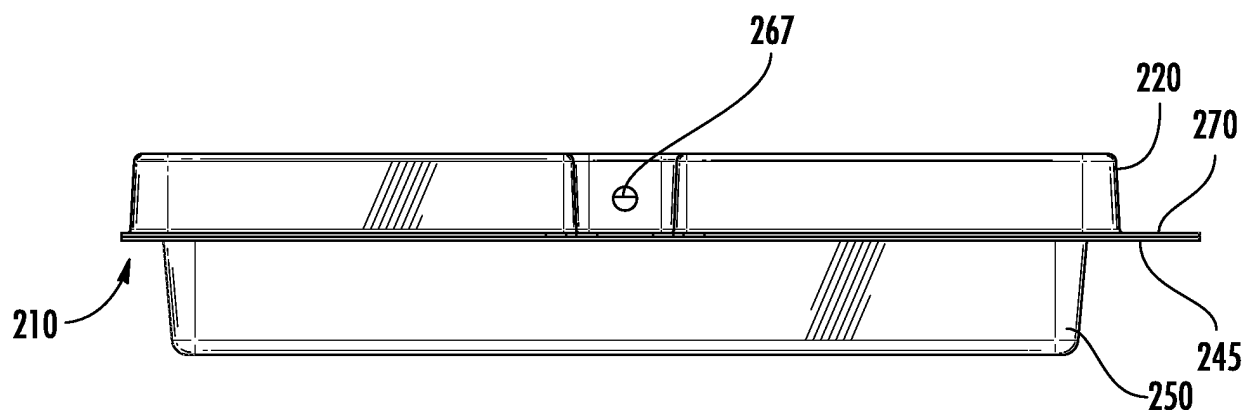


FIG. 4A

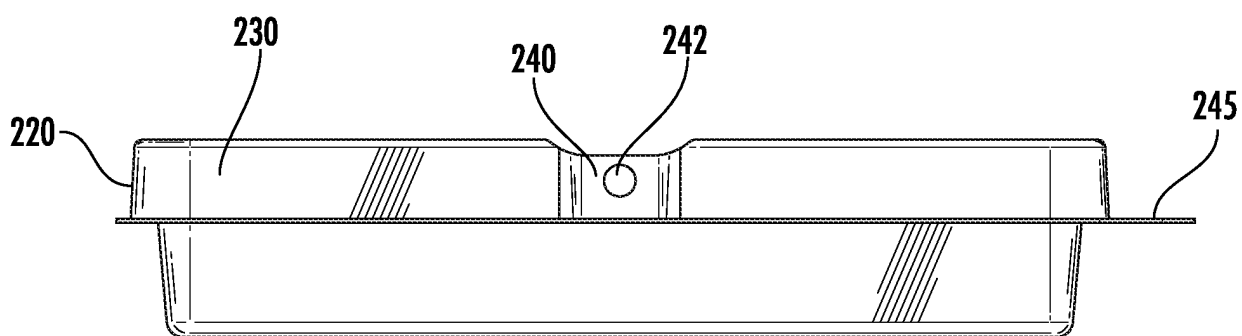


FIG. 4B

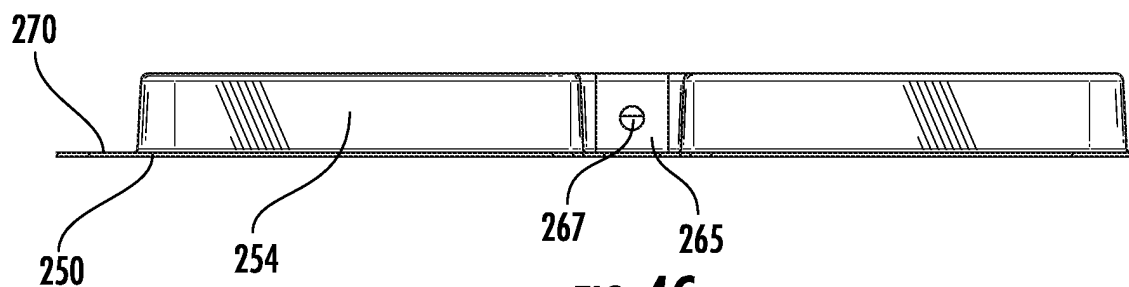


FIG. 4C

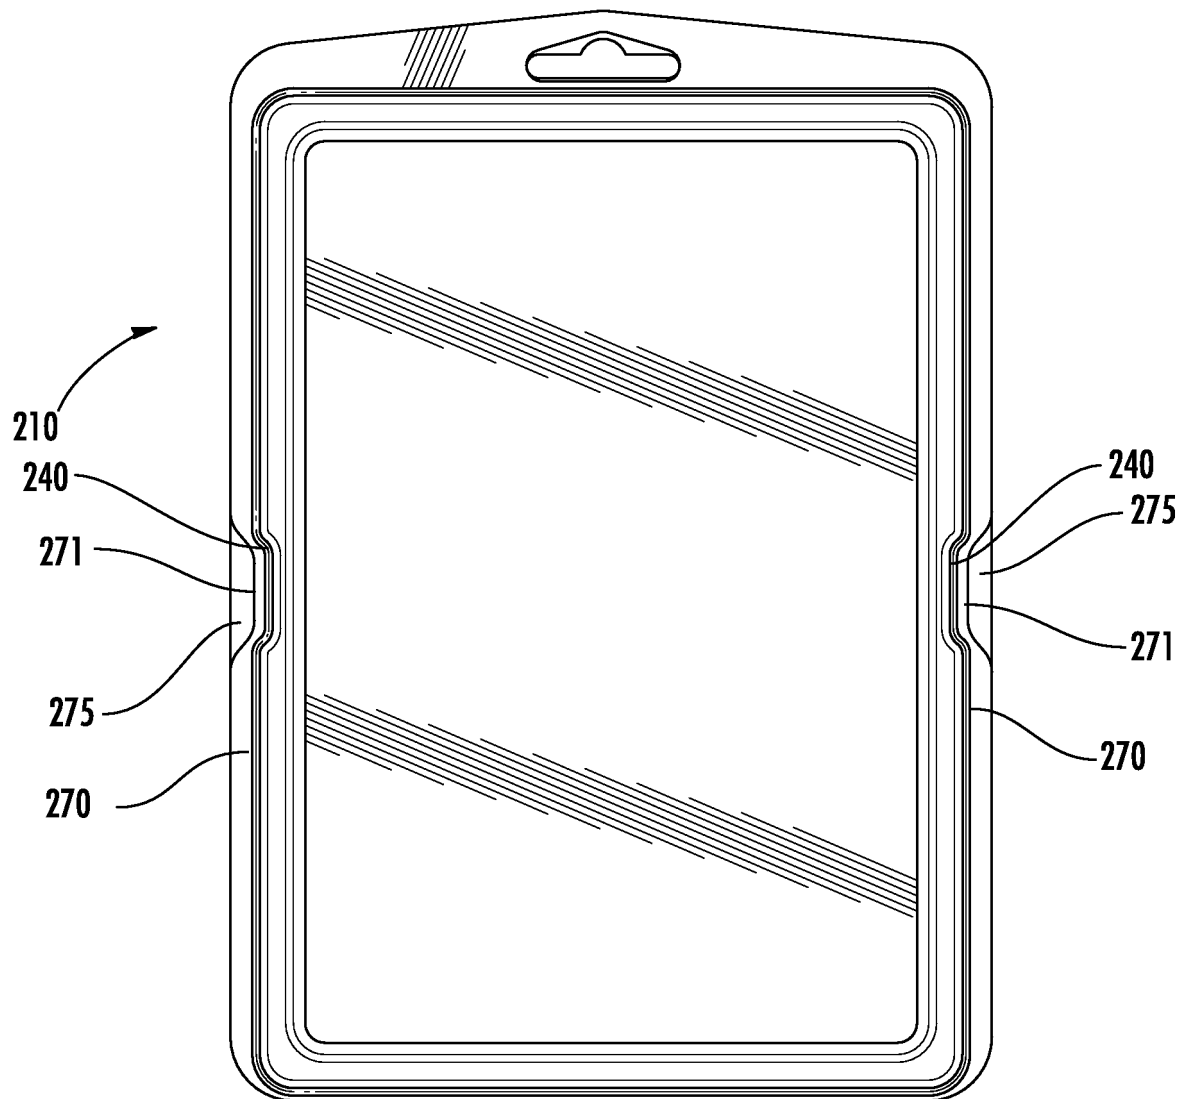


FIG. 4D

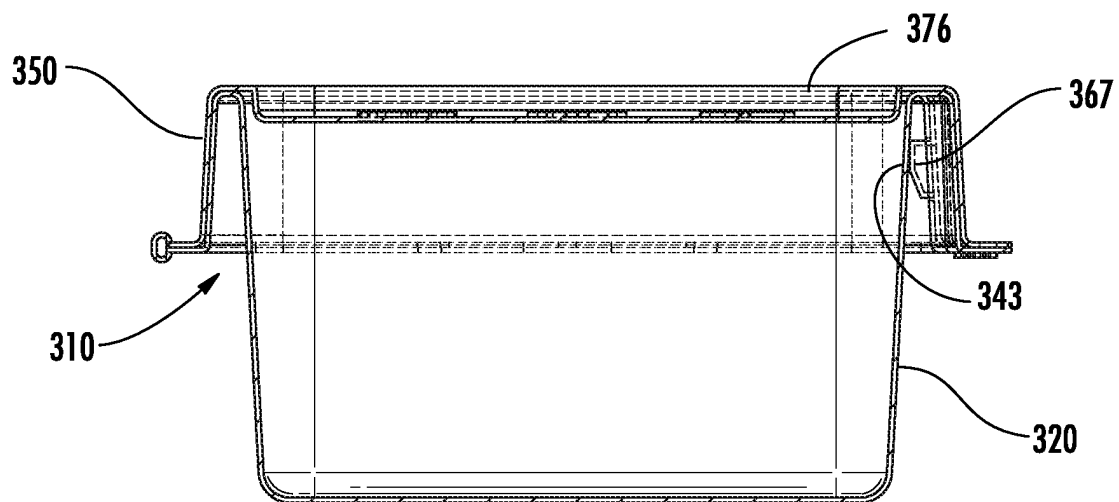


FIG. 5A

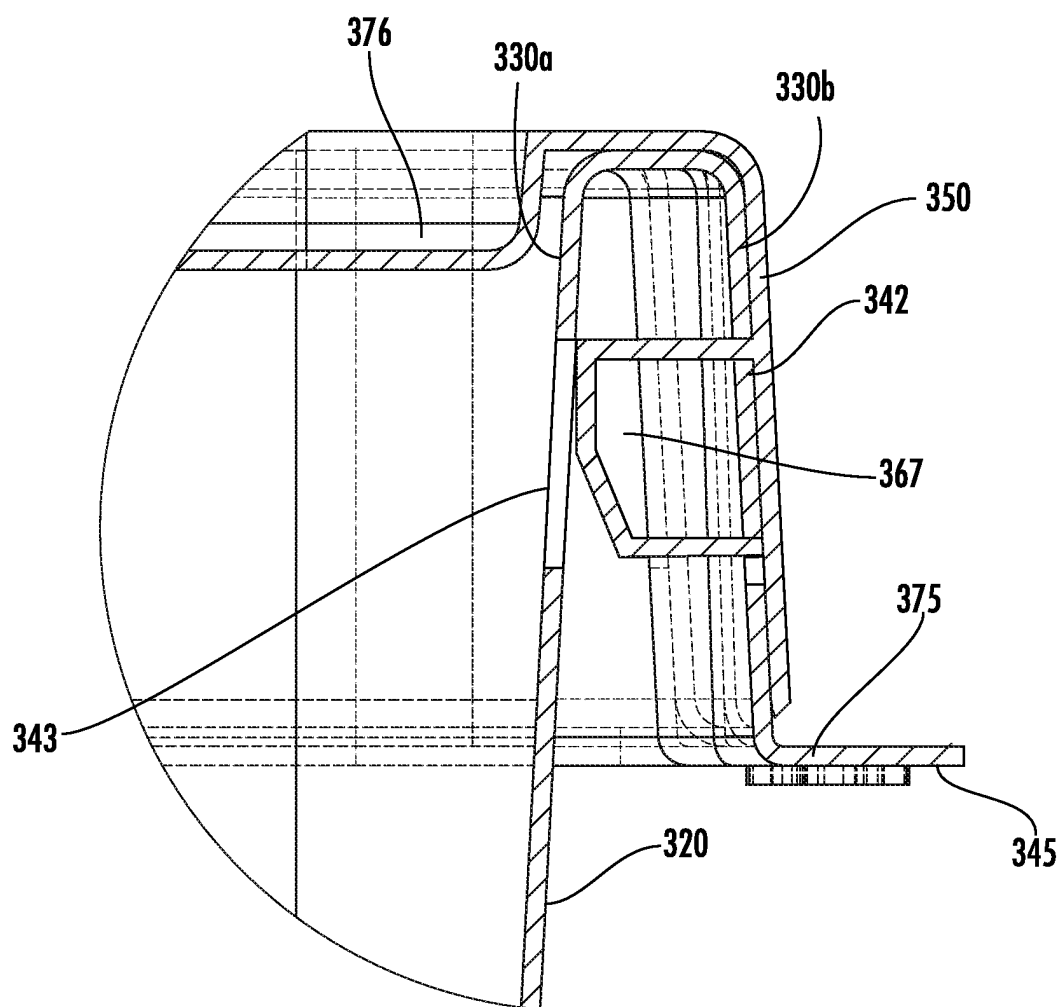
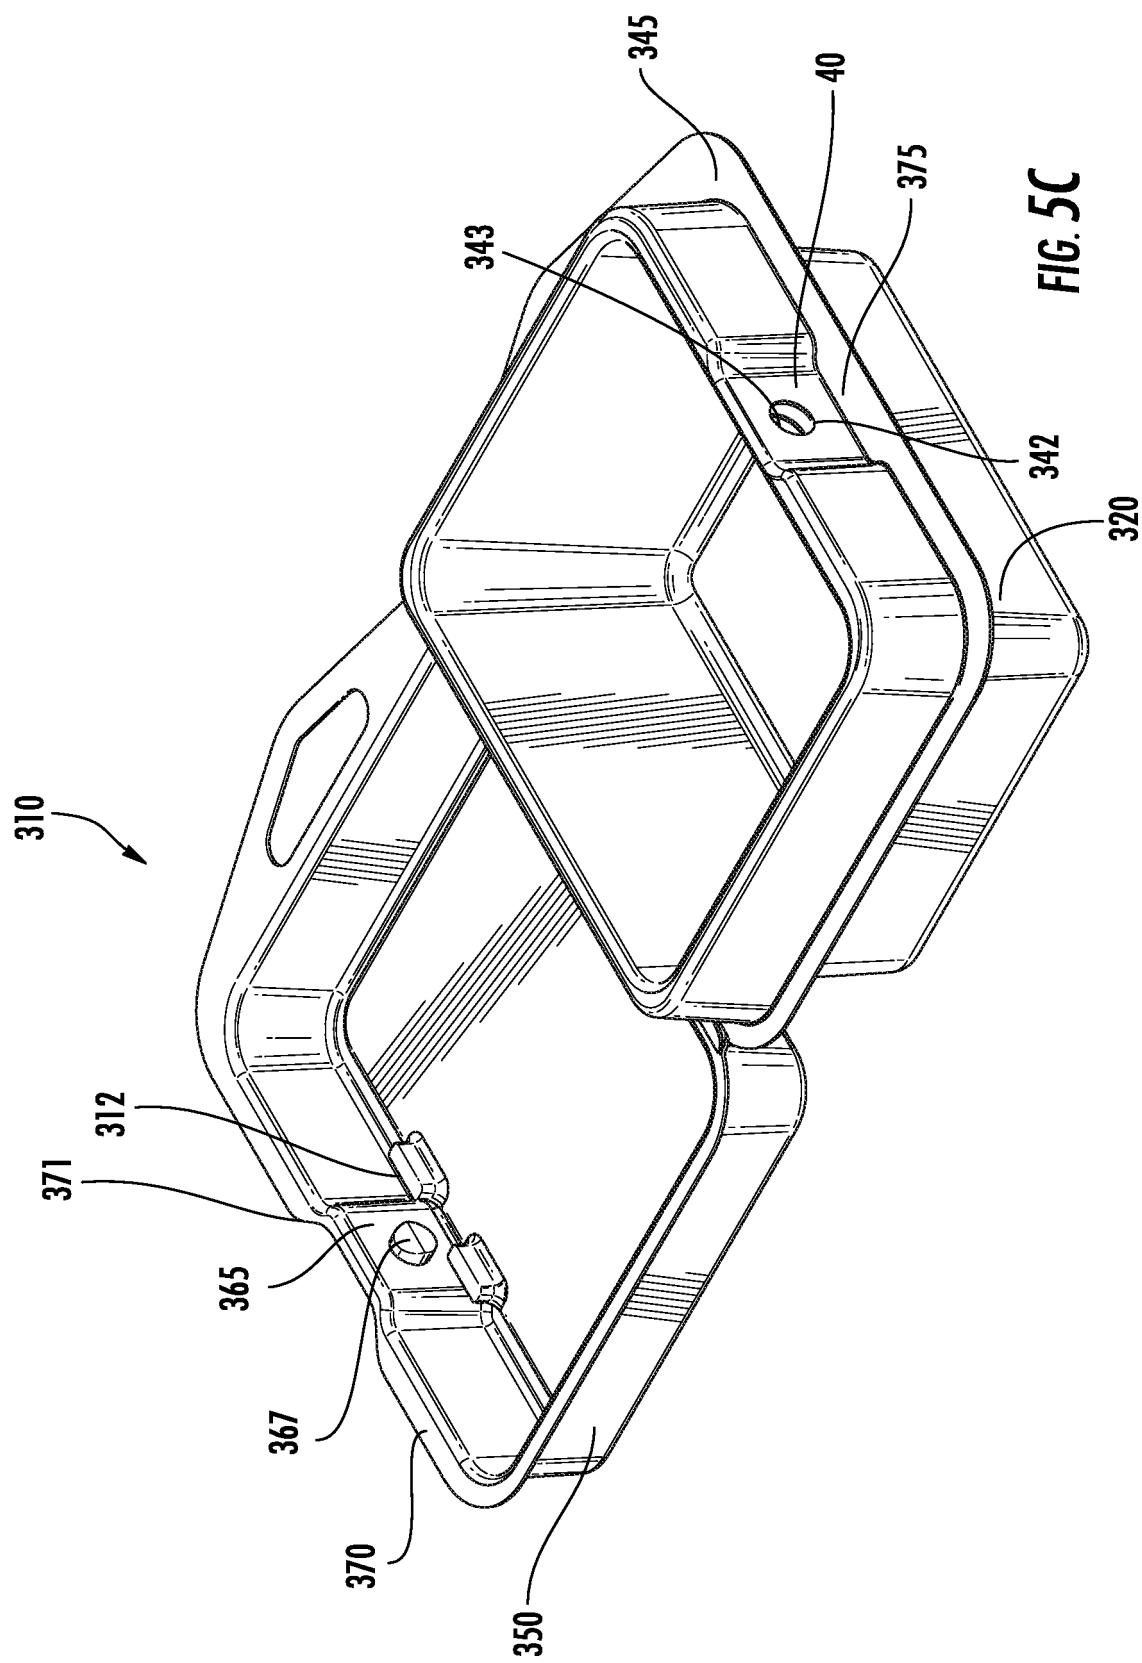


FIG. 5B



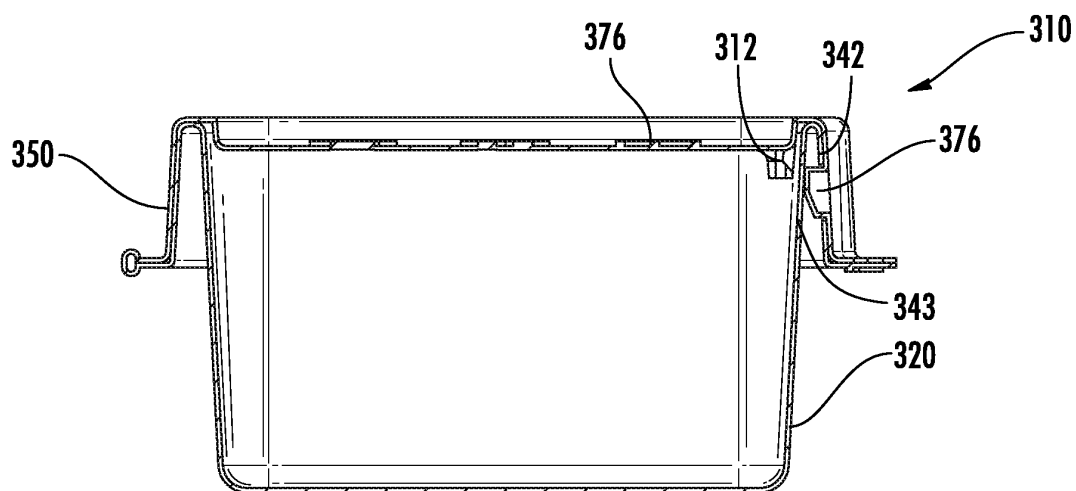


FIG. 5D

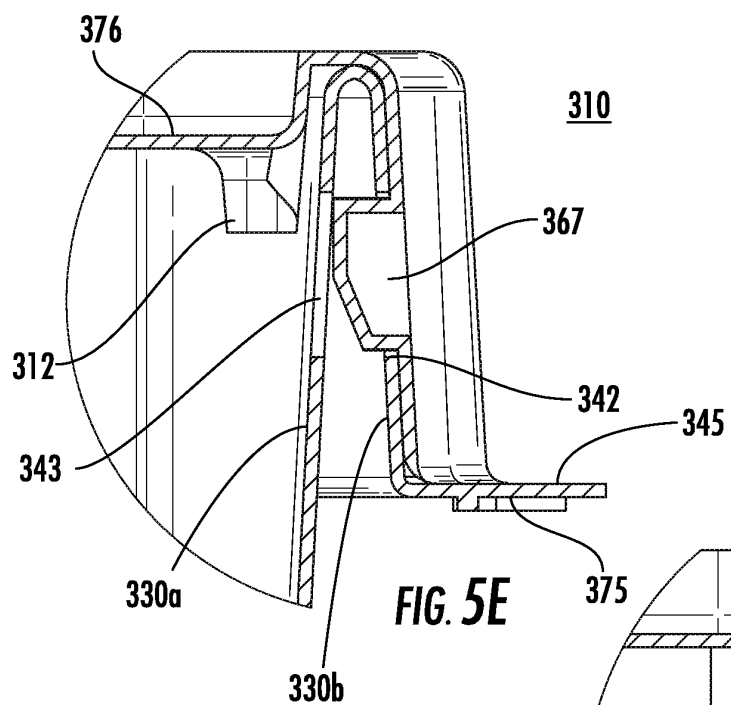


FIG. 5E

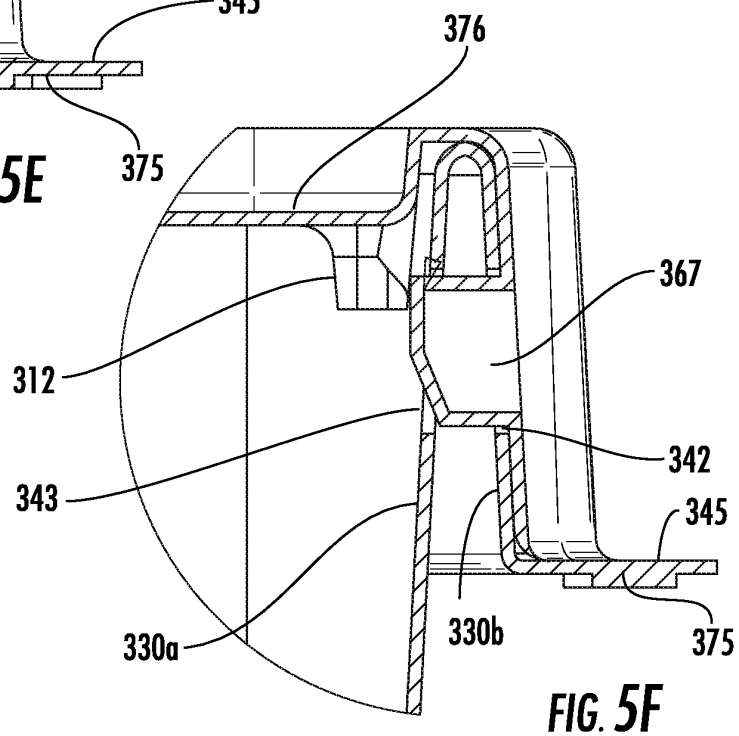
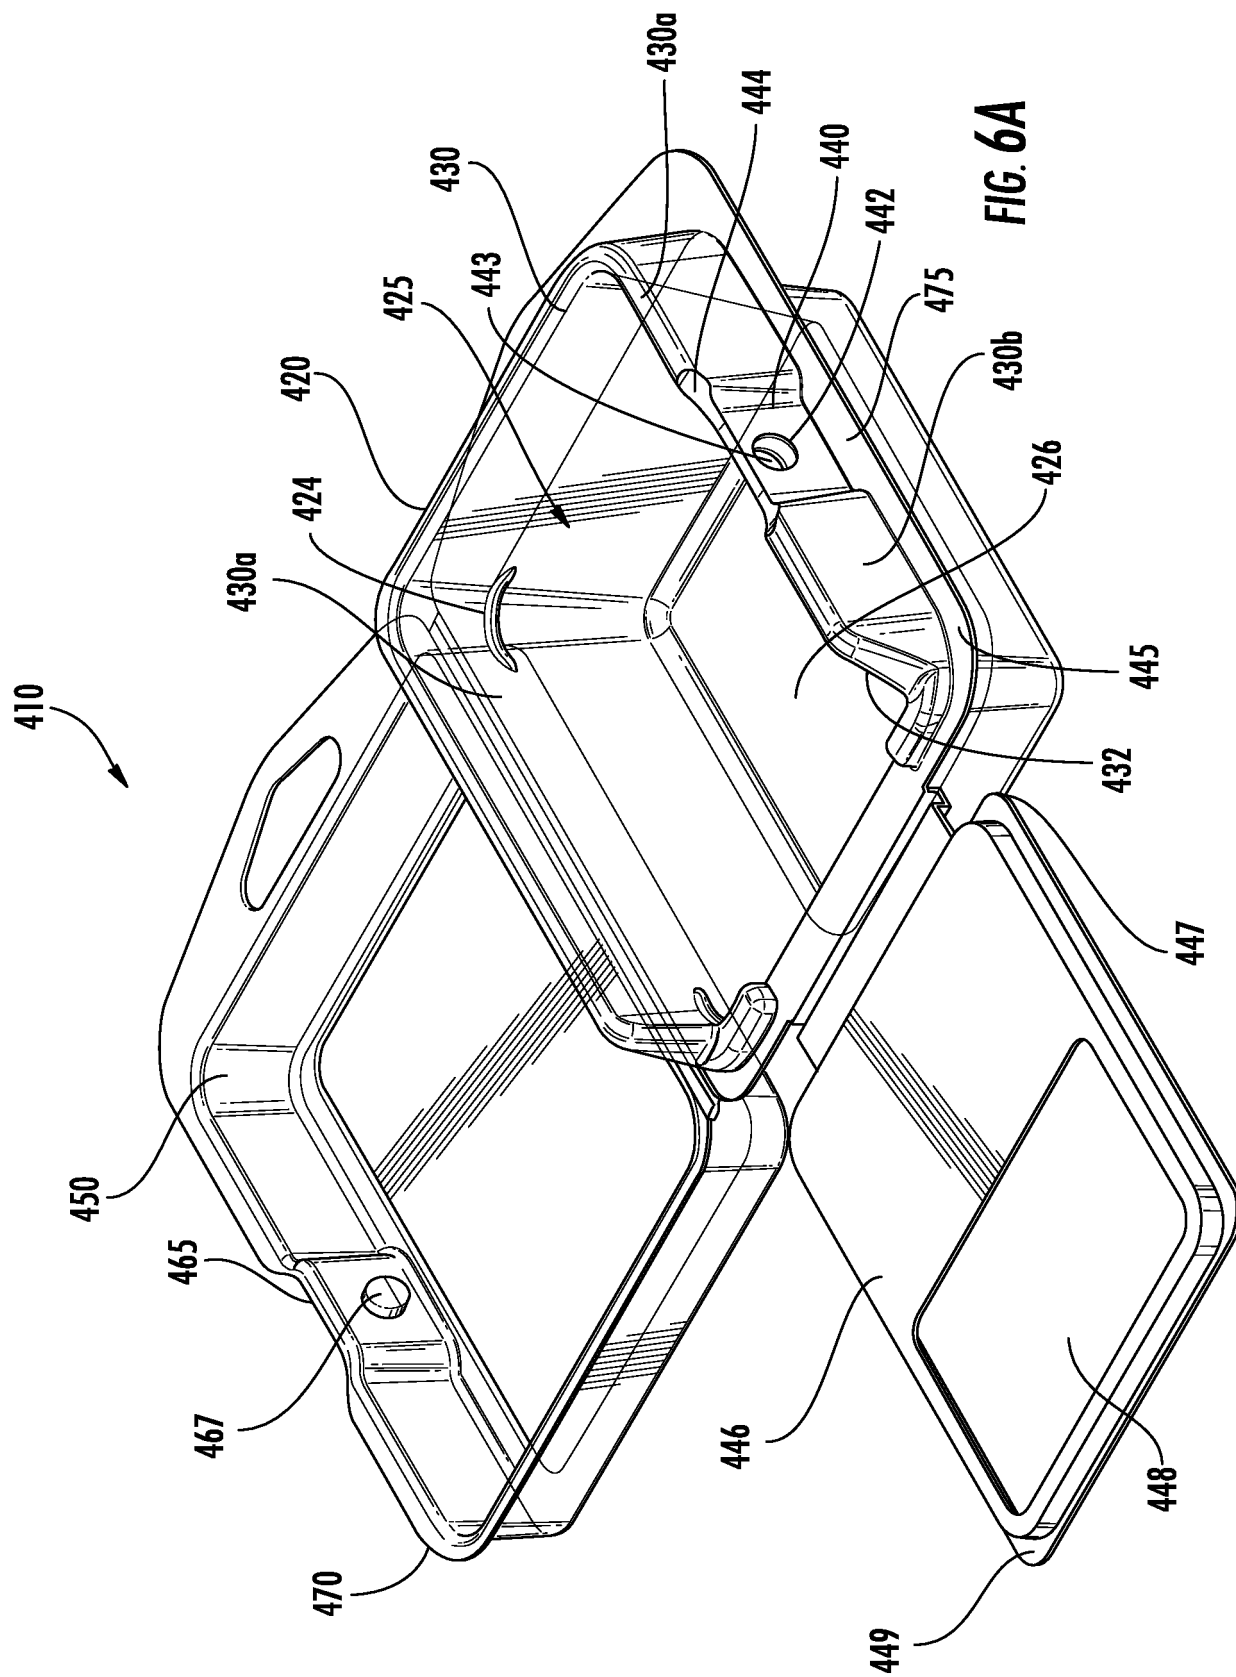


FIG. 5F



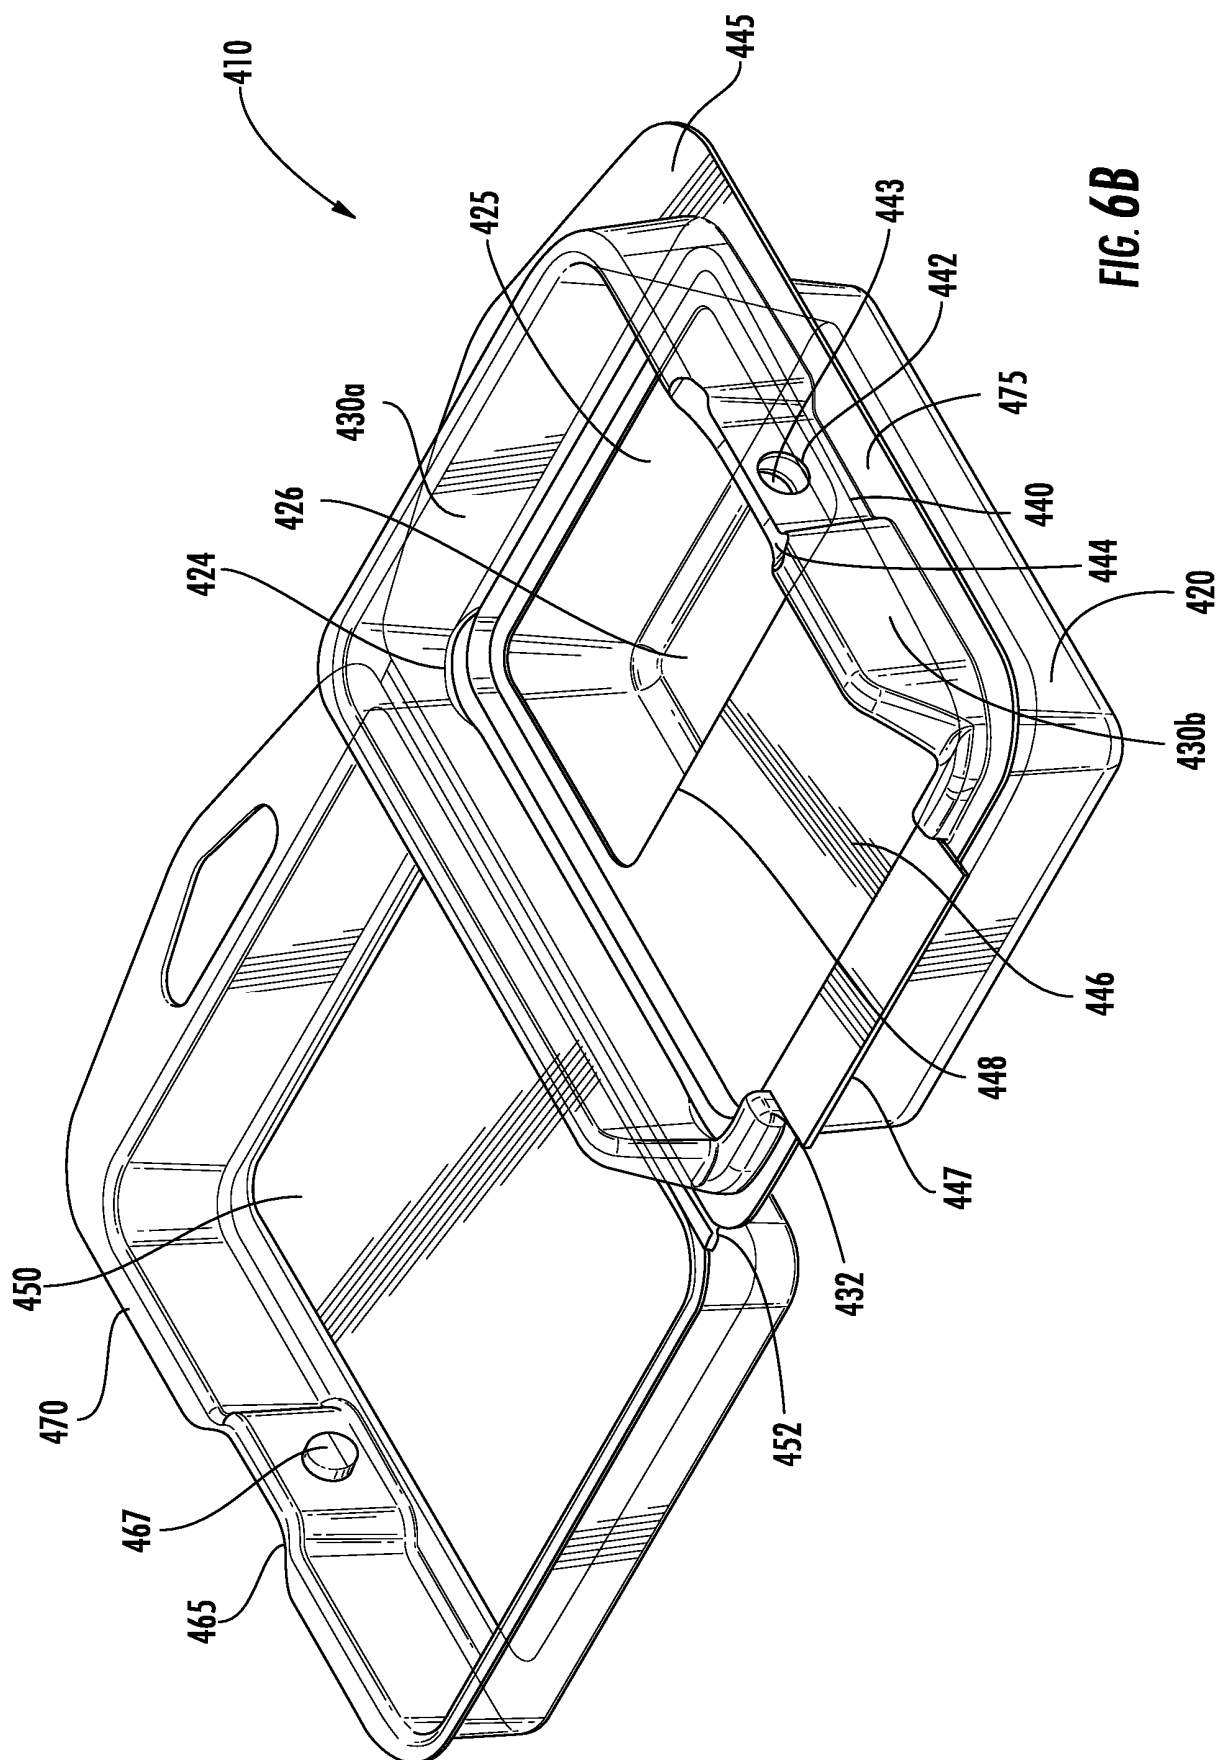


FIG. 6B

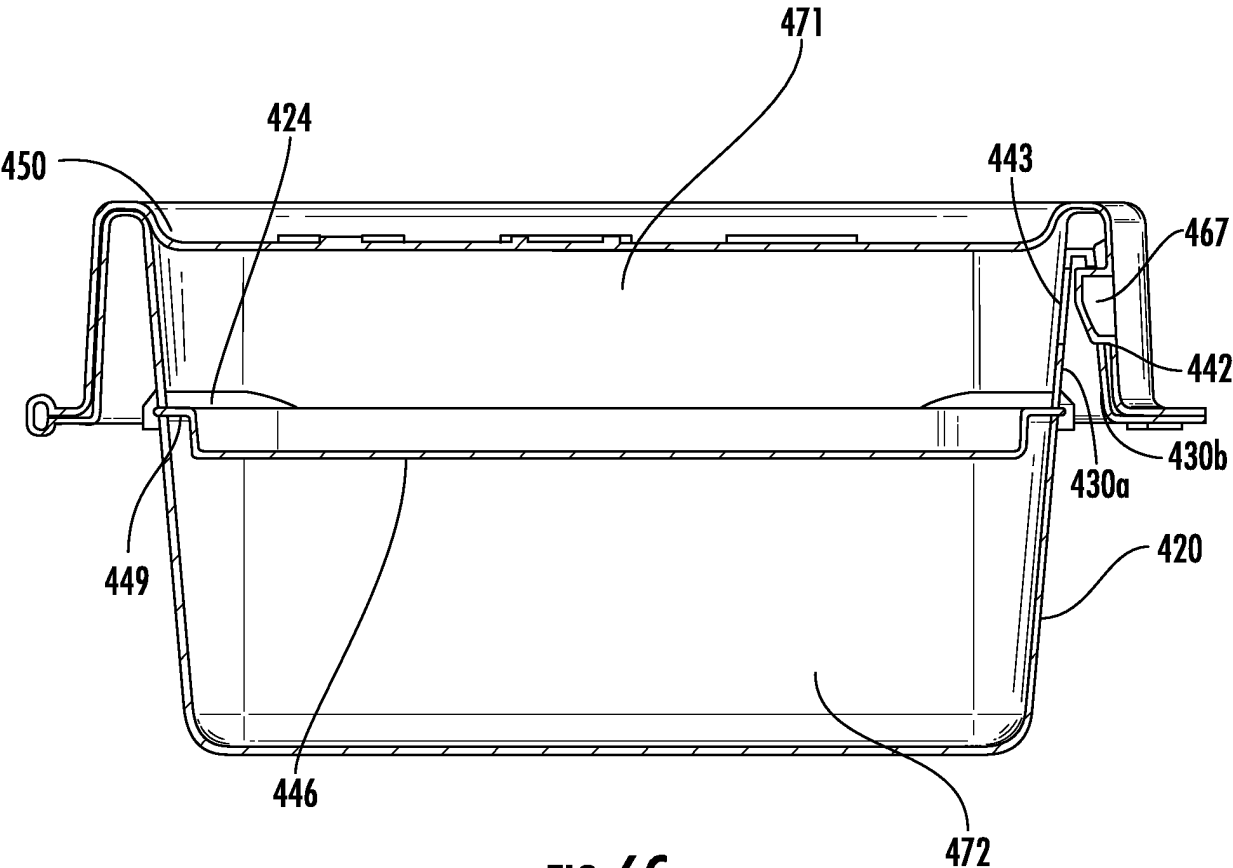


FIG. 6C

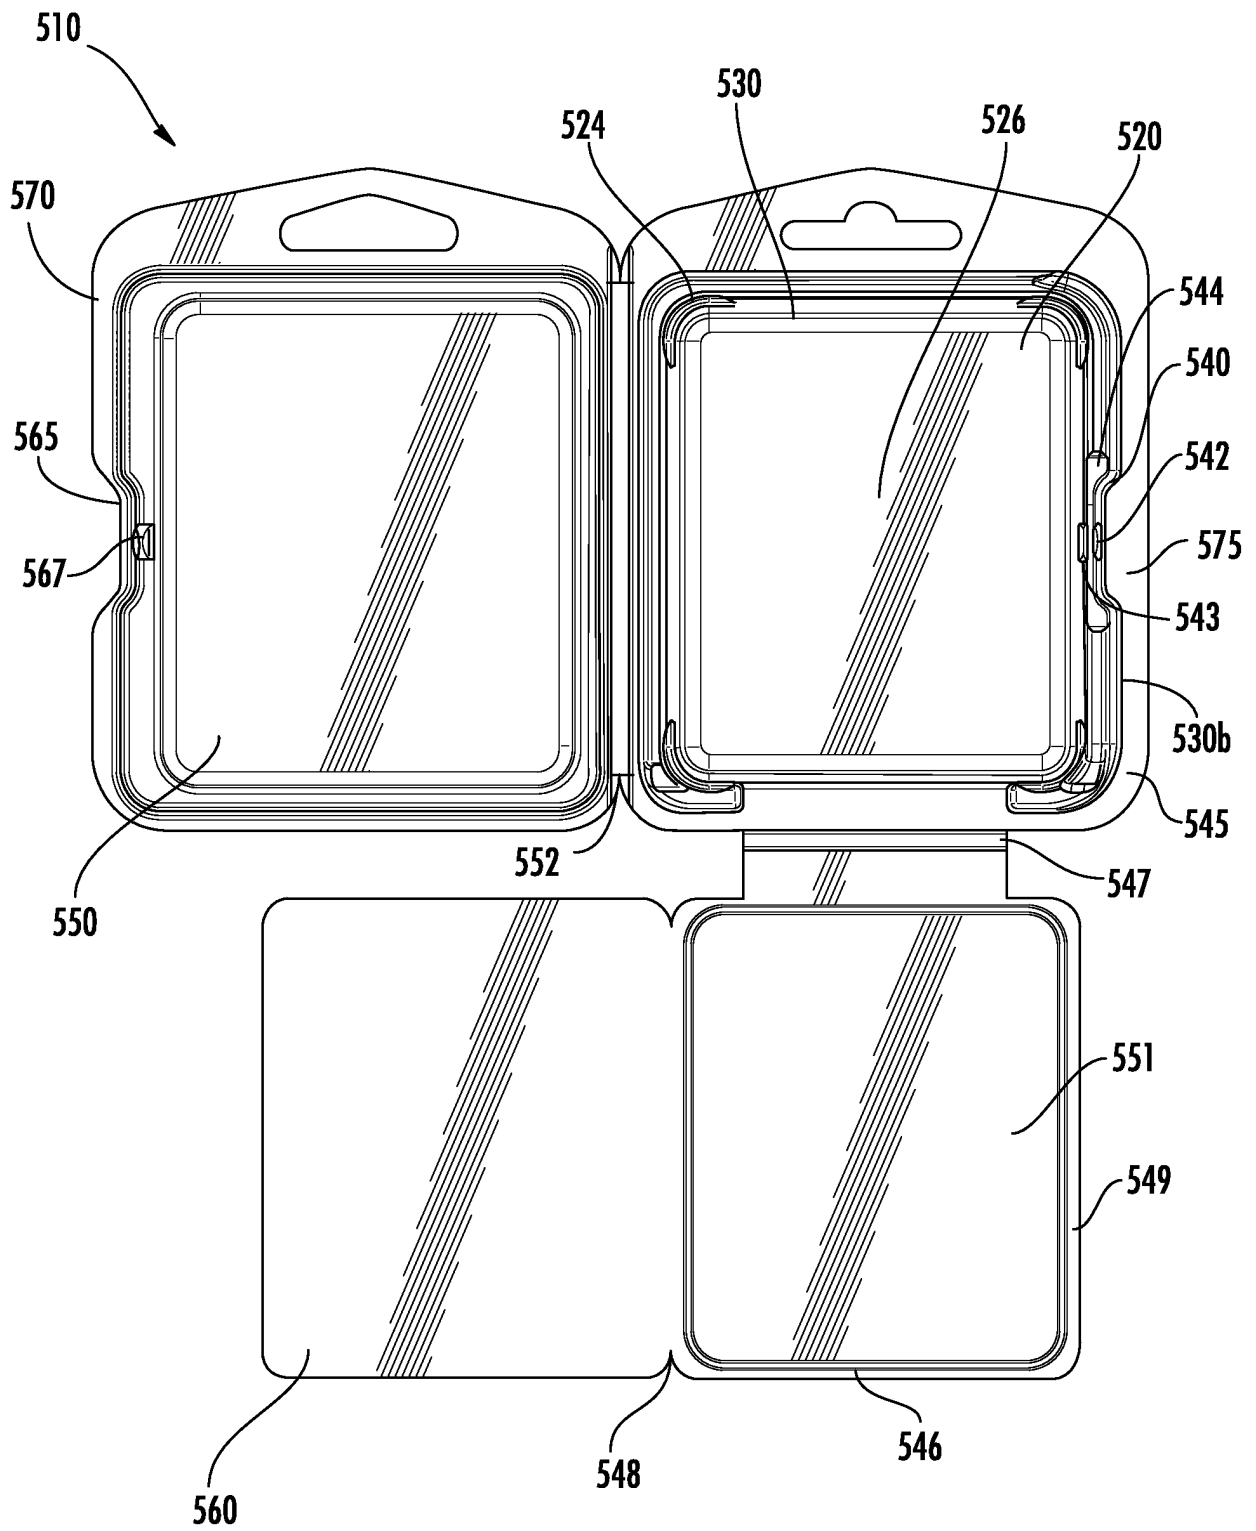


FIG. 7A

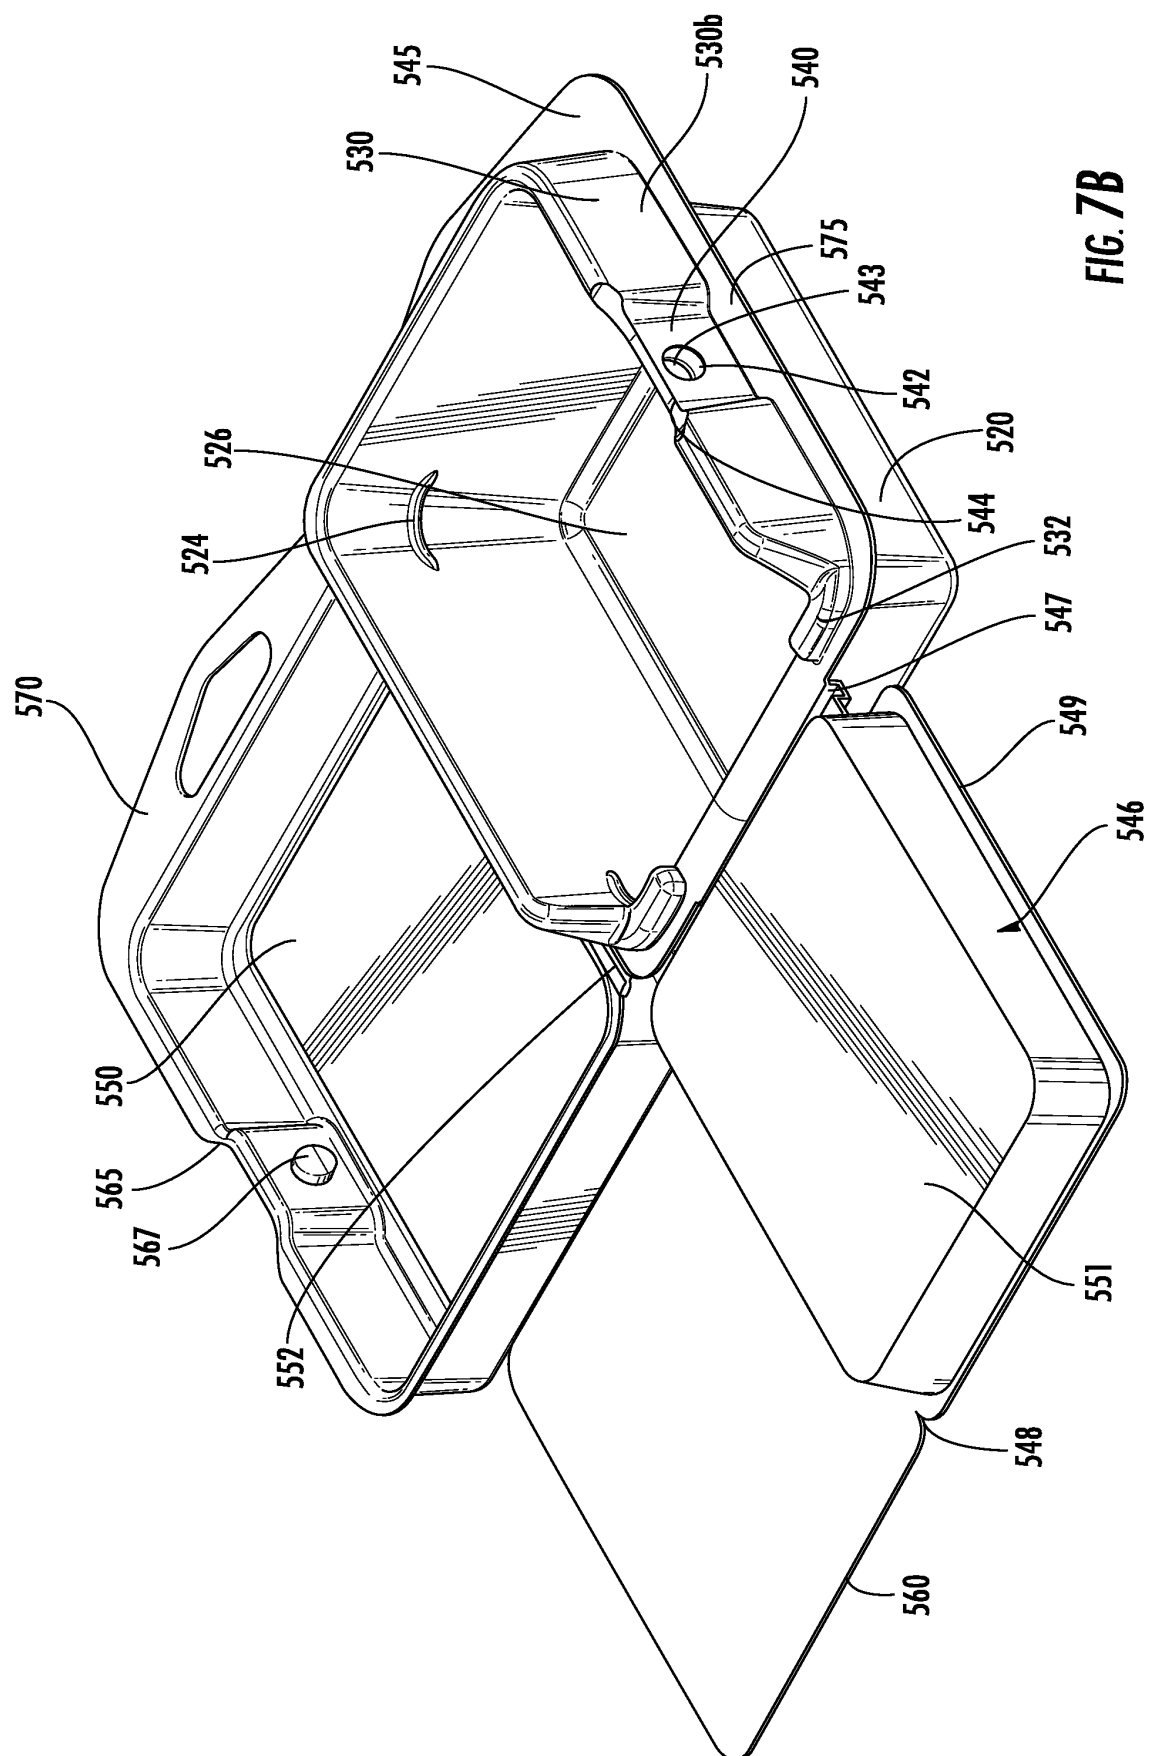


FIG. 7B

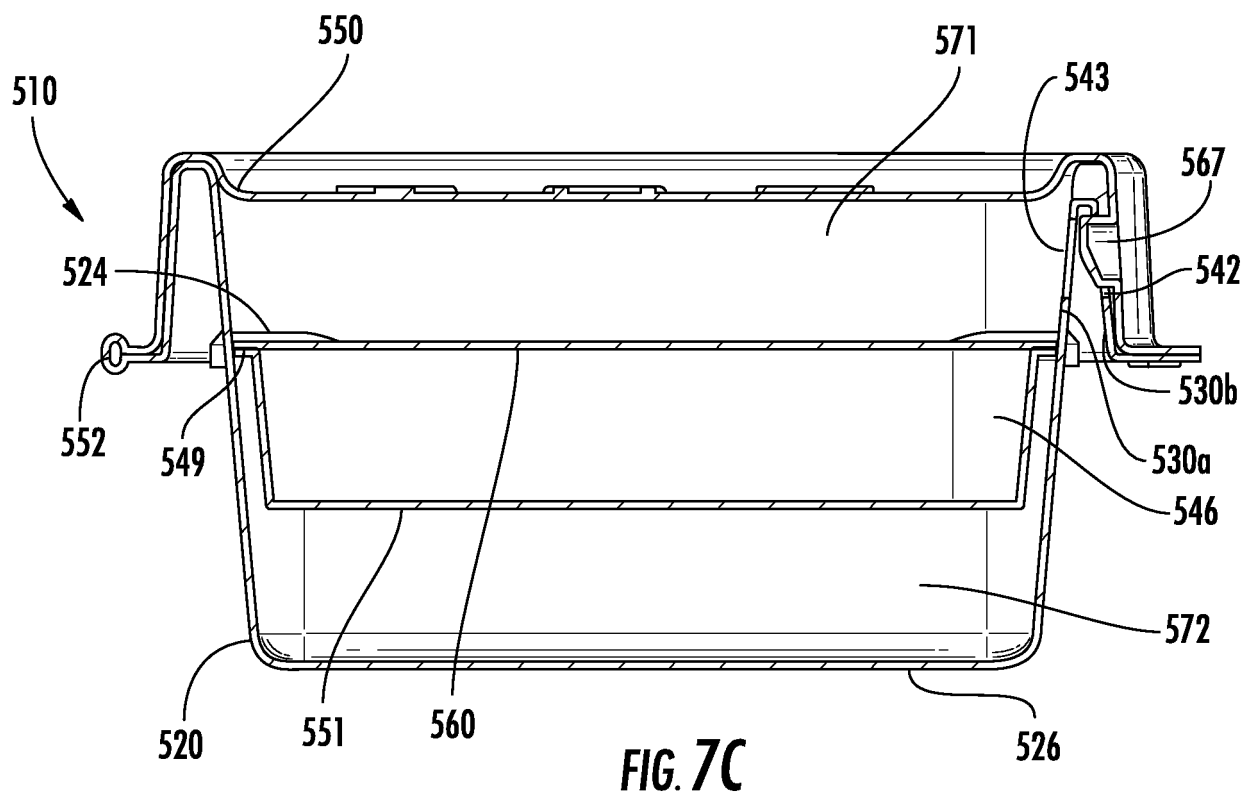


FIG. 7C

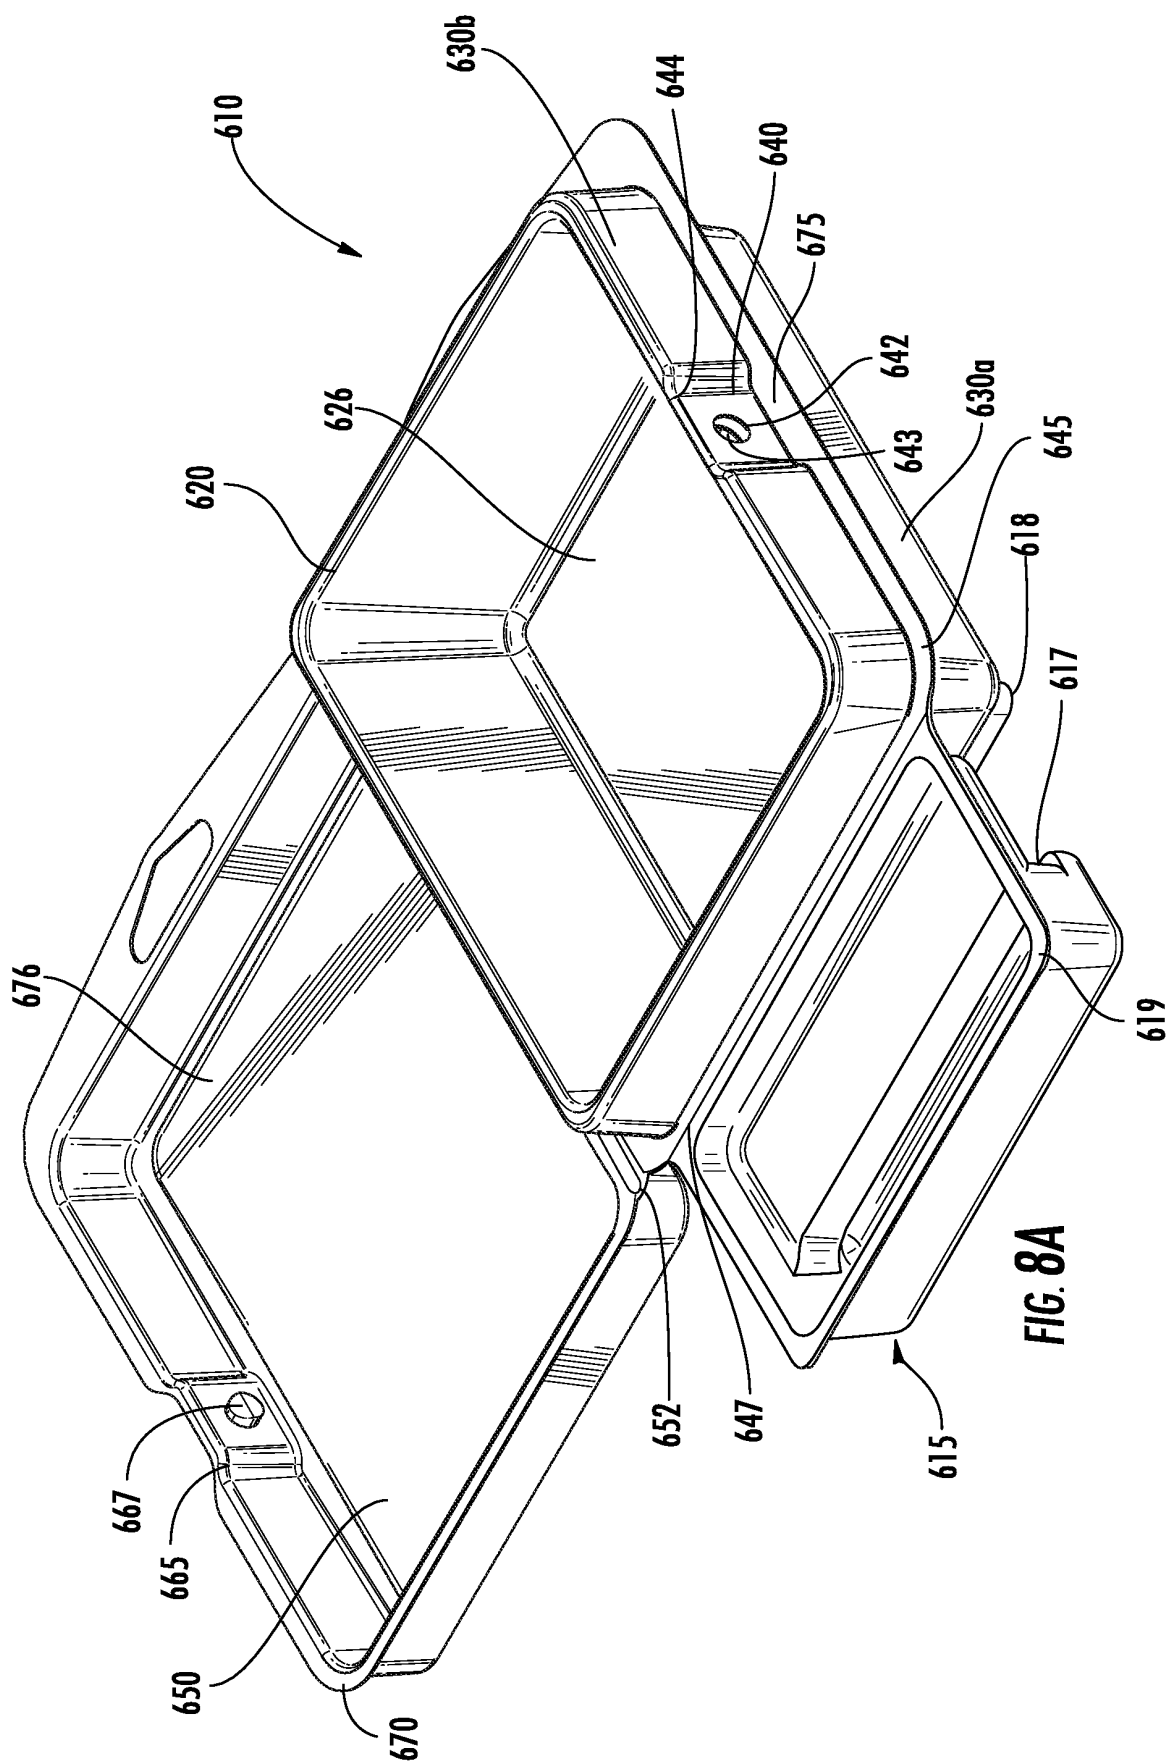
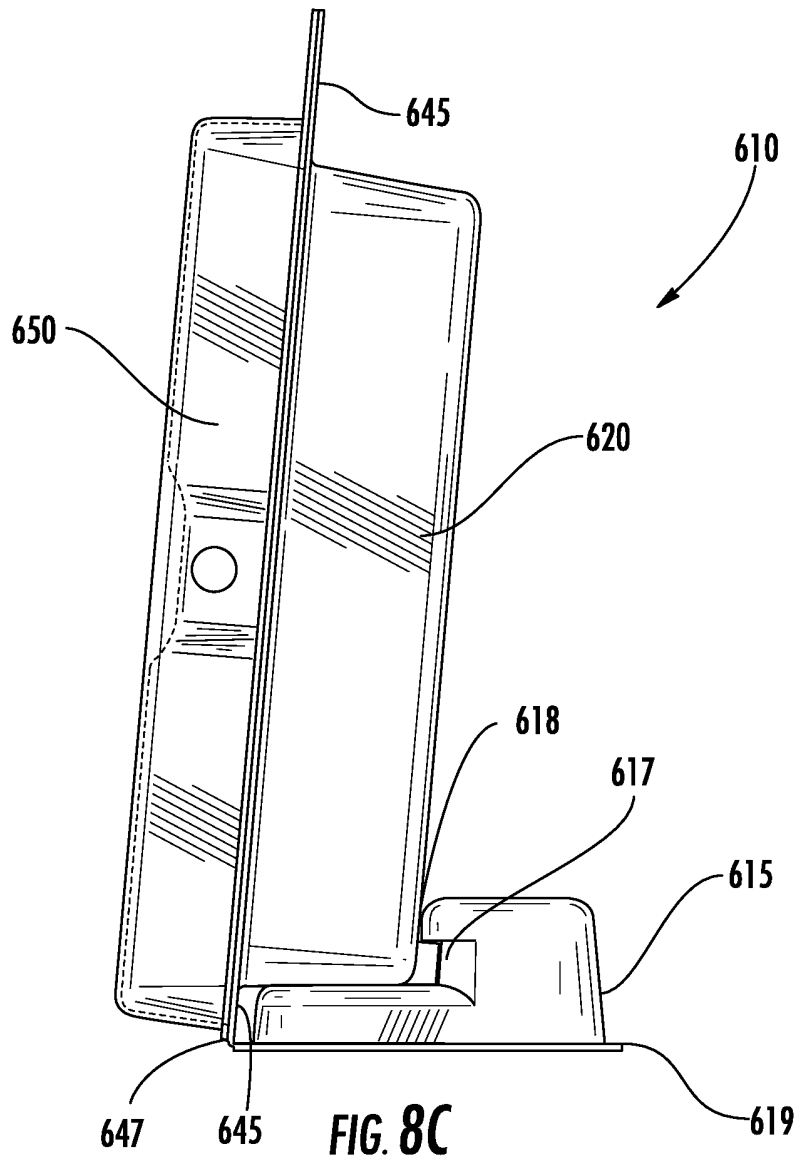
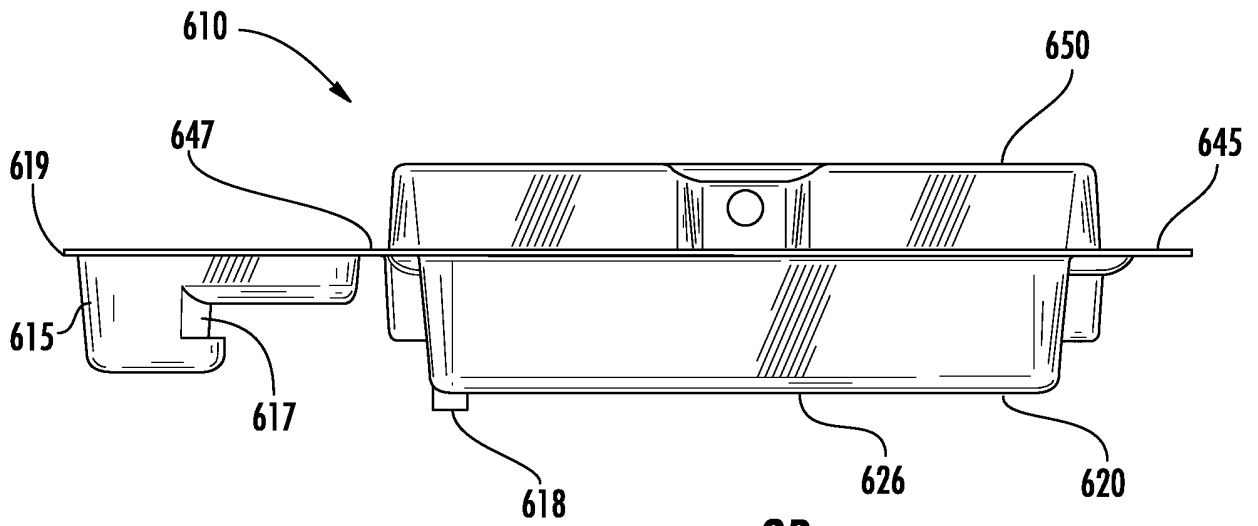
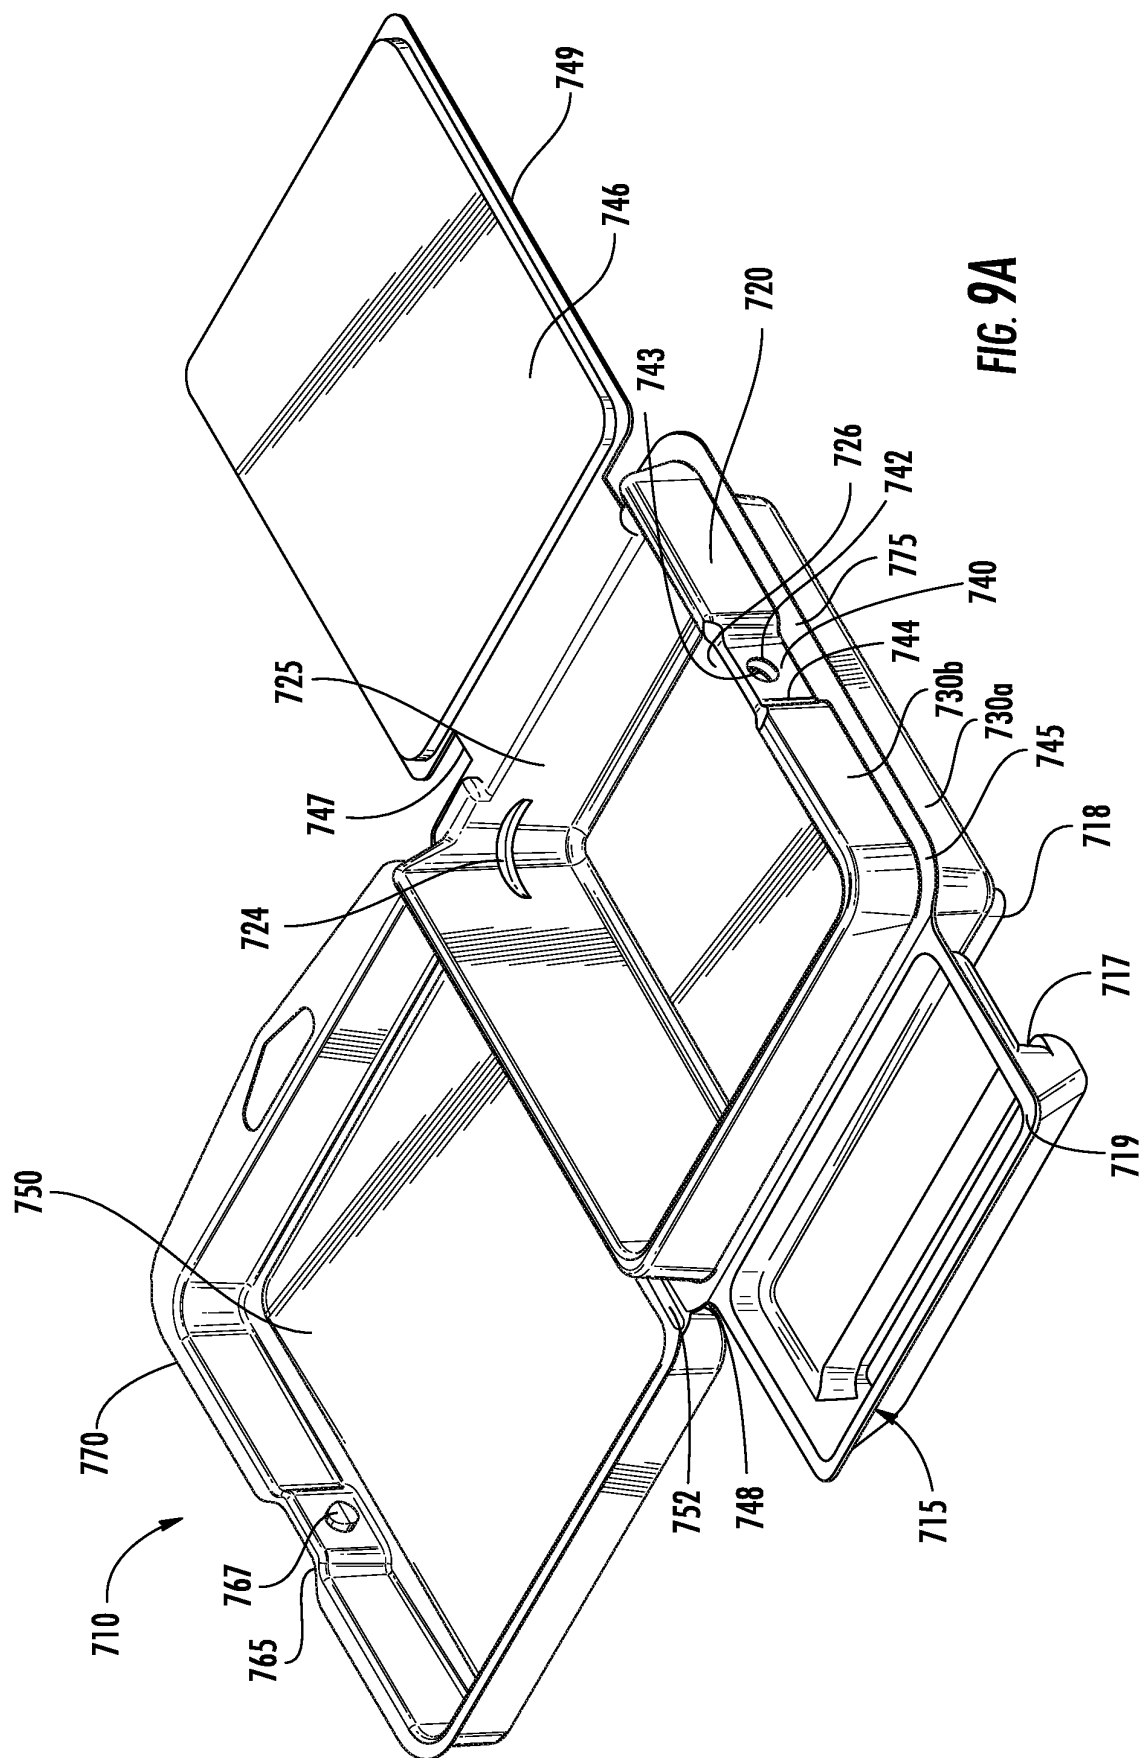


FIG. 8A





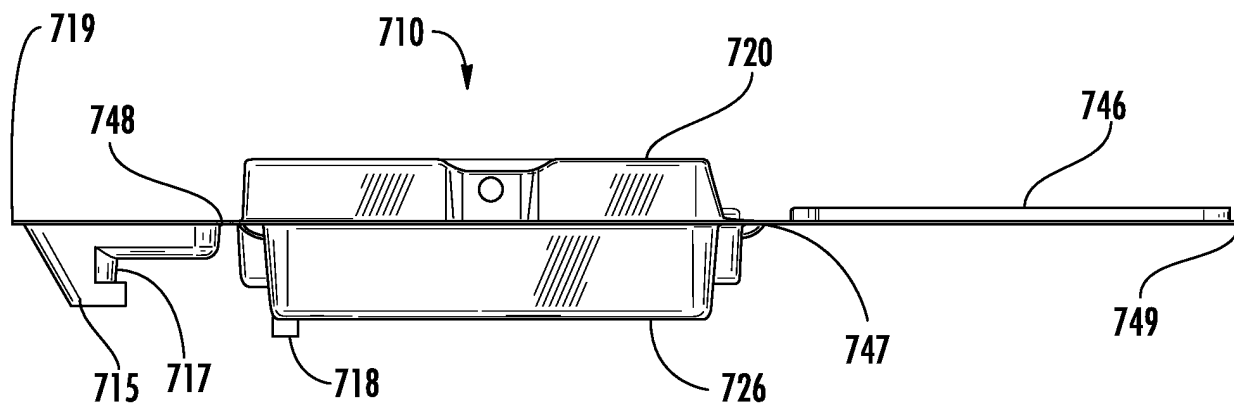


FIG. 9B

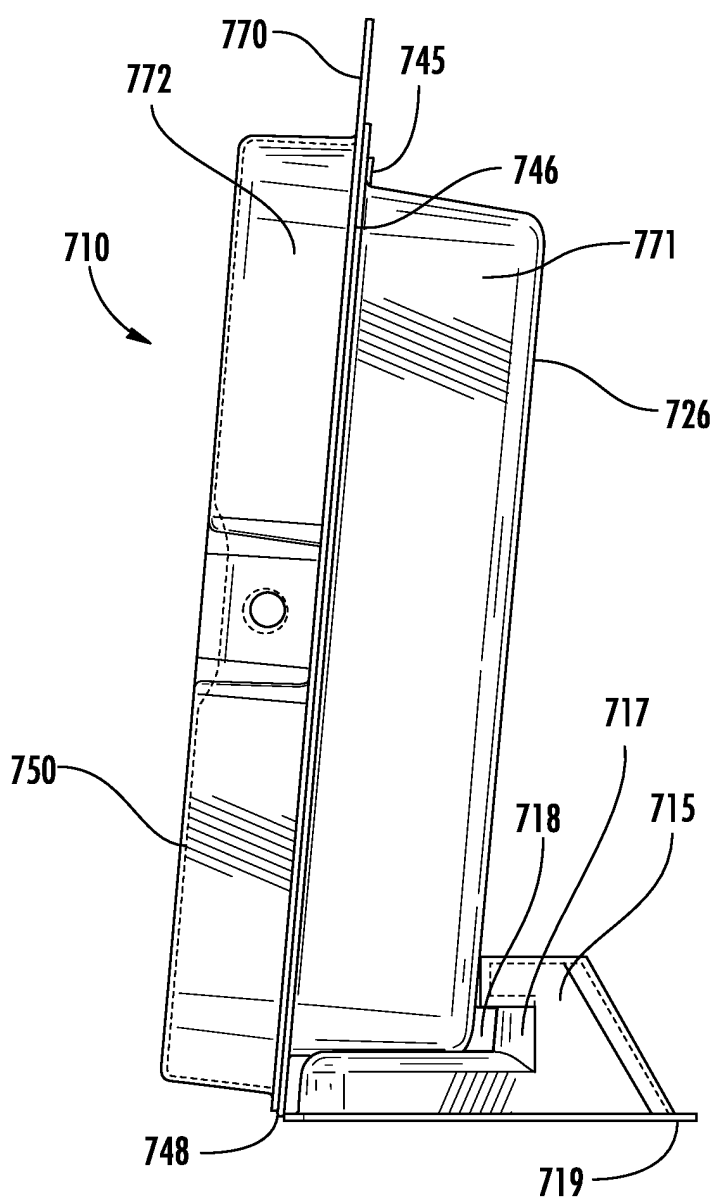
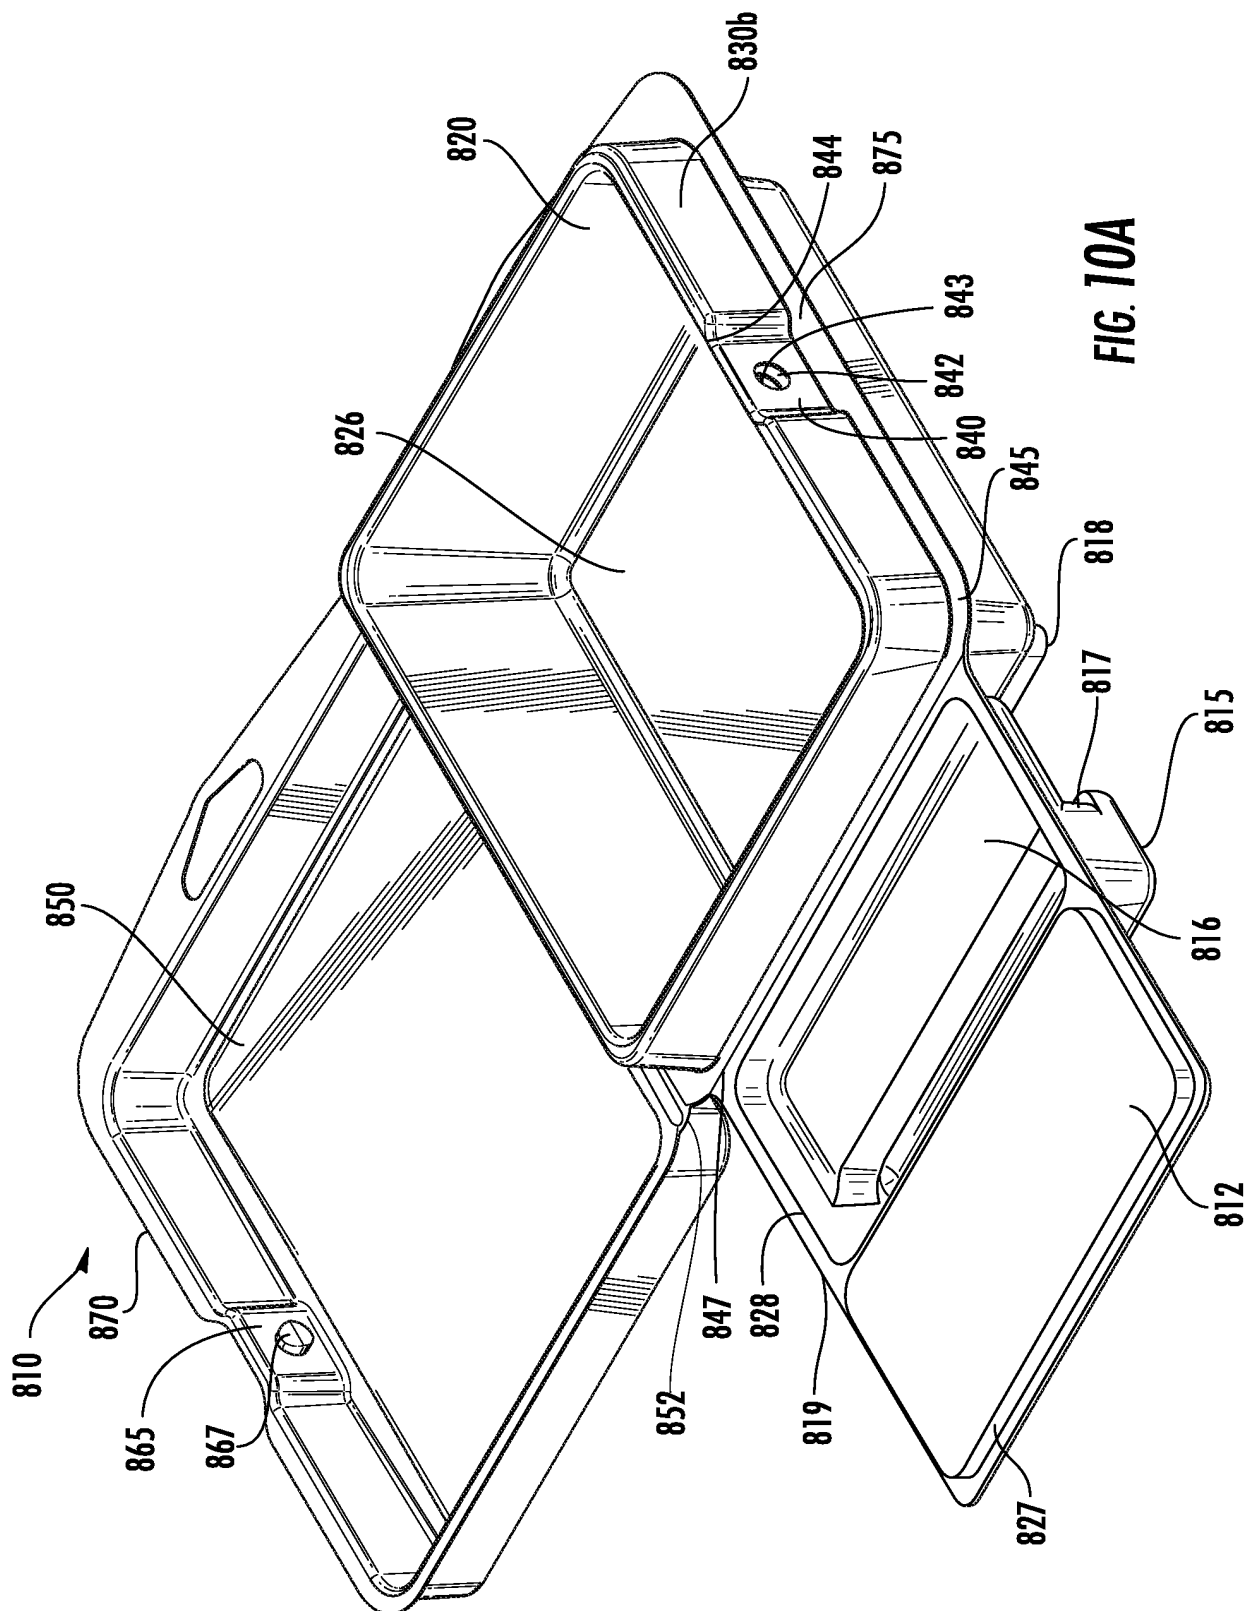


FIG. 9C



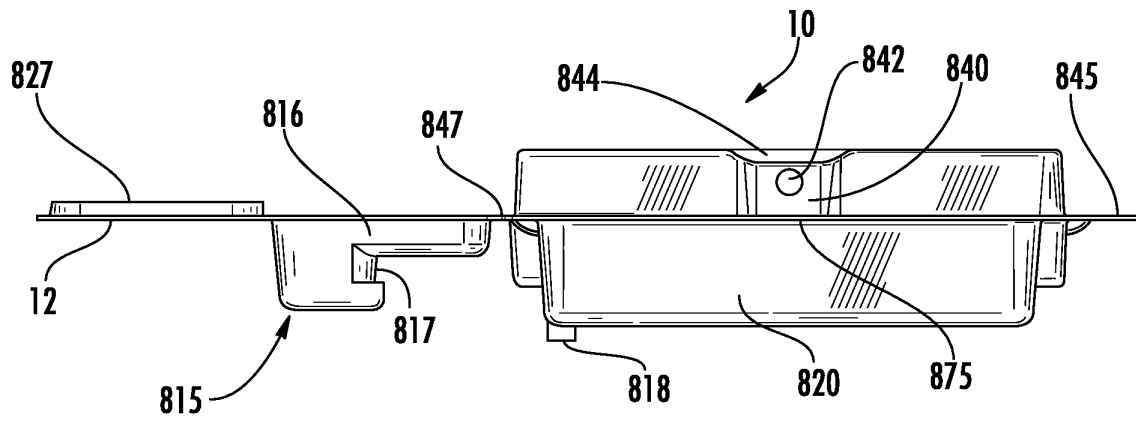


FIG. 10B

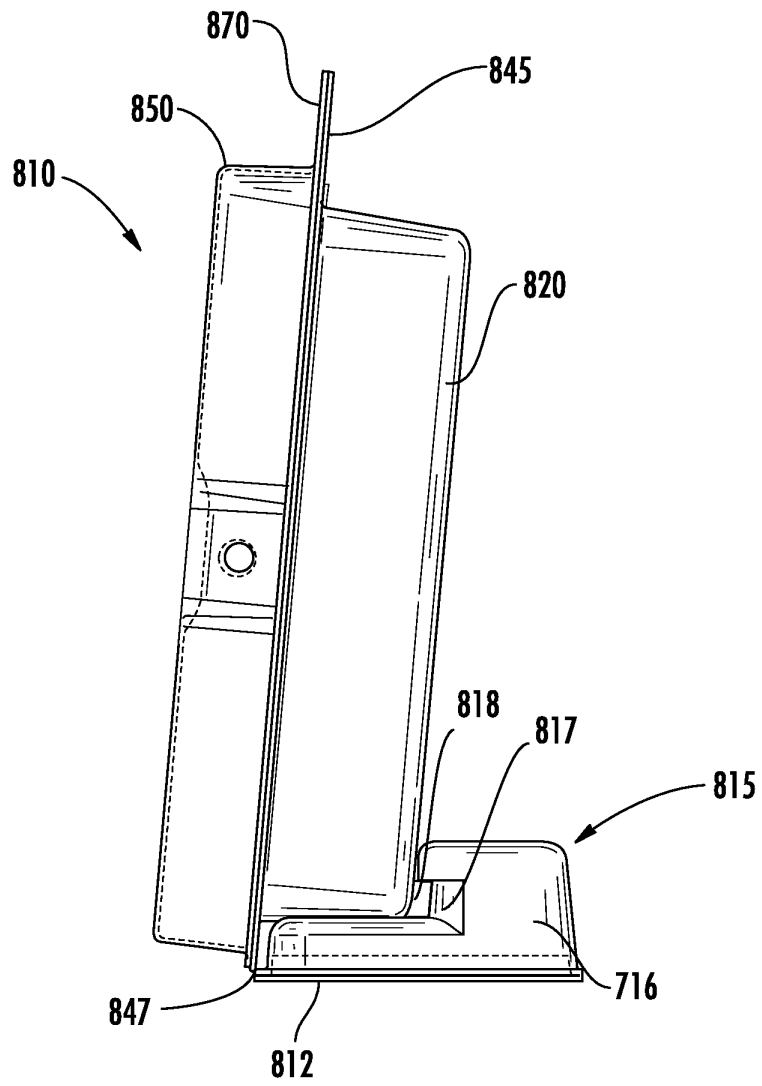


FIG. 10C

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2014262878 A [0002]