



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
21.03.2018 Bulletin 2018/12

(51) Int Cl.:
F21K 9/232 ^(2016.01) **F21K 9/237** ^(2016.01)
F21K 9/238 ^(2016.01) **F21Y 115/10** ^(2016.01)

(21) Application number: **17191071.4**

(22) Date of filing: **14.09.2017**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

- **Frye, Lambert**
89555 Steinheim (DE)
- **YU, HuaLi**
Foshan, Guangdong 528000 (CN)
- **XU, Baijin**
Foshan, Guangdong 528000 (CN)
- **LIU, Jitao**
Foshan, Guangdong 528000 (CN)
- **XIE, Qian**
Foshan, Guangdong 528000 (CN)
- **LI, Liqin**
Foshan, Guangdong 528000 (CN)

(30) Priority: **16.09.2016 DE 102016117450**
07.11.2016 CN 201610977226

(71) Applicant: **Ledvance GmbH**
85748 Garching bei München (DE)

(74) Representative: **Schulz, Oliver Frank Michael**
df-mp Dörries Frank-Molnia & Pohlman
Patentanwälte Rechtsanwälte PartG mbB
Theatinerstrasse 16
80333 München (DE)

(72) Inventors:

- **Haberkorn, Lene**
89551 Königsbrunn (DE)
- **Eckert, Klaus**
89542 Herbrechtingen (DE)

(54) **LED LIGHTING DEVICE HAVING AN IMPROVED LED HOLDER**

(57) A lighting device comprises a holder for LED filaments (12). The holder has a first electrically conductive holding structure (14) and a second electrically conductive holding structure (15). Each holding structure comprises an essentially longitudinal connection section (9, 9) and an attachment section (17, 20) essentially perpendicular to the connection section.

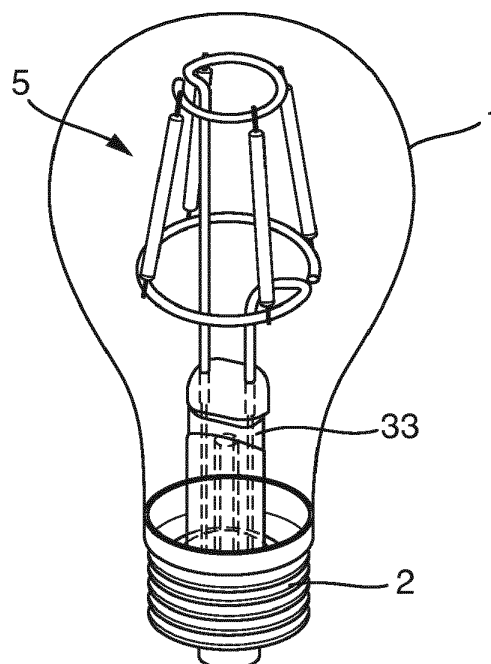


Fig. 1

Description

Technical Field

[0001] The present invention relates to a LED lighting device, in particular a lighting device using LED filaments which are attached to an improved holder.

Background

[0002] A specific type of LED lighting devices uses LED filaments, i.e. strip-like LED elements which typically comprise a plurality of LEDs arranged in a row on a transparent strip-like carrier (e.g. glass or sapphire materials). The LEDs may be coated by a coating for converting the light generated by the LEDs into a desired wavelength range. Multiple LED filaments are usually arranged inside a bulb of a lighting device. For ensuring a specific arrangement of the LED filaments with respect to each other and for supplying the LED filaments with electrical power a holder is needed.

[0003] Known holders, such as for example disclosed in Chinese patent CN 204573938 U, consist of multiple elements and are, therefore, rather complicated to manufacture and, thus, expensive. Often, manual work is required for manufacturing the holder.

Summary of the Invention

[0004] In view of the known prior art, it is an object of the present invention to provide an improved lighting device, in particular a lighting device with a holder which can be easily machine-made.

[0005] This object is solved by a lighting device according to the independent claim. Preferred embodiments are given by the dependent claims.

[0006] A lighting device according to the present invention comprises a translucent bulb, in particular a transparent bulb, a base having at least two electrical contacts, and a light engine arranged inside the bulb. The bulb can be made from glass or a plastic material. The base can for example be a screw base (e.g. E14), a bayonet base (e.g. GU10), a bi-pin base (e.g. G4), or any other type of lamp base. The light engine inside the bulb comprises one or more LED filaments attached to a holder. The light engine may comprise 4, 5, 6, 7, 8 or any other number of LED filaments. Preferably, the LED filaments are arranged such that not all LED filaments are positioned parallel to each other, in order to minimize the generation of shadows.

[0007] The holder has a first electrically conductive holding structure and a second electrically conductive holding structure. Each LED filament is connected with a first end to the first holding structure and with a second end to the second holding structure. Apart from the connection via the LED filaments, the first holding structure and the second holding structure are electrically isolated from each other. Preferably, the LED filaments are con-

nected to the holding structures such that an electrically parallel connection (as opposed to an electrically serial connection) is obtained.

[0008] The first holding structure is connected to a first electrical contact of the base and the second holding structure is connected to a second electrical contact of the base. The connection of the first and second holding structure to the electrical contacts of the base may either be direct (i.e. the holding structure itself is connected to the electrical contact or the holding structure is connected to an electrically conductive element such as a wire which in turn is connected to the electrical contact) or indirect (i.e. the holding structure is connected to an electrical driving circuit for driving the LEDs and the driving circuit (also known as driver) is in turn connected to the electrical contact).

[0009] Thus, applying an electrical voltage to the electrical contacts of the lamp base in turn supplies the LED filaments and, accordingly, the LEDs on the LED filaments with an electrical voltage. In the case of a direct connection of the holding structures to the electrical contacts, the voltage supplied to the LED filaments is the voltage applied to the electrical contacts. In the case of an indirect connection of the holding structures to the electrical contacts, the voltage supplied to the LED filaments is determined by the driving circuit.

[0010] The holder may be supported inside the bulb by a glass stem which can be melted during manufacture of the lighting device. The holder, i.e. the ends of the connection sections of both holding structures, is then inserted into the molten stem. After cooling of the stem, the holder is fixedly attached to the stem.

[0011] Alternatively, the holder may comprise fixation elements at the end of the connection section of each holding structure. The fixation elements can be attached to separate connectors that have been inserted into the glass stem as described above. In this case, an electrical voltage is supplied to the LED filament via the separate connectors, the fixation elements, and then the holding structures. Such fixation elements are described in German patent application DE 102016117450.5.

[0012] Each of the first holding structure and the second holding structure comprises an essentially longitudinal connection section and an attachment section essentially perpendicular to the connection section. The LED filaments are attached to the attachments section, such that an electrical connection as well as a mechanical connection between LED filaments and holding structure is achieved. The connection section connects the attachment section to the electrical contacts of the lamp base (if a driving circuit is used, indirectly via the driving circuit). The connection section and the attachment section can be different parts of a single element or they can be constituted by different elements which are electrically conductively and mechanically connected to each other, for example, they can be soldered or welded together.

[0013] For each holding structure, both the connection section and the attachment section are electrically con-

ductive. Thus, no further elements are needed for mechanically holding the LED filaments in their desired positions and for achieving their electrical connection to the electrical contacts of the lamp base. Accordingly, such a holder is simple and easy to manufacture, especially in an automated production line.

[0014] In a preferred embodiment, at least one of the first holding structure and the second holding structure is formed from a wire. The wire is preferably made from steel, in particular stainless steel, and may be plated with nickel or another metal. The wire may have a diameter between approximately 0.8 mm to approximately 2.5 mm. Holding structures fabricated from such a wire are stable enough to mechanically support the LED filaments in their desired positions. Manufacturing a holding structure from a wire by bending the wire into the shape of the holding structure is easy and can easily be included in an automated production line.

[0015] Each holding structure may be manufactured by bending the holding structure as a whole from a single wire. Alternatively, a holding structure may be manufactured by bending two or more pieces of the holding structure from a wire each and then connecting the pieces with each other electrically conductively, e.g. by soldering or welding.

[0016] In a preferred embodiment, at least one of the attachment section of the first holding structure and the attachment section of the second holding structure has a circular or a polygonal circumference. The term "circular" also includes an elliptical shape or other small deviations from the mathematical shape of a circle, e.g. egg-shaped. A polygonal shape includes polygons with 3, 4, 5, 6, 7, 8, or more sides. The sides of the polygon may all have the same length but may also have different lengths. The number of sides of the polygon may equal the number of LED filaments attached to the polygon. The LED filaments may be attached to a polygon at the corners of the polygon or along its sides.

[0017] Preferably, the attachment section can be formed by bending a wire into the desired, for example circular or polygonal, shape. Such an attachment section is particularly easy to manufacture.

[0018] In a preferred embodiment, at least one of the connection section of the first holding structure and the connection section of the second holding structure has the shape of a straight line. The connection section can, in particular be constituted by a straight wire. This further simplifies manufacture.

[0019] In a preferred embodiment, for at least one of the holding structures the connection section is connected to the respective attachment section by a radial section. This allows positioning the connection section at a suitable location with respect to the attachment section. In particular if the connection section as well as the attachment section is made from a wire, the connection section must not be located at the circumference of the attachment section but can also be located towards the "interior" of the attachment section. The connection sec-

tion can, however, also be positioned at a point along the circumference of the attachments section. In that case, no additional radial section is necessary.

[0020] The radial section can lie essentially in the plane of the respective attachment section or it can be arranged under an angle with respect to the plane of the respective attachment section. In the former case, the upper end of the connection section is at approximately the same height than the attachment section, in the latter case, the upper end of the connection section lies at a lower height than the attachment section.

[0021] In a preferred embodiment, the holder comprises a bridge element attached to the first holding structure and the second holding structure, wherein the bridge element is not electrically conductive. The bridge element can in particular be made from a plastic material. The bridge element can stabilize the holder by fixing the relative position of the two holding structures with respect to each other at the position of the bridge element.

[0022] In a preferred embodiment, the bridge element comprises a front portion and a rear portion connectable to the front portion, wherein at least one of the front portion and the rear portion comprises grooves for accommodating the first holding structure and the second holding structure. The front portion and the rear portion may be connected by an additional element acting as a hinge during closing of the bridge element, i.e. during attaching the bridge element to the two holding structures. The front portion and the rear portion may be connected by a snap fit connection.

[0023] In a preferred embodiment, at least one of the connection section of the first holding structure and the connection section of the second holding structure comprises an anti-rotation portion for preventing rotation of the bridge element around the respective holding structure. Such an anti-rotation portion may be constituted by a bend, preferably by a zig-zag bend in the wire from which the connection section is made. If the bridge element is located at the position of the anti-rotation portion, e.g., if the bend is located inside the bridge portion, rotation of the bridge element with respect to the connection section is prevented, further increasing stability of the holder.

Brief Description of the Drawings

[0024] Preferred embodiments of the invention will be explained in the following, having regard to the drawings. It is shown in:

Fig. 1 a schematic view of an embodiment of a lighting device according to the present invention;

Fig. 2 a schematic view of an embodiment of a light engine of the lighting device according to Fig. 1;

Fig. 3 a schematic view of another embodiment of a light engine according to the present invention;

Fig. 4 a schematic view of the first holding structure of the light engine according to Fig. 3;

Fig. 5 a schematic view of the second holding structure of the light engine according to Fig. 3;

Fig. 6 a schematic view of the bridge of the light engine according to Fig. 3;

Fig. 7 a schematic view of a detail of another embodiment of a holding structure of a light engine according to the present invention.

Detailed Description of the Invention

[0025] In the following, preferred embodiments of the invention will be described with reference to the drawings. The same or similar elements or elements having the same effect may be indicated by the same reference number in multiple drawings. Repeating the description of such elements may be omitted in order to prevent redundant descriptions.

[0026] Fig. 1 shows a schematic view of an embodiment of a lighting device according to the present invention. An enlarged view of the light engine is shown in Fig. 2. The lighting device (in this case a retrofit lamp (hereinafter referred to simply as "lamp"), suitable for replacing known incandescent lamps) comprises a glass bulb 1, a light engine 5 arranged inside the bulb 1, and a lamp base 2 with an Edison type screw base. In order to enhance thermal dissipation and prolong the life of the lamp, the bulb can be filled with a gas having high thermal conductivity. Preferably, the gas contains helium and/or hydrogen.

[0027] The light engine comprises a holder having a first holding structure 14 and a second holding structure 15. Both holding structures are made from a wire (e.g. nickel plated stainless steel with a diameter between approximately 0.8 mm to approximately 2.5 mm) by bending the wire into the shape of the holding structure. The first holding structure 14 comprises an annular attachment section 17 which is attached to its connection section 9 via a radial section 18. The attachment section 17 is arranged essentially perpendicular to the straight connection section 9. The radial section 18 lies essentially in the plane of the attachment section 17. The lower end of the connection section 9 is fixedly held by a glass stem 33.

[0028] The stem 33 comprises a flange 33a, two lead wires 33b and a glass tube 33c. During production of the lamp, the bulb 2 can be evacuated and filled with a gas having high thermal conductivity through the tube 33c which is then closed by melting.

[0029] The second holding structure 15 comprises an annular attachment section 20 which is attached to its connection section 9 via a radial section 21. The attachment section 20 is arranged essentially perpendicular to the straight connection section 9. The radial section 21 lies essentially in the plane of the attachment section 20.

The lower end of the connection section 9 is fixedly held by a glass stem 33.

[0030] In both attachment sections 17,20 the end of the wire lies next to the point where the attachment section 17,20 meets the corresponding radial section 18,21.

[0031] Since both holding structures 14,15 are made by bending a single wire, their production can easily be integrated into an automated production line. No soldering or welding is necessary for the production of the holding structures. Nevertheless, the completed holder is strong enough to support the LED filaments.

[0032] The LED filaments 12 are electrically conductively attached with their electrical contacts 13 to the attachment sections 17,20 of both holding structures 14,15, e.g. by soldering or welding.

[0033] The LED filaments are connected in parallel such that the LED filaments work independently from each other. Accordingly, even if one of the LED filaments should fail, the lamp is still able to operate, thus prolonging the life of the lamp.

[0034] Fig. 3 shows a schematic view of another embodiment of a light engine according to the present invention. Details of this embodiment are shown in Figs. 4-7. The holder of the light engine shown in Fig. 3 comprises a first holding structure 14 and a second holding structure 15. Both holding structures are made from a wire (e.g. nickel plated stainless steel with a diameter between approximately 0.8 mm to approximately 2.5 mm) by bending the wire into the shape of the holding structure. A bridge 16 is attached to both holding structures 14,15 and stabilizes the holder.

[0035] The first holding structure 14 comprises an annular attachment section 17 which is attached to its connection section 9 via a radial section 18. The attachment section 17 is arranged essentially perpendicular to the straight upper portion of the connection section 9. The radial section 18 lies essentially in the plane of the attachment section 17.

[0036] The connection section 9 includes a zig-zag bend 19, i.e. two bends of approximately 90°. The two bends of the zig-zag bend 19 are arranged such that the upper portion of connection section 9 and the lower portion of connection section 9 are essentially parallel to each other. In other words, the upper portion of connection section 9, the lower portion of connection section 9, and the zig-zag bend 19 essentially lie in the same plane. The end of the lower portion of connection section 9 is bent by an angle of approximately 45°, thus resulting in a fixation element 10 which serves for attaching the light engine 5 to connectors held for example by a glass stem.

[0037] The second holding structure 15 comprises an annular attachment section 20 which is attached to its connection section 9 via a radial section 21. The attachment section 20 is arranged essentially perpendicular to the straight connection section 9. The radial section 21 lies essentially in the plane of the attachment section 20. The end of the lower portion of connection section 9 is bent by an angle of approximately 45°, thus resulting in

a fixation element 10 which serves for attaching the light engine 5 to connectors held for example by a glass stem.

[0038] In both attachment sections 17,20 the end of the wire runs parallel to a portion of the attachment section 17,20. The end of the wire can include a S-shaped bend next the point where the attachment section 17,20 meets the corresponding radial section 18,21 so that the end of the wire lies slightly below (alternatively above, inside, or outside) the attachment section 17,20. The end of the wire may be electrically conductively connected to the respective attachment section 17,20.

[0039] The bridge 16 is shown in an unmounted state in Fig. 6. The bridge 16 comprises a front portion 23 and a rear portion 22 connected to each other by a flexible hinge element 24. The rear portion 22 comprises two channels 25. The depth of the channels 25 is approximately equal to or greater than the thickness of the wire from which the holding structure 14,15 are made. Both channels 25 have an angle of approximately 90°. Thus, the zig-zag bend 19 of the first holding structure 14 and the 90° bend at the inner end of the radial portion 21 of the second holding structure 15 can be received by the channels 25. Thereafter, the front portion 23 of the bridge 16 can be moved over the rear portion 22 and can be fixed to the rear portion 22 by means of latches 26 on the front portion 23 engaging window 27 in the rear portion 22. Thus, bridge 16 is closed and fixates the two holding structures 14,15 with respect to each other. The bridge 16 is made from an electrically non-conductive plastic material (e.g. by injection molding), isolating the two holding structures 14,15 from each other. Since the part of the zig-zag bend 19 of the first holding structure and the 90° bend of the second holding structure are covered by the bridge 16, rotation of the bridge 15 with respect to either holding structure 14,15 is prevented.

[0040] Fig. 7 shows schematically another embodiment of an upper portion of the first holding structure 14. An upper portion of the second holding structure 15 could also be designed in this alternative form. In this alternative embodiment, the radial section 28 does not lie in the plane of the attachment section 17, but rather at an angle to the plane downwards and inwards. The end of the wire does not run along the attachment section 17 (as shown in Fig. 6) but along the radial section 28. The end of the wire may be electrically conductively connected to the radial section 28.

[0041] While the above holding structure have been described as being bent from a single wire, it is also possible to bend two or more portions of one or both holding structures of a holder separately and attach them to each other, e.g. by soldering or welding. For example, a first wire section can be bent into a circle (attachment section) and a second wire portion can be bent into an L-shape (radial section and connection section). The end of one arm of the L can then be welded to the circle to obtain a holding structure as shown above in Figs. 1 and 2. Other separations of a holding structure into portions to be bent separately are also envisioned by the invention.

[0042] Although the invention has been illustrated and described in detail by the explained embodiments, it is not limited to these embodiments. Other variations may be derived by the skilled person without leaving the scope of the attached claims.

[0043] Generally, "a" or "an" may be understood as singular or plural, in particular with the meaning "at least one", "one or more", etc., unless this is explicitly excluded, for example by the term "exactly one", etc.

[0044] In addition, numerical valued may include the exact value as well as a usual tolerance interval, unless this is explicitly excluded.

[0045] Features shown in the embodiments, in particular in different embodiments, may be combined or substituted without leaving the scope of the invention.

List of Reference Numbers

[0046]

1	bulb
2	base
5	light engine
9	connection section
10	fixation element
12	LED filament
13	electrical contact of LED filament
14	first holding structure
15	second holding structure
16	bridge
17	attachment section of first holding structure
18	radial section of first holding structure
19	zig-zag bend
20	attachment section of second holding structure
21	radial section of second holding structure
22	rear portion of bridge
23	front portion of bridge
24	hinge element
25	channel
26	latch
27	window
33	glass stem
33a	flange
33b	lead wire
33c	glass tube

Claims

1. Lighting device comprising a translucent bulb, a base having at least two electrical contacts, and a light engine arranged inside the bulb, the light engine comprising one or more LED filaments attached to a holder, the holder having a first holding structure that is electrically conductive and a second holding structure that is electrically conductive, wherein each LED filament is connected with a first end to the first holding structure and with a second end to the sec-

ond holding structure, wherein the first holding structure is connected to a first electrical contact of the base and the second holding structure is connected to a second electrical contact of the base, **characterized in that** the first holding structure and the second holding structure each comprises an essentially longitudinal connection section and an attachment section essentially perpendicular to the connection section.

5

tation portion for preventing rotation of the bridge element around the respective holding structure.

10

2. Lighting device according to claim 1, wherein at least one of the attachment section of the first holding structure and the attachment section of the second holding structure has a circular or a polygonal circumference.

15

3. Lighting device according to one of the preceding claims, wherein at least one of the connection section of the first holding structure and the connection section of the second holding structure has the shape of a straight line.

20

4. Lighting device according to one of the preceding claims, wherein for at least one of the first holding structure and the second holding structure, the connection section is connected to the respective attachment section by a radial section.

25

5. Lighting device according to claim 4, wherein the radial section lies essentially in the plane of the respective attachment section.

30

6. Lighting device according to claim 4, wherein the radial section is arranged under an angle with respect to the plane of the respective attachment section.

35

7. Lighting device according to one of the preceding claims, wherein at least one of the first holding structure and the second holding structure is formed from a wire.

40

8. Lighting device according to one of the preceding claims, wherein the holder comprises a bridge element attached to the first holding structure and the second holding structure, wherein the bridge element is not electrically conductive.

45

9. Lighting device according to claim 8, wherein the bridge element comprises a front portion and a rear portion connectable to the front portion, wherein at least one of the front portion and the rear portion comprises grooves for accommodating the first holding structure and the second holding structure.

50

10. Lighting device according to one of claims 8-9, wherein at least one of the connection section of the first holding structure and the connection section of the second holding structure comprises an anti-ro-

55

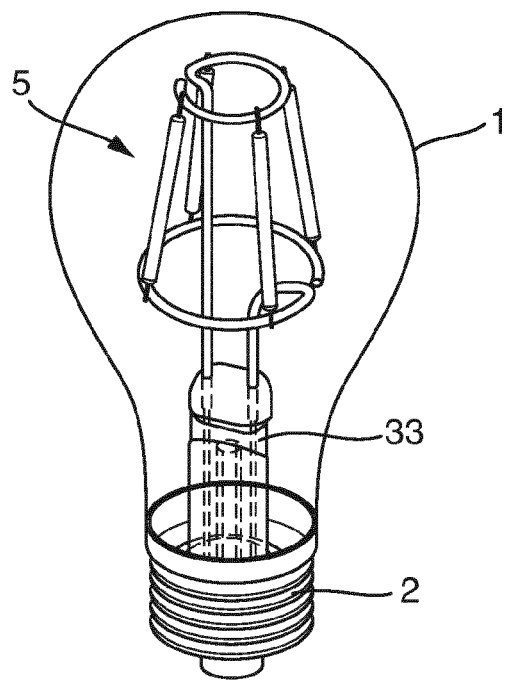


Fig. 1

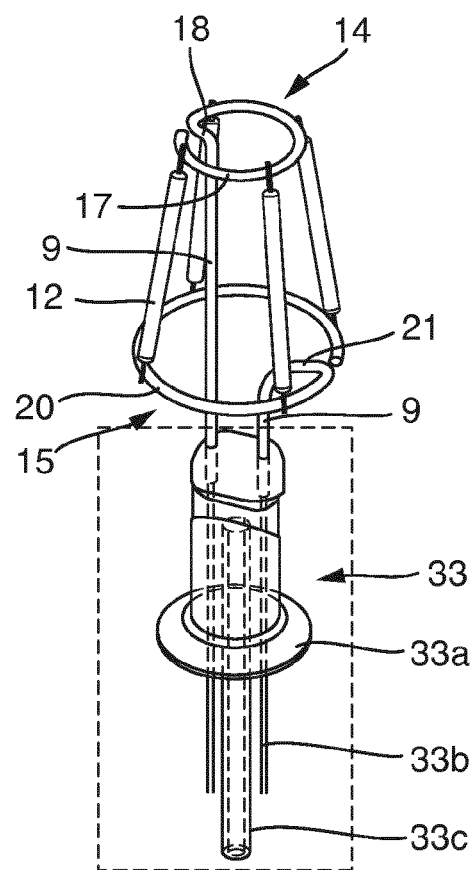


Fig. 2

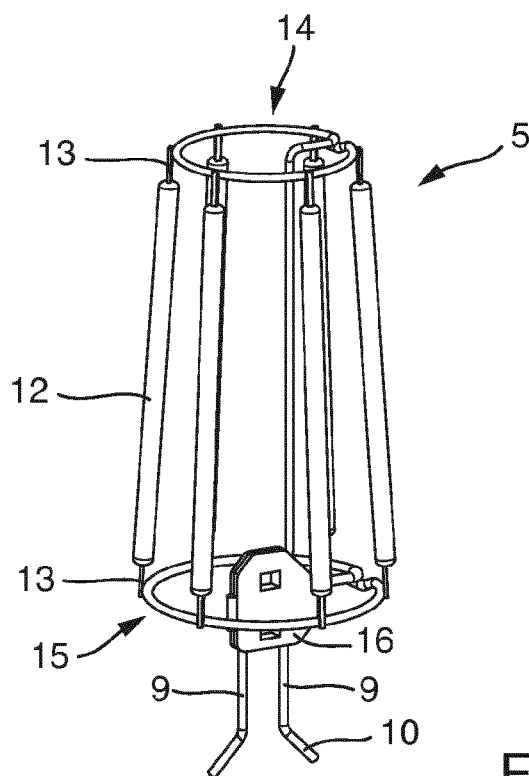


Fig. 3

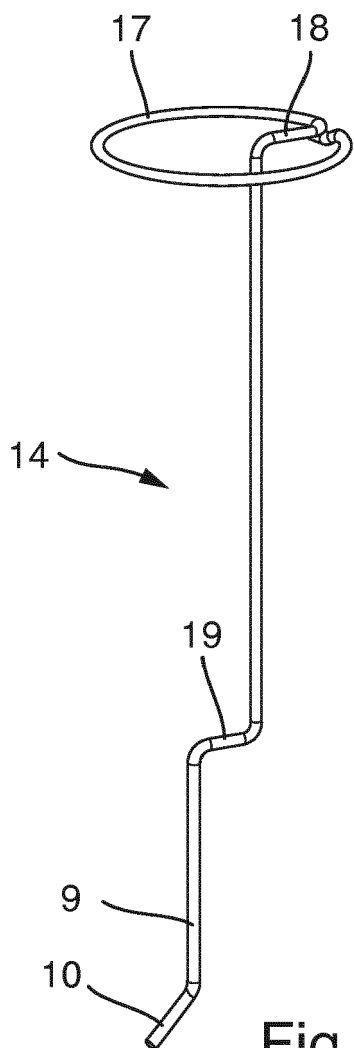


Fig. 4

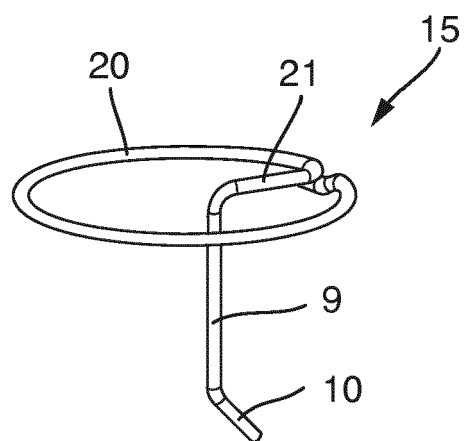


Fig. 5

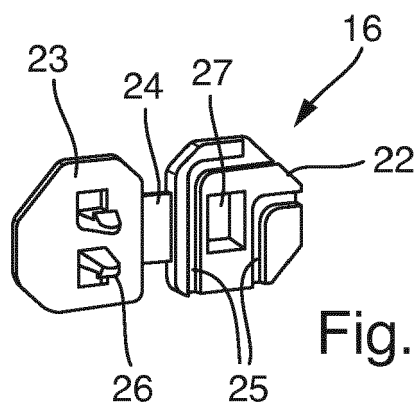


Fig. 6




Fig. 7



EUROPEAN SEARCH REPORT

 Application Number
 EP 17 19 1071

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	CN 204 611 431 U (SICHUAN HUACHUAN IND CO LTD) 2 September 2015 (2015-09-02) * figures 1, 2 *	1-5,7,8	INV. F21K9/232 F21K9/237 F21K9/238
X	----- CN 104 676 322 A (ZHEJIANG KAIYAO LIGHTING CO LTD) 3 June 2015 (2015-06-03) * figure 1 *	1-5,7-9	ADD. F21Y115/10
X	----- EP 2 236 907 A2 (LIQUIDLEDS LIGHTING CORP [KY]) 6 October 2010 (2010-10-06) * figures 1, 2, 4 *	1,3,7,8	
X	----- CN 104 763 900 A (SHENZHEN HONGYUN ZHIYUAN ENERGY SAVING TECHNOLOGY CO LTD) 8 July 2015 (2015-07-08) * figure 2 *	1,3,7	
X	----- US 2014/268779 A1 (SORENSEN ROBERT [US] ET AL) 18 September 2014 (2014-09-18) * figure 1 *	1-5,7-9	
X	----- CN 205 424 484 U (ZHEJIANG LEDISON OPTOELECTRONICS CO LTD) 3 August 2016 (2016-08-03) * figure 4 *	1-6,8,9	TECHNICAL FIELDS SEARCHED (IPC) F21K F21Y
X	----- US 2015/009689 A1 (CHEN PENG-YU [TW] ET AL) 8 January 2015 (2015-01-08) * figures 7, 8 *	1-3	
A	----- CN 204 852 983 U (SHANDONG PROSPEROUS STAR OPTOELECTRONICS TECHNOLOGY CO LTD) 9 December 2015 (2015-12-09) * figures 1-6 *	1	
		-/--	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 9 November 2017	Examiner Allen, Katie
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 19 1071

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-11-2017

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
CN 204611431	U	02-09-2015	NONE	
CN 104676322	A	03-06-2015	NONE	
EP 2236907	A2	06-10-2010	EP 2236907 A2	06-10-2010
			JP 2010245037 A	28-10-2010
			TW 201037212 A	16-10-2010
			US 2010253221 A1	07-10-2010
CN 104763900	A	08-07-2015	NONE	
US 2014268779	A1	18-09-2014	NONE	
CN 205424484	U	03-08-2016	NONE	
US 2015009689	A1	08-01-2015	TW 201502425 A	16-01-2015
			US 2015009689 A1	08-01-2015
CN 204852983	U	09-12-2015	CN 204852983 U	09-12-2015
			WO 2016188138 A1	01-12-2016
CN 204005447	U	10-12-2014	NONE	
CN 104791627	A	22-07-2015	CN 104791627 A	22-07-2015
			WO 2016169471 A1	27-10-2016
CN 104534302	A	22-04-2015	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 204573938 U [0003]
- DE 102016117450 [0011]